

Asset Management Register

PrimeCore Minerals | Secure Multi Office Network

PC-04 | Version 0.1 | 23 September 2026
Status: Initial inventory with verification actions
Owner: IT Administrator | Approver: Project lead | Approval date: Pending

Maintain an accountable inventory of PrimeCore equipment, virtual machines, software and cloud services.
The initial register records evidenced HQ assets and separately identifies assets requiring discovery.

Register conventions

Asset IDs remain stable if a hostname changes. Proposed names use SITE-ROLE-NN, for example HQ-MON-01; preserve existing HQ-MONITOR and HQ-EMP-LAPTOP names until a controlled rename is approved. Record logical and physical location separately. Evidence observed on 13 September 2026 is not a current live inventory scan.

ID and asset	Location and addressing	Specification and status
PC-A001 HQ-FW	EVE HQ firewall WAN 192.168.1.159/24 DHCP; LAN 10.10.10.1/24; VLAN gateways in PC-13	pfSense; installed version to verify Observed interfaces
PC-A002 HQ-MONITOR	EVE HQ monitoring guest 192.168.90.60/24; GW 192.168.90.1; ens3	Ubuntu 26.04; root filesystem about 24 GiB Observed services and address
PC-A003 HQ-EMP-LAPTOP	EVE HQ test endpoint 192.168.11.100/24; GW 192.168.11.1; ens3	OS and allocated capacity to record Observed test endpoint
PC-A004 EVE host	Lab virtualisation platform Management address to record	Host CPU, RAM, disk, version and location to record Inventory required

Software and discovery register

Component	Host and purpose	Recorded state
rsyslog	HQ-MONITOR; receives firewall UDP 514	Observed; version and retention to record
Alloy	HQ-MONITOR; forwards /var/log/pfsense.log to Loki	Observed; version to record
Loki	HQ-MONITOR; central log storage	Observed TCP 3100 and 9096 listeners; version to record
Grafana	HQ-MONITOR; query, dashboard and alerts	Observed TCP 3000; version and access controls to record
Gmail SMTP route	Monitoring mail submission	Test receipt evidenced; final firewall rule needs capture

ID and role	Owner role	Discovery required
PC-A005 Directory service	Identity administrator	Domain, hostname, version and backup to verify; Discovery required
PC-A006 File service	Data owner	Host, shares, ACL model and capacity to verify; Discovery required
PC-A007 HQ-BACKUP repository	Backup operator	Later evidence 29–30 September 2026: dedicated 100 GB disk, Restic 0.18.1 and archive recovery tested; independent host protection and immutability unverified
PC-A008 Azure prototype	Cloud administrator	Gateway, test VM and logging in PC-05; Planned

Lifecycle and record fields

For each asset record ID, name, owner, custodian, type, serial or VM ID, location, IP and MAC, OS and software versions, support or licence status, classification, criticality, dependencies, backup policy, last patch, evidence reference, last verification and disposal date. Use “not recorded” rather than inventing serial numbers or quantities.

On acquisition, approve an owner and baseline before connecting. On change, reconcile the register and configuration backup. Monthly, compare EVE nodes, directory devices, firewall leases and software inventory. On retirement, revoke identities and keys, remove DNS and rules, securely dispose of data and record the authoriser and method.

Verification actions

Confirm the EVE host and physical equipment inventory; reconcile branch-site assets with the network designer; confirm directory and file roles; capture software versions; record actual cloud resources only after deployment. The companion CSV is an editable initial asset register, not a scan result.

References and linked artefacts

[S1] HQ_Network_Addressing_Artefact.md, project deliverables, evidence dated 13 September 2026.

[S2] Security_Alerting_Implementation_Artefact.md, project deliverables, 13 September 2026. Credits Jared Williams for the original monitoring foundation and Adam Donovan for subsequent remediation, alerting and validation.

Screenshot evidence appendix

These figures record selected laboratory observations. They support the tested functions described in this artefact. Proposed policies, untested controls and organisational approval remain separate from the pictured results.

Figure E1 HQ firewall interfaces

```
WAN (wan) -> vtnet0 -> v4/DHCP4: 192.168.1.159/24
LAN (lan) -> vtnet1 -> v4: 10.10.10.1/24
EMPLOYEE_VLAN (opt1) -> vtnet2.10 -> v4: 192.168.10.1/24
VISITOR_VLAN (opt2) -> vtnet2.20 -> v4: 192.168.20.1/24
EMPLOYEE_WIFI_VLAN (opt3) -> vtnet2.11 -> v4: 192.168.11.1/24
PRINTER_VLAN (opt4) -> vtnet2.30 -> v4: 192.168.30.1/24
VIDEO_VLAN (opt5) -> vtnet2.40 -> v4: 192.168.40.1/24
CCTV_VLAN (opt6) -> vtnet2.41 -> v4: 192.168.41.1/24
IOT_VLAN (opt7) -> vtnet2.50 -> v4: 192.168.50.1/24
SERVER_VLAN (opt8) -> vtnet2.90 -> v4: 192.168.90.1/24
BACKUP_VLAN (opt9) -> vtnet2.91 -> v4: 192.168.91.1/24
MANAGEMENT_VLAN (opt10) -> vtnet2.99 -> v4: 192.168.99.1/24

0) Logout / Disconnect SSH
1) Assign Interfaces
2) Set interface(s) IP address
3) Reset admin account and password
4) Reset to factory defaults
5) Reboot system
6) Halt system
7) Ping host
8) Shell
9) pfTop
10) Filter Logs
11) Restart GUI
12) PHP shell + Netgate pfSense Plus tools
13) Update from console
14) Enable Secure Shell (sshd)
15) Restore recent configuration
16) Restart PHP-FPM

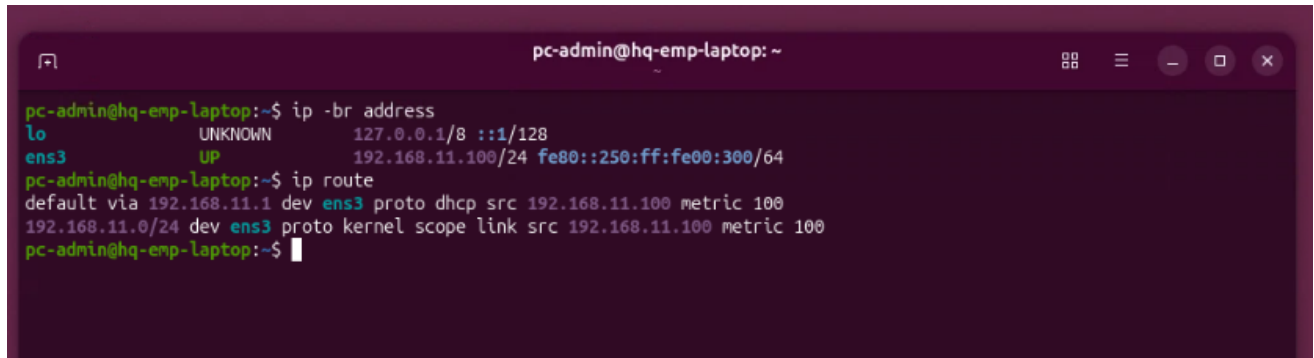
Enter an option: █
```

The interface register shows the recorded VLAN gateways. Interface presence alone does not demonstrate that every switch port or access rule has been tested.

Source evidence: evidence/HQ_FW_Interface_Map.png

Screenshot evidence continued

Figure E2 Employee test endpoint addressing

A terminal window titled 'pc-admin@hq-emp-laptop: ~' with standard window controls. The terminal shows the output of two commands. The first command, 'ip -br address', displays details for the loopback interface 'lo' (127.0.0.1/8) and the ethernet interface 'ens3' (192.168.11.100/24 with a MAC address of fe80::250:ff:fe00:300/64). The second command, 'ip route', shows the default route via 192.168.11.1 on interface ens3, and a specific route for 192.168.11.0/24 also via ens3.

```
pc-admin@hq-emp-laptop:~$ ip -br address
lo                UNKNOWN      127.0.0.1/8  ::1/128
ens3              UP            192.168.11.100/24  fe80::250:ff:fe00:300/64
pc-admin@hq-emp-laptop:~$ ip route
default via 192.168.11.1 dev ens3 proto dhcp src 192.168.11.100 metric 100
192.168.11.0/24 dev ens3 proto kernel scope link src 192.168.11.100 metric 100
pc-admin@hq-emp-laptop:~$
```

HQ-EMP-LAPTOP has 192.168.11.100/24 and default gateway 192.168.11.1, placing the test endpoint on the employee WiFi subnet.

Source evidence: evidence/HQ_EMP_LAPTOP_Address_Route.png

Screenshot evidence continued

Figure E3 Mount validation and Restic version

```
labadmin@HQ-BACKUP:~$ sudo systemctl daemon-reload
labadmin@HQ-BACKUP:~$ sudo findmnt --verify
none
[W] non-bind mount source /swap.img is a directory or regular file

0 parse errors, 0 errors, 1 warning
labadmin@HQ-BACKUP:~$ df -h /srv/backups
Filesystem      Size  Used Avail Use% Mounted on
/dev/vdb         98G   2.1M   93G   1% /srv/backups
labadmin@HQ-BACKUP:~$ restic version
restic 0.18.1 compiled with go1.25.0 on linux/amd64
labadmin@HQ-BACKUP:~$
```

findmnt reports zero errors; its warning is for the existing swap file. vdb is mounted with about 93 GB available; Restic is version 0.18.1.

Source evidence: evidence/Backup_Server/B39_a985fb32-4a28-4a9e-bcb4-92c60d48839a.png