


- NOTES:
- 1. TORQUE ITEM 5 TO 9.5 Nm.
 - 2. PRESS ITEM 3 FLUSH TO ITEM 1.
 - 3. APPLY LOCTITE 243 TO ITEM 5.
 - 4. ITEM 4 ORIENTED PER DETAIL B.
 - 5. INSTALL ITEM 9 AFTER PAINT.

ITEM	QTY	PART NO	DESCRIPTION	MATL	REV
1	1	4471-020	BRACKET, MOUNTING	6061	D
2	1	4471-105	SHAFT, PINION DRIVE	4140	B
3	2	4471-108	BUSHING, FLANGED	BRZ	A
4	1	4471-210	BRACKET, SENSOR	CRS	A
5	4	MS-M6-16	SCREW SHCS M6X16	A2-70	-
6	4	NAS1149F0632P	WASHER	CRES	-
7	4	CLS-M4-1	PEM NUT	STL	-

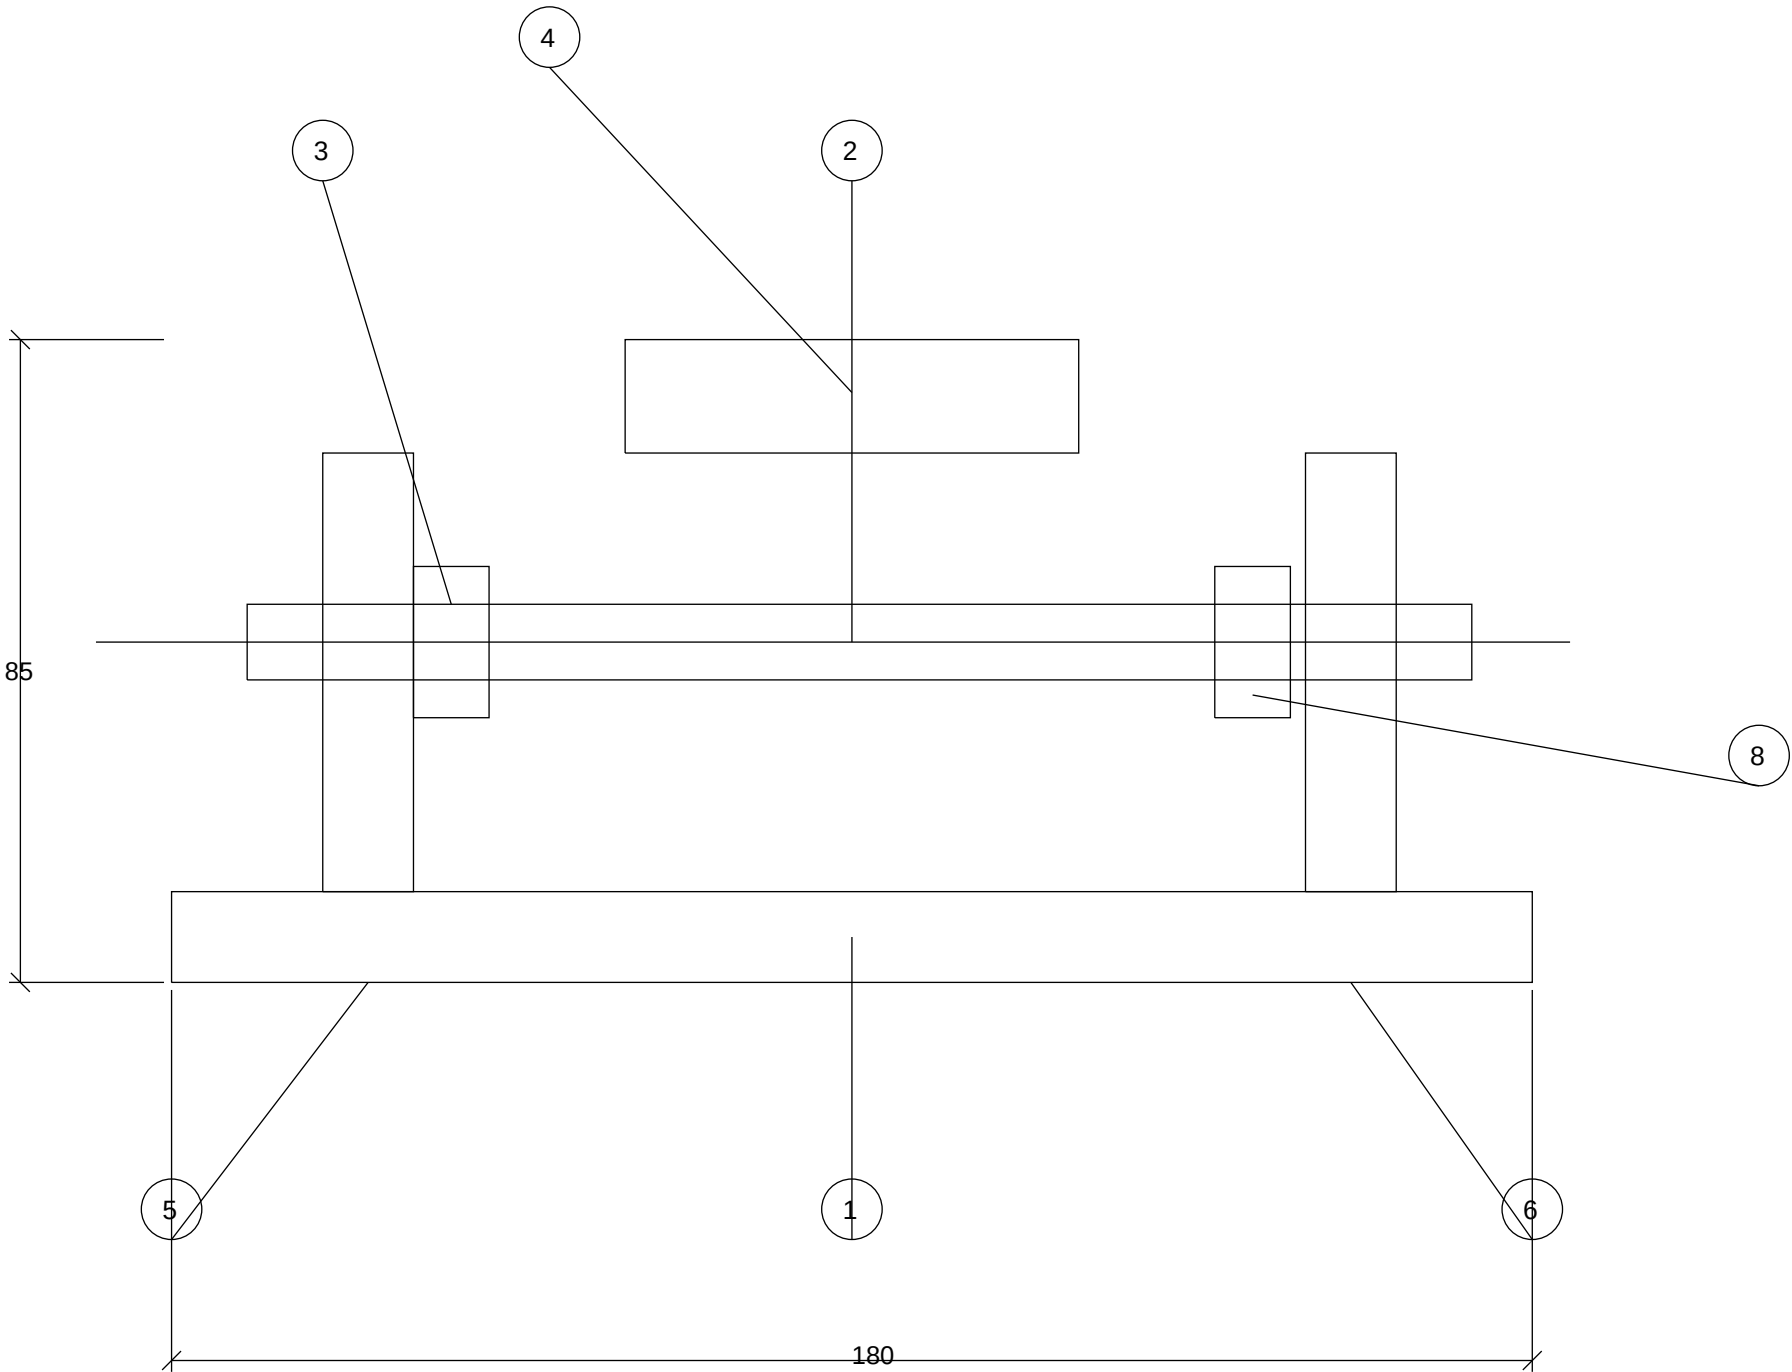

SECTION A-A
SCALE 1:2

PART NO 4471-000		REV B	
MATERIAL SEE PARTS LIST		FINISH -	
TITLE ASSY, DRIVE MODULE		ECO ECO-2321	
DRAWN JMK 06/20/26	CHECKED DLH 06/21/26	APPROVED RLS 06/22/26	SHEET 1 OF 1