
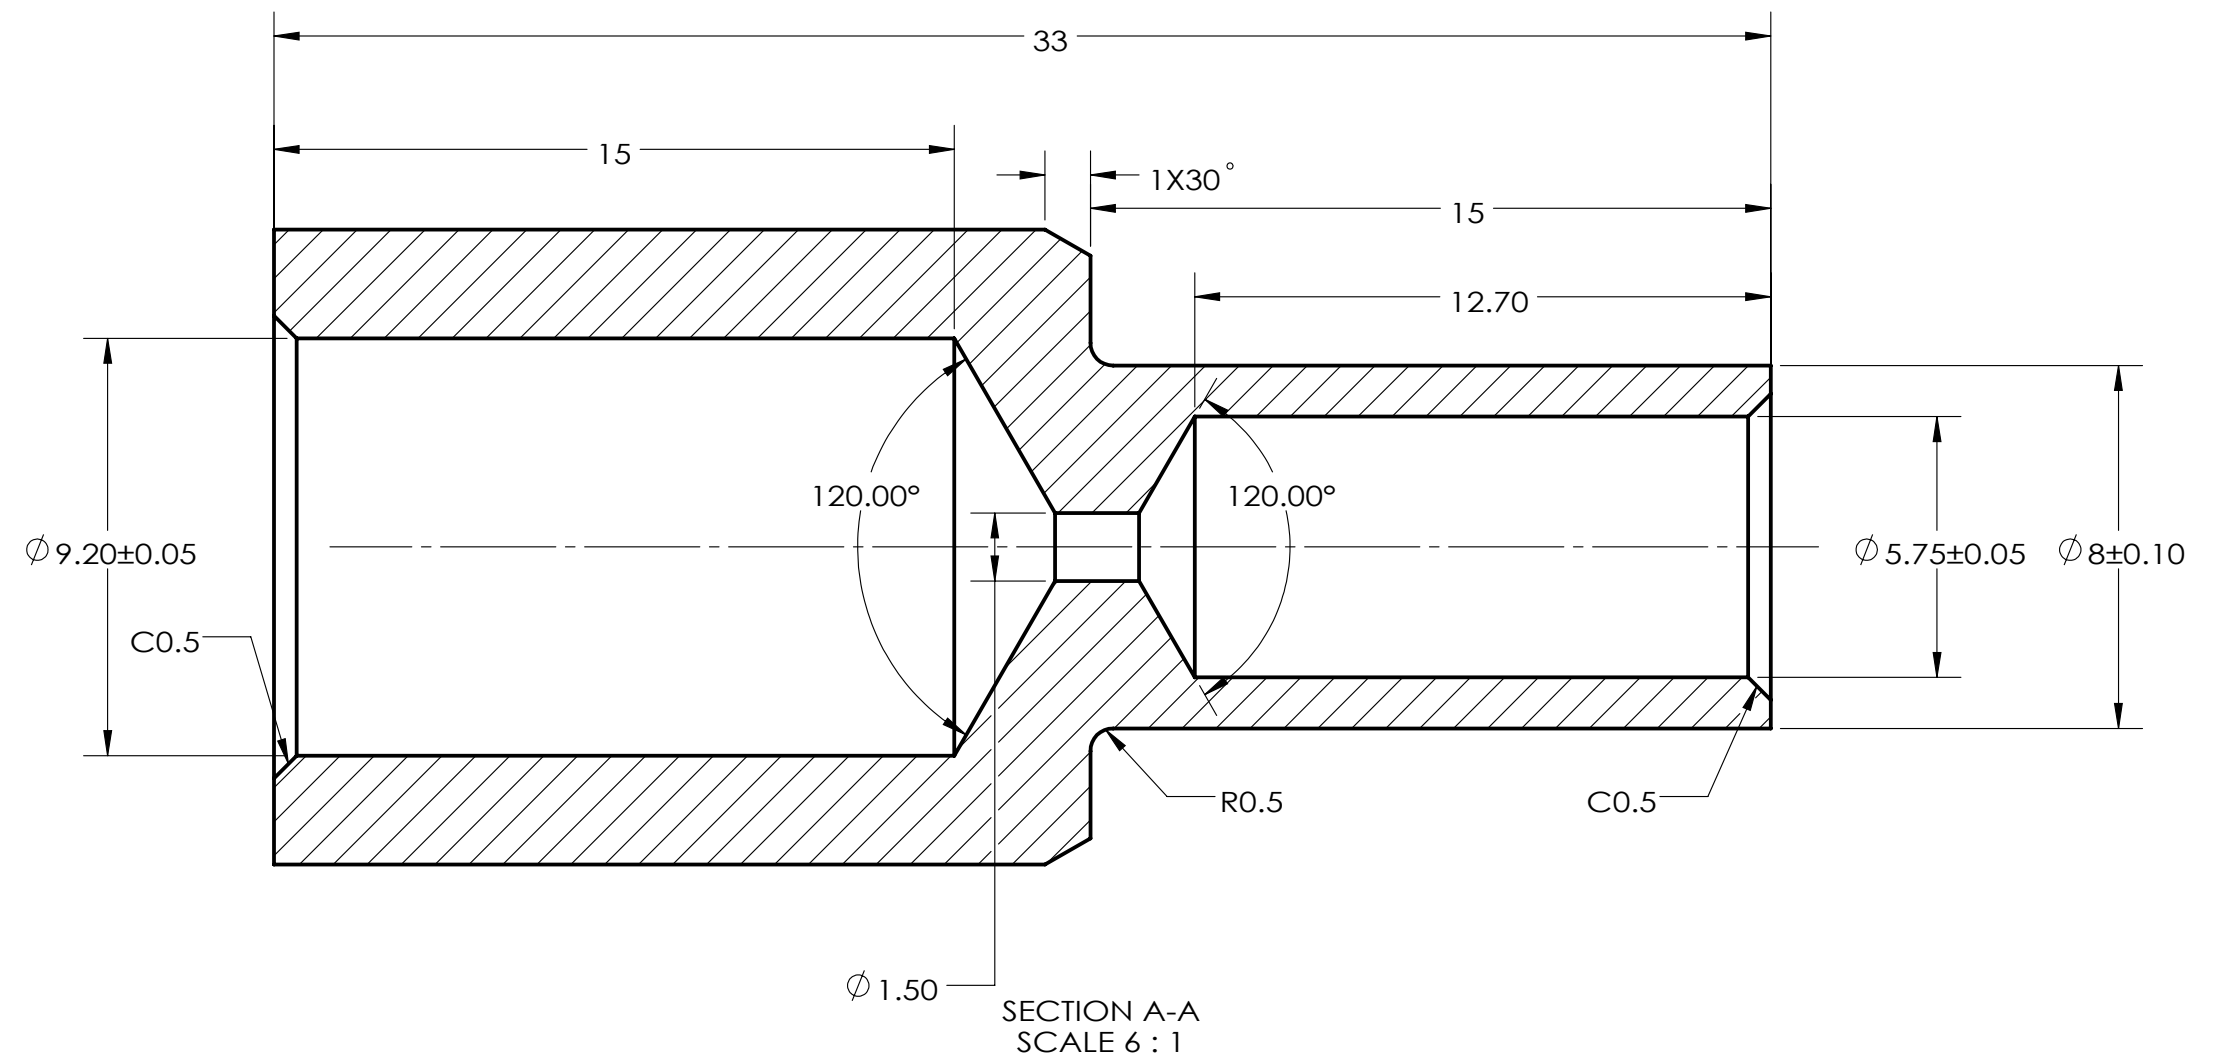
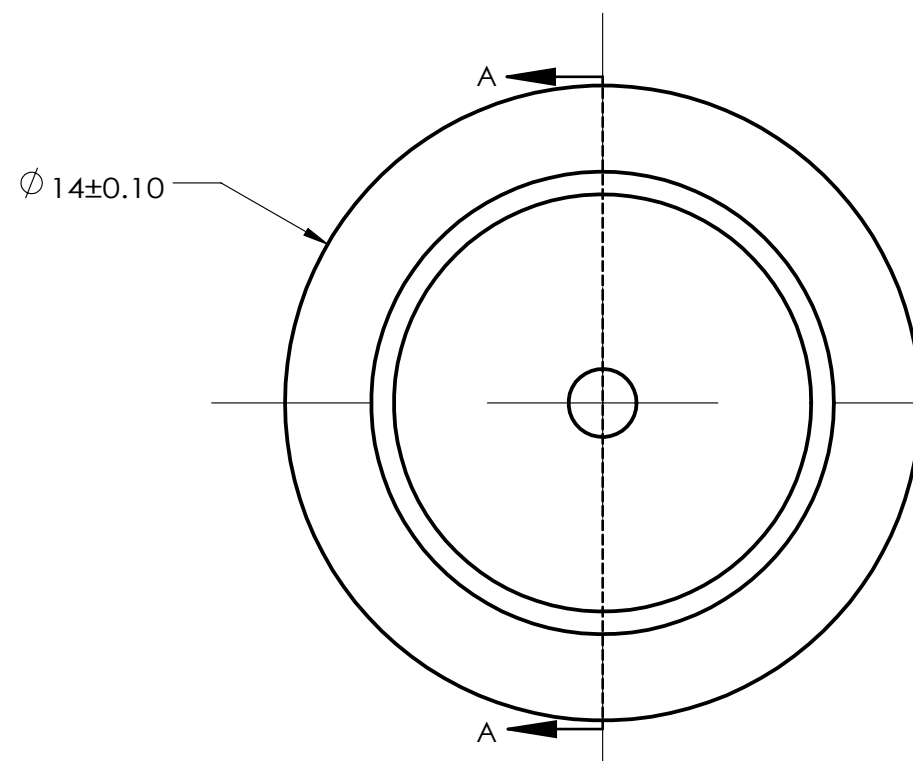


REVISIONS			
ZONE	REV.	DESCRIPTION	DATE
	A	INITIAL RELEASE	2021/10/11

AMPHENOL P/N	SURFACE FINISH	SURFACE AREA
C10-762930-00B	NONE	2120.418MM^2
C10-762930-001	SILVER PLATED 200~300u" OVER NICKEL 50~150u" PER 9-1882 TYPE II	

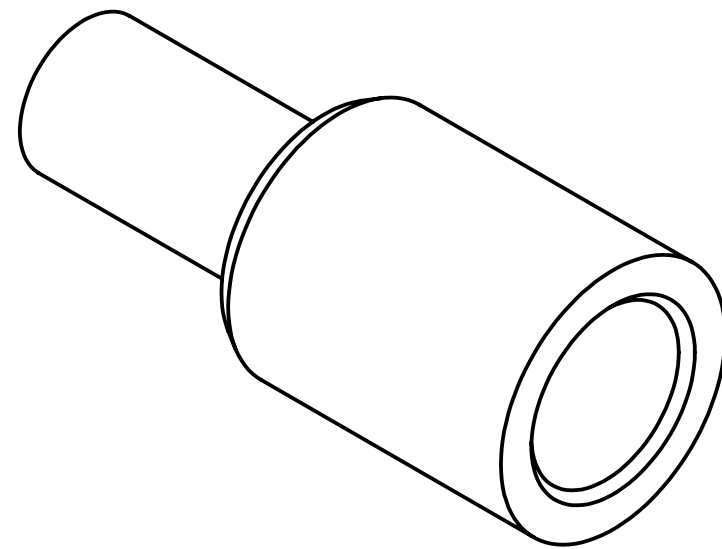


6.  MEANS "KEY DIMENSION & CHARACTERISTICS".
* MEANS "SIGNIFICANT DIMENSION & CHARACTERISTICS"
5. BREAK ALL SHARP CORNER TO R0.10MM UNLESS OTHERWISE SPECIFIED
4. ALL PARTS MUST BE FREE OF BURRS
3. SURFACE FINISH OF MACHINED SURFACES MUST BE RA1.6 OF BETTER UNLESS OTHERWISE SPECIFIED
2. ALL DIMENSIONS ARE AFTER PLATED UNLESS SPECIFIED
1. THE REFERENCED PRODUCT SHALL BE COMPLIANT TO ROHS DIRECTIVE

NOTES

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM THE AMPHENOL CORP.

CR-302055-125
Next Assembly

UNLESS OTHERWISE SPECIFIED					
LINEAR DIMENSIONS ARE IN MILLIMETERS					
TOLERANCES:					
DIM. RANGE	0-5.3	>3-6	>6-30	>30-120	>120-400
TOLERANCE	±0.1	±0.1	±0.2	±0.3	±0.5
ANGLES = ±2°					
DIM. & TOL. PER ASME Y14.5M-1994;					
DRM PER MIL-DTL-31000;					
OTHER AMPHENOL STANDARDS: 9-9318					
THIRD ANGLE PROJECTION					
					

APPROVALS		DATE
PREPARED BY:	ALLEN TSAI	2021/9/24
LEAD/PRODUCT ENGINEER:	ROSAN HUANG	
ENGINEERING MANAGER:	ROB WENG	
PRODUCT GROUP:	C&I	
AIPG DIVISION:	AIO	
MATERIAL SPEC		PROCESS SPEC
C11000 H02		N/A

AMPHENOL CORPORATION Amphenol Technology (Zhuhai) Co. Ltd. No. 63 Xingnan Road, Sanzao Town, Jinwan, Zhuhai, PRC			
L			
CRIMP SLEEVE FOR 6AWG			
SIZE	CAGE CODE	DOCUMENT NUMBER	REV
C	77820	10-762930	A
SCALE: 5:1		REF: N/A	SHEET 1 OF 1