


## Model PM1000



# WHEEL MOUNTED CRUSHING PLANT WITH IMPACT CRUSHER


### Technical Specifications :

- ◆ Throughput : upto 200 TPH, depending on material
- ◆ Feed material size : upto 600 mm
- ◆ Feed hopper : 6 m<sup>3</sup> (8cu. yds) approx.
- ◆ Grizzly feeder : 1100 x 3580 mm (43"x 11'7") with grizzly for pre-screening
- ◆ Fines conveyor : 650W x 3600 mm (25"x 11'10") for pre-screened material
- ◆ Impact crusher : P1000
  - Inlet opening : 1070 x 700 mm (42"x 28")
  - Rotor parameters : L 1000 (40") x Ø 1150 (45")
- ◆ Discharge feeder : 1000 x 2670 mm (39"x 8'8")
- ◆ Product conveyor : 800W x 9000 mm (32"x 29'6")
- ◆ Power unit : Diesel engine of 190 kW (250 hp) @ 2100 rpm with 75 kVA alternator
- ◆ Chassis unit : 2-axle semi trailer unit with pneumatic brakes, hydraulic jack and lighting
- ◆ Weight : 32 MT
- ◆ Optional features : Magnetic separator
  - Variable speed for grizzly feeder
  - Dust suppression system
  - Fines conveyor
  - Wireless remote control

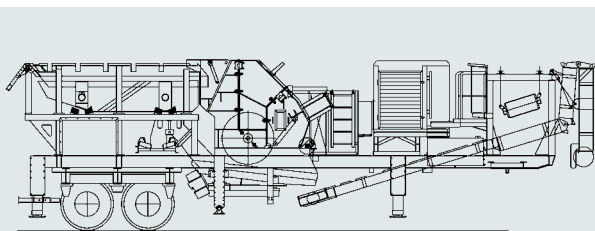

#### Transport Position

Width : 2500 mm (8' 2")      Length : 12600 mm (41' 3")  
Height : 4000 mm (13' 1")      Weight : 32 MT

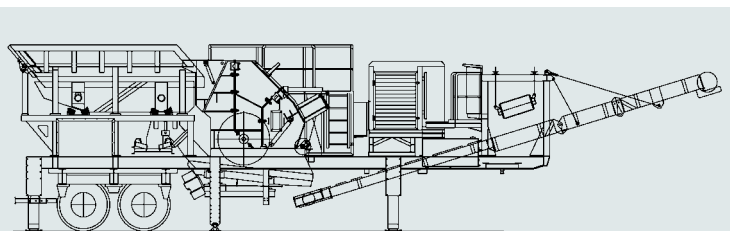

#### Working Position

Width : 4500 mm (14' 8")      Length : 15500 mm (50' 8")  
Height : 4200 mm (13' 8")      Weight : 32 MT

[www.apollo.co.in](http://www.apollo.co.in)

*Innovative Design, Technology & Service*




**Apollo**<sup>®</sup>  
Quality Construction Equipment

# WHEEL MOUNTED CRUSHING PLANT WITH IMPACT CRUSHER

## Model PM700


### Technical Specifications :

- ◆ Throughput : upto 100 TPH, depending on material
- ◆ Feed material size : upto 450 mm
- ◆ Feed hopper : 4 m<sup>3</sup> (5cu. yds) approx.
- ◆ Grizzly feeder : 800 x 3500 mm (32"x 11'6") with grizzly for pre-screening
- ◆ Fines conveyor : 500W x 3300 mm (20"x 10'10") for pre-screened material
- ◆ Impact crusher : P700
  - Inlet opening : 720 x 500 mm (28"x 20")
  - Rotor parameters : L 700 (28") x Ø 1000 (39")
- ◆ Discharge feeder : 750 x 1500 mm (30"x 5'0")
- ◆ Product conveyor : 800W x 9100 mm (32"x 29'10")
- ◆ Power unit : Diesel engine of 140 kW (190 hp) @ 2100 rpm with 53 kVA alternator
- ◆ Chassis unit : 2-axle semi trailer unit with pneumatic brakes, hydraulic jack and lighting
- ◆ Weight : 26 MT
- ◆ Optional features : Magnetic separator  
Variable speed for grizzly feeder  
Dust suppression system  
Fines conveyor  
Wireless remote control

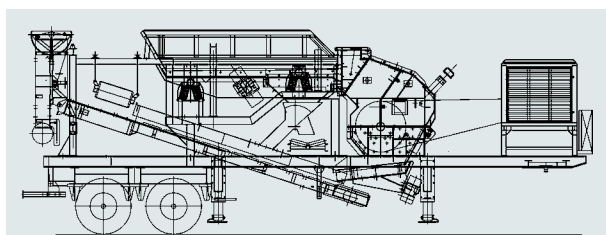

#### Transport Position

Width : 2500 mm (8' 2")      Length : 11100 mm (36' 5")  
Height : 4000 mm (13' 1")      Weight : 26 MT

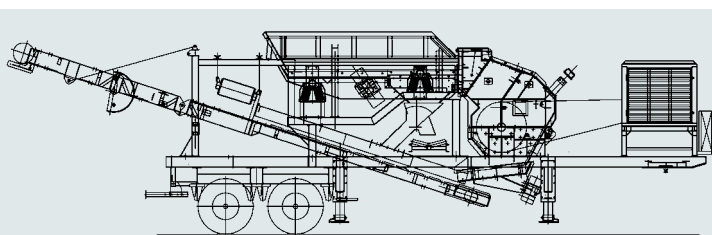

#### Working Position

Width : 4500 mm (14' 8")      Length : 14050 mm (46' 1")  
Height : 4000 mm (13' 1")      Weight : 26 MT

With Apollo's policy of constant upgradation of products, specifications are subject to change without prior notice. Accessories shown are optional and not a part of standard supply. Technical data are approximate and should be used as a guide only. Capacity and power requirements depend on the type and characteristics of the feed materials.

#### Corporate Office :

**GUJARAT APOLLO INDUSTRIES LIMITED**  
"Apollo House" Near Mithakhali Circle,  
Navrangpura, Ahmedabad - 380 009, INDIA.  
Phone : +91-79-2656 3730 / 6618 8888  
Fax : +91-79-2656 4705  
Email : info@apollo.co.in  
Website : www.apollo.co.in

#### German Subsidiary :

**APOLLO MASCHINENBAU GmbH**  
Grünauer Fenn 44,  
D-14712 Rathenow, Deutschland.  
Phone : +49(0)3385 510200  
Fax : +49(0)3385 510203  
Email : info@apollo-maschinenbau.de  
Website : www.apollo-maschinenbau.de

**Apollo®**  
Quality Construction Equipment

*One Source, Unlimited Possibilities...*