

HPM 66Y S16 PROGRAM CONTROL PAPER CUTTER



Computer System:

1. German Operating System is Equipped to meet the operating habits of domestic users and guarantee convenient operation.
2. Highly sensitive of touch screen reaction speed is more than 10 times that of other products
3. Main board display support 60m/min, position display in place immediately
4. Signal amplification function strong, anti-interference avoid size error caused by drive

[This is an electronic message, hence signature not](#)

Hyderabad

Pune

Vizag

Nairobi-kenya

aging.

5. Dimension in front of knife will be displayed to facilitate sizes for cutting.
6. Program storage capacity is 200programs, each program can store 500 items cutting size.
7. Free operation of addition subtraction multiplication and division constantly outputting programs,
8. Equipment has relative positioning function relative to current position
9. With minimal compensation, it can rapidly correct program errors due to paper distortions
10. Can rapidly find out user defined number of cutters
11. Teach to automatically change the data of the knife
12. Insert the number of cuts in the program
13. The air closing distance can be set. Different air closing distances need to be set according to the different roughness of the paper surface improve the precision of paper cutting
14. Each hair cushion program can be programmed
15. The time of automatic cutting signals can be set up and canceled Single automatic cutting can be started by inputting a password.
16. High and low speed can be manually switched over rapidly
17. Paper pushing program is equipped to push paper automatically so as to guarantee safety and enhance operation efficiency
18. Automatic cutting can be made as per instructed programming
19. Display precision is 0.01mm or 0.001inch
20. Multiple languages such as Chinese and English are available for order management
21. Manual and automatic operations can be rapidly switched over to enhance efficiency to the greatest extent
22. Massages are equipped to make users judge equipment conditions correctly
23. Backgauge speed is 5m/min.

Machine Performance

- Unlike other paper cutting machines, the main motor needs to run when in standby mode. This paper cutting Machine only operates the main motor during cutting, reducing electricity consumption by more than 60%
- The paper cutting machine is driven by hydraulic pressure and archives high precision cutting through a sturdy structure and direct measurement
- The paper press relies on hydraulic pressure to press the paper, and the spring returns to its position. The paper press operates and applies pressure stably. The paper pressure can be continuously adjusted over a large through a

This is an electronic message, hence signature not

Hyderabad

Pune

Vizag

Nairobi-kenya

graduated knob to meet the cutting requirement of different materials

- Both precise and gentle oblique swing cutting are hydraulically driven, allowing the tool to adjust its dwell time at the lowest point to adapt to different material.
- The hydraulic control system adopts high performance plug in hydraulic valve technology optimizes hydraulic circuit design, and reduces hydraulic damping of the fluid, the cutting mechanism is adjusted through a hydraulic system, ensuring smooth and impact free cutting, and the machine has a long service life.
- Integrated seamless workbench, surface chrome plating treatment good structural strength durable and not deformed
- The paper pusher adopts side mounted linear guide rail guidance high precision ball screw drive, and advanced and reliable Huichuan servo system to ensure smooth operation and precise positioning of the paper pusher
- The key components such as the gantry casting body have undergone aging treatment without deformation ensuring long term accuracy
- High resolution photoelectric protection device ensures the safety of operators in the cutting area
- The electrical components are selected from internationally renowned brands such as Schneider, and the electrical control system is advanced and reliable. Schneider switch power supply is used, which ensures stable power output and effectively ensures the safety of computer power supply.
- Using an electric handwheel for quick and convenient size adjustment without the need for gear adjustment
- The knife holder adopts an eccentric shaft fine adjustment rod, which can be fine adjusted at the lower end to ensure paper cutting
- High end industrial touch LCD screen with strong anti-interference ability and signal amplification function, ensuring service life.

This is an electronic message, hence signature not

Hyderabad

Pune

Vizag

Nairobi-kenya

Configuration Listing

No	Name	Brand and Model
1	Computer Display Touch Screen	Industrial LCD Screen
2	Paper Feeding Positioning Motor	Servo System (NNOVANCE)
3	Working Platform	Slot less Chrome Plating Work
4	Gantry Cast Body	HT250
5	Sensor	FOTEK
6	Switch Power Supply	Schneider (TE)
7	Paper Feeding Screw	High Precision ball screw
8	Rail	High precision linear double guide rail (JSM)
9	Hydraulic Pump	Dual Gear Pump (YTP)
10	Main Plug-In Combination Valve	ASDON
11	Main Bearings	NSK

Technical Parameters:

Model	HPM66YS16
Max Cutting Width	670 mm
Max. Cutting Length	670 mm
Max. Cutting Height	86 mm
Max. Clamp Pressure	1500 N
Cutting Speed	20 time/ min
Main Motor	3 KW
Front Table Length	670 mm
Table Height	900 mm
Supply Voltage	380 V
G. W/N. W	1000/850 KG
Packaging Size	2060 * 1460 * 1750 mm



This is an electronic message, hence signature not

Hyderabad

Pune

Vizag

Nairobi-kenya

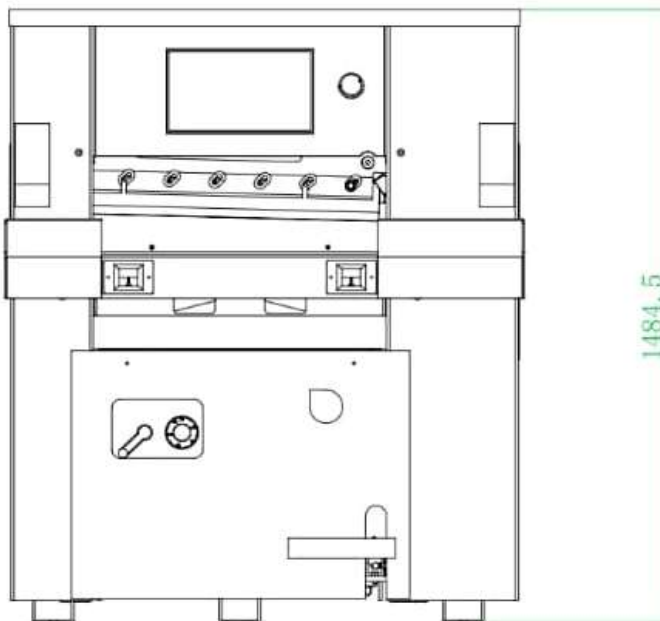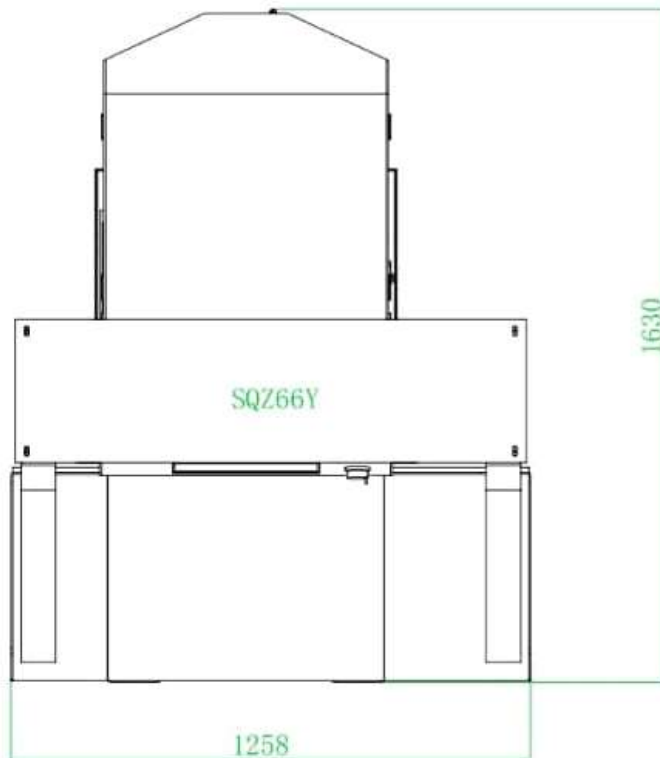

This is an electronic message, hence signature not

Hyderabad

Pune

Vizag

Nairobi-kenya