

LS-PrePost 4.8

Release Data:

Major new features of the 4.8 series, compared to 4.7:

LS-PrePost 4.8

New keywords and improvement

 New keywords

 Keyword Reading

Scripting Command Language and Python Language

 Scripting Command Language

 Python Language

General Preprocessing

 Entity Display

 Part SortBy

 Entity Creation

 Identify dialog:

 support "PLOT" of *DEFINE_CURVE_DUPLICATE.

 Keyword Manager

 Model Compare

 Shell splitting

 Set-segment creation

 Find

 Dummy Position

 Material Direction

 Move Copy

 Element Generation

General Post-processing

 Vector Plot

 Measure

 New XY Plot

 Old XY plot

 3DGraphics

 NVH-panel contribution

 Binout Fringe

 Fast Render

 S-ALE

 MS-Post

 Media Tool

 Split Window

General

 Sort by Size/Extend

 Color Box

 Background Color

 Statistical Information

 DES

 Trace

 Adaptive

 View

 Section Plane

Geometry

Multiphysics Solution

Open

[Create New Solution](#)
[Solution Tree Structure](#)
[Mechanical and Thermal Case](#)
[ICFD](#)
[Structured-ALE](#)
[Solution Property](#)
[ASCII and Binout](#)
 [ASCII](#)
 [Binout](#)
[Femzip](#)
[File Reading and Writing](#)
[Command File](#)

New keywords and improvement

New keywords

- CONTROL_EXPLICIT_THERMAL_OUTPUT
- CONTROL_EXPLICIT_THERMAL_SOLVER
- CONTROL_ACOUSTIC
- CONTROL_FORMING_TRIMMING_SOLID_REFINEMENT
- CONTROL_MPP_PFILE
- CONTACT_AUTOMATIC_SINGLE_SURFACE_TIEBREAK
- CONTACT_AUTOMATIC_GENERAL_TIEBREAK
- CONTACT_AUTOMATIC_SINGLE_SURFACE_TIEBREAK_BEAM_OFFSET
- CONTACT_AUTOMATIC_GENERAL_TIEBREAK_BEAM_OFFSET
- CONSTRAINED_SOLID_IN_SOLID{OPTION1}{OPTION2}
- CONSTRAINED_IMMERSED_IN_SPG
- DATABASE_PBLAST_SENSOR
- ICFD_BOUNDARY_PERIODIC
- IGA_options
- INITIAL_STRAIN_SHELL_NURBS_PATCH
- INITIAL_STRESS_SHELL_NURBS_PATCH
- MAT_296
- MAT_291
- MAT_187_LIGHT
- PART_COMPOSITE_LONG_CONTACT
- SECTION_IGA_SHELL
- SECTION_IGA_SOLID
- SET_IGA_EDGE{OPTION1}{OPTION2}{OPTION3}
- SET_IGA_FACE{OPTION1}{OPTION2}_{OPTION3}
- SET_IGA_POINT_UVW{OPTION1}{OPTION2}
- EM_CONTACT_SUBDOM
- EM_BOUNDARY_PRESCRIBED
- EM_CONTROL_COUPLING
- EM_CONTROL SOLUTION
- EM_RANDLES_EXOTHERMICREACTION
- EM_RANDLES_EXOTHERMICREACTION
- EM_EP_CELLMODEL_FENTONKARMA
- EM_EP_CELLMODEL_FITZHUGHNAGUMO

- EM_EP_CELLMODEL_FITZHUGHNAGUMO
- EM_CONTROL(updated)
- EM_ISOPOTENTIAL(updated)
- EM_MAT_001(updated)
- EM_MAT_001(updated)
- EM_MAT_006(updated)
- EM_RANDLES_MESHLESS(updated)
- EM_RANDLES_BATMAC(updated)
- EM_RANDLES_TSHELL(updated)
- EM_RANDLES_TSHELL(update)

Keyword Reading

1. speed up of reading keyword file by improve the process of remove space characters of each line.
 2. speed up the process of include transform, especially for model which has too many *include_transform subsystems.
 3. speed up the process of pre-comment.
-

Scripting Command Language and Python Language

Scripting Command Language

1. support for the "scalar" component name to get the node scalar and element scalar results.
2. support for element deletion.
3. update scl samples of control macro with file.
4. fix int array bugs to deep copy the int array results.
5. Save result node id of the command "ident xyzpt" to get ready for SCLCmdResultGetValue in SCL.
6. fix bug of xyplot related functions when no model loaded.
7. retrieve selected parts and nodes from genselect.

More examples see [SCLExamples](#)


Python Language

At the moment, the Python language is also used as the scripting language of LS-PrePost. The user can use Python scripting in LS-PrePost. The Python modules that LS-PrePost provides include "DataCenter" and "LsPrePost", more details see [Lsppscripting.pdf](#)

How to use Python Scripting in LS-PrePost

Firstly the user should set own Python home path(LS-PrePost4.8 only supports Python36) by using LS-PrePost command:

```
setpythonhome "python/home/path"(like D:\Python36)
```

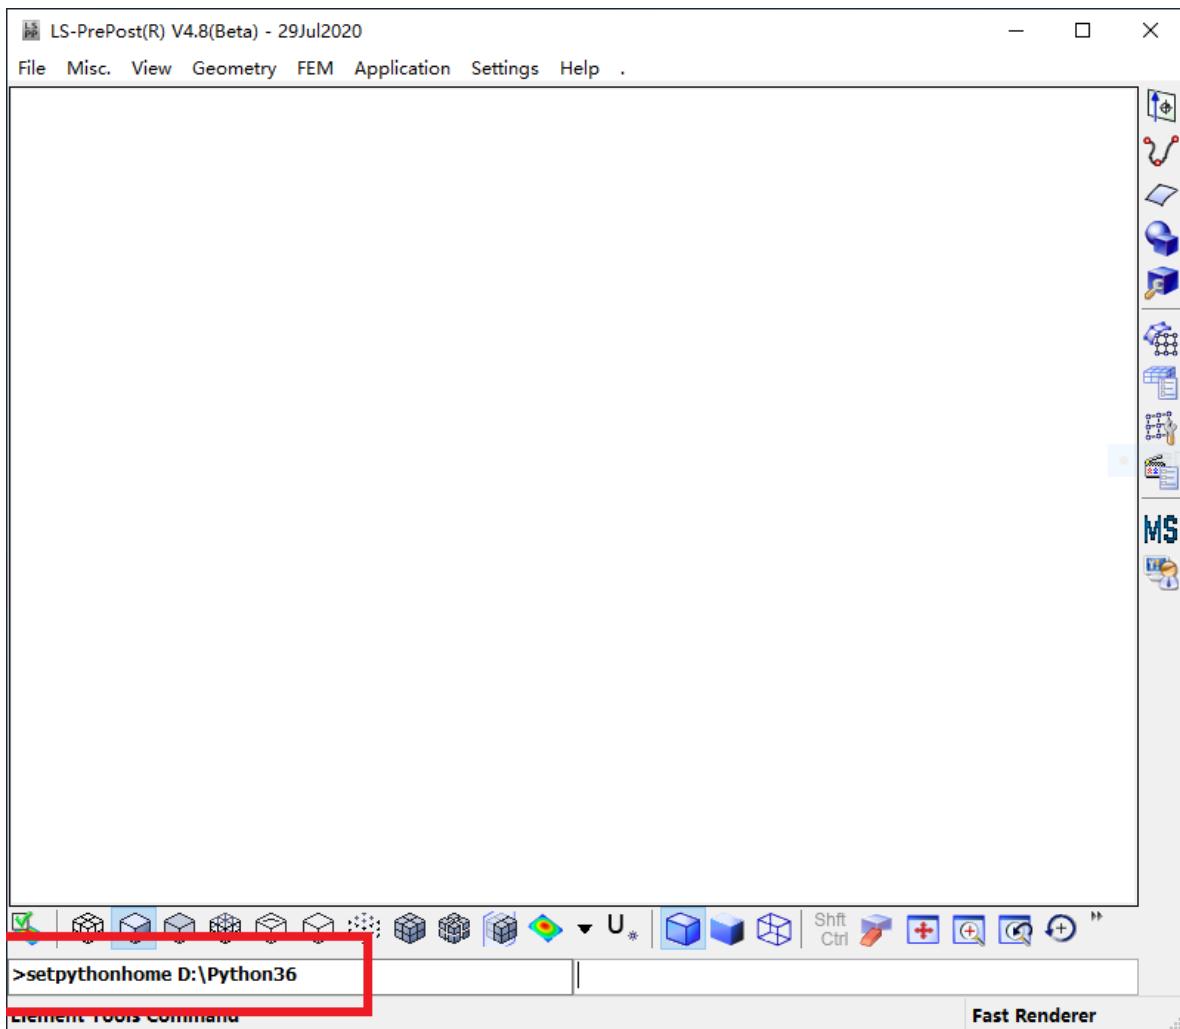


The Python home path will be automatically saved to the config file.

And then run Python scripting with the regular LS-PrePost command, or within the command file, use the runpython command to execute the Python scripting, parameters can also be passed to the script.

The syntax:

```
runpython "pythonscriptingname" optional parameters
```

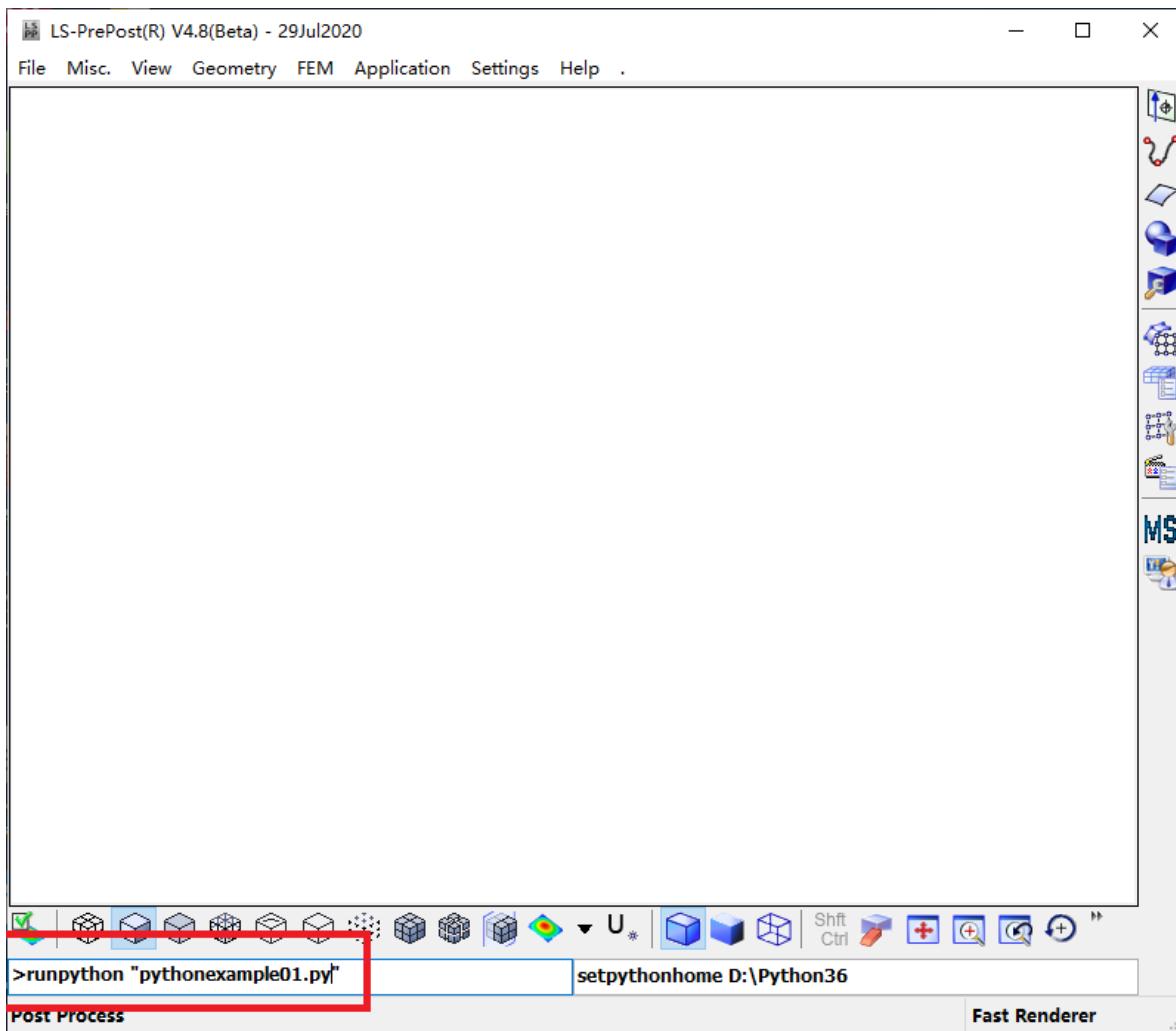

Example: the following command file will execute the script that creates a X-Y curve with the parameters defined in the command file.


```
parameter pa 9.0E+07
parameter pb 7000.0
parameter pc 4.0E+07
parameter npt 300
parameter xmin 0.0
parameter xmax 0.00126
runpython "customcurve.py" &npt &pa &pb &pc &xmin &xmax
```

More examples see [PythonExamples](#)

General Preprocessing

Entity Display

support multiply ids in "Keyin" of entity selection panel

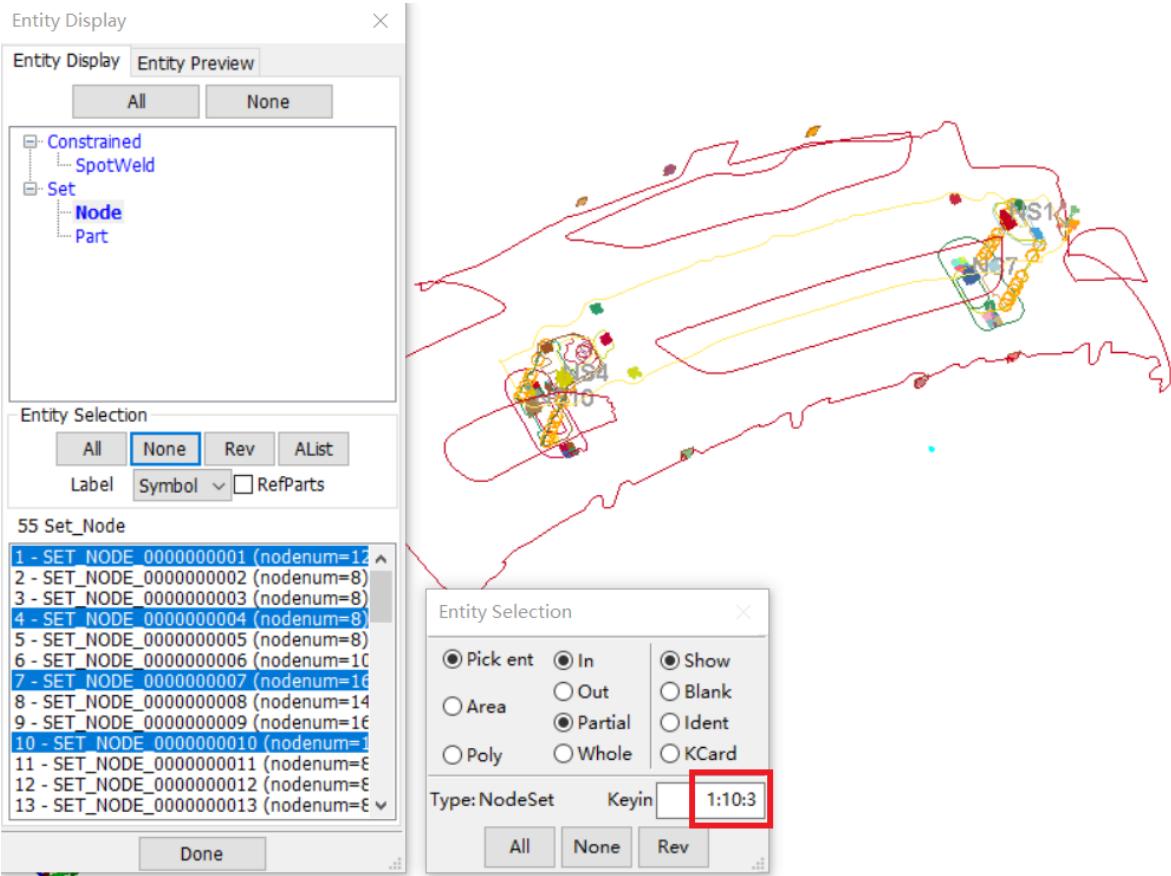

Part SortBy

support popup keyword form when right click on the cell of SortBy dialog

Part Sort


	Type	PartId	PartKwd	PartName	SectionId	SectionName	MatId	N	Setting Column:
1	Shell	1	PART	2_bumperplastic	1	2_bumperplastic	2000003		<input checked="" type="checkbox"/> Type
2	Shell	3	PART	113_raillowerconnectorL	3	113_raillowerconnectorL	2000120		<input checked="" type="checkbox"/> PartId
3	Shell	4	CONTACT	114_raillowerouterL	4	114_raillowerouterL	2000121		<input checked="" type="checkbox"/> PartKwd
4	Shell	5	CONTACT	115_raillowerouterR	5	115_raillowerouterR	2000122		<input checked="" type="checkbox"/> PartName
5	Shell	6	PART	116_raillowerconnectorR	6	116_raillowerconnectorR	2000123		<input checked="" type="checkbox"/> SectionId
6	Shell	9	CONTACT	26_bumper	9	26_bumper	2000132		<input checked="" type="checkbox"/> SectionName
7	Shell	10	PART	32_framefrontcapR	10	32_framefrontcapR	2000135		<input checked="" type="checkbox"/> MatId
8	Shell	11	PART	337_framefrontcapRpostbase	11	337_framefrontcapRpostbase	2000136		<input checked="" type="checkbox"/> MatName
9	Shell	12	PART	31_framefrontcapL	12	31_framefrontcapL	2000137		<input checked="" type="checkbox"/> MatTypeName
10	Shell	13	CONTACT	35_framefrontL	13	35_framefrontL	2000138		<input checked="" type="checkbox"/> EosId
11	Shell	14	PART	34_framefrontcapRbrkt	14	34_framefrontcapRbrkt	2000141		<input checked="" type="checkbox"/> Hrglass
12	Shell	15	CONTACT	30_framefrontL	15	30_framefrontL	2000142		<input checked="" type="checkbox"/> Elform
13	Shell	16	PART	33_framefrontcapRpost	16	33_framefrontcapRpost	2000158		<input checked="" type="checkbox"/> Thickness
14	Beam	17	PART	639_BeamSpotWelds	17	639_BeamSpotWelds	2000486		<input checked="" type="checkbox"/> OPTT
15	Shell	21	CONTACT	Slave tied contact bumper	21	Slave tied contact bumper	2000000		<input checked="" type="checkbox"/> Mass
16	Shell	27	PART	master for wasserkasten	27	master for wasserkasten	2000138		<input checked="" type="checkbox"/> Lump Mass

popup keyword form with the entity ID when right click on the cell if the entity exists in the model.

Pop KForm


Entity Creation

support create *INITIAL_VELOCITY in EntCreation dialog

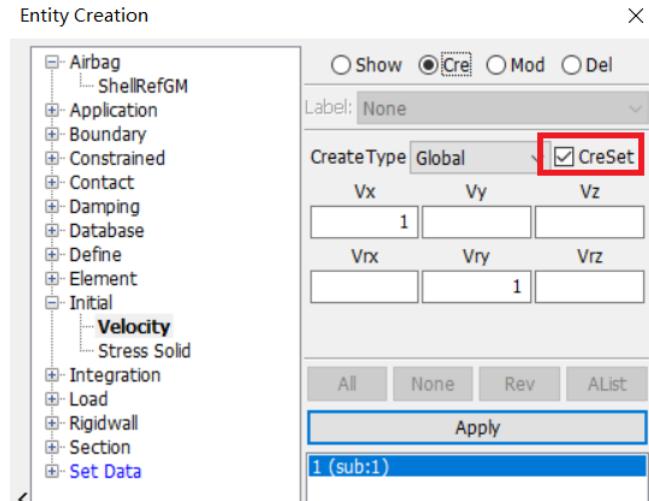

Identify dialog:


support pop-up keyword form of selected Entity(node/element/part)

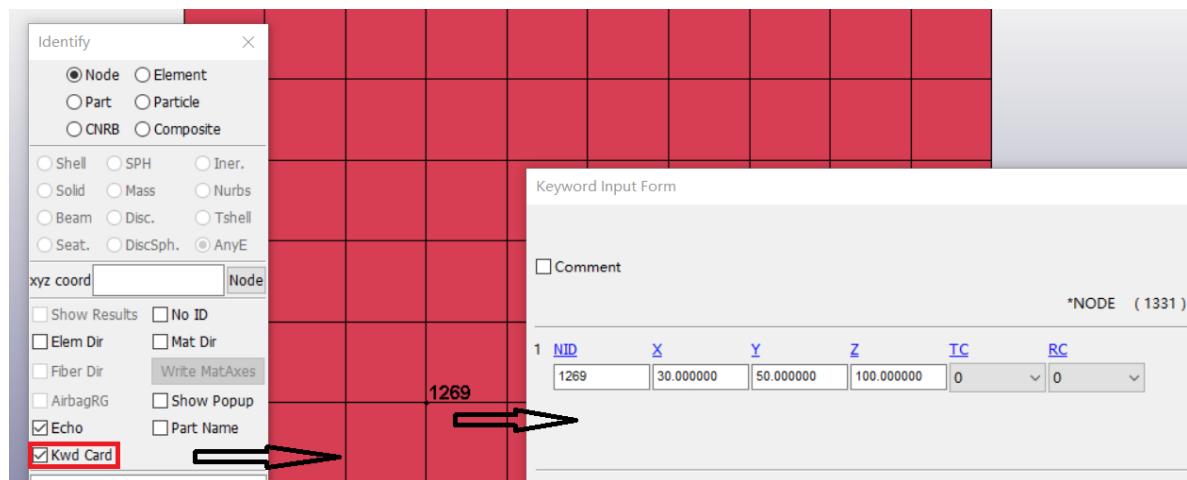

Keyword Input Form


support "PLOT" of *DEFINE_CURVE_DUPLICATE.

Keyword Input Form

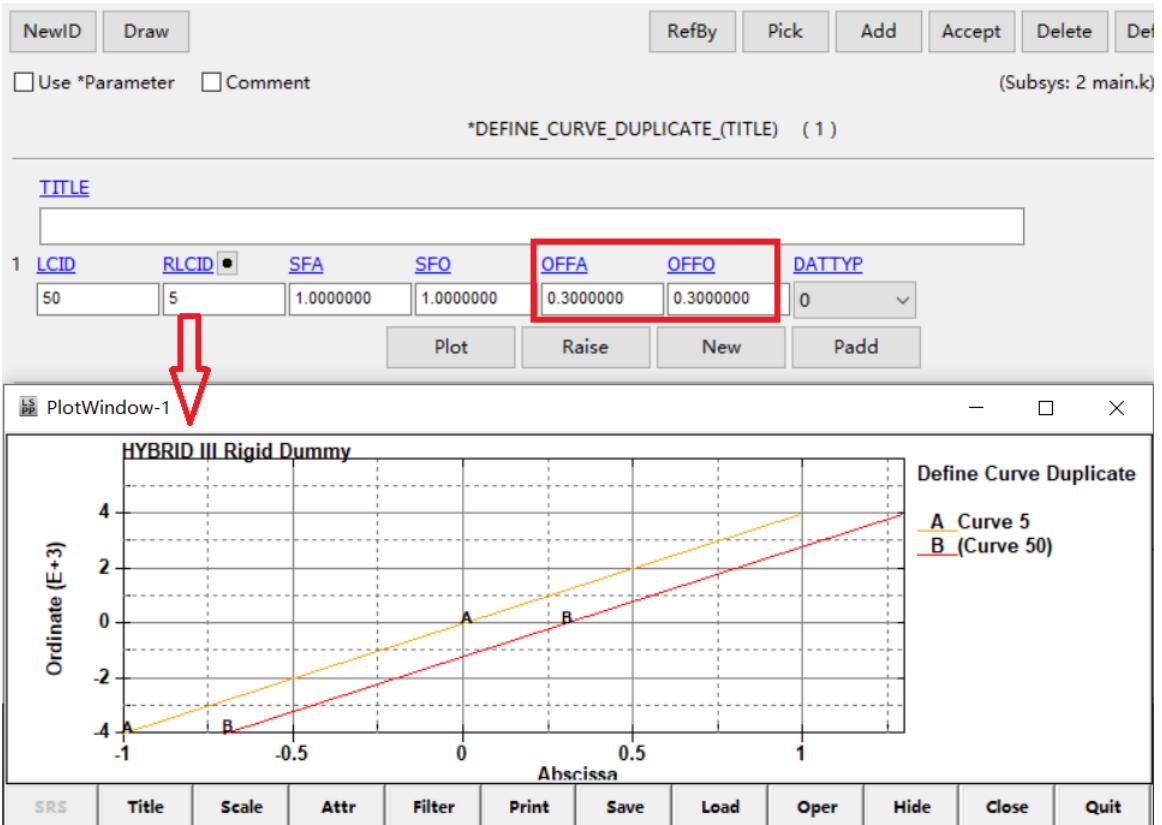


Keyword Manager

right menu of `*DEFINE_CURVE` to load curve from xydata file, "Load Curve" will load curve data from file and create `*DEFINE_CURVE`, "Load curve to table" will also use these curve ids to create `*DEFINE_TABLE`.

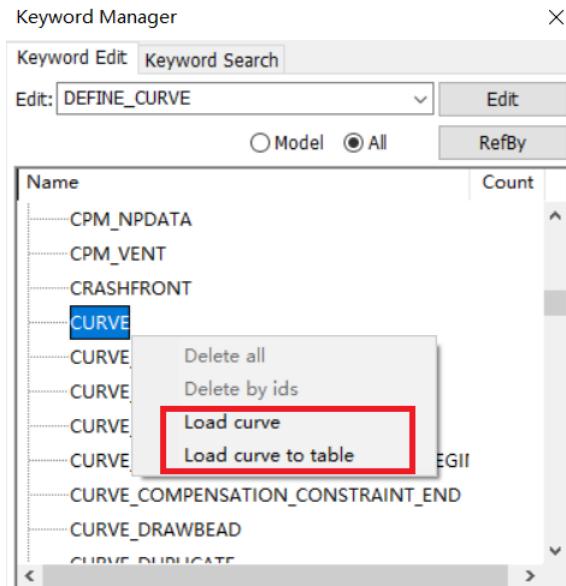


Model Compare

support "Diff Parts" on model compare dialog, compare the selected two models and find out parts that are different or only exist in one model, then highlight these parts and set others as transparent.

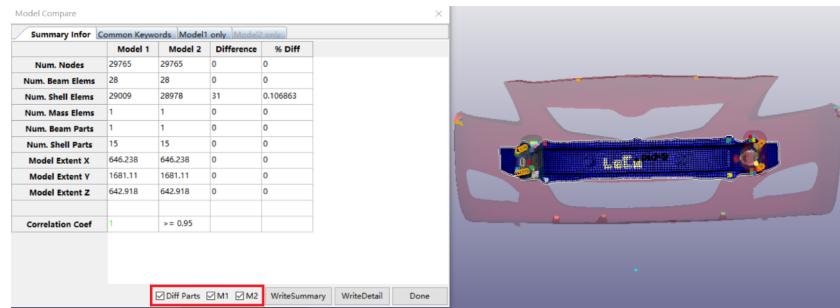


Shell splitting

Description: split quad elements into tria elements so that their diagonals create a unionjack pattern.




Advantage: this split seems to provide slightly better stability when we crush the honeycomb barriers.

Implement: this feature can be activated from "element editing dialog" -> "Split/Merge" -> "Split Operation:Shell" -> "unoinjack icon", if the additional "Propagate" checkbox is checked, the splitting will propagate to the entire part.

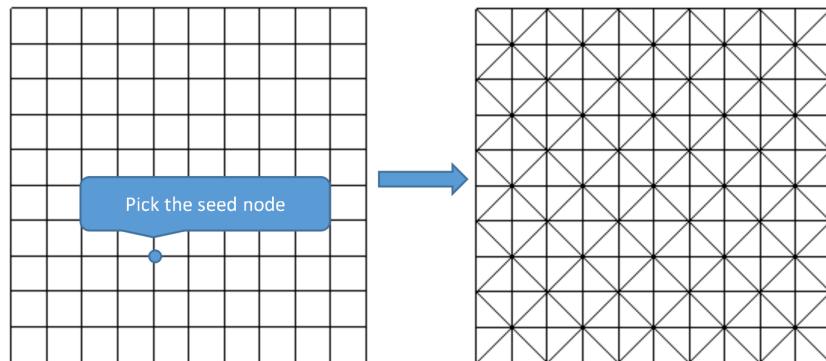


Set-segment creation

support element with both 8 or 20 nodes

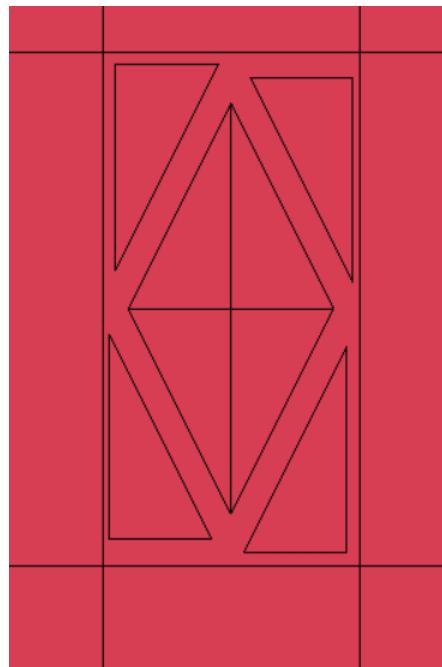

Find

Add CNRB option to find out CNRB as well when finding neighbor elements.

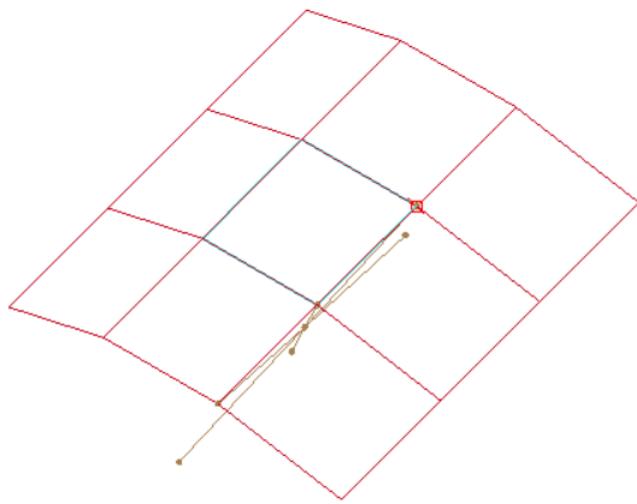

Dummy Position

support soft angle parameter (S. Limit = 1) for a child assembly

Material Direction

mat-36E, mat-274


Move Copy

support Penta element.


Element Generation

1. Element Generation -> Shell -> Tunnel.


Given a batch of section coordinates (such as X, Y or Z coordinates) and profiles' parameters (such as circle's area, radius, perimeter, or square's area, side length, diagonal length), it construct a revolve shell mesh. Here provides a "Sample" button to load a sample data.

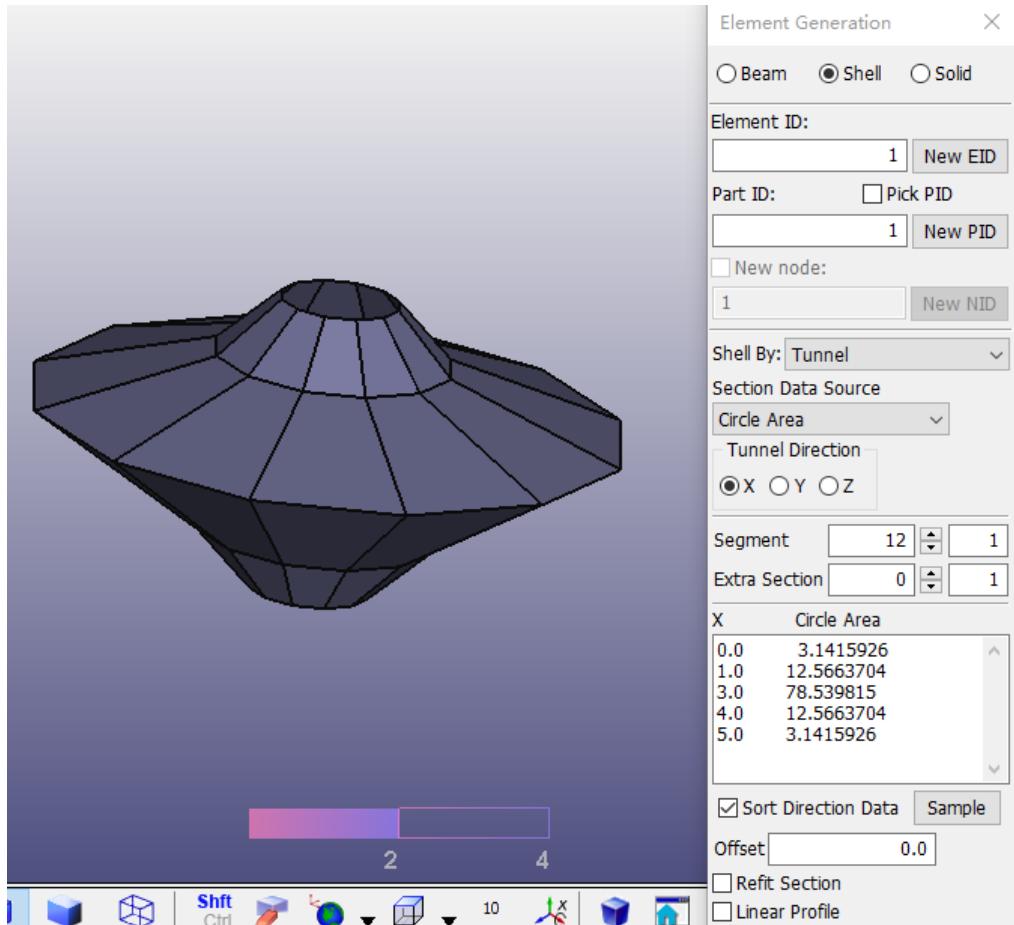

Here you can select "Tunnel Direction" to change revolve axis direction. Define "Segments" to set number of sampling points in section plane. Set "Extra Section" to interpolate more points in profile.

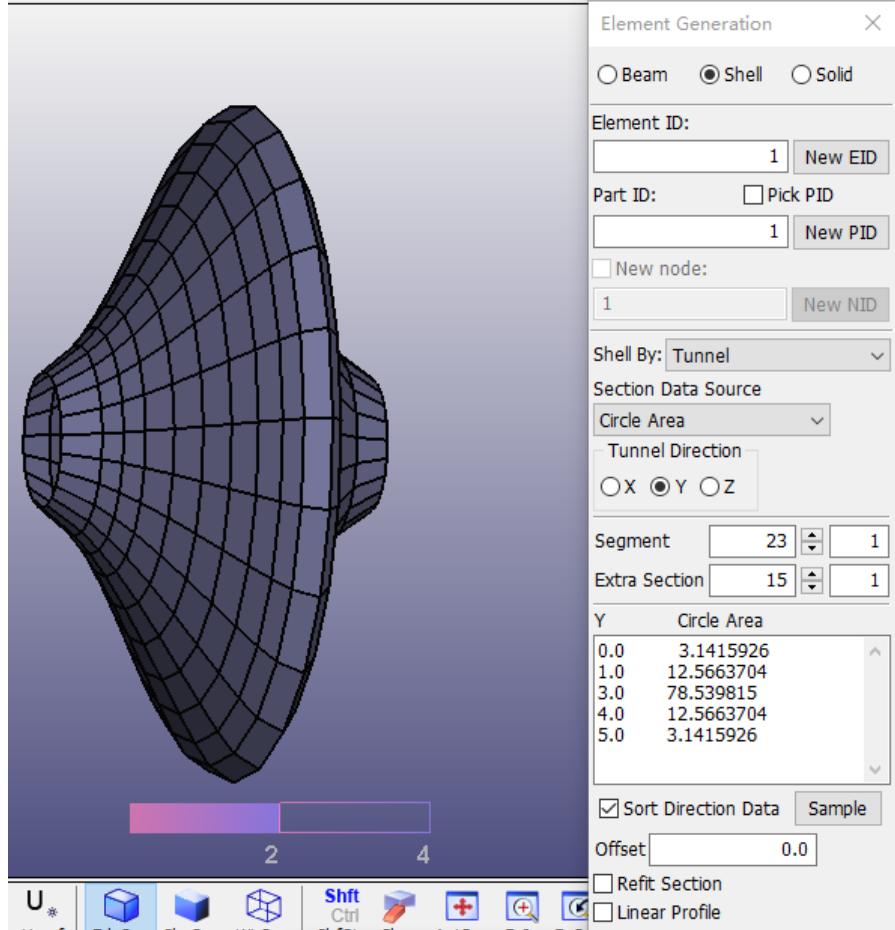


We also provide two options “Refit Section” and “Linear Profile”. “Refit Section” will fit a b-spline curve by raw section position. During meshing, all section points will be sampled from the b-spline curve and raw section points will not be kept. “Linear Profile” will sample profile points from polygon’s profile instead of b-spline profile.

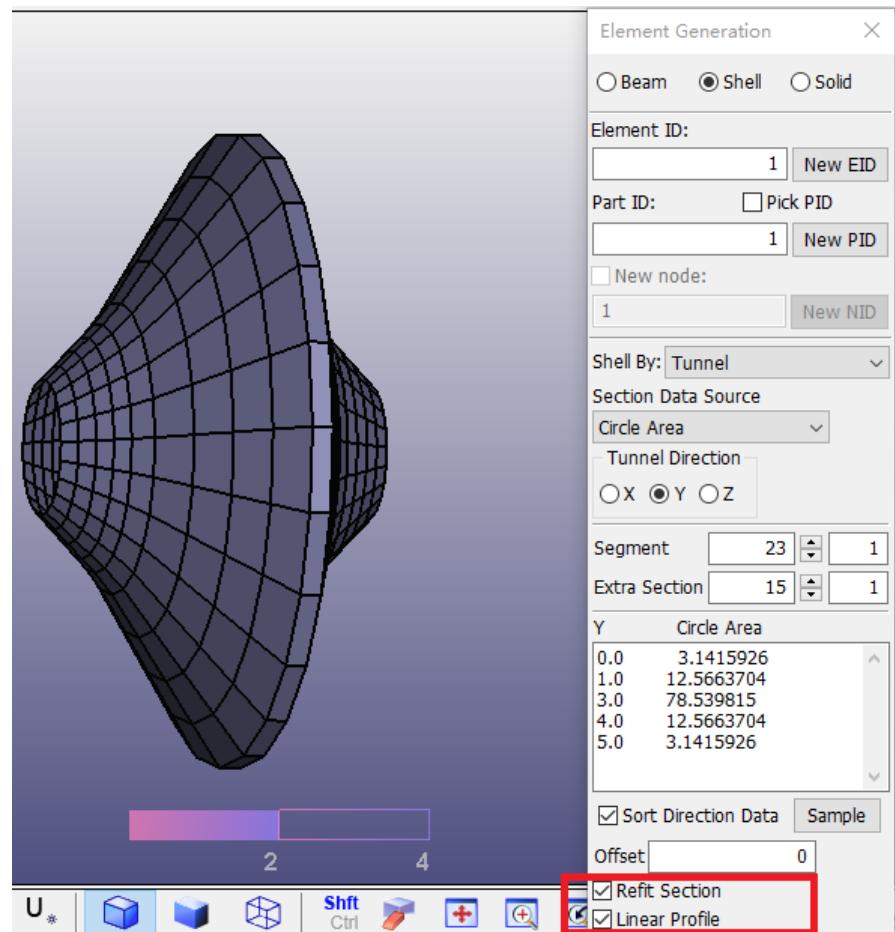


2. Element Generation -> Shell -> Fan Mesh.

Given a center point and several boundary points, it construct a shell fan mesh.

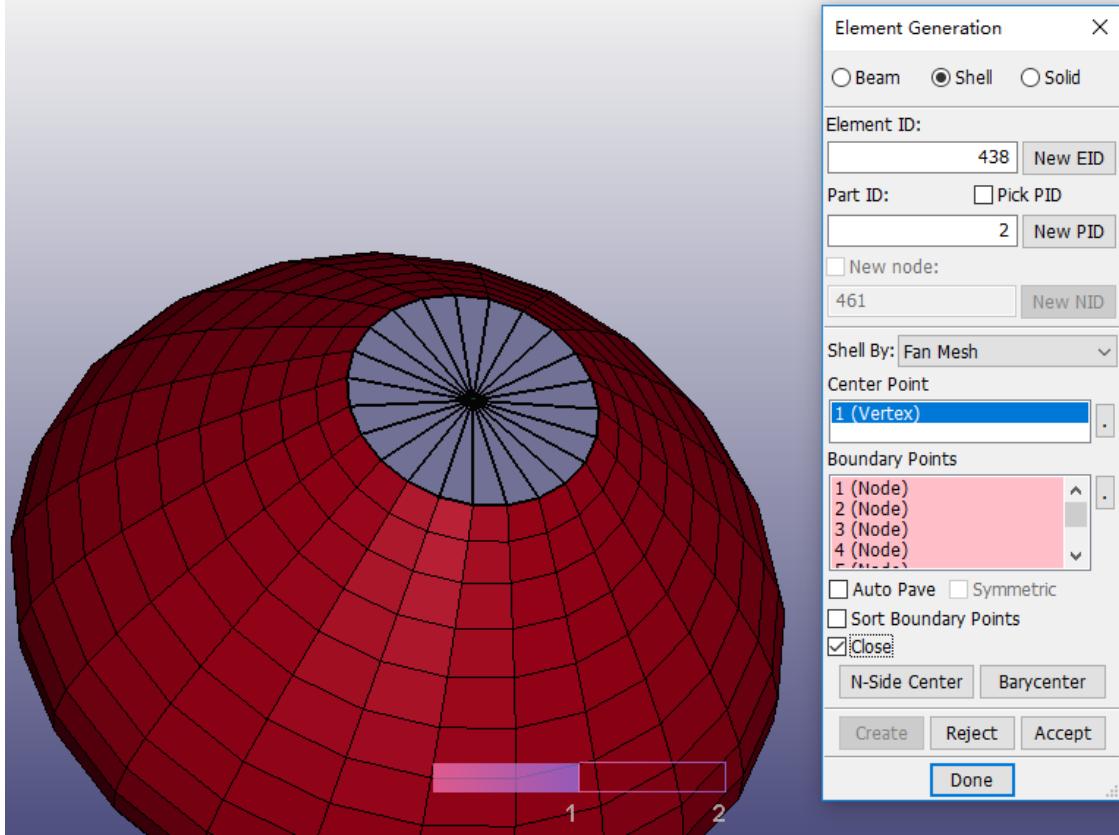


To construct fan mesh easily, here we provide a “Auto Pave” option and “N-Side Center” button. In the following example, we pick three nodes to “Boundary Points”, and click “N-Side Center” to calculate the fan center, check “Auto Pave” to pave other nodes in fan mesh.

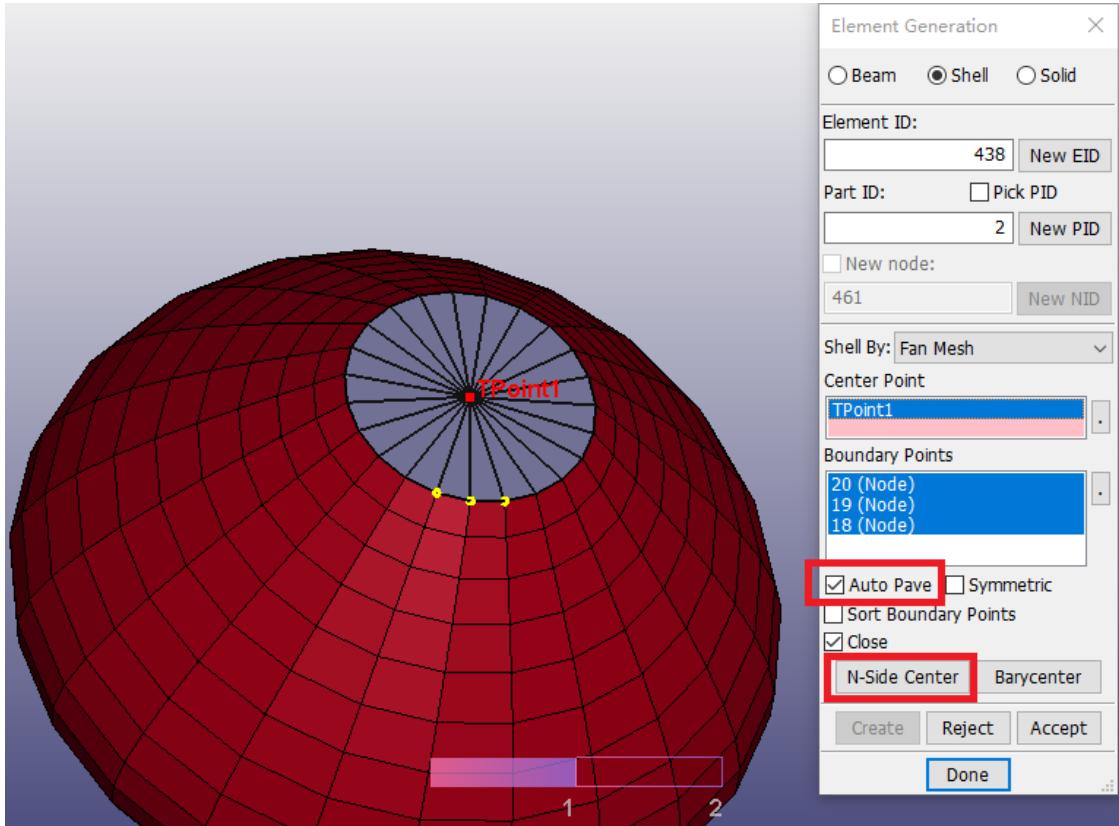


3. Element Generation -> Shell -> Voxel Mesh

Given several closed 2D curves, it construct a structure mesh on grids’ region.

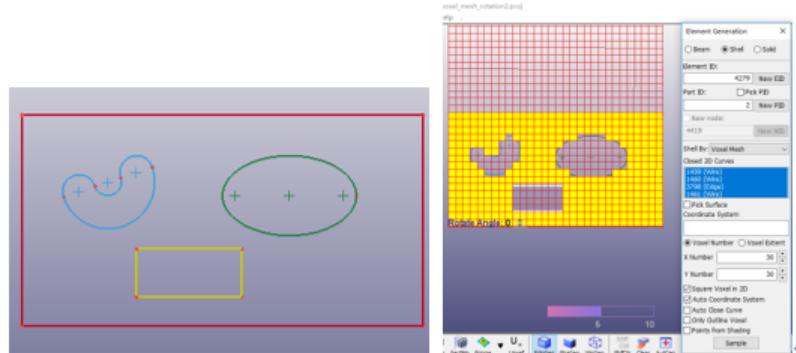


a. Raw four planar loops

b. voxel mesh preview by 4 loops (10*10 grids)

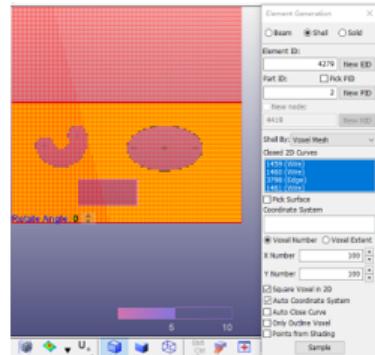


c. preview of 100*100 grids

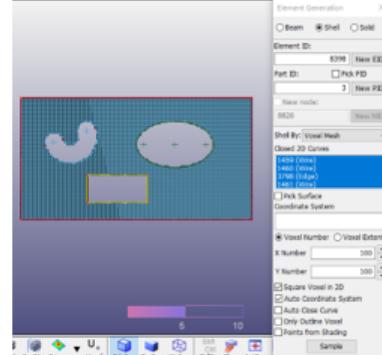


d. final result


For curvature closed curves, we will try to fit a b-spline surface as background surface. The following pictures show voxel mesh from two closed curvature loops. To get better mesh result, you need to adjust "Rotation Angle" in view region.

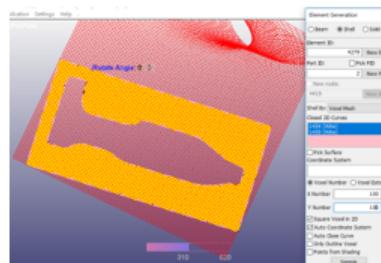

a. curvature voxel mesh by two loops

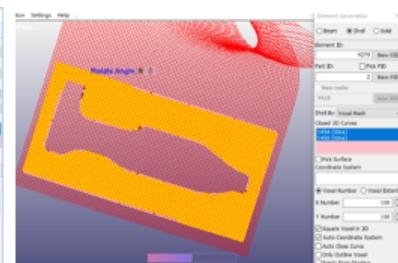


b. adjust rotation angle to align parameter domain

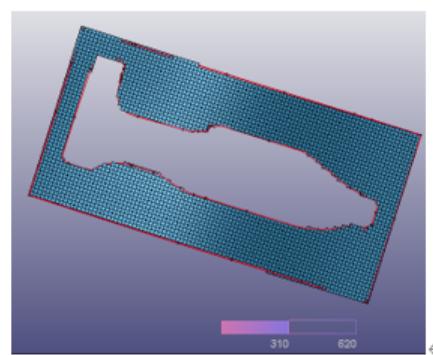


c. final result

To get boundary voxel mesh, check "Only Outline Voxel".

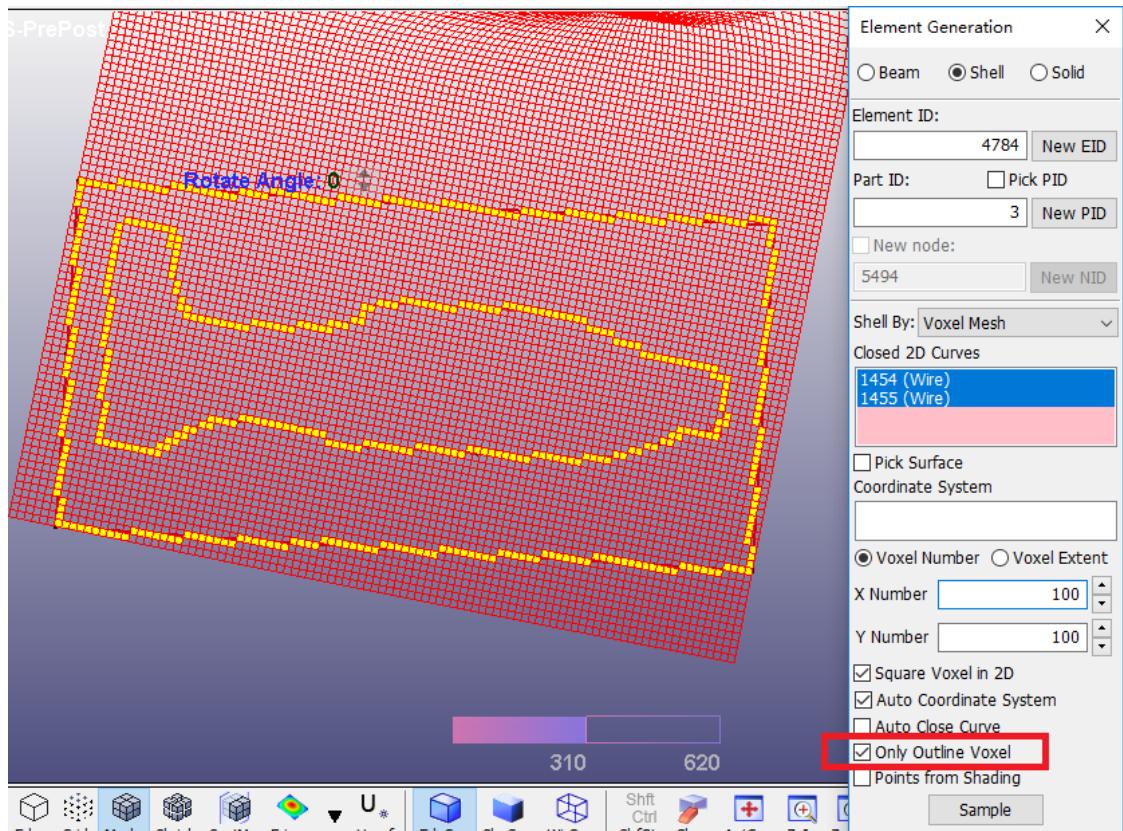


It also can construct a structure mesh on the surfaces.

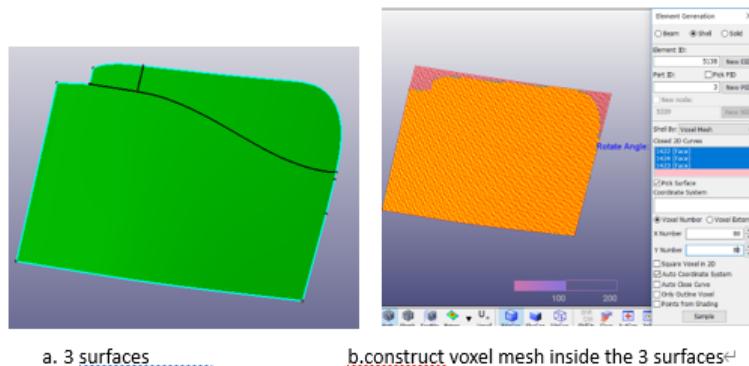


4. Element Generation -> Solid -> Voxel Mesh


Given a geometry solid shape, it construct a structure hex mesh on 3D grids' region.

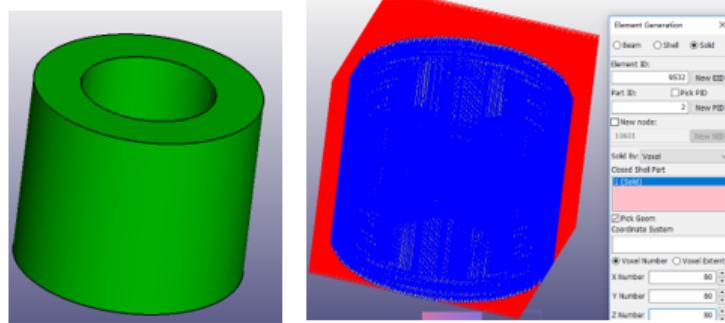

a. Solid shape

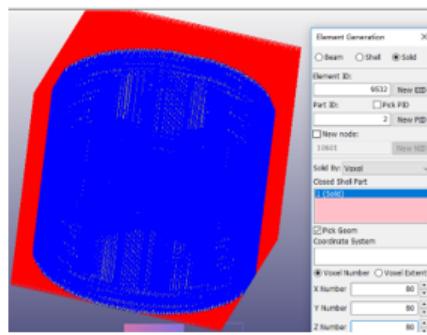

b. construct 3D hex mesh inside the solid




c. final result

General Post-processing


Vector Plot

print the vector scalar on the screen

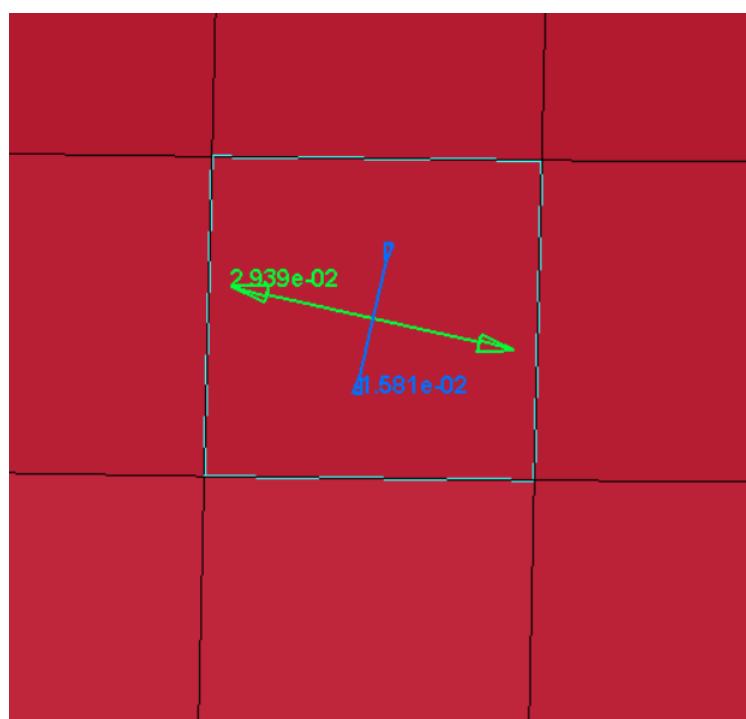


Measure

Measure->Area->Nd

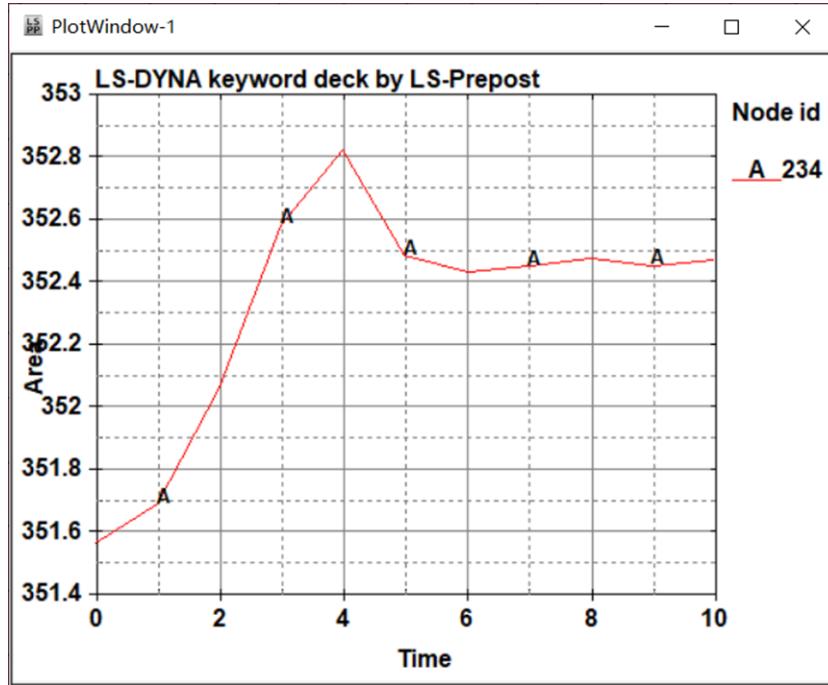


New XY Plot


1. support for the splitwindow state about "Plot" and "New" of history dialog.
2. support for draw the annotation in split window and main window by changing the annotation functions based on port area.

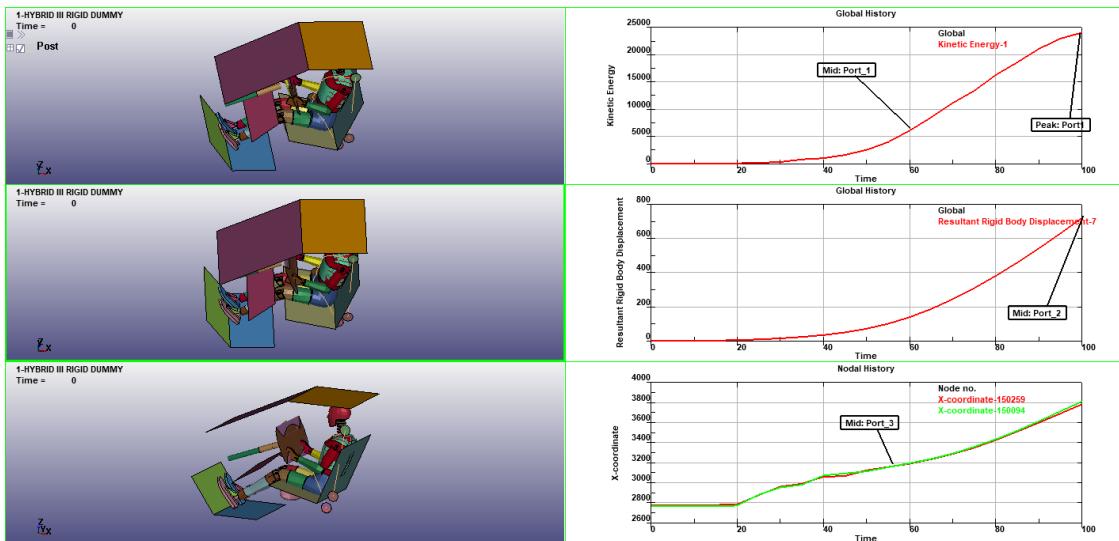


3. support for the rubber band for annotation link line.
4. improve the annotation text boundary.

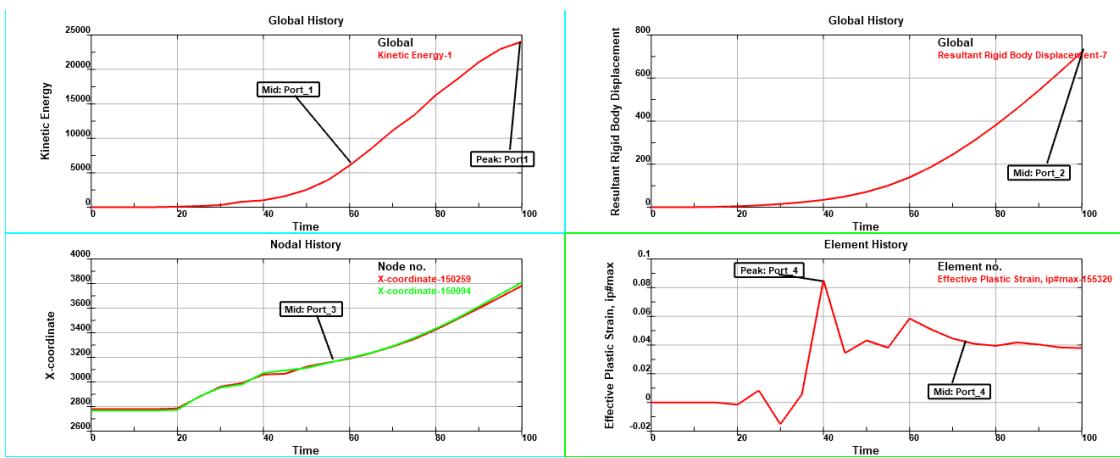

5. support for the splitwindow state to fix "Comment by Shi. split window, draw histroy plot, then close lspp, crash".
6. support for the splitwindow state about "Plot" of history dialog.
7. improve enter and exit annotation state both of them will refresh the xyplotting zone.
8. support for showing the XYPlot on the split window state.
9. fix print bug when annotation notes on the screen.
10. Add the enter label callback function to improve the UE.
11. change default font size to smaller.
12. Add without arrow on annotation for like label to curve.
13. Add the boundary of label on annotation.
14. improve the move port on main when out of the main window boundary, Shift+ctrl+mouse left button to drag the port on main window.
15. improve the move port on main to add return default position function.

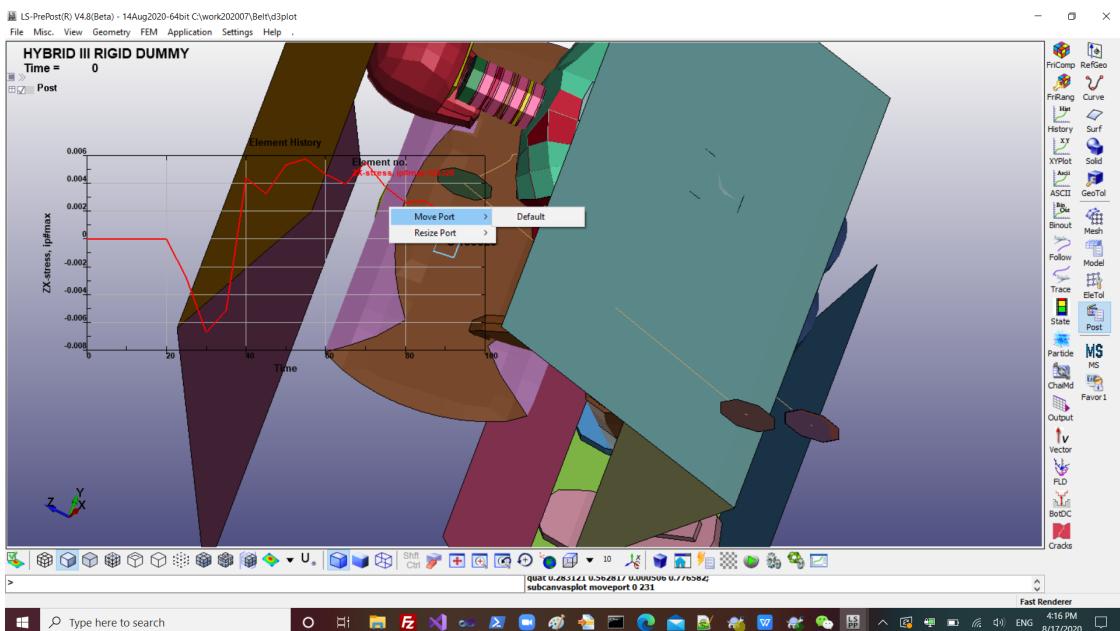


16. support for the cross2d for all curves in different ports.

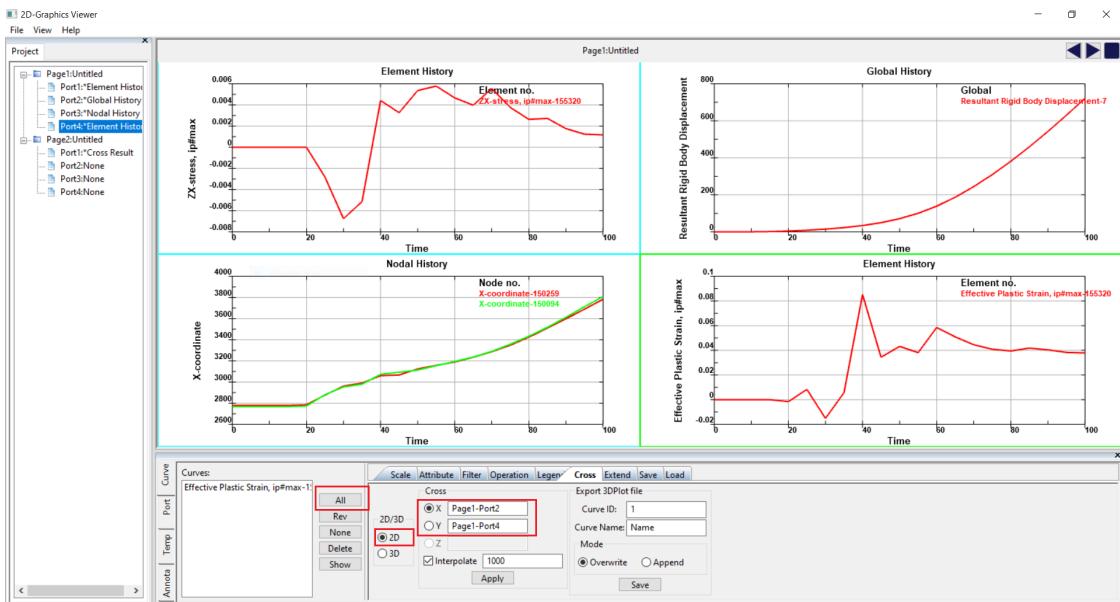

17. Add the "X" button to exit window when crossing results.
18. support for drawing the port with model when getting curves from external file.
19. [Bug 16213] New: Problem with x-axis label when saving FLD curve.

Old XY plot

1. support for the crossing curves with different x range when interpolation.
2. support for the saej211.

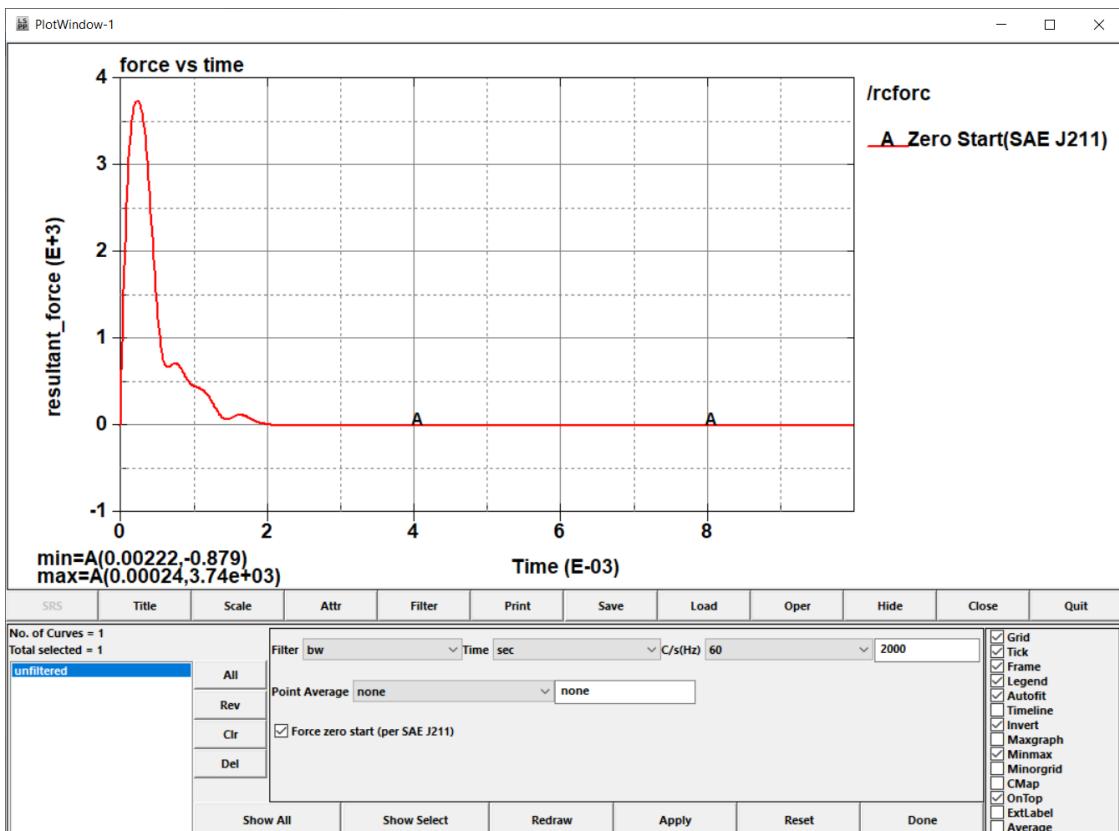


3. support for interface of prepare for define curve.
4. support for the legend on XYPlot dialog and fix plotting csv file bug.
5. [Bug 16213] New: Problem with x-axis label when saving FLD curve.
6. fix bug of loading the empty csv file.

7. Fix the filter problem when GUI operated and send command results are different.
 8. improve the efficient problem of drawing all of curves in file.
-

3DGraphics

1. support for visualizing DEFIND_TABLE_2D.
2. support for visualizing DEFIND_TABLE_3D.

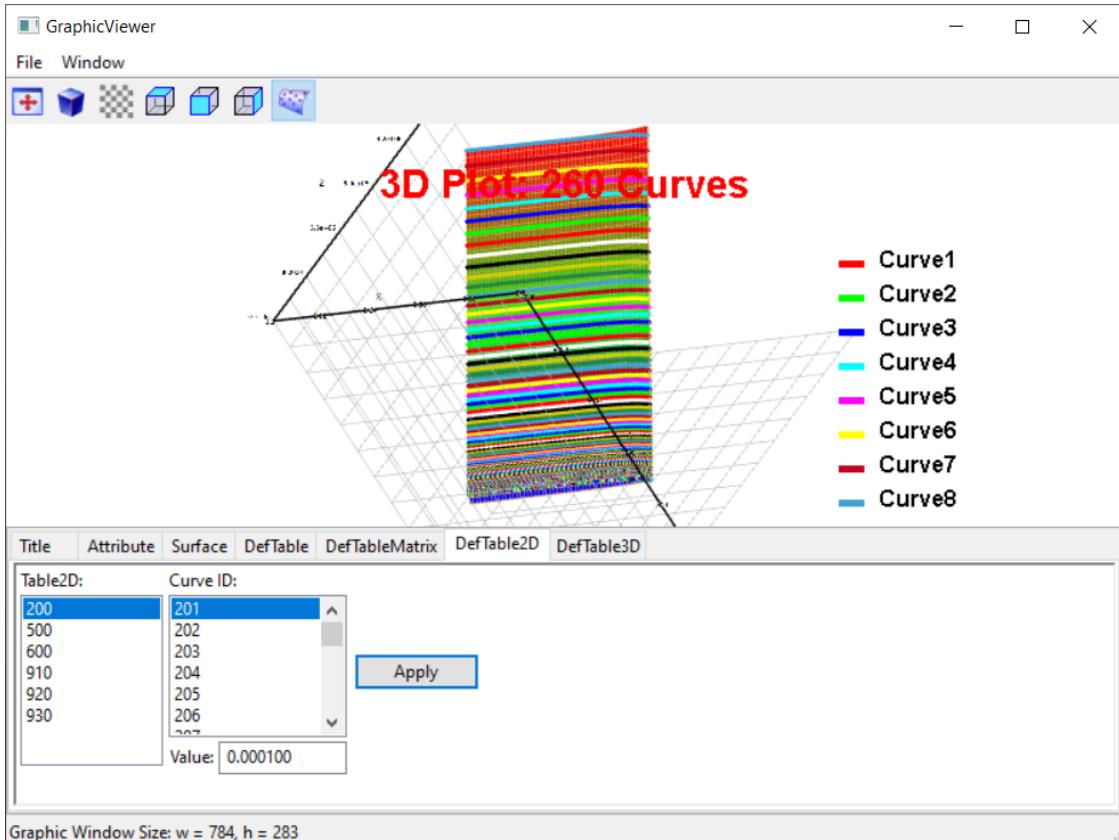


3. fix DefTable crashing bug when no data is loaded.
4. improve the GUI.

NVH-panel contribution

Description: provide tools for acoustic panel contribution analysis.

Implement: this application can be activated from "LS-PrePost" -> "Main menu" -> "Application" -> "NVH"-> "Panel Contribution"

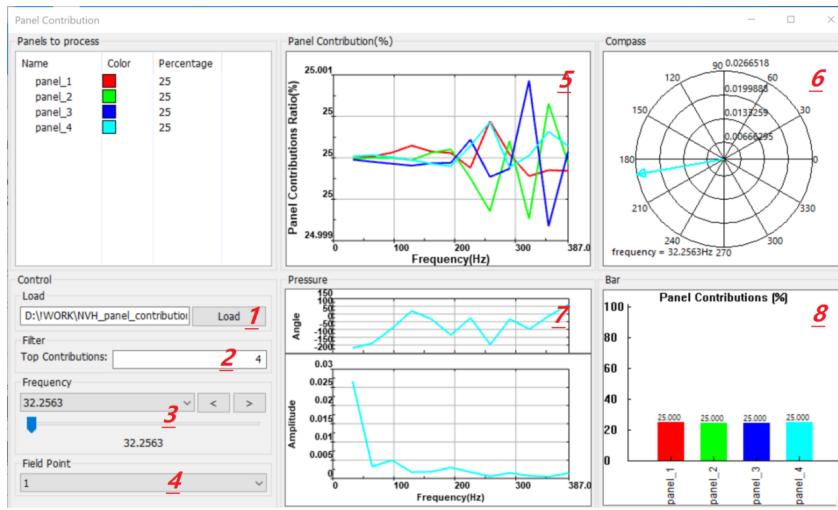

1. Load binout file
2. Set the number of top contributions. Only the panels of which contribution ranked top "n" will be shown. For example, Enter "2" and press "Enter" button on the keyboard, only top 2 panels are displayed.
3. Select frequency. Three ways to select which frequency to show.
 - o Select frequency on the choice widget.
 - o A sliding bar can be pulled back and forth to change the frequency.
 - o A pair of buttons to select previous frequency and next frequency.
4. Select field point. The data on this Field Point will be loaded and plotted.
5. XYplot window with panel contributions ratio for whole range of frequencies.
6. A circle to show the vector of panel contribution (magnitude and phase for each panel).
7. XYplot window with both magnitude and phase angles for whole range of frequencies.
8. A bin plot to show panel contribution percentage.

Binout Fringe

1. Tprint Fringe

fringe component->LSDA->Load.


Type: switch element type.

Index: switch ips.

For K file:

Animate by fringe dialog animate bar.

support step forward, step backward, stop operation.

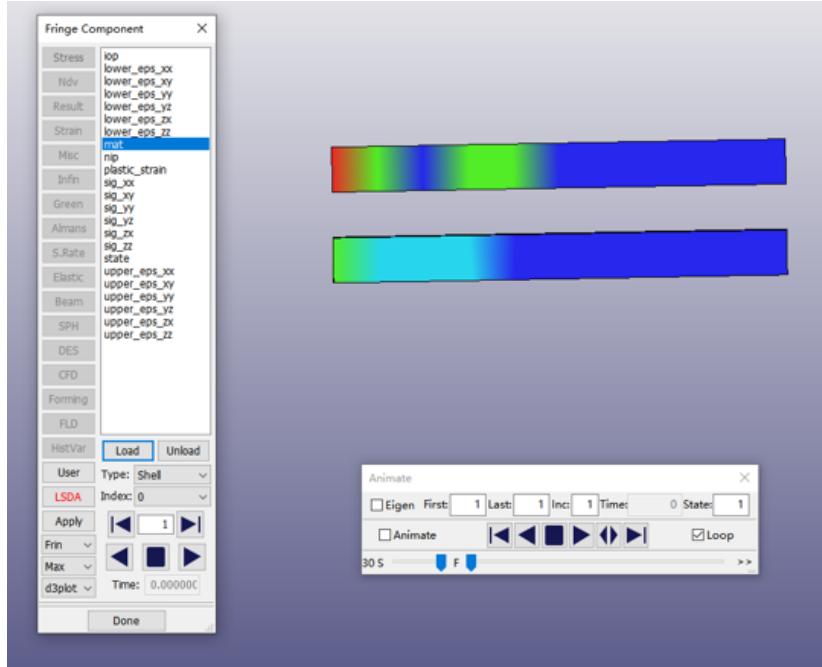

2. Elout Fringe

fringe component->LSDA->Load.

Type: switch element type.


Index: switch ipts.

For d3plot:

animate by lspp Animate bar.


For K file:

Animate by fringe dialog animate bar.

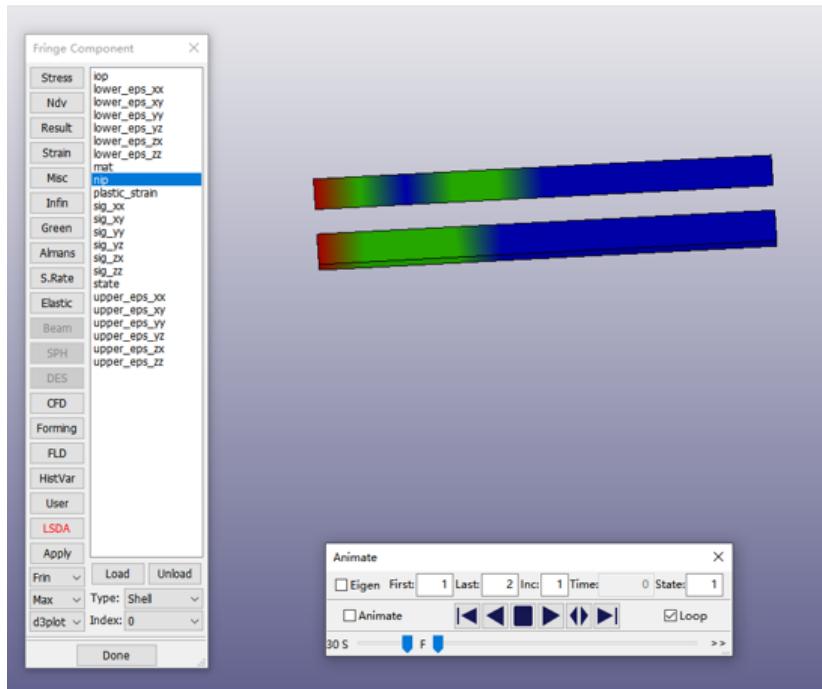

Fast Render



1. Modify light model of fast render mode to make it seems consistent with normal render.
Remove highlight in previous state.

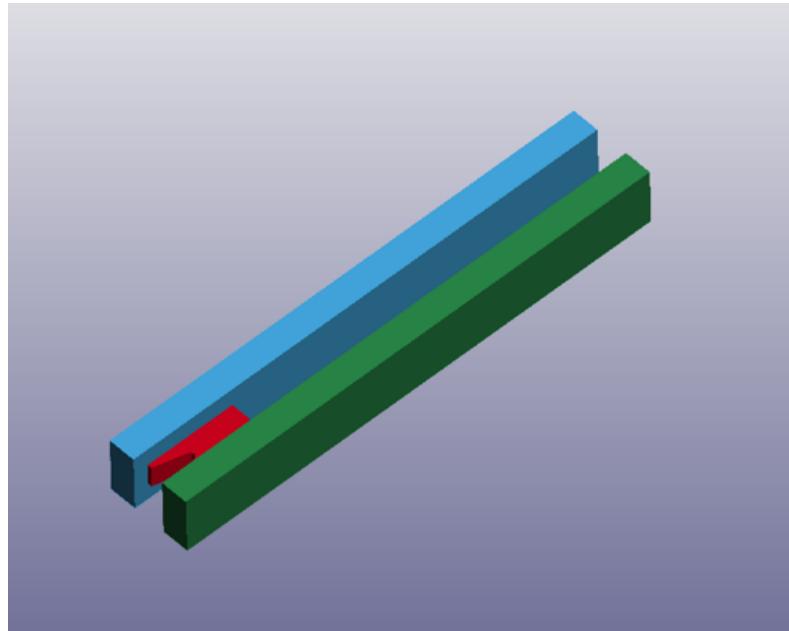


2. Tet10 render for fast render.

S-ALE

S-ALE data is much smaller than the old type, LS-PrePost 4.8 fully support to read it, unpackage it, render, pick, and transparency.

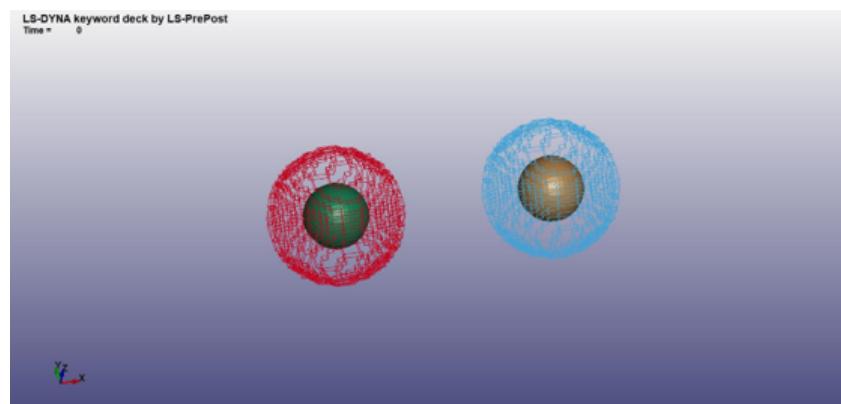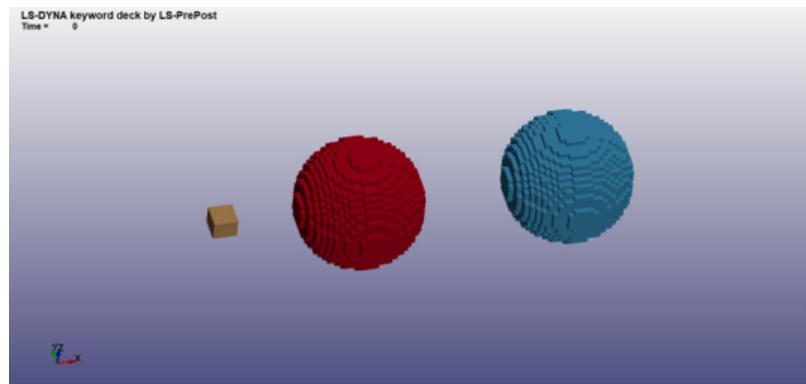


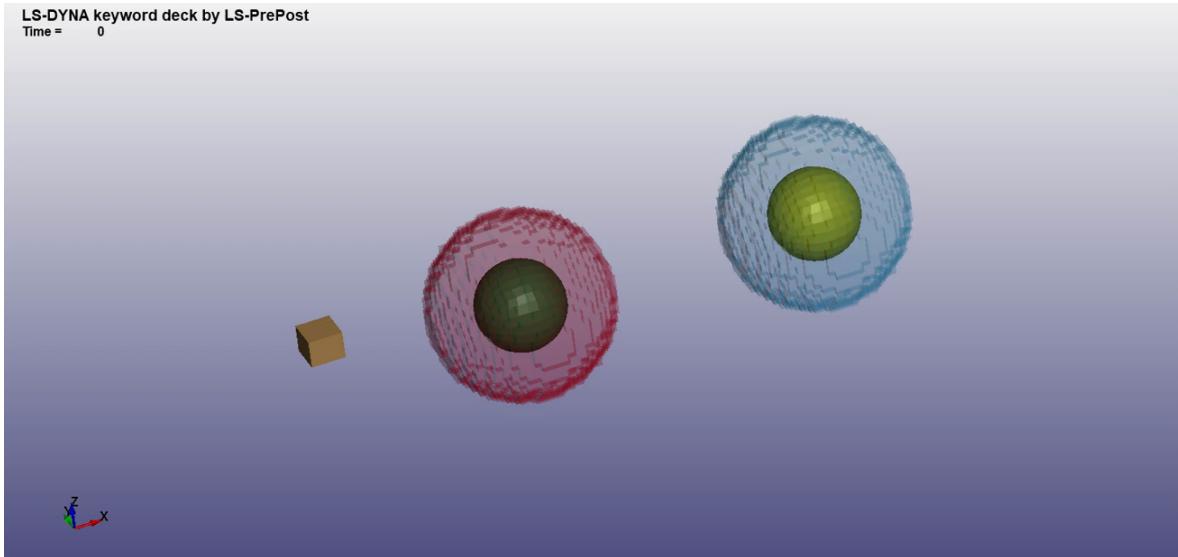

MS-Post


1. Follow Function

support follow function for structural part for MS-POST. From Post->Follow set “Follow Point” or “Follow Plane”.

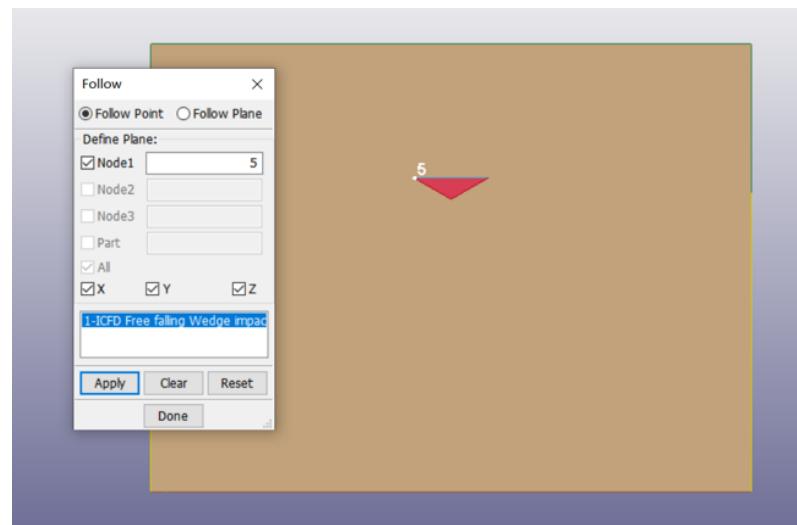


2. Cylinder

support cylinder section for MS-POST. Create a section plane on an object, switch section type to “cylinder”, set value of “radius”, then update the section plane.

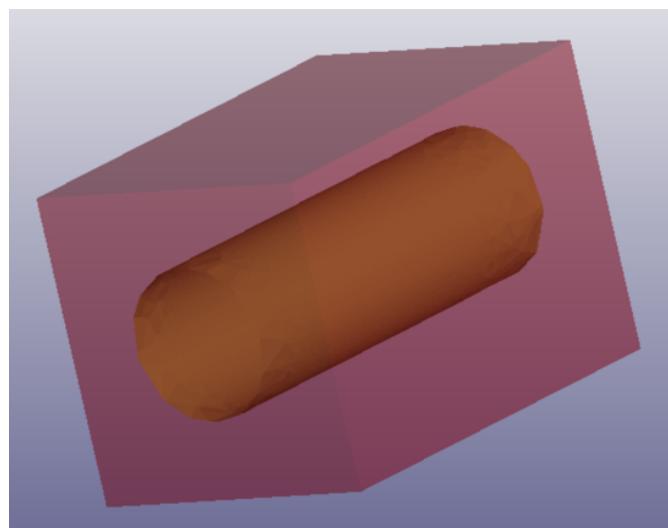


3. Fringe by Fringe Dialog

fringe by fringe dialog for MS-POST. select the variable to be fringed, if this variable exists for multisolver part, it will be fringed, if not, the color will reset to original part color.

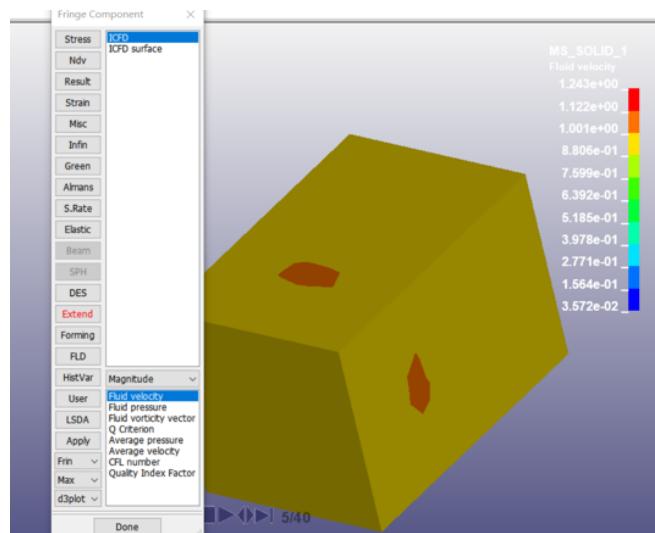


4. MSASCII

support icfd_steady_residual type for MSASCII plot. From MS-POST-> MSASCII, switch “file type” to “ICFD”, select “icfd_steadyresidual” from the list, load the file to be plot, the select variables to be plot.

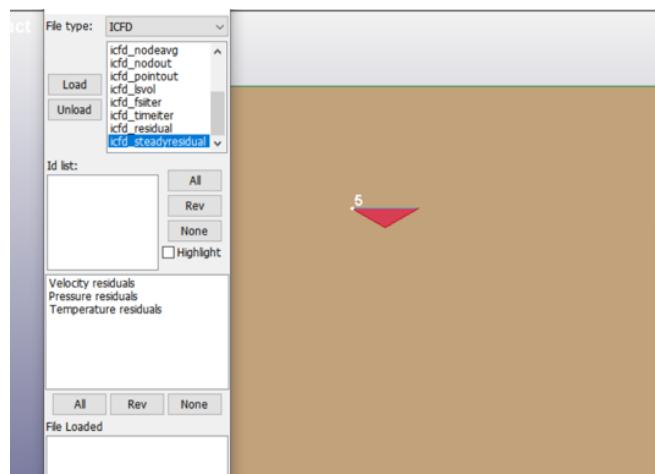

Media Tool


1. Update media load panel, delete two media compare

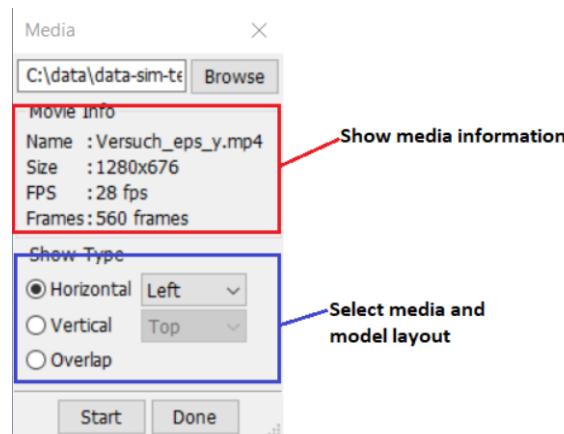


2. Use a new control panel

- o The new panel was divided to 3 parts. Each part has their own control button.


- Left part is used to control media. User can change media start frame, last frame. So active frame could equal model active frame.
- Right part is used to control model.
- Common part: Used to control both Media and Model. Only media and model active frame equal, common part will be enable.

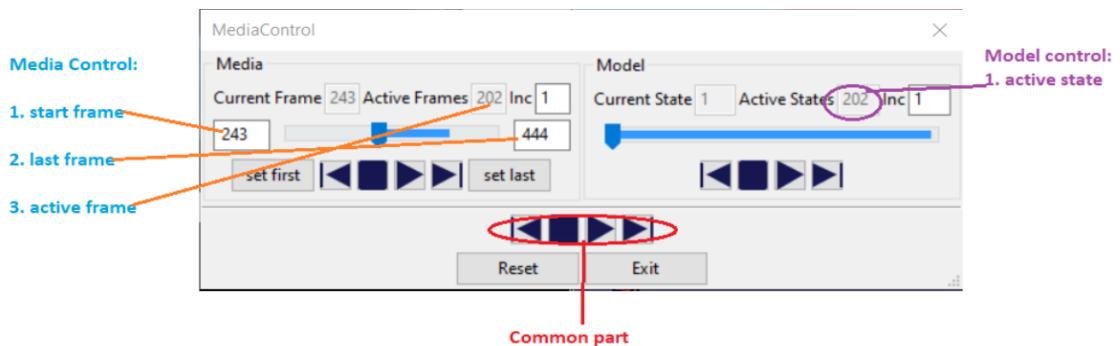


3. Horizontal

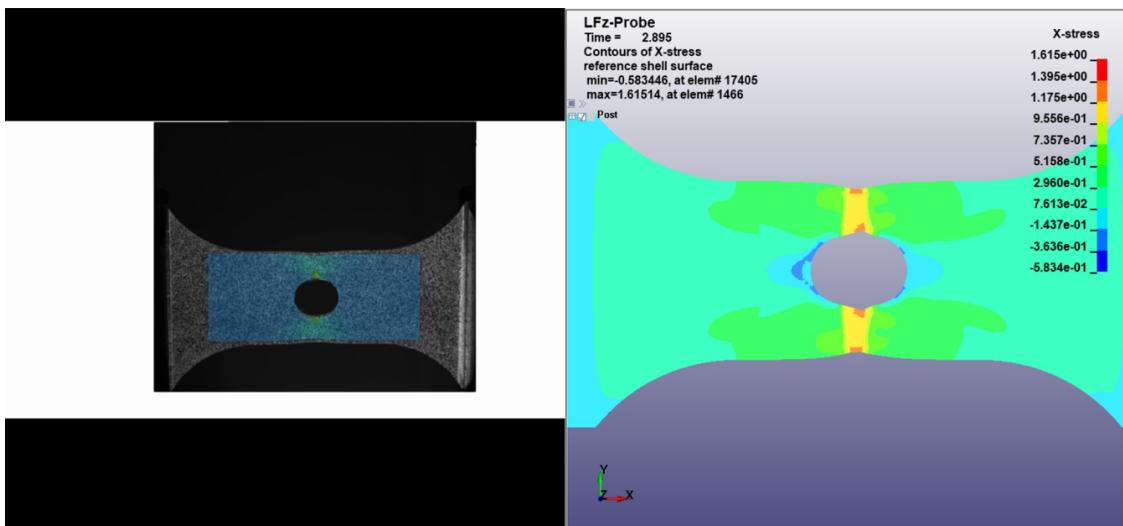

4. Vertical

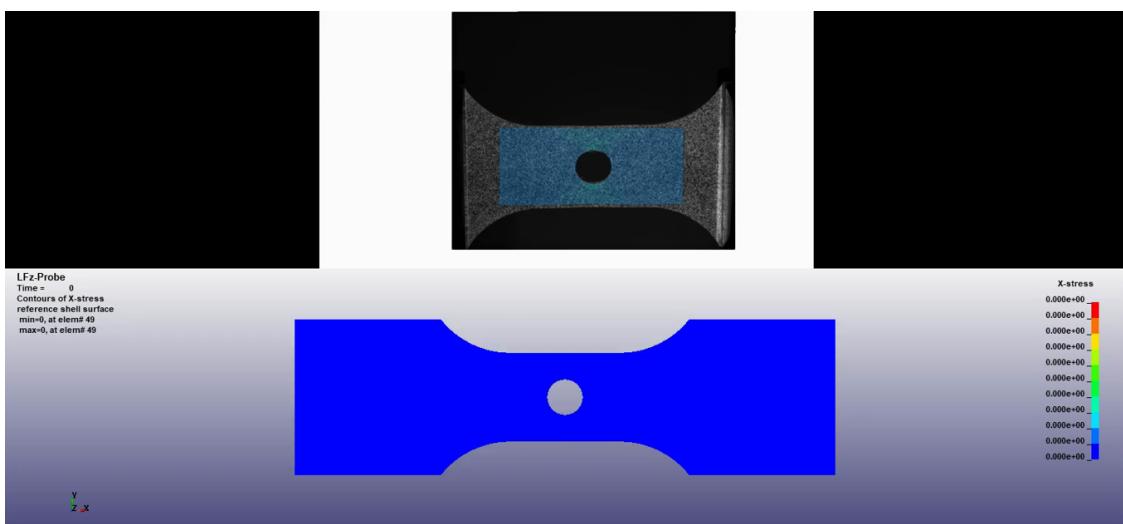


5. Overlap

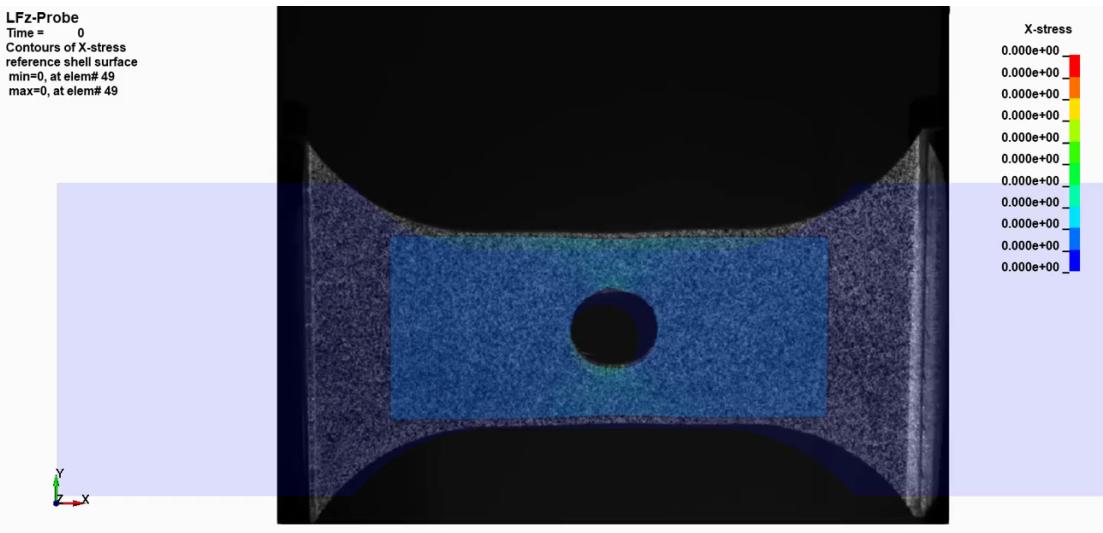

6. Add movie format(H264)


Split Window

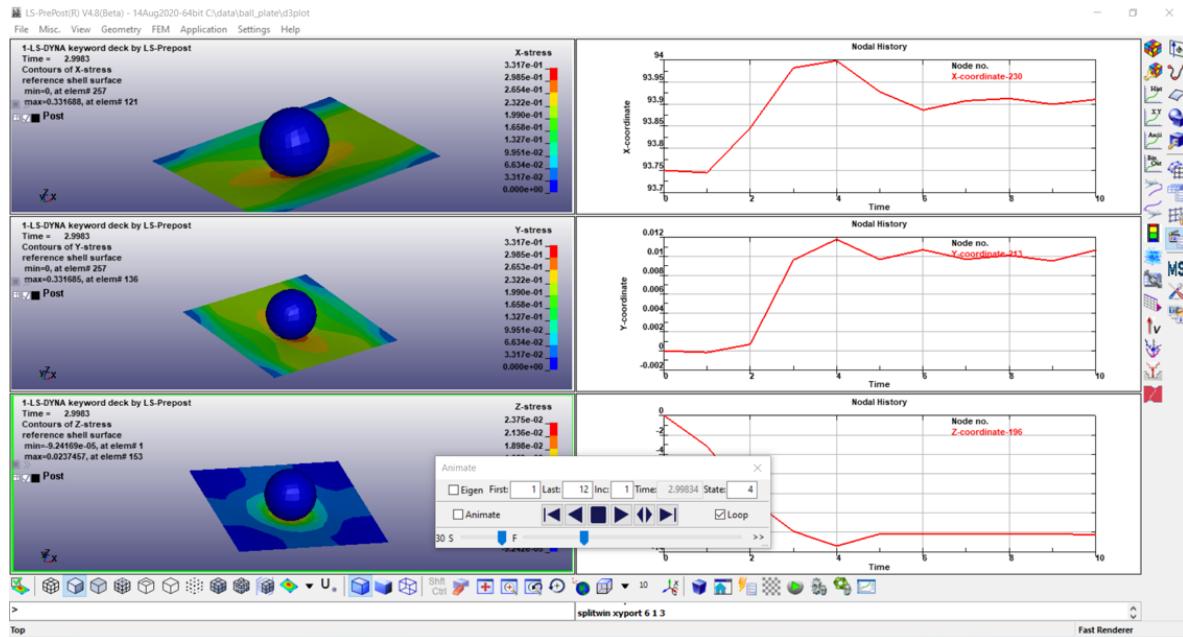

General

Sort by Size/Extend

Add "Sort by Size" and "Sort by Extend" options in Feature Tree (size Extend in X,Y,Z, Area, Volume, Length).

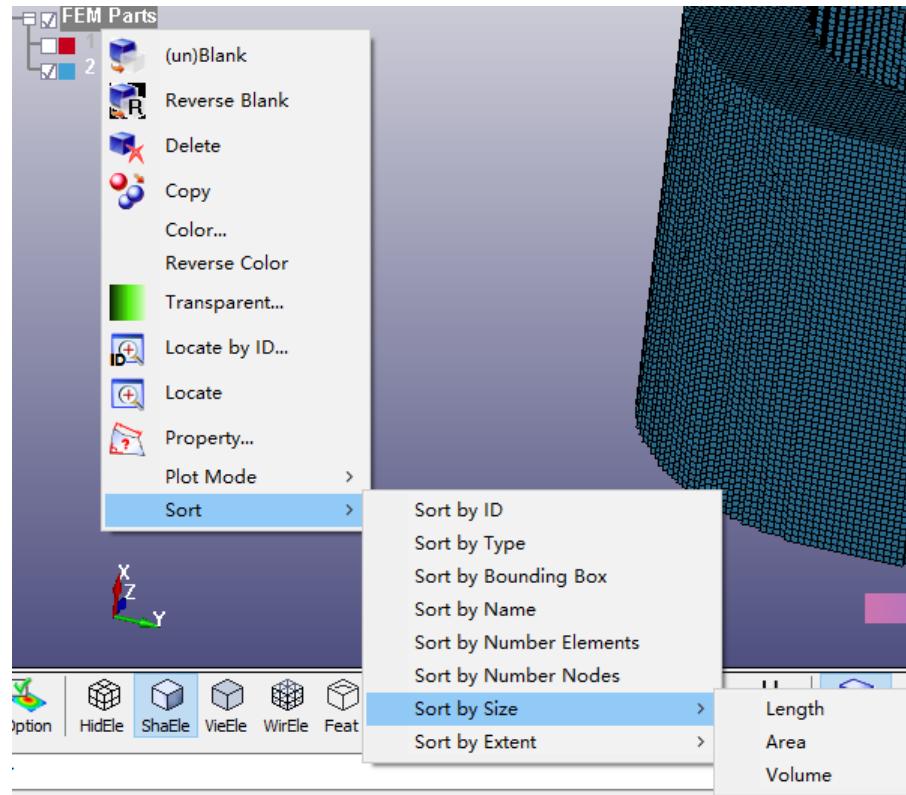

Color Box

Add color box in Feature Tree.

Background Color

Add background color in Active Label.

Statistical Information

List all parts' elements and nodes number in Statistical Information panel when selecting multiple parts in Feature Tree.

DES

overall support for genselect, fringe and history plot.

Trace

Speed up the Trace Node for big model.

Adaptive

support adaptive SPH model.

View

Show Deleted Element Only and No Coord. Update.

Section Plane

overall support for clip mode with beam, sph and deletion data.


Geometry

1. Curve-Sketch


Modify Ellipse editor in Curve-Sketch.

2. B-Spline Curve

Draw aux projecting lines in B-Spline Curve->Respace Para.

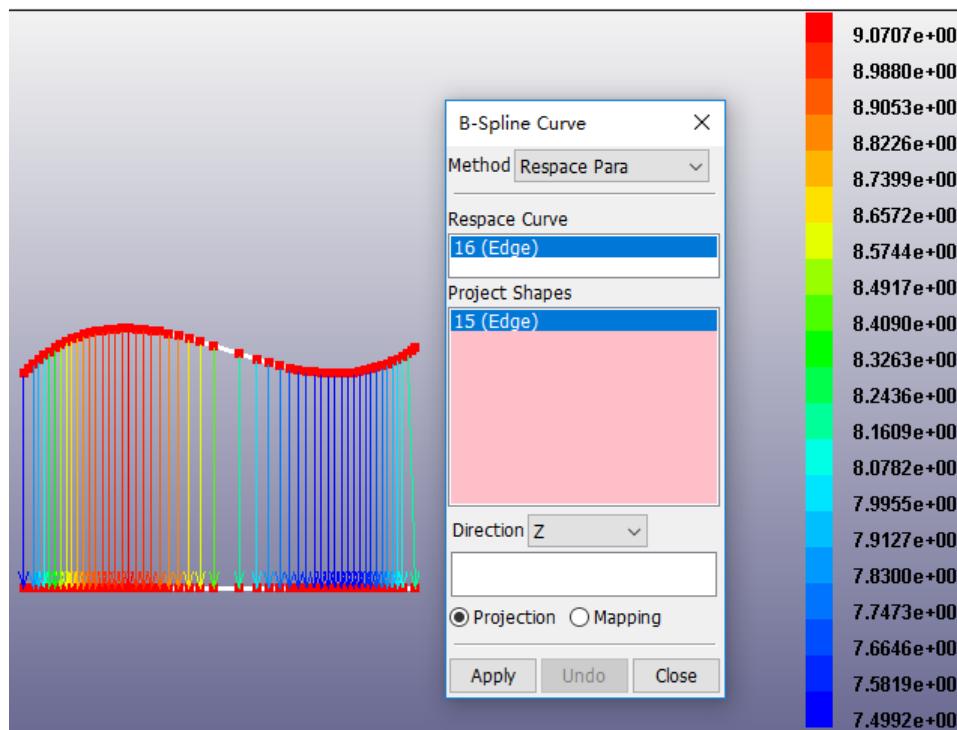

3. Converting Ref-Coordinate System to keyword coordinate system in Feature Tree.

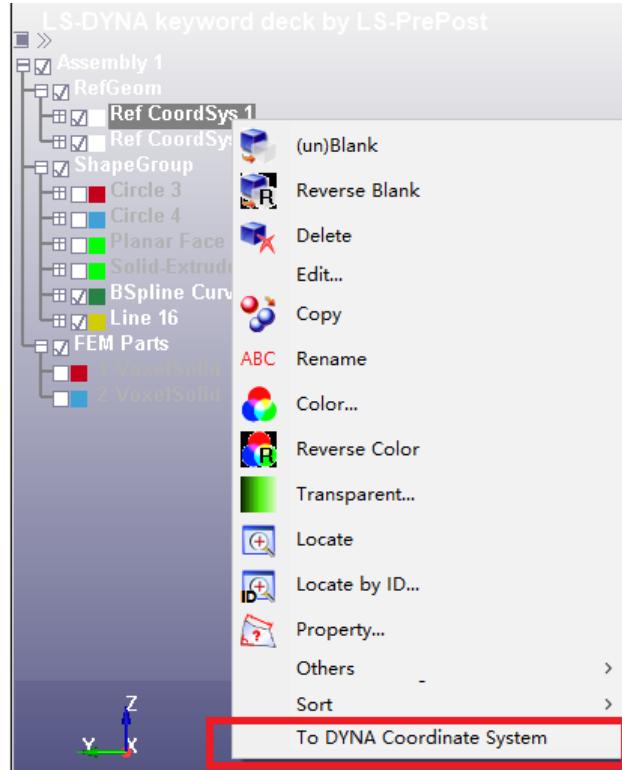


4. Add "Standard", "End Point Constraint" and "Mixed" three algorithm options into Shape Offset->Edge on Face.
5. Add Angle by 3 Points measure in Geometry Measure.
6. Add "Sweep Mode" in Curve->Middle Curve->Axis of Pipe to extract axis from FEM parts using sweeping algorithm.


Multiphysics Solution

Open

1. Open the "Multiphysics Solution" interface by checking on the "Solution Explorer" item under the "View" menu.

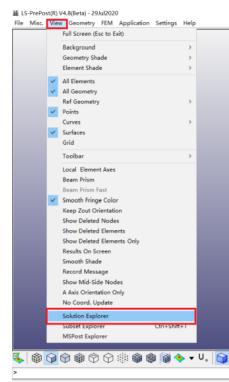


2. Pop up the solution explorer file operation menus by right clicking on the top tree item in the solution explorer.

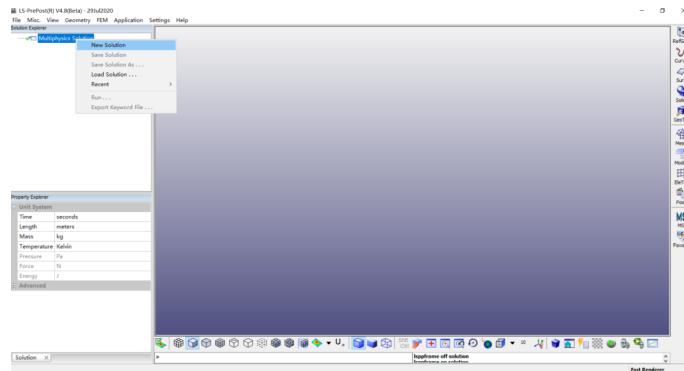

- “New Solution” can create a new solution file.
- “Save Solution” can save the current solution data to the already named solution file.
- “Save Solution As...” can save the current solution data to a new solution file with a new name.
- “Load Solution...” can load a saved solution file to the solution explorer.
- “Recent” can list the latest 5 opened solution files.
- “Run” can open the “LS-Run” and call the “LS-DYNA” solver to solve the defined solution file. And this item can also save the solution data to a “.solution” file and a corresponding keyword file.
- “Export Keyword File...” can save the solution data to corresponding keyword file.

Create New Solution

1. Select the “New Solution” menu item and pop up the “New Solution” interface.

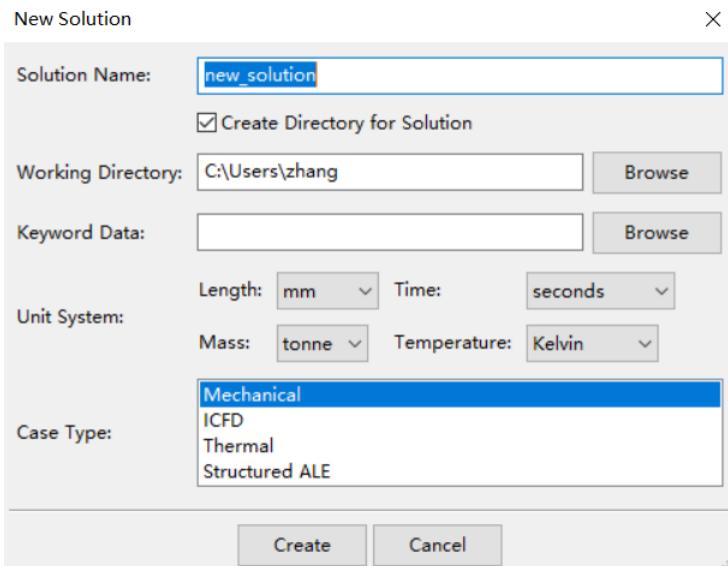


- This interface can name the new solution file and set the working directory.
- When the current model data is not the correct one for the new solution file, user can use the “Keyword Data” option to load a keyword file.
- The unit system is based on the loaded keyword file or the current opened model data in LS-Prepost.
- Solution Explorer can support “Mechanical”, “ICFD”, “Thermal(structure)” and “Structured ALE” four case types. User can choose the right one to define the whole solution tree structure.

Solution Tree Structure

1. The tree structure contains three layers:

- The top layer is called "Multiphysics Solution", in this layer user can set the unit system and keyword data version for the whole analysis.
- The second layer is called "Case".




- Different cases have the same model data(the materials of parts in different case can have different properties.), connectors data and contact data if these tree items exist in one case. So the case operations in right-clicked menu of the case item can copy the case data to other cases which can be added before or after the current case. User can choose to call the "LS-DYNA" solver from any case by clicking on the "Run..." menu item. If user choose to run from a selected case, a ".lsda" file which is got from the previous case is necessary.
- The third layer is different case types. Different case types may have different tree structures. User select correct case type when create a new solution file from the "New Solution" interface, LS-Prepost will build whole tree structure automatically.

2. The solution data contains two parts, one is the tree node in the tree structure and the other one is called property gird which is attached to the corresponding tree node. User can select different tree nodes and set their related property data in the property gird.


Unit System	
Time	milliseconds
Length	mm
Mass	tonne
Temperature	Kelvin
Pressure	TPa
Force	MN
Energy	kJ
Advanced	
Keyword Version	Dev

Mechanical and Thermal Case

1. For "Mechanical" and "Thermal" case types, the whole tree structure both contains three parts:Analysis, Model,Output. It can be built like the following picture.

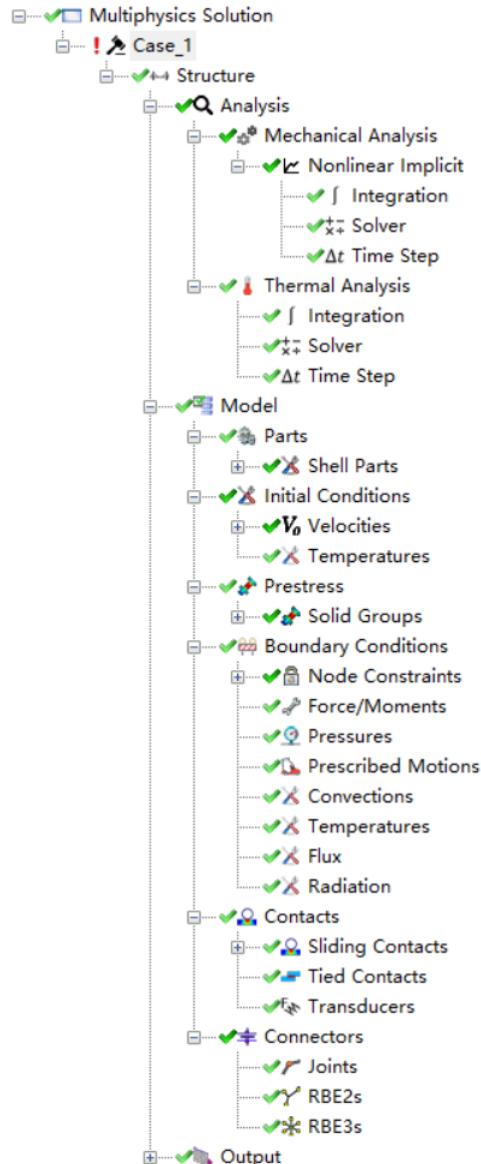



2. In the "Analysis" item user can set the solver data, time step data, and integration data. For "Mechanical", the solution only support the "Nonlinear Implicit" solver for now. If user select the "Mechanical" and "Thermal" case type, the tree data under the "Analysis" item is like what the picture shows.
3. The "Model" item contains fem model data, initial conditions data, boundary conditions data, prestress data, contact data, connector data.
 - *Different analysis type mean different boundary conditions data. The "Node Constraints", "Force/Moments", "Pressures" and "Prescribed Motions" belong to "Mechanical" analysis. And "Convection", "Temperature", "Flux" and "Radiation" are related to "Thermal" analysis.*
 - *The material property in part item is defined by a new material library. In LS-Prepost executable folder, LS-Prepost add a sample material database file called "material.xml". It is in XML and keyword format. Users can add their own material databases as the LS-Prepost "built-in" database format. The thermal material data will be shown when the thermal analysis exists in the solution tree structure.*

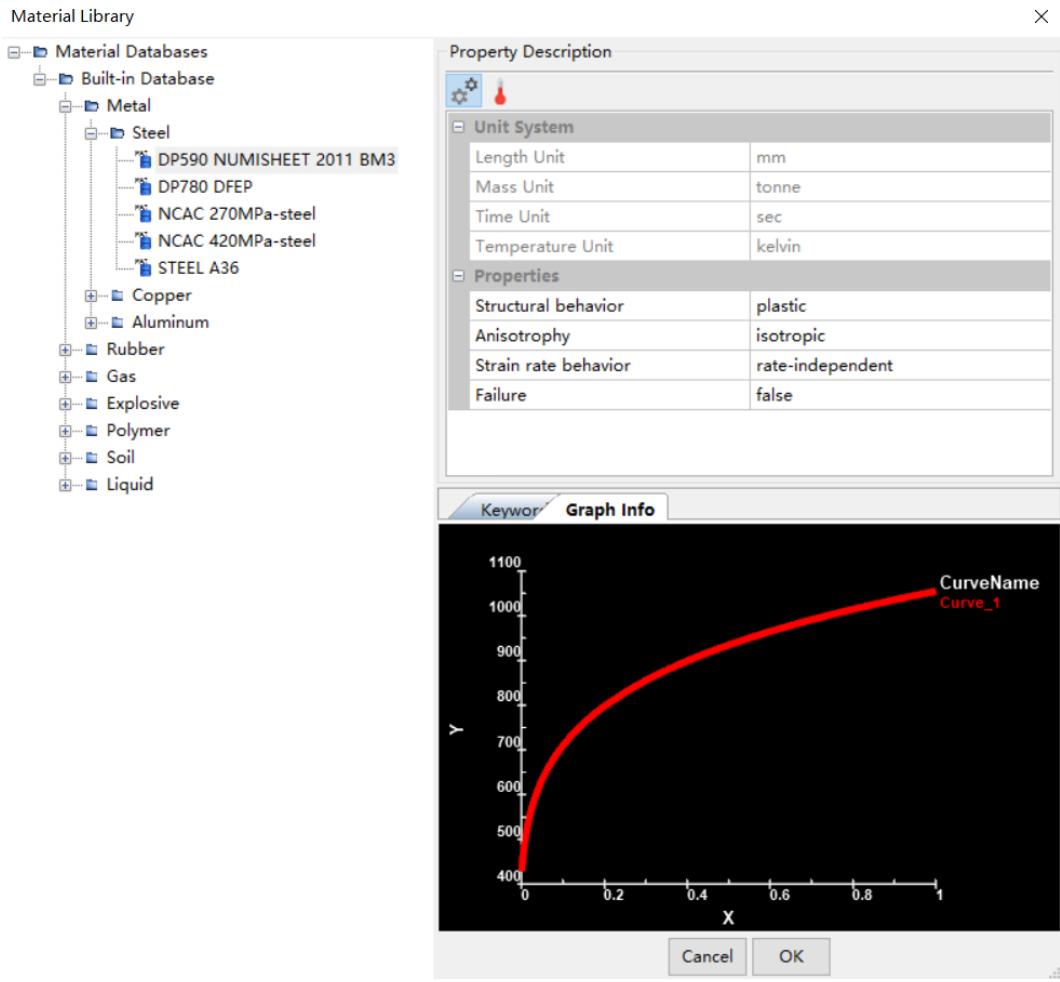

- Contact item only support "Sliding Contact", "Tied Contact" and "Transducer" three types for now. The data for thermal analysis is in every contact item property grid.

4. The "Output" item can output the defined "Node Data" and "Element Data" and some default result files like "glstat", "rcforc", "bndout", "spcforc", "matsum", "secforc", "sleout" and so on.
5. For now, the post analysis is added into the property grid for part items and contact items. And user can switch the item property between "pre" and "post" button. If users change any "pre" data, they need to rerun the current case to update the post data. When users choose to rerun the case, the case data after the selected one will be updated too.

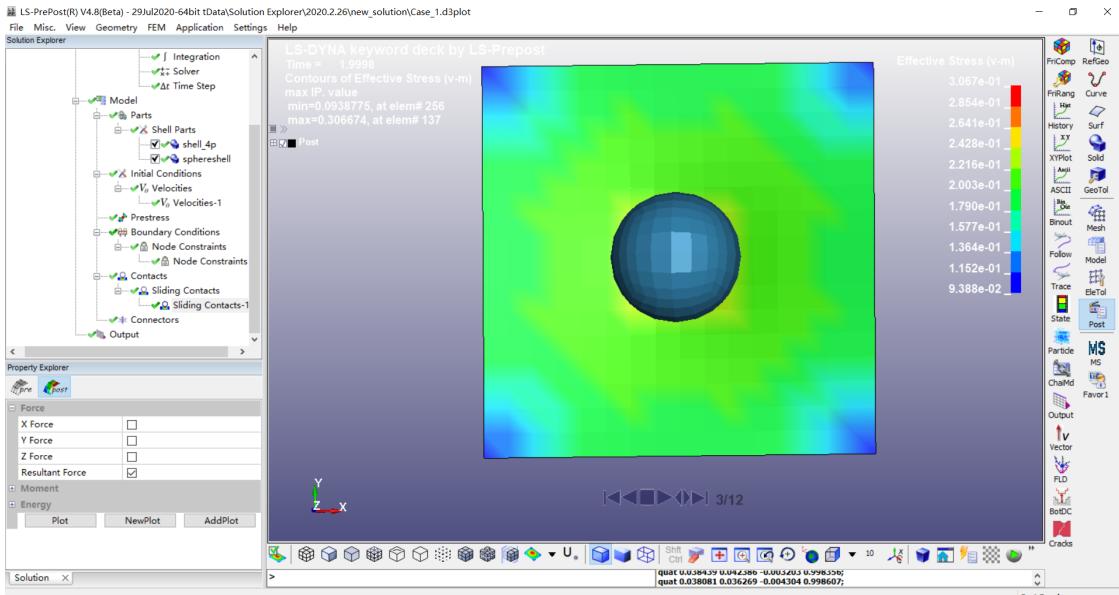


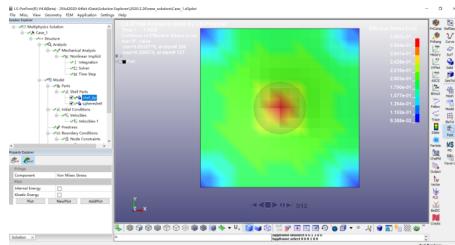

ICFD

The ICFD type may build a tree structure as the following picture shown. It uses the same solution data format(tree nodes and related property grid). ICFD has its special items which are related to the ICFD analysis.


1. Now solution explorer supports these six analysis types, and they are "Turbulent", "Thermal", "FSI", "DEM Coupling", "Free Surface" and "RTM". Different analysis types have different properties.
 2. Users need to define their own materials under "Material" item and mesh data under the "Mesh" item.
 3. The model data is came from the loaded keyword file in "New Solution" interface or the current opened model data in LS-Prepost.
 4. In "Output" item, users can set the output result data for ICFD analysis.
 5. Support the initial condition of "initial free surface" for ICFD Pre-processing in solution explorer.

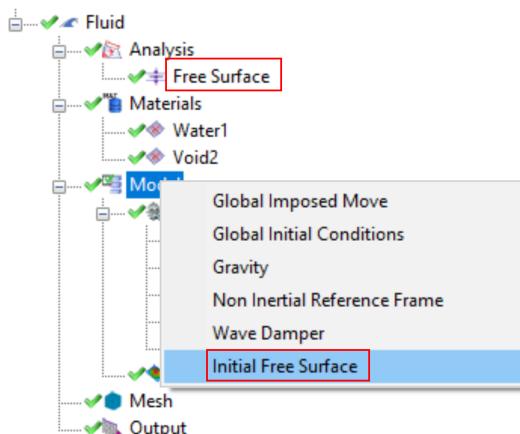

- *Initial Free Surface is available if “Free Surface” is defined.*

Property Explorer	
Shape Name	BOX
+ Max Point	0.4; 0.305; 0.3 mm
+ Min Point	8.9407e-08; -0.305; 0 mm
Invert	<input type="checkbox"/>


- Generated an initial levelset surface by a box

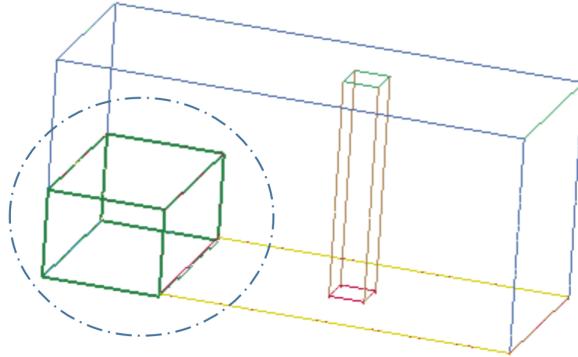


- The defined box will be drawn on the canvas

Structured-ALE

The Structured-ALE type may build a tree structure using the same solution data format(tree nodes and their related property grid) as the following picture shown.

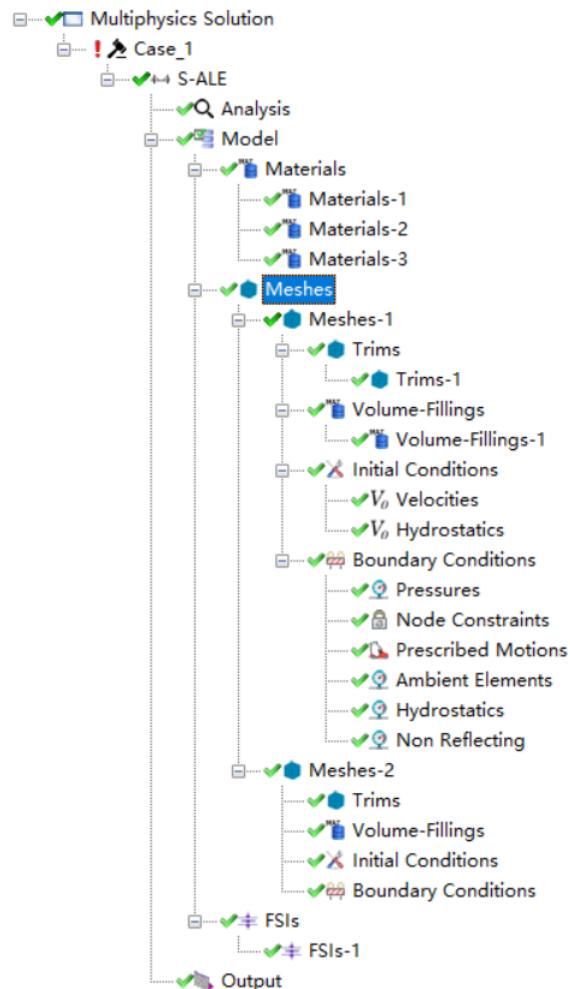

1. If users want to do a "FSI" analysis, they need to load the fem keyword data when create the new solution file or use the already opened model data in LS-Prepost. The "FSI" analysis data can be set under the "FSI" items.
2. The "Trim", "Volume-Filling", "Initial Conditions", "Boundary Conditions" are all based on the defined "Mesh". And the properties about the mesh is like below picture.

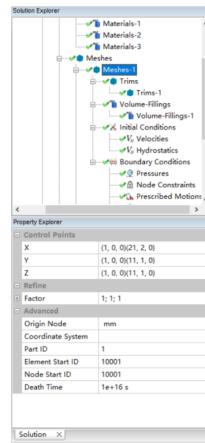

3. The “Boundary Conditions” can support six different types: “Pressure”, “Node Constraint”, “Prescribed Motion”, “Ambient Element”, “Hydro static” and “Non Reflecting”.

Solution Property

Solution explorer defines some properties which will call the LS-Prepost other powerful functions.

1. Define Set Data: clicking the first button will list all defined set data in current model and clicking the second button will confirm what data users have selected on the model.

- o *Node Set*:



- o *Part Set*:



- o *Shell Element Set*:




- o *Segment Set*:



2. Define Local Coordinate System: clicking the first button will list all the defined local coordinate system in current model and clicking the second button will pop up the “Define Local Coordinate System” interface.



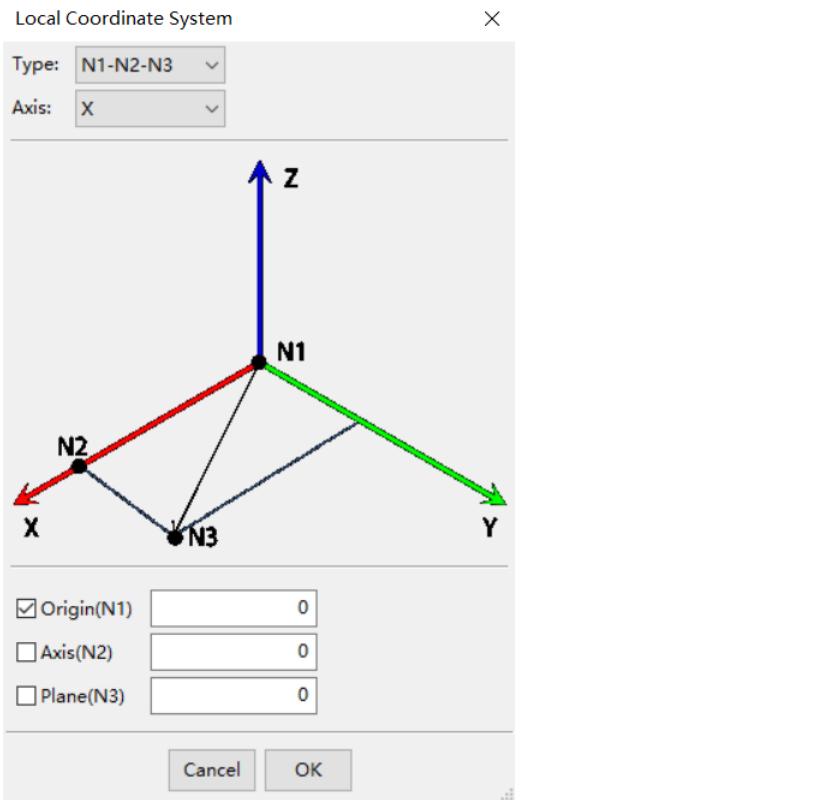

3. Define Material: clicking the button will pop up the "Material Library" interface and list all the material databases in LS-Prepost.

Material DP590 NUMISHEET 2011 BM3

Material Library

Material Databases

- Built-in Database
 - Metal
 - Steel
 - DP590 NUMISHEET 2011 BM3
 - DP780 DFEP
 - NCAC 270MPa-steel
 - NCAC 420MPa-steel
 - STEEL A36
 - Copper
 - Aluminum
 - Rubber
 - Gas
 - Explosive
 - Polymer
 - Soil
 - Liquid

Property Description

Unit System	
Length Unit	mm
Mass Unit	tonne
Time Unit	sec
Temperature Unit	kelvin


Properties	
Structural behavior	plastic
Anisotropy	isotropic
Strain rate behavior	rate-independent
Failure	false

Keyword Graph Info

```
*MAT_PIECEWISE_LINEAR_PLASTICITY_TITLE
DP590 NUMISHEET 2011 BM3
##    MID      RO      E      PR      SIGY      ETAN
##           17.83000E-9  207000.0     0.3   428.1632    0.01
##      C      P      LCSS      LCSR      VP
##      0.0      0.0      1      0      0.0
##      EPS1      EPS2      EPS3      EPS4      EPS5      EPS6
##      0.0      0.0      0.0      0.0      0.0      0.0
##      ES1      ES2      ES3      ES4      ES5      ES6
##      0.0      0.0      0.0      0.0      0.0      0.0
*DEFINE_CURVE_TITLE
DP590 NUMISHEET 2011 BM3_HardeningCurve
##    LCID      SIDR      SFA      SFO      OFFA      OFFO
##      1          0        1.0        1.0      0.0      0.0
##      A1          O1
##      0.0        428.1632
##      0.001      439.9385
##      0.002      450.4002
##      0.003      459.8344
##      0.004      468.4408
```

Cancel OK


4. Define Curve: clicking the first button will switch current property among constant, curve, curve function, function four types, and clicking the second button will list all the defined curve data, clicking the third button will pop up a interface to input all the curve data.

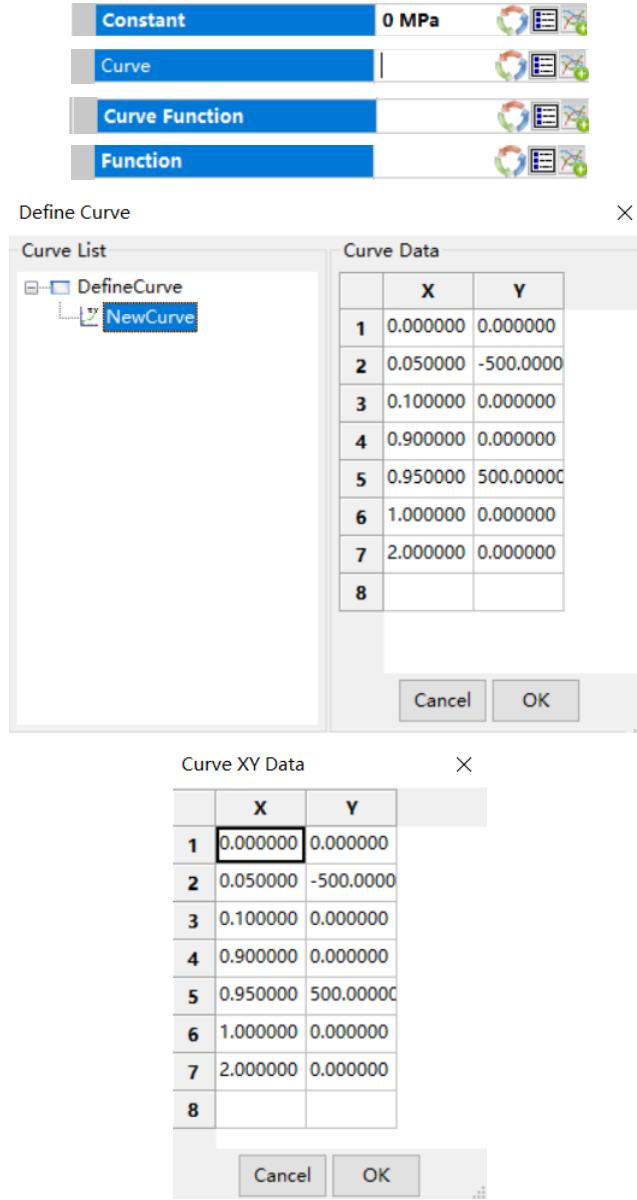

ASCII and Binout

ASCII


1. support for the new component in the sbtout branch.

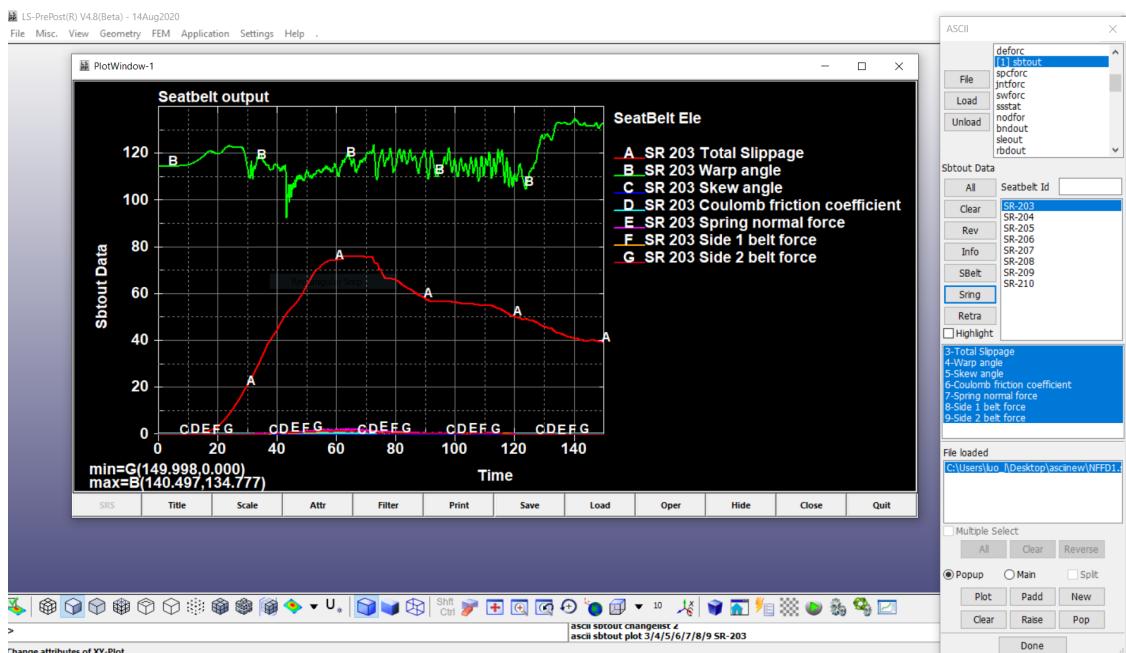


2. support for PBLAST_SENSOR branch.
3. support for swfore about OPT=9 of *MAT_100.
4. fix crashing bug when elout including Elastic materials have no history variables.
5. fix boundary array problem.
6. fix problem of FreeNSetAsciiMemory.

Binout

1. support for the new component in the sbtout branch.

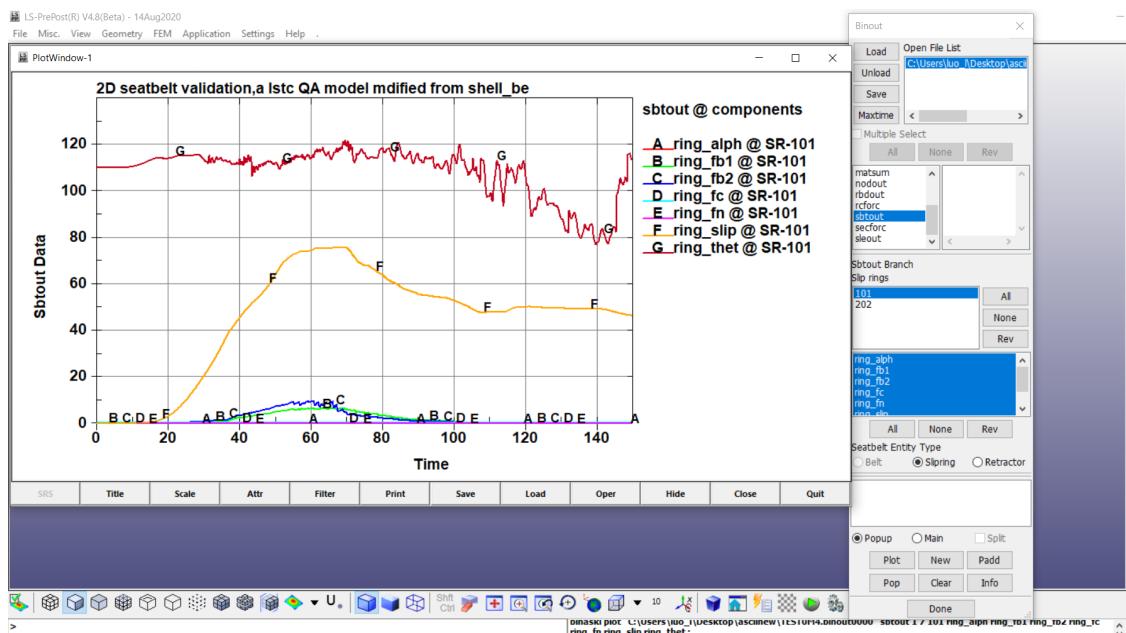

2. support for the sphflow branch.
3. support for pblast_sensor branch.
4. support for the hex assembly with binout of area selection.
5. Model selection the spotweld to highlight binout dialog's id list related and highlight on model when selected on binout dialog id list.

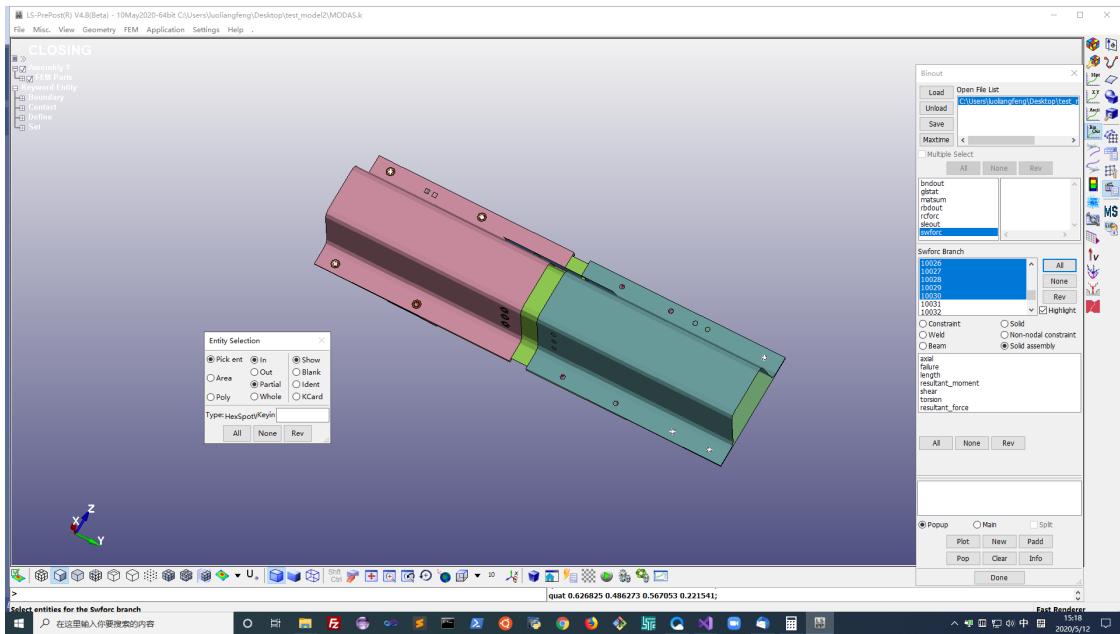

6. support for highlight the define coordinate entity when clicking the swfrc solid assembly.
7. support for picking define coordinate and update the binout swfrc id list.
8. support for outputting curvout to ascii file.
9. fix the rwfrc bug when multiple selecting ids and components.
10. fix the bug of showing curve after the element is deleted.
11. update l2a for sphflow and pblast_sensor branches.
12. [Bug 16272] New: lspp fails to read a large binout file Ticket#2019120410000167
13. fix bug of selected multiple components to plot set id data.
14. Disboud: consider deletion data in plotting disboud components.

Femzip

1. improve the efficient problem of loading the first state to draw model.
2. fix problem of loading model and fringe.
3. fix crash of setting the SPH surface.
4. support progress bar in reading file.
5. support progress bar in reading file.

File Reading and Writing

1. Optimize STL writer module for large model.
2. Support loading batch of STL files.
3. Apply multi-thread tessellation during reading IGA pre model.

Command File

1. Retrieve ids with "#var1,#var2 or #var3" appearing in the command statement after issuing command "range identmax 3"