

## FRONT SEAT REMOVAL/INSTALLATION

id091300800200

### Warning

- Handling a side air bag improperly can accidentally operate (deploy) the air bag, which may seriously injure you. Read the service warnings/cautions in the Workshop Manual before handling the front seat (side air bag integrated). (See AIR BAG SYSTEM SERVICE WARNINGS.) (See AIR BAG SYSTEM SERVICE CAUTIONS.)
- If the sliding mechanisms on both sides are not locked after assembling the front seat, the front seat will operate accidentally while the vehicle is driven, which could result in serious injury. After assembling the front seat, shake it up and down and verify that the sliding mechanism on the both sides are locked.


### Caution

- If the slide lever is operated after the front seat is removed, the left/right slide positions will deviate and the adjuster unit could be damaged after the front seat is installed. After removing a front seat, do not operate the slide lever.
- Verify that there are no malfunctions in the forward/back slide of the seat and in the adjuster unit after installing a front seat.
- When performing the procedure with a front seat removed from the vehicle, perform the procedure on a clean cloth so as not to damage or soil the seat.

### Note


- When removing the front seat from the vehicle or putting it back in, it can be performed smoothly by removing the headrest.

1. Switch the ignition off (LOCK).
2. Disconnect the negative battery cable and wait for **1 min or more**. (See NEGATIVE BATTERY CABLE DISCONNECTION/CONNECTION [SKYACTIV-G 2.0, SKYACTIV-G 2.5].) (See NEGATIVE BATTERY CABLE DISCONNECTION/CONNECTION [SKYACTIV-G 2.0, SKYACTIV-G 2.5 (WITHOUT i-stop)].) (See NEGATIVE BATTERY CABLE DISCONNECTION/CONNECTION [SKYACTIV-D 2.2].)
3. Press part A in the direction of the arrow (1) shown in the figure and disengage tabs, move the lever in the direction of the arrow (2) and disconnect the connector in the direction of the arrow (3).

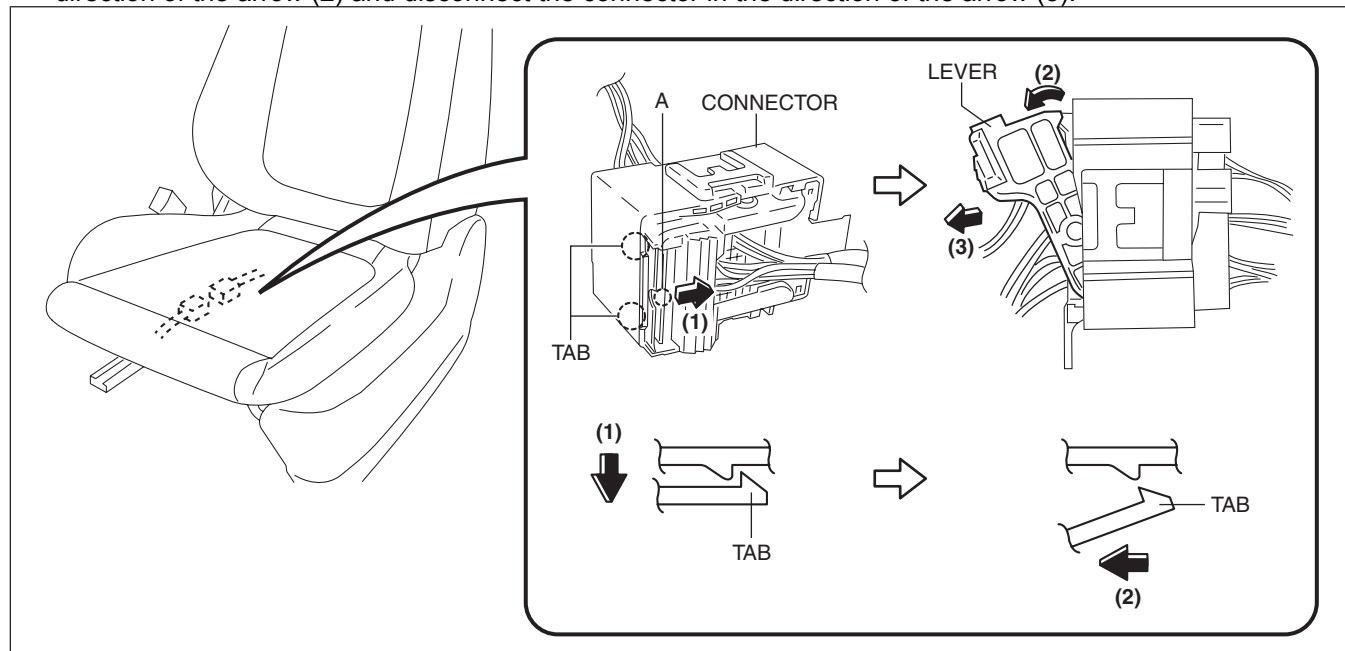

4. Remove the bolts in the order of (1), (2), (3), (4) shown in the figure, then take the front seat out from the opened front door.

ac5wzw00003192

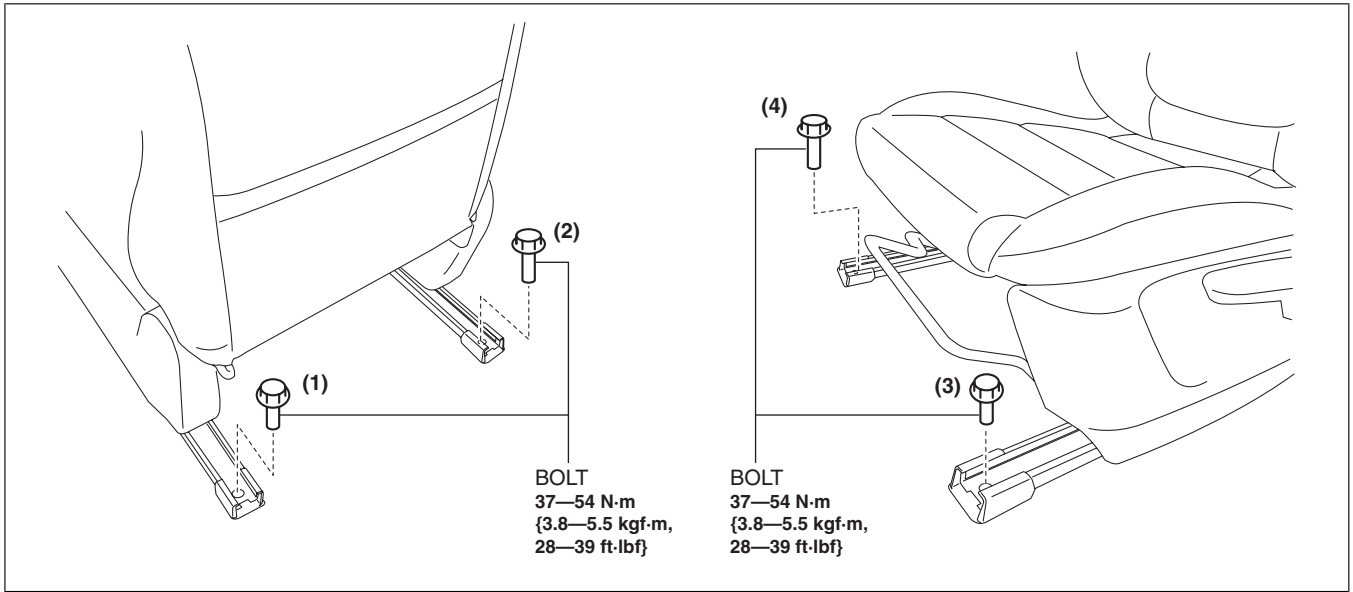

ac5wzw00003103

5. Install in the reverse order of removal.