Pecube User Guide

Table of Contents

Getting started	3
Installation	3
Running Pecube	4
PECUBE	4
MPI version	5
VTK Postprocessor	5
Input file tester	5
Using old input files	5
File structure	6
bin	6
src	7
tools	7
docs	7
tmp	7
old_input	8
project folders	8
topo	9
Main input file	9
Topography parameters	9
Time evolution parameters	11
Thermal parameters	12
Data parameters	13
Tectonic parameters	14
Output parameters	18
Isostasy parameters	20
Inversion parameters	21
Miscellaneous flags	23
Output	23
Types and formats	23
CSV files	23
VTK files	25
BIN files	26
Log file	27
Feeding data to Pecube	27
Conventions	27
Data types	28

	Checking the data	34
[n	version	34
	Parameters to invert for	35
	Misfit function	35
	NA behaviour	36
	Inversion results	36
Ez	xamples	37
	EXMP1	37
	EXMP2	38
	EXMP3	39
	EXMP4	41
	EXMP5	42
	EXMP6	42
	EXMP7	43
	EXMP8	44
	EXMP9	45
	EXMPA	46
	EXMPB	47

Pecube is a software designed to interpret thermochronological data by solving the heat equation in 3D in the crust.

Pecube is often referred to as a `thermo-kinematic' model because the velocity field used in the advection term of the heat equation is specified by the user, not derived from a dynamical model. However, **Pecube** is more than a simple thermo-kinematic model because it allows for a finite amplitude, time varying surface topography. Temperature histories are computed for rock particles that will end up at the surface of the model. Rock paths are computed assuming a simple block uplift or motion along faults. From the temperature histories, **Pecube** compute ages for a variety of thermochronological systems that are compared to observed ages and/or displayed. **Pecube** can also be run in *Inversion* mode by finding the optimum values of given model parameters within a specified range that minimize a misfit function. The misfit function is the norm of the difference between observations and predictions. The optimization is performed using the Neighbourhood Algorithm.

Pecube is intended to help thermochronologists in interpreting their data. It transforms tectonic and geomorphic scenarios into thermal histories that are computed to produce synthetic ages. In this latest version of **Pecube**, thermal histories extracted from the data using other pieces of software (such as QTQT or HEFTY) can be used as constraints rather than the ages themselves. This is a simple way to combine the strength of other pieces of software, which focus on predicting probable thermal histories to the strength of **Pecube**, which focus on predicting probable tectonogeomorphic scenarios.

Getting started

To run **Pecube**, you must use line-commands inside a shell or terminal window. **Pecube** does not have a fancy User Interface. To unlock all functionalities inside **Pecube**, you must also have installed Paraview, R, gfortran, gcc and mpi (in order of importance) on your computer. These are compilers and interpreters that are needed to transform the code and script files that are provided to you in the distribution file into executalbes. Executables have been created and included in the distribution that should allow you to run **Pecube** on a MacIntosch computer or a PC.

To run **Pecube** on a Mac, simply go to the main **Pecube** folder and issue the following command:

bin/run.sh EXMP1

This will execute a script that will perform a series of operations, including running **Pecube** from a default (or example) input file: **EXMP1/input/Pecube.in**. Once this operation is performed (it should take a few minutes on a reasonably fast computer), you can look at the output generated by **Pecube** in the **EXMP1/output** folder. You can open any of the .vtk files using Paraview. You can also open any of the .csv files in Excel or Number. They contain summary information of the **Pecube** run output you just performed.

On a PC, you should execute the following comand:

bin\run.bat EXMP1

or, after making sure that the Pecube/bin directory is included in your PATH:

run.bat EXMP1

Installation



If you can read this User Guide, it means that you have already managed to perform at least one of the important steps in installing **Pecube**: opening the tarball `Pecube_v4.0.tar.gz.

For a basic installation of **Pecube**, you only need a computer running MacOSX, Linux or Windows. The **Pecube** tarball includes executables for MacOSX and Windows. If you have installed gfortran and gcc compilers, you will be able to create the required executables for your system by compiling Pecube. On a Windows machine you will also need a make facility such as mingw32-make. For a complete installation of **Pecube**, you will need gfortran and gcc compilers, an MPI installation and two other pieces of (free) software: Paraview, the kitware VTK viewer, and R, the statistical package.

Installation procedure for a basic installation:

• untar the tarball:

tar -xzvf Pecube_v4.0.tar.gz

• go to the main **Pecube** directory:

cd Pecube

• run Pecube:

bin/run.sh EXMP1

Installation procedure for a complete installation:

• after obtaining a basic installation, modify a piece of code:

touch src/Pecube.f90

and compile the code:

bin/compile.sh

• and check that the new version runs properly:

bin/run.sh EXMP1

Running Pecube

PECUBE

bin/run.sh \$NAME

where \$NAME is the name of a project, i.e., a folder the user has created that contains at minima an input directory in which the main **Pecube** input file Pecube.in is stored. This will run the input file tester bin/Test, **Pecube** itself bin/Pecube, and the VTK post-processor bin/Vtk.



In the previous version of **Pecube** (version 3), the name of the project was contained in the topographic input file. In **Pecube** version 4 (2018) the user needs to specify the name of the project folder in the command line that starts **Pecube**. This is a major difference between this new version 4 (2018) and the previous version 3.



\$NAME, the name of the project folder, is exactly 5 characters in length (like RUN01, NZ00A ot TEST1)

Pecube will echo the content of the input file (if the echo_input_file flag has been set) to the default output (screen/terminal) and provide information about the progress of the run as it progresses.

In *Inversion* mode, the output is limited to one line per run.

MPI version

mpiexec -np \$n bin/PecubeMPI.sh \$NAME

where \$n is the number of processors/cores/threads to be used by **Pecube**. This will run \$n instances of **Pecube** simultaneously on the \$n processors.



The MPI version should only be use din *Inversion* mode as **Pecube** cannot take advantage of multi-processor architecture for a single run.

VTK Postprocessor

The user may select to run the VTK post-processor only by issuing the command:

bin/Vtk \$NAME

Input file tester

The user may select to run the input file tester only by issuing the command:

bin/Test \$NAME


Using old input files

To allow easy migration to the **Pecube** version 4 (2018), a utility called Pecube324 is provided that transform the two input files topo_parameters.txt and fault_parameters.txt needed in the version 2 of **Pecube** into a single input file Pecube.in for **Pecube** version 3. To run the procedure, first copy the two version 2 input files in the folder old_input and run the bin/Pecube324 utility:

bin/Pecube324

File structure

Pecube exists inside of a strict file structure that is designed to help you organize your **Pecube** projects. It is summarized in the following diagram.

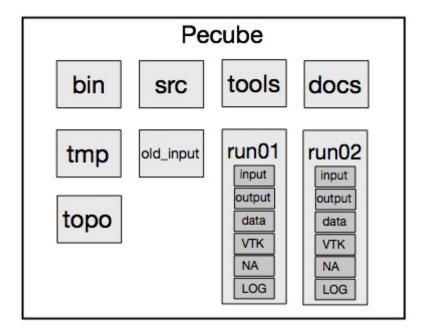

The bin folder contains the executables produced at compilation and that need to be used to run **Pecube**. The src folder contains the FOrtran (and C) code. The tools folder contains a few tools such as NA.R the R-script used for displaying the results of inversions or GenerateTimes.fio, a Fortran code to generate file names in a sequence. The docs folder contains the documentation as well as all the elements needed to update it (figures and the Pecube.adoc file). The tmp folder contains intermediary files created during a **Pecube** run. It should not be changed/eroased. The old_input is used to translate old **Pecube** input files (form V2) into a new input file (V3). The topo folder shold contain the Topo30 file that contains the global world topography (see section Topography parameters) for details. The other folders correspond to distinct **Pecube** projects. You should create one folder per idea/dataset/location/etc.

bin

This folder contains several shell scripts:

- run.sh: used to run Pecube
- crun.sh: used to compile **Pecube** and all its components AND run Peccube
- compile.sh: used to compile **Pecube** and all its components
- tarngo.sh: shell script to create a new **Pecube** tarball; to use it, one must be in the main **Pecube** folder and issue the command tools/tarngo.sh VERSION where VERSION is a version number or tag that will be added to the name of the tarball: Pecube_VERSION.tar.gz.



crun.sh and compile.sh will work ONLY if you have <code>gfortran</code>, <code>gcc</code> and <code>mpi</code> properlyt installed on your computer

as well as some executables:

- Pecube: Pecube executable
- Vtk: executable to produce VTK output files after a **Pecube** run
- Test: executable to produce VTK geometry files (such as topography, fault geometry, and velocity) before a **Pecube** run to check the validity of an input file
- PecubeMPI: Pecube executable for multi-processor machines
- Pecube324: Executable to transform "old format" **Pecube** input files to the "new format" input file



Don't forget that to run **Pecube** or to perform any operation, the corresponding command muyst be issued form the main **Pecube** folder

src

This folder contains the complete set of ForTran and C subroutines that make up **Pecube**. They are all necessary for the user to compile **Pecube**.



The content of the src folder should only be accessed/modified by expert users or developers. It is not recommended that you change any of the source files to perform an operation that could be accessed through the proper set of parameters or to perform an operation for q=which **Pecube** has not been designed.

tools

This folder contains:

• NA.R: R-script used for displaying the results of inversions

docs

This folder contains the documentation. It includes:

- Pecube.adoc: the User Guide in .adoc format that is used to generate the .html version using asciidoc
- Pecube.html: the User guide for display on a web browser
- Pecube.pdf: the User guide in pdf format
- asciidoc.conf: configuration file for asciidoc
- images: a folder containing a few images/figures used in the User Guide

tmp

This folder contains intermediary files that are created when **Pecube** is executed.



If this folder becomes too voluminous, the user may erase its content. But the folder itself must exist for **Pecube** to run.

old_input

This is where the user should put the "old format" **Pecube** input files, namely topo_parameters.txt and fault_parameters.txt to be transformed/translated to the new format. To perform this translation, the user should then run the Pecube324 executable. Pecube324 will read the name of the run in topo_parameters.txt and will create a folder of the same name where the new input file Pecube.in will be stored (in the data folder)



You must be in the main **Pecube** folder to perform this operation and issue the command bin/Pecube324

project folders

For each project, the user should create a project folder. For backward compatibility, the name of the folder corresponding to any given project must be composed of 5 characters, such as RUN01 or KINGC or 00027. Each project folder should contain, at minima, an other directory called input. In this directory should be a file named Pecube.in. This is the main (and only) input file containing the value of all **Pecube** model parameters.



The user should not use space (blank characters) for the project folder names...

The project folders may also contain a data folder that contains the data collected by the user and used to constrain a **Pecube** run. The data folder itself is made of subfolders of arbitrary name (not limited to 5 characters) that contains a series of data files. Only one of these sub-directories can be accessed/read in any given **Pecube** run/inversion and is specified by the data_folder parameter in the input file **Pecube.in**. The reason for creating this layer of subfolders is to allow the user to use different datasets or different combinaisons of datasets to perform different inversions using **Pecube**.

For example, the user has performed an inversion using all the data from a series of files stored in the data/dataset1 sub-folder. The user may wish to see how important a set Apatite Helium ages is in constraining the result of an inversion. For this the user creates a new subdirectory called data/dataset2 in which all files from the data/dataset1 sub-directory have been copied, EXCEPT for the file(s) containing the Apatite Helium ages. The user can then perform a new **Pecube** run or inversion by specifying data_folder = dataset2 in the Pecube.in input file.

After **Pecube** is run, the project folder will contain an output folder in which the **Pecube** outputs are stored as .csv files and .out or binary files. The .csv files can be opened in Excel or Numbers or any other data analysis software for processing. They include: the ages at all points of the topographic grid for each of the thermochronological systems (or as requested), the comparison between the data/observations and the **Pecube** predictions (if data has been provided to **Pecube**), time-temperature paths (if requested) and volume eroded (if requested). The .out files are binary files that are used to produce the VTK files stored in the VTK folder (see below). The content of all output files is described in the section [Output]

Other folders created at **Pecube** run time include:

- a VTK folder that contains the .vtk files created by Pecube
- a NA folder that contains the results of any Pecube inversion as .csv and .nad files
- a LOG folder that contains a log file in case the user has turned on the debug option in the Pecube.in input file



At run time, **Pecube** will create all the folders (if they do not exist yet) inside the project folder, but obviously not the input folder which must already exists as it contains the main input file Pecube.in

topo

The topo folder contains a single file called Topo30 that contains a 30 sec resolution DEM of the world. See section [topo_file_name] for further details on its content and its use/purpose.


Main input file

Pecube input file Pecube.in contains all the directives and model parameter values needed for **Pecube** to perform a run, including the name of the topographic file (or DEM) and the name of the data folder where the data/observations to model are stored. it is stored in the \$RUN/input directory/folder.

Topography parameters

topo_file_name (default = Nil)

Name of the file containing the topography as a grid of elevation points. The file should be in the \$RUN/data directory and contain a single column of real numbers giving the elevation of the topography in meters, starting from the bottom left corner, ending at the top right corner, and spanning the area of interest (defined by lat0, lon0, nx, ny, dlon, dlat) in row-major order.



- If topo_file_name is given the value Nil, the topography is assumed to be flat at elevation 0.
- If topo_file_name is given the value Topo30, the topography is automatically extracted from the global elevation database GTOPO30 (https://dds.cr.usgs.gov/srtm/version2_1/SRTM30/srtm30_documentation.pdf). This option requires that you download the 1.8 GB file: ftp://topex.ucsd.edu/pub/srtm30_plus/topo30/.
- if topo_file_name ends with a slash '/', it will be assumed to be a directory in which there is a collection of files containing the topography, topo0 to topon, the uplift rate, uplift0 to upliftn, and the surface temperature, temp0 to tempn. The number of steps needed are set by ntime, i.e. n = ntime + 1

nx (*default* = **31**)

Number of points describing the topography in the x-(or longitude-)direction



nx can only take integer values. The value you attribute to it MUST be an integer. Do not use nx = 25.0 or even nx = 25. This will cause **Pecube** to crash. Note that this warning applies to all paameters that can only take integer values. To make sure that this problem does not affect you, a good habit is to avoid using a decimal point at the end of numbers if you don't need it.

ny (*default* = **31**)

Number of points describing the topography in the y-(or latitude-)direction

lon0 (default = 0)

Longitude of the bottom left corner of the topographic data/file/grid(s)



Longitudes are expressed in decimal degree; longitudes East of Greenwich meridian are positive; longitudes West of Greenwich are negative meridian

lat0 (default = **0**)

Latitude of the bottom left corner of the topographic data/file/grid(s)



Latitudes are expressed in decimal degree; longitudes North of Equator are positive; longitudes South of Equator are negative

dlon (default = 0.0083333)

Distance in decimal degrees between two points on the topographic grid in the longitude direction



dlon and dlat must be positive and strictly greater than 0

dlat (default = 0.0083333)

Distance in decimal degrees between two points on the topographic grid in the latitude direction

nskip (default = 1)

Stride used to read the topo_input_file. When nskip=1, all points of the topo_input_file are used, otherwise every nskip point only is used, in both the x- and y-directions

Time evolution parameters

ntime (default = 1)

Number of time steps needed to describe the scenario for the evolution of the topography. For each time step, you will need to provide an amplification factor, amplification, an offset factor, offset, as well as an output flag value, output;. At step i, the topography used in **Pecube**, h_i , is obtained by the following scaling of the topography, h_0 , in the input file: $h_i = \text{offset}_i + \text{amplification}_i \times h_0$



There is an implied time step corresponding to present-day, for which the amplification factor amplification_ntime+1 is 1, the offset offset_ntime+1 is 0 and the output flag, offset_ntime+1 is 1. ntime should therefore be regarded as the number of intervals used to describe the topographic scenario, and the time_topoi values the times at which each interval starts.

time_topoi (no default values)

Time expressed in million years in the past at which topography is set to $h_i = offset_i + amplification_i \times h_0$.



Because **Pecube** uses geological time, the various time_topoi must monotonously decrease with i such that: time_topoi > time_topoi+1

amplificationi (default = 1)

Topographic amplification factor used at time i

offseti (default = 0)

Topographic offset factor used at time i

outputi (default = 1)


Output flag used at time i. If output i = 1, **Pecube** will compute and output thermochronological ages at time i. If output i = 0, **Pecube** will not compute nor will it output ages at time i



Setting the output flag outputi = 1 at a time i that is not equal to ntime + 1 will generate ages that can be compared to detrital ages or detrital age distributions as well as "maps" of ages, as requested. This means that the ages are given as ages with respect to present-day, not with respect to time_topoi.

erosional_time_scale (default = 0)

Time scale (in Myr) that determines how the topography is interpolated between two time steps, i.e. during a given time interval. If the time scale is nil, the interpolation is linear; if the time scale is large and positive, the interpolation corresponds to a decelerating change throughout the time interval (the most likely "geomorphic" scenario for an eroding topography); if the time scale is large and negative, the interpolation corresponds to an accelerating change throughout

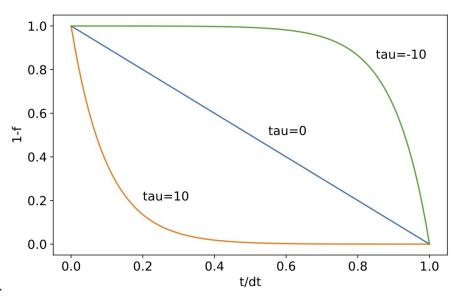

the time interval.



```
The formula used in Pecube to interpolate topography during a time step is: h(t) = h1 + (h2 - h1)*(1 - exp(-f(t)*dt/tau))/(1 - exp(dt/tau)) where h1 and h2 are the initial and final topography over the time interval dt and f(t) = (t - t1)/(t2 - t1)
Note that if tau = 0, this formula shortens to: h(t) = h1 + (h2 - h1)*f(t)
```

Thermal parameters

thickness (default = 35)

Assumed crustal thickness (in km). This is the depth of the bottom of the crustal layer being modeled. The temperature at the base of the model (depth = thickness) is assumed to be fixed at a value set by basal_temperature

basal_temperature (default = 700)

Temperature (in °C) imposed at the base of the model, i.e. at a depth specified by thickness.

nz (*default* = **21**)

Number of points used to discretize the crust in the z-direction

sea_level_temperature (default = 0)

Temperature (in °C) at sea level (zero topography).



The surface boundary condition in **Pecube** assumes that the temperature can vary as a function of elevation. The formula for T(h) used in **Pecube** is:

$$T(h) = T(0) + LR h$$

where T(0) is the temperature at zero elevation (sea_level_temperature) and LR is the lapse rate ('lapse_rate') or rate of change of temperature with elevation.

lapse_rate (default = 0)

Rate of change of temperature with elevation in the atmosphere (in °C/km).

thermal_diffusivity (default = 25)

Thermal diffusivity, kappa, used in **Pecube** to solve the heat transport equation in 3D:

```
T_t + vx T_x + vy T_y + vz_z = kappa (T_{xx} + T_{yy} + T_{zz}) + H
```

The thermal diffusivity is in km²/Myr. If it is given as a negative number, a subroutine called thermal_diffusivity must be supplied by the user to describe the spatial variation of the diffusivity at the onset of calculations, and its potential variation with time and temperature. The following "empty" subroutine is provided with the **Pecube** distribution.

```
double precision thermal_diffusivity (x0,y0,z0,temp,time)

implicit none

double precision x0,y0,z0,temp,time

thermal_diffusivity=25.d0

return
end
```

heat_production (default = 0)

Heat production used to solve the heat transport equation (in °C/Myr). If it is given as a negative number, a subroutine called heat_production must be supplied by the user to describe the spatial variation of the heat production at the onset of calculations, and its potential variation with time and temperature. The following "empty" subroutine is provided with the **Pecube** distribution.

```
double precision function heat_production (x0,y0,z0,temp,time)
implicit none
double precision x0,y0,z0,temp,time
heat_production=3.d0
return
end
```

Data parameters

```
data_folder (default = Nil)
```

Name of a folder stored in the data/ directory that contains all the data/observations that the use wishes to pass to **Pecube**, either for comparison with **Pecube**'s predictions or for inversion purposes. The content of the .csv files contained in the data_folder is described in the section Feeding data to **Pecube**.

```
default age (default = time topo1)
```

Default age (in Myr) given to rock particles that have not been reset, i.e. that have not reached


the "closure temperature" for the system considered.

FT_code_flag (default = 0)

Flag used to define which of the two fission track annealing routine to use to predict fission track ages and fission track length distributions. If FT_code_flag = 0 Peter van der Beek's routine is used; if FT_code_flag = 1 Richard Ketcham's routine is used.


Tectonic parameters

Tectonic forcing is introduced in **Pecube** by setting a velocity field (relative to the base of the model that is assumed to remain fixed) or rock uplift/transport velocity that is then used in the heat transport equation. **Pecube** allows for two type of tectonic forcings: a "uniform" uplift, i.e. that can only vary as a bi-linear function of horizontal coordinates, and a velocity field corresponding to faults of a given geometry. The faults are planar and tri-dimensional but must all have the same strike (i.e. orientation of their ssurface expression). To define a fault, the use must specify the direction of that strike, as well as the width of the faults, by giving the lat-lon coordinates of two points, X1 and X2. The geometry of these two points is shown in the following figure.




The vertical geometry of the faults is then specified by a number of (r,s) points that define segments of the faults. r is the horizontal coordinate perpendicular to the line defined by the two points X1 and X2. s is the vertical coordinate (positive above the top surface, z = 0). Note that the direction of r is to the right of the line defined by going from X1 to X2.

Velocities are then calculated by assuming that the velocity vector parallel to each of the successive fault segments. In regions where two segments of the fault can be used to define the velocity, the average is used. This ensures mass conservation across fault segments.

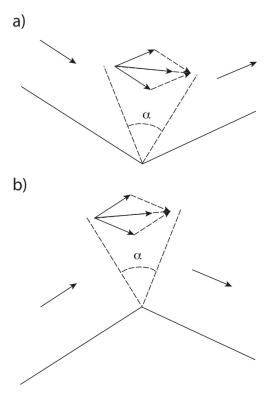

The amplitude of the velocity can change through time for each fault. It is specified through a termporal history made of time intervls and velocity magnitude. The velocity amplitude provided by the user is the horizontal convergence velocity (or divergence velocity). If the velocity is positive, the fault is assumed to be normal; if the velocity is negative the fault is assumed to be a thrust.

Note that the order in which the (r,s) points are given is important: it determines on which side of the fault the velocity is calculated/applied. The rule is that the velocity is applied on the right-hand side of the fault (going from the first to the last point defining the segments of the fault). The two options are illustrated in the following figure for a thrust fault (negative velocity amplitude).

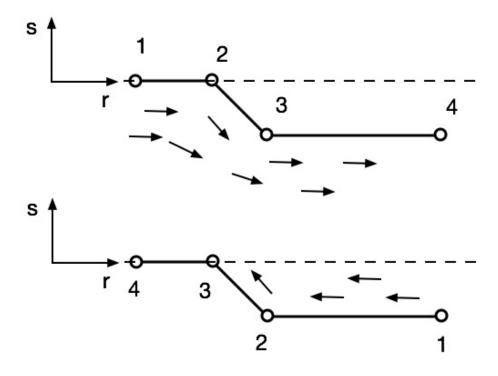

nfault (default = 0)

Number of faults used to describe the velocity field.



If the user wishes to specify a uniform uplift and no fault, nfault must still be set to 1. nfault = 0 implies no tectonic forcing/uplift and **Pecube** will compute the thermal effect of topographic change only.

lon1 (*default* = **0**)

Longitude (in decimal degrees) of X1, the first of two points used to define the faults strike and width.

lat1 (*default* = **0**)

Latitude (in decimal degrees) of X1, the first of two points used to define the faults strike and width.

lon2 (default = 0)

Longitude (in decimal degrees) of X2, the second of two points used to define the faults strike and width.

lat2 (*default* = **0**)

Latitude (in decimal degrees) of X2, the second of two points used to define the faults strike and width.

npointi (no default value)

Number of points used to define the fault segments in the vertical direction for fault i.



Note that if the user wishes to use a uniform uplift function, it must specify a single fault (nfault = 1) for which the number of points is negative (npoints1 = -1).



The fault segment geometry (the r and s coordinates) as well as a velocity history MUST BE PROVIDED FOR EACH OF THE FAULTS.

ri_j (no default value)

Horizontal coordinate of point *i* of fault *i* (in km) used to define the fault *i* geometry.



- Note, as indicated above, that the order in which the coordinates are numbered (from 1 to npointi) is important as it defines in which of the two half-spaces (above or below the fault) the velocity is computed/set.
- If the user wishes to impose motion on either sides of the fault (overthrusting on top and underthrusting below, for example), two faults must be defined, with identical geometries but with the points defining the segments in reversed orders.

si_j (no default value)

Vertical coordinate of point j of fault i (in km) used to define the fault i geometry. Positive values correspond to positive elevation, negative values correspond to depth.



Setting an r or s coordinate value to a star value * implies that the the corresponding r or s value is equal to the previous r or s values, respectively.

bottom_left (default = 1)

Uplift velocity (in km/Myr) imposed across the entire depth range at the bottom left corner of the **Pecube** domain (minimum longitude and minimum latitude). This parameter as well as bottom_right, upper_right and upper_left, are needed when defining a uniform uplift velocity (nfault = 1 and npoints1 = -1). These four values are then used to compute a velocity field by bilinear interpolation.

bottom_right (default = 1)

Uplift velocity (in km/Myr) imposed across the entire depth range at the bottom right corner of the **Pecube** domain (maximum longitude and minimum latitude).

top_right (default = 1)

Uplift velocity (in km/Myr) imposed across the entire depth range at the upper right corner of the **Pecube** domain (maximum longitude and maximum latitude).

top_left (default = 1)

Uplift velocity (in km/Myr) imposed across the entire depth range at the upper left corner of the **Pecube** domain (minimum longitude and maximum latitude).

nstepi (no default value)

Number of time intervals needed to define the velocity history for fault i.

time_starti_j (no default value)

Begining of time interval \boldsymbol{j} (in Myr and geological time) for fault \boldsymbol{i} .



Because **Pecube** use geological time, the start time must be greater than the end time.

time_endi_j (no default value)

End of time interval *i* (in Myr and geological time) for fault *i*.



Setting a time_start to a star value * implies that the time_start for the corresponding interval is equal to the time_end of the previous interval, i.e. time_starti_j = time_endi_j-1



One can also force a time value (either time_start or time_end) to be equal to one of the times defining the topographic evolution, i.e., time_start1_1 = time_topo1 or time end1 1 = time topo2

veloi_j (no default value)

Velocity amplitude (in km/Myr) for time interval *i* for fault *i*.

statici (default = 0)

Flag used to inhibit the contribution from fault i to the computed velocity field; when this flag is

set to 1 the fault is only used to advect the other faults, it does not contribute to the velocity field used to compute the advection term in **Pecube**.

logarithmic_velocity (default = 0)

Flag used to specify whether velocities are given as logarithmic values (if set to 1) (this is potentially useful for inversion purposes). See section [Inversion] for more details about **Pecube** inversion mode.

Output parameters

Pecube outputs the results of the computations in a variety of formats and files. A full descrition of the output from **Pecube** is given in section [Output]. One of these outputs is the computed ages at all points of the surface/topographic grid. The number of these points can be quite large (10,0000 or more) and computation of all ages (i.e. for all thermochronometric systems) will take some time. The user might not be interested in all different types of ages; therefore options exists to restrict the number of thermochronologis systems being computed by **Pecube**.

age_TL_flag (default = 0)

Flag to impose the computation of Thermoluminescence ages (=1) at all points of the surface/topographic grid or to prevent it (1).

age_OSL_flag (default = 0)

Flag to impose the computation of Optical Luminescence ages (=1) at all points of the surface/topographic grid or to prevent it (1).

TL_doser (default = 5)

Dose rate used for TL/OSL data computation (in Gy/s/ka)

TL_D0 (*default* = **800**)

Onset of dose saturation for TL/OSL data computation (in Gy)

TL_a (*default* = **1.8**)

Kinetic orders of trapping for TL/OSL data computation

TL_b (*default* = **1.8**)

Kinetic orders of detrapping for TL/OSL data computation

TL_Et (*default* = 1.4)

Activation energy for TL/OSL data computation (in eV)

TL_logs (*default* = 12)

Logarithm of thermal frequency factor for TL/OSL data computation (in 1/s)

TL_logrho (default = -5.5)

Logarithm of dimensionless recombination center density for TL/OSL data computation

age_AHe_flag (default = 0)

Flag to impose the computation of Helium ages in Apatite (=1) at all points of the

surface/topographic grid or to prevent it (1).

age_ZHe_flag (default = 0)

Flag to impose the computation of Helium ages in Zircon (=1) at all points of the surface/topographic grid or to prevent it (1).

age_AFT_flag (default = 0)

Flag to impose the computation of fission track ages in Apatite (=1) at all points of the surface/topographic grid or to prevent it (1).

age_ZFT_flag (default = 0)

Flag to impose the computation of fission track ages in Zircon (=1) at all points of the surface/topographic grid or to prevent it (1).

age_FTL_flag (default = 0)

Flag to impose the computation of mean fission track length in Apatite (=1) at all points of the surface/topographic grid or to prevent it (1).

age_KAr_flag (default = 0)

Flag to impose the computation of Argon ages in K-Feldspar (=1) at all points of the surface/topographic grid or to prevent it (1).

age_BAr_flag (default = 0)

Flag to impose the computation of Argon ages in Biotite (=1) at all points of the surface/topographic grid or to prevent it (1).

age_MAr_flag (default = 0)

Flag to impose the computation of Argon ages in Muscovite (=1) at all points of the surface/topographic grid or to prevent it (1).

age_HAr_flag (default = 0)

Flag to impose the computation of Argon ages in Hornblende (=1) at all points of the surface/topographic grid or to prevent it (1).

debug(default = 0)

Flag to impose debuging information to be sent to a log file (if set to 1)



This option for advanced users or developers only.

save PTT paths (default = 0)

Flag to force the saving to .csv files of the thermal histories of points where observations have been provided (if set to 1).

save_eroded_volume (default = 0)

Flag to force the saving to a .csv file of the eroded volume through time (if set to 1)

echo_input_file (default = 0)

Flag to echo the content of the Pecube. in file. Four values are accepted:

- 0: no echo
- 1: echo the name of the parameter and its value read in the input file
- 2: echo the name of the parameter and both its value read in the input file and its default value
- 3: echo the name of the parameter, its value read in the input file and its default value, and a short description
- 4: echo a short description of all parameters that can be specified in the input file (this option interrupts the execution of **Pecube**)

Isostasy parameters

isostasy (default = 0)

Flag used to trigger flexural isostatic adjustment to **Pecube**. If isostasy = 0, no isostatic calculations are done; if isostasy = 1 isostatic calculations are performed at every time step.

Pecube solves the equation governing the deflection of a 2D thin elastic plate floating on an inviscid asthenosphere:

```
D w_{xxxx} + D w_{xxyy} + D w_{yyyy} + (rhoa - rhoc) g w = rhoc g dh
```

where w is the isostatic surface deflection, x and y are the spatial coordinates, rhoa and rhoc are the density of asthenospheric and crustal rocks, respectively, g is gravitational acceleration, dh is the amount of material begin eroded and or deposited, and D is the flexural parameter given by:

```
D = Y EET^3 / 12(1 - pr^2)
```

where Y is Young's moduls, EET effective elastic plate thickness and pr Poisson's ratio. **Pecube** uses an FFT (Fast Fourier Transform) method as described in Nunnes and (Nunn and Aires, 1988).



The load rhoc g dh is computed from the amount removed/added to the surface topography between two time steps and is used to compute an incremental deflection over the time step. This deflection is then used to adjust the erosion or exhumation rate (i.e. vertical velocity with respect to the base of the model) at every point of the model. It DOES NOT affect the topography that is arbitrarily specified by the user.

EET (*default* = **20**)

Effective Elastic Thickness (in km) used to compute the isostatic deflection.

rho_crust (default = 2400)

Crustal density (in kg/m³) used to compute the isostatic deflection.

rho_asthenosphere (default = 3150)

Asthenospheric density (in kg/m³) used to compute the isostatic deflection.

young_modulus (default = 1e11)

Young Modulus (in Pa) used to compute the isostatic deflection.

poisson_ratio (default = 0.25)

Poisson's ratio (unitless) used to compute the isostatic deflection.

nx_isostasy (default = 1024)

resolution of the FFT grid (in the x-direction) used to solve the flexure equation. It must be a power of 2.



Pecube first interpolates the load (derived from the increment in topography over the time step) onto a regular mesh of resolution $nx_isostasy \times ny_isostasy$ on which the deflection is computed by FFT. This is why $nx_isostasy$ and $ny_isostasy$ must be powers of 2. The deflection is then interpolated back on the **Pecube** mesh of resolution $nx \times ny$ (with stride nskip).

ny_isostasy (default = 1024)

resolution of the FFT grid (in the x-direction) used to solve the flexure equation. It must be a power of 2.

Inversion parameters

Pecube can be used in *Inversion* mode to explore/find the value of selected parameters that produce ages that best fit observations/data provided by the user. The *Inversion* mode is explained in section [Inversion] and makes use of the Neighbourhood Algorithm (NA). A few flags can be set to control/alter the behaviour of the Neighbourhood algorithm.

maximum_number_of_iterations (default = 4)

Total number of NA iterations to be performed (not including the first one).

NA explores the parameter space by randomly generating sets of model parameters (one set per forward model run of **Pecube**). It performs this task a set number οf times (or iterations) given by the parameter maximum_number_of_iterations. At the end of each iteration, NA constructs the Voronoi diagram around the points in parameter space that correspond to each model run (and set of parameters) performed during previous iterations. It will then select a finite number (number_of_cells_to_resample) of the best Voronoi cells (those that are charcterized by a small misfit function value) to resample in the next iteration. It will perform model runs (sample_size_for_all_other_iterations of them) by selecting model parameter sets that are contained in those Voronoi cells only. During the first iteration NA performs a set number of model runs (given by the parameter sample_size_for_first_iteration) corresponding to sets of parameters uniformly distributed in the entire parameter space.



sample_size_for_first_iteration (default = 8)

Number of model runs (and model parameter sets) performed during the first, initial iteration.

sample_size_for_all_other_iterations (default = 8)

Number of model runs (and model parameter sets) performed during every subsequent iteration.

number_of_cells_to_resample (default = 4)

Number of Voronoi cells that will be resampled uniformly during any given iteration (except the first one). Those Voronoi cells are selected to be those that are charcaterized by the smallest misfit values..

misfit_weight_AGE (default = 1)

Factor or weight (dimensionless) multiplying the part of the misfit function that measures the difference between observed and predicted ages.



The Neighbourhood Algorithm explores parameter space to minimize a misfit function that measures the difference between observations and predictions. This function is made up of various components that are added to each other and correspond to different types of data/observations. The user can alter how these different types of data are combined by specifying weights or factors. These are misfit_weight_age, misfit_weight_FTLD, misfit_weight_TH, misfit_weight_43He, misfit_weight_TL and misfit_slope.

misfit_weight_FTLD (default = 1)

Factor or weight (dimensionless) multiplying the part of the misfit function that measures the difference between observed and predicted fission track length distributions.

misfit_weight_TH (default = 1)

Factor or weight (dimensionless) multiplying the part of the misfit function that measures the difference between observed and predicted thermal histories.

misfit_weight_43He (default = 1)

Factor or weight (dimensionless) multiplying the part of the misfit function that measures the difference between observed and predicted ⁴³Helium ages.

misfit_weight_TL (default = 1)

Factor or weight (dimensionless) multiplying the part of the misfit function that measures the difference between observed and predicted Thermoluminescence data.

misfit_slope (default = 0)

Flag to set whether the ages themselves are to be used to define the age part of the misfit function (misfit_slope=0) or if the slope and intercept of the age-elevation relationship derived form the predictions and observations are to be used (misfit_slope=1).



Note that the age elevation relationship used for the misfit function is computed for all the points for which an age is provided.

misfit_corrected (default = 0)

Flag to correct the misfit function by the number of observations minus the number of parameters + 1 (if misfit corrected=1)

Miscellaneous flags

fault_advect_flag (default = 0)

Flag to set whether the motion on any given fault can affect the geometry/position of the other faults (fault_advect_flag = 1) or not (fault_advect_flag = 0).



In theory, this flag should be set to 1. However, in practice, this requires that the faults be each defined by a large number of segments/points as the fault geometry is updated by updating the position of the points defining the segments. If a fault is defined by only a few points, once these points are advected the fault geometry resulting from connecting these points by line segments can be very "strange". In general, we do not recommend that the user sets this flag to 1.

shear_heating (default = 0)

Friction coefficient used to multiply an arbitrary stress value of 100 Mpa to compute the heat produced by friction; the heat is calculated as the product of strain rate, stress, and the friction coefficient, divided by the specific heat capacity (taken here to be 800 J/°C/kg). The strain rate is directly computed from the velocity field.



To change the value of the assumed stress and/or heat capacity, the user should simply modify the value of the friction coefficient accordingly, as all factors are multiplied.

Output

Types and formats

Pecube produces several types of output. They include:

- · ages computed at the nodes of the topographic grid
- ages and T-t paths computed at the observation points (i.e. where data was provided)
- The temperature field inside the crust
- echoes of the model setup, such as the topography through time, the geometry of the faults and the exhumation velocity field

These outputs are stored under verious formats:

- as .csv or comma-separated-values files stored in the output folder of the current \$RUN
- as .vtk or virtual tool kit files stored in the VTK folder of the current \$RUN
- as .out or binary files stored in the output folder of the current \$RUN

CSV files

Ages files

The main purpose of **Pecube** is to compute ages from a given tectonomorphic scenario. **Pecube** therefore computes the ages for a variety of system for all the points (or rock particles) that end up at the nodes of the topographic file at the end of the run. It also computes these ages at intermediary times as specified in the **Pecube.in** file by the **outputi** flag. If this flag is set to 1 for **n** steps (including the last step corresponding to present-day), **Pecube** will generates **n** ages files named **Ages001.csv** to **Ages00n.csv**, starting from the oldest to the youngest age.

Each file contains a table that include, as columns:

- Longitude
- Latitude
- · Height
- Apatite Helium age
- · Zircon Helium age
- · Apatite Fission track age
- Zircon aFission track ge
- K-Feldspar K-Argon age
- Biotite K-Argon age
- Muscovite K-Argon age
- · Hornblend K-Argon age
- Apatite Fission track mean track length

Longitudes and latitudes are in decimal degrees, height is in meters, Ages are in Myr and length in microns Each row corresponds to a point on the topographic mesh. Note that only selected ages are computed, as instructed by the user in the Pecube.in file through the various age_xxx_flags. See section Output parameters for details.



French users are warned that **Pecube** uses English/US convention for .csv files, i.e. the columns are separated by commas ,. To read those files into the French version of Excel or Numbers, the user needs to transform the .csv files generated by **Pecube**. For this we suggest to run a simple sed command that will do the job on a **Pecube** generated .csv file named English.csv that is transformed into a French .csv file named Erench.csv:

```
sed sed 's/,/;/g' English.csv | sed 's/./,/g' > French.csv
```

Comparisons with data

Pecube other main purpose is to compare its preditions to data. If the user provides data, **Pecube** will automatically predict this data. It will also generate several output files that compare predicted to observed ages, thermal histories, 43He or TL data. These are called:

- CompareAGE.csv, for the ages
- CompareTT.csv, for the thermal histories
- Compare43HE.csv, for the ⁴³He data
- CompareTL.csv, for the TL data

These files have a simple structure made of columns that, in addition to latitude and longitude, give the observed (OBS) and predicted (PRED) quantities. Each row corresponds to an observation/sample.



To extract from **Pecube** synthetic ages at specific points (i.e. that are not nodes of the topographic grid), the user should include a fake data A-file that contains only longitude and latitude information and no ages. **Pecube** will then produce synthetic ages at these points.

Time temperature paths

Pecube will also exports computed time-temperature paths at the observation points (i.e. where data has been provided by the user) if the flag save_PTT_paths has been set to 1 in the Pecube.in input file. This information is stored in the TimeTemperaturePaths.csv file in the output folder.

The format of the TimeTemperaturePaths.csv file is:

- as many rows as there are times in the thermal history
- as many columns as there are points to track + 1
- the first column is the time
- the other columns are the temperatures of each of the points to track

Eroded volumes

On request, a file containing the evolution through time of eroded volume is produced by **Pecube**. It is called VolumeEroded.csv and is stored in the output 'folder. To generate the eroded volumes file, the flag 'must be set to 1 in the Pecube.in input file.

The format of the VolumeEroded.csv file is:

- four columns and as many rows as there are time intervals
- the first two colums are the start and end of each time interval in Myr
- the thrid column is the flux or volume per unit time in km³/Myr
- the fourth column is the cumulative eroded volume in km³

VTK files

Pecube also generates .vtk files that can be used to visualize the results of a model run using the Paraview software.

These include:

- Ages00i.vtk files that contain surface ages computed by **Pecube**
- Pecube00i.vtk files that contain the temperature structure computed by Pecube
- Topo00i.vtk files that contain surface topography given to **Pecube**
- fault00i.vtk files that contain fault geometries given to **Pecube**
- velo00i.vtk files that contain velocity fields computed by Pecube

where **i** is the number of the time step among those that have been saved as indicated in the Pecube.in input file through the output***i** flags.

Pecube also generates a file named Data.csv stored in the VTK folder that contains the location of the observations provided to **Pecube**.

The .vtk files are not generated by **Pecube** *per se* but by two other programs called Test and Vtk that are stored in binary form in the bin folder. These programs are automatically called when the user issues a bin/run.sh \$RUN command, where \$RUN is the name of the project being run. They can also be used individually by issuing one the two following commands:



bin/Test \$RUN

to generate the Topo00i.vtk, fault00i.vtk and `velo00i.vtk`files, and/or

bin/Vtk \$RUN

to generate the **Pecube00i.vtk** and `Ages00**i.vtk**`files



Paraview is a very powerful yet free software that is widely used to represent scietific data in 3D. The author strongly recommends to **Pecube** users to learn the basics of Paraview as well as a=some of its advanced features to analyse **Pecube** predictions in details.

BIN files

Everytime **Pecube** runs it generates two binary output files that are used for post-processing. Note that this does not apply when **Pecube** is run in *Inversion* mode. These two files are called **Pecube.out** and **Ages.out** and are stored in the **output** folder. The first one contains the complete temperature history computed by **Pecube**, as well as the surface geometry and the velocity used to copmute the thermal histories. The second contains the ages as computed by **Pecube**.



The binary files exist mostly for legacy reasons. They should not be used by the user. If a user needs access to the complete temperature structure, for example, the author should be contacted for further information on how to access these binary files.

Log file

When the debugging mode is activated, **Pecube** activity is logged in a log file called **Pecube.log** stored in the LOG folder. The information sent to the log file is for debugging purposes and of little use to the user. To enable debugging mode, the user must set the debug to 1 in the **Pecube.in** file.

Feeding data to Pecube

Pecube accepts many types of data, mostly ages but not exclusively. **Pecube** makes use of data in two separate ways: First, **Pecube** can be used to reproduce observations by computing synthetic values at the same locations, second it can use these synthetic values to compare them to the observations and to direct the search for optimal values of model parameters, when used in its *Inversion* mode.

All data must be stored in .csv files that contains informative labels to help **Pecube** access the data. For example a data file that contains Apatite Helium ages and their uncertainty at a set of n locations must contain, at minima five columns: one containing the name of each sample, two containing the latitude and longitude of each sample and two containing the age and its uncertainty. There may be more columns that contain other information useful for **Pecube**, like Apatite fission track ages, for example, or not, like the age of the geologist who collected the data. That "useless" information is managed by **Pecube** but not used.

Some data types require a different format. For example raw fission track length measurements that consist in a large collection of number (~100) each corresponding to a discrete track length measurement. This data is stored in a file where columns containing the sample name, its latitude and longitude are necessary but also a column that contain more than one number, i.e. the fission track length measurements.



Note that two distinct methods/formats can be used to input a fission track length dataset, the first, as described above, by reading in a long list of track length measurements, the second by reading a fission track length distribution that has already been computed by the user from the raw fission track length dataset.

All data files must be stored inside one sub-folder in the data folder. The name of the subfolder is passed to **Pecube** through the **Pecube.in** input file under the tag/name data_folder. The user can create more than one data subfolder to group the various datafiles in intended combinaisons. There are five different types of data files, age datafiles (A_files), fission track length data files (FTL_files), thermal histories data files (TH_files), ⁴³He datafiles (43_files) and thermoluminescence datafiles (TL_files).

Conventions

All data files must be in .csv format. This means that they can be prepared in your favorite data analysis software (like Excel or Numbers) and exported as .csv.



French users are warned that Excel (or Numbers) export data in .csv format that are not comma separated but semi-colon separated because the comma is used in the numbers themselves (to separate the fractional part from the integer part of the number). This will not work with **Pecube** which expects COMMA separated data with a dot . used for decimal numbers. French users will therefore need to modify their input data to make them conpatible with **Pecube**. For this we suggest to run a simple sed command that will do the job on a French .csv file named French.csv that is transformed into a US/English .csv file named English.csv:

To recognize data file types and the data inside the files, **Pecube** does not use data file names, but the tags/labels of the columns inside the files. For example, any data/sample in any file must contain a column names **SAMPLE** and two other columns names **LON** and **LAT**. Apatite Helium ages are stored in a column named **AHE** and their uncertainties in **DAHE**.

The convention is that the capitalization of the tag does not matter, i.e., **ahe** is equivalent to **AHe** or to **AHE**.

The order of the columns (or tags) does not matter. The first column can be the sample name, but it does not have to be.

Some colums can be empty and some lines can be empty.

Some columns may contain data that is not meaningful for **Pecube**; they will not be read but should not interfere with the meaningful information. Avoid, however, cluttering your .csv data files with useless information that increases the chance that your data be not read appropriately by Peube.



Where a data is expected, the user should use numerical values that make sense, such as 1.2 or 1.e-3 or 0.0023. But not values that cannot be interpreted as real numbers, such as 1+1 or Nil or NoData. If a type of data is missing for a sample, leave the corresponding entry empty.

Data types

In the following table, we give the list of tags that are expected ($\sqrt{}$) or allowed (+) in each of the five different data type files.

[[Data types]]

Data type	Tag	A_files	FTL_files	TH_files	43_files	TL_files
Sample name	SAMPLE	V	\checkmark	\checkmark	\checkmark	√
Sample longitude	LON	V	\checkmark	$\sqrt{}$	\checkmark	$\sqrt{}$

Data type	Tag	A_files	FTL_files	TH_files	43_files	TL_files
Sample latitude	LAT	\checkmark	\checkmark	\checkmark	\checkmark	\checkmark
Sample height	HEIGHT	+	+	+	+	+
Apatite Helium age	AHE	+				
Uncertainty on Apatite Helium age	DAHE	+				
Apatite fission track age	AFT	+				
Uncertainty on Apatite fission track age	DAFT	+				
Zircon Helium age	ZHE	+				
Uncertainty on Zircon Helium age	DZHE	+				
Zircon fission track age	ZFT	+				
Uncertainty on Zircon fission track age	DZFT	+				
K-feldspar K- Ar age	KAR	+				
Uncertainty in K-feldspar K-Ar age	DKAR	+				
Biotite K-Ar age	BAR	+				
Uncertainty in Biotite K- Ar age	DBAR	+				
Muscovite K- Ar age	MAR	+				

Data type	Tag	A_files	FTL_files	TH_files	43_files	TL_files
Uncertainty in Muscovite K-Ar age	DMAR	+				
Hornblende K-Ar age	HAR	+				
Uncertainty in Hornblende K-Ar age	DHAR	+				
Grain size	SIZE	+			V	
Relative proportion of FT lengths in 0-1 µm range	TL1	+				
Relative proportion of FT lengths in µm range	TL	+				
Relative proportion of FT lengths in 19-20 µm range	TL20	+				
Fission track lengths	FTL		√			
Time point	TIMEH			V		
Temperature point	ТЕМРН			V		
Uncertainty on temperature	DTEMPH			V		
⁴³ Helium age	AGE43				V	
Uncertainty on ⁴³ Helium age	DAGE43				V	
Heating step duration	DUR43				V	

Data type	Tag	A_files	FTL_files	TH_files	43_files	TL_files
Heating step temperature	TEMP43				V	
Relative gas release	%REL				\checkmark	
Relative gas release	D%REL				\checkmark	
Age gas release	AREL				√	
Relative gas release	DAREL				√	
Dose rate	DOSER					\checkmark
Onset of dose saturation	D0					V
Kinetic orders of trapping	ATL					√
Kinetic orders of detrapping	BTL					√
Activation energy	ET					√
Logarithm of thermal frequency factor	LOGS					√
Logarithm of dimensionle ss recombinati on center density	LOGRHO					√
Relative number of trapped electrons	N/N					√

All ages and times are in Myr, all temperatures are in °C, all longitudes and latitudes are in decimal degrees, heights are in meters, fission track lengths and grain sizes are in microns, Step durations are in minutes, dose rates are in Gyr/kyr, onset of dose saturation in Gyr, and energies are in eV.

A files

Ages files (A_files) are the original **Pecube** files. They contain age (and age uncertainty) data for a given number of samples. Each sample is a row in the file and each system/age or data is a column in the file. The tags that are searched for in an A-file are: **SAMPLE** (compulsory), **LON** (compulsory), **LAT** (compulsory), **HEIGHT**, **AHE**, **DAHE**, **AFT**, **DAFT**, **ZHE**, **DZHE**, **ZFT**, **DZFT**, **KAR**, **DKAR**, **BAR**, **DBAR**, **MAR**, **DMAR**, **HAR**, **DHAR**, **TL1** to **TL20** and **SIZE**. All other tags are not read. Missing data points are allowed.

Example of an A_file:

SAMPLE	LON	LAT	HEIGHT	AHE	DAHE	AFT	DAFT
Sample1	12.4	-23.1	1321	12.4	3.2		
AK-123/23	12.5	-22.8				14.2	3.4
Dummy	12.1	-23.2					
Dummy	12.1	-23.2	-200				

The first sample has Apatite Helium data only, the second Apatite fission track only and no information about the height, the third is a dummy sample which is used to extract age information from **Pecube** at a selected site, the fourth is identical to the third except that the user has specified a negative number for the **HEIGHT** field, which means that the age will be calculated at a depth of 200 meters below the surface (as if it had been collected in a well)

FTL files

Fission track length files (FTL_files) contain fission track length measurements for a given number of samples. To each sample sample corresponds a number of rows in the file that contains the fission track length data. The tags that are searched for in an A-file are: **SAMPLE** (compulsory), **LON** (compulsory), **LAT** (compulsory), **HEIGHT** and **FTL** (compulsory). All other tags are not read.

Example of a FTL_file:

SAMPLE	LAT	LON	HEIGHT	FTL
KK123/1	-45.2	178.12		12
				13
				8
				1
				10
				5
				7
				12
				5
KK123/2	-45.2	178.12	1245	13

SAMPLE	LAT	LON	HEIGHT	FTL
				17
				12
				8

The first sample has 9 track length measurements but no **HEIGHT** field; the second sample has only 4 track length measurements but has a height.

TH files

There exist several methods/pieces of software to extract thermal histories from thermochonometric data (HEFTY, QTQT for example). A new option allows to use these thermal histories to constrain **Pecube**, avoiding the need to perform age calculations in **Pecube**. In this way the user combines the strength of thermal history software such as QTQT with the strength of **Pecube**, designed to test tectonogeomorphic against thermal histories.

Thermal history files (TH_files) contain thermal histories for one or several samples. To each sample corresponds a number of rows in the file that contains the thermal history of the sample under the tags **TIMEH**, **TEMPH** and **DTEMPH**, that correspond to the time, temperature and uncertainty on temperature for each of the points of the thermal history. Times are in Myr in the past (geological time) and temperature and uncertainty on temperature are in °C.



The thermal histories must be given in chronological order, i.e., form the oldest point to the youngest; they do not need, however, to be monotonous.

Example of a FTL_file:

SAMPLE	LAT	LON	HEIGHT	TIMEH	ТЕМРН	DTEMPH
KK123/1	-45.2	178.12		12.1	250.	25.
				10.2	200.	25.
				5.7	125.	25.
				2.1	75	20.
				0.	15.	15.
KK123/2	-45.2	178.12	1245	100.	500.	100.
				66.	250.	50.
				55.	350.	50.
				0.	0.	10.

The first sample has a monotonous thermal history made of 5 points but no **HEIGHT** field; the second sample has a non-monotonous thermal history made of 4 points but has a height.



DO NOT specify NIL UNCERTAINTY as the uncertainty appears in the denominator in the expression of the misfit function.

43 files

Experimental (not fully tested)

TL files

Experimental (not fully tested)

Checking the data

Pecube performs a series of simple check on the data. First it discards the points that are not located within the **Pecube** domain (defined by the geometry of the topographic file or DEM). It then looks for inconsistencies in the data such as a thermal hitory that has no temperature column, or a data point that it cannot locate because it has no longitude or latitude. Samples that do not have a sample name are not considered either.

If **Pecube** detects an error it will interrupt the run and send an error message. If **Pecube** notice a non-fatal inconsistency in the data it will report it in a file called data_folder_Message.txt (where data_folder is the name of the data_folder specified in the input file) stored in the data folder.

Inversion

Pecube can be used in *Inversion* mode to explore/find the value of selected parameters that produce ages that best fit observations/data provided by the user. The *Inversion* mode makes use of the Neighbourhood Algorithm (NA) developed by Malcolm Sambridge (Sambridge, 1999a, 1999b).

NA explores the parameter space by randomly generating sets of model parameters (one set per forward model run of **Pecube**). It performs this task a set number of times (or iterations). At the end of each iteration, NA constructs the Voronoi diagram around the points in parameter space that correspond to each model run (and set of parameters) performed during previous iterations. It will then select a finite number of the best Voronoi cells (those that are charcterized by a small value of the misfit function) to resample in the next iteration. It will perform model runs by selecting model parameter sets that are contained in those Voronoi cells only. During the first iteration NA performs a set number of model runs corresponding to sets of parameters uniformly distributed in the entire parameter space.

NA explores parameter space in order to minimize a misfit function that measures the difference between observations and predictions. This function is made up of various components that are added to each other and correspond to different types of data/observations.



Using **Pecube** in *Inversion* mode implies that it is provided with data that **Pecube** will attempt to match by searching through parameter space (using NA). There is no point in performing an inversion if no data is provided to **Pecube**. Note, however, that synthetic ages can be provided to **Pecube** to perform an inversion. This is a way to estimate the quality/quantity of data that is necessary to verify/discard a proposed scenario.

Parameters to invert for

Any of **Pecube** parameters can be inverted for. They are selected by the user by specifying a range rather than a single value in the input file (Pecube.in). The range is given by two numbers (rather than one) separated by a column:



Some parameters cannot be inverted for. For example those that do not have a numerical value, like a file name, or are just flags or integers that can only take a discrete number of values. USE COMMON SENSE when deciding which parameter you wish to invert for.



- Some parameters appear as a series of numbers, such as the various times in
 the topographic or velocity history, or the successive coordinates of the points
 defining a fault geometry. In these situations, the user can use a star * instead
 of a time or coordinate value. This instructs NA to set the range for this
 parameter to be whatever value NA has selected for the previous value in the
 series and/or the next one. This of course does not apply for the first or last
 unmber in the series.
- Note that this causes a strong correlation between two (or more) of the parameters NA is inverted for. This has soncequences for the way you shold interpret the outcome/result of the inversion.

Misfit function

The misfit function is composed of 5 parts:

the age part

```
M1 = sqrt(sum [(Ao-Ap)^2^/dA^2^]/N1)
```

where Ao, dA and Ap are the observed, uncertainty in and predicted ages, N1 is the total number of age constraints. Note that in case the age-elevation relationship is used rather than the "raw" ages (misfit_slope = 1), the misfit function is constructed from the mean age Am and slope of the age-elevation relationship AEs, obtained by linear regression of the observed/predicted ages vs elevations. The misfit function (M1) is replaced by the following:

```
M1 = sqrt(sum [(Amo-Amp)^2^/Amo^2^+(AEso-AEsp)^2^/AEso^2^]/Na)
```

where the summation is over the different age/systems used/available and Na is their number. - the fission track length part

M1a = Kuiper test comparing observed and predicted track length distributions

• the thermal history part

```
M2 = sqrt(sum [(To-Tp)^2^/dT^2^]/N2)
```

where To, dT and Tp are the observed, uncertainty in and predicted temperature, N2 is the total number of steps in the thermal histories - the ⁴³He part

```
M3 = sqrt(sum [(Ro-Rp)^2^/(0.1*Ro)^2^]/N3)
```

where Ro and Rp are the observed, uncertainty and predicted percent gas release, N3 is the total number of steps in the step heating procedure - the Thermo Luminescence part

```
M4 = sqrt(sum [(NNo-NNp)^2^/dNN^2^]/N4)
```

where NNo, dNN and NNp are the observed, uncertainty in and predicted NN, N4 is the total number of TL observations

NA behaviour

In *Inversion* mode, **Pecube** performs not one but MANY forward model runs. This means that the computational time is greatly increased (by a factor of several thousands in most cases). This implies:

- that the user should consider limiting the cost of a single forward model run: for this the user should consider increasing the value of the stride parameter (nskip) to lower the horizontal resolution used in **Pecube**; the user should also consider decreasing the value of the vertical spatial resolution (nz); to help the user, all flags selecting which ages to calculate at the horizontal grid points are automatically turned off (i.e. set to 0);
- that the user should try to limit the number of forward model runs performed during the inversion: for this the user should consider minimizinfg the number of model parameters to invert for; this is because the number of points necessary to sample a space of dimension N increases almost exponentially with the diemension N; NA is recommended for highly nonlinear problem having a relatively small number of parameters (<10);
- that the user should try to use a multi-processors/cores machine: we provide the user with a version of **Pecube** that is optimized for running on a multi processor machine by makeing of MPI (Message Passing Interface); to use this feature, the user have a purposedly compiled version of **Pecube** or create it by issuing the make MPI command; this requires that the adequate libraries and compiler options have been installed on the computer.

Inversion results

The results of the inversion are written to a series of files stored in the NA folder. The main output is saved at the end of the **Pecube** inversion in the file NA_results.csv which contains nparam + 1 columns where nparams is the number of parameters inverted for. The first colum contains the value of the misfit and the others the corresponding values of the model parameters.

Another similar file is stored in the NA folder. It is called NA_int_res.csv and contains the same information as that contained in NA_results.csv but is updated in real time during the inversion run. It is possible that this file be corrupted when **Pecube** runs in *Inversion* mode using multiple processors/cores. This is the reason the other file NA_results.csv is created at the end of the inversion.

To access these files, an R-script is provided (in the tools directory). It is called NA.R and can read the files and display their content in several ways. In particular NA.R produces diagrams representing each model run by a colored dot/circle that are very useful to assess the evolution of the misfit function and map the function in parameter space. We recommend its use.



Don't forget to run the NA.R script from the main **Pecube** folder...

Alternatively, we suggest to the user to use the second part of Malcolm Sambridge's software package that builds from the model run a more sophisticated statistical information, such as a probability Density Function for each of the model parameters **Pecube** has inverted the observations for. Malcolm Sambridge's second piece of software reads the NA.nad file that has also been generated by the **Pecube** + NA run.

When run in *Inversion* mode, **Pecube** issues a single line to the screen per model run. It contains the misfit value and th ecorresponding model parameter values. All other information is removed.


Examples

EXMP1

In this first example Pecube.in, we perform a simple experiment using a flat surface topography (no topo_file_name is specified). The grid is of dimension 21x21 kilometers (approximately) as the default grid spacings dlon = 0.0083333 and dlat = 0.0083333 are used. The experiment goes for 10 million years as specified by time_topo1 = 10. We impose a uniform uplift npoint = -1 set to velo1_1 = 2 over the complete experiment time, i.e. from time_start1_1 = 10 to time_end1_ = 0`.


The predcited Apatite Helium age is 0.84 Ma and the T-t or Temperature-time path for a particle in the middle of the model is shown in the following figure. To extract that information, we introduced a "fake" data file that only contains one point of which the lcatitude and longitude only are specified and set save_PTT_paths = 1. We see the exponential shape of the Tt path which simply reflects the exponentional geotherm being established by the finite advection of rocks through th eupper fixed surface. This is due to the finite value of the "Peclet" number (Pe = vL/k) where V is the exhumation velocity, V the thickness of the layer being exhumed and V the thermal diffusivity. In this example, V = 2 km/Myr, V = 35km and V = 25 km²/Myr, such that V = 2*35/25 = 2.8.




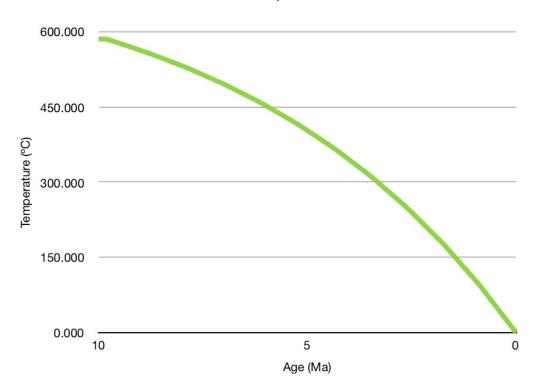

In this second example Pecube.in, we use a finite amplitude topography arbitrarily extracted from the global topographic database topo30 at the locatino of Kings Canyon in the Sierra Nevada of Souther California. For this we specify the latitude and longitude of the bottom left corner of the area of interest and cut out a square of dimensions 60x60 km approximately.

The results are shown as two plots of the resulting Apatite Helium ages, one assuming that the topography remains constant through time Pecube.in, the other that the topography amplitude has decreased from 3 times its present-day amplitude at 10 Ma to its present-day amplitude at 0 Ma Pecube.in. This is imposed by changing the amplification1 to 1 or 3, respectively. In the first case we see a strong positive age-elevation relationship at all wavelengths. In the second case we see a strong negative age-elevation relationship at the longest wavelengths of the topography and a positive age-elevation relationship at short wavelength. See Braun (Terra Nova, 2002) for further explanation of this behaviour.

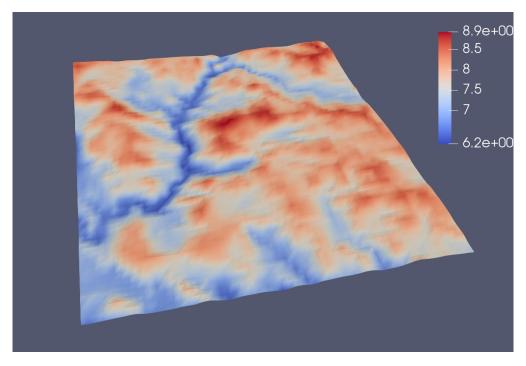

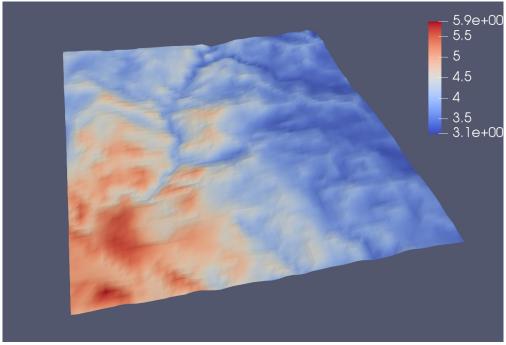



Note that to obtain the .vtk files necessary to produce the 3D plots one needs to execute bin/Vtk EXMP2


EXMP3

This example Pecube.in is very similar to the previous one, except that the topographic history is more complex, i.e. made up of more than one step. There are three steps, one that starts at 90 Ma when the topography is 3 times higher than present-day, one that starts at 70 Ma when the topography is still 3 times higher than today. This represents the tectonically active phase. We then impose that the relief disappears completely over the interval starting at 70 Ma and finishing at 5 Ma to form a flat plateau at 1 km elevation. Finally the topography is recreated (to its present-day value) in the last 5 Ma to mimic an erosional response to a climate change, for example (by setting offset3 = 1). The velocity field is relatively fast (1 km/Myr) during the tectonic phase (between 90

and 70 Ma). Them much slower, i.e. 0.04 km/Myr, during the interval (70-5 Ma).

Note that nskip = 2 to force **Pecube** to use half the resolution (in each direction) of the input DEM. In fact, **Pecube** only uses every second point in the DEM (in both directions). Note also the use of a start * to impose that the time of the start of the second interval of the velocity scenario is equal to the time of the end of the first interval.

The resulting topography, Apatite Helium ages and 3D temperature structure ar eshown in the following figure. It shows the evolution of the topography, as imposed, the very large variation in ages a the end of the model run, as well as the advection of the isotherms during the tectonic phase.

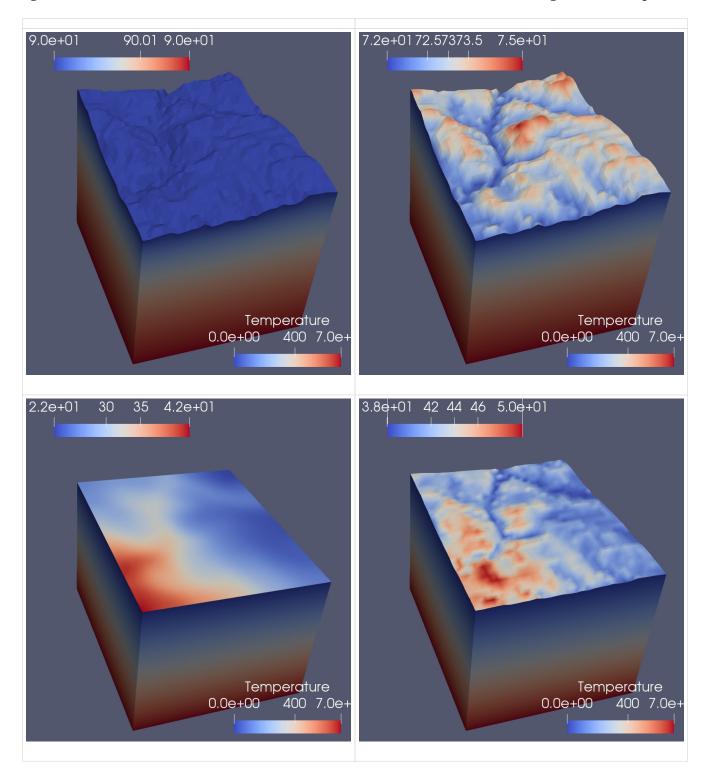


Note the very large spread of ages on the present-day landscape. The age distributions at the other


time steps should be compared to detrital age distributions that would be obtained from a sedimentary unit of the equivalent stratigraphic age.

EXMP4

In this example, we introduce two thrust faults that will be activated in sequence. For simplicity we will assume that the topography is flat. They are made of two segments each, a horizontal segment at 10 km depth and a dipping segment at 45° dip. The faults are offset by 20 km. We assume that the motion on the first fault last between 10 and 5 Ma and that motion on the second fault lasts between 5 and 0 Ma. The velocity does not change over time and is set at 1 km/Myr. Here is the resulting Pecube.in.

The results are shown in the two figures below and show the resulting velocity field at 5 Ma and at present-day, as well as the predicted Apatite Helium ages at the end of the run. The distribution of ages is made of very young ages near the most recent fault and intermediary ages above the first structure. Note that the faults have not bee advected one by the other which, in this situation of insequence faulting, makes no difference for the predicted age distribution.

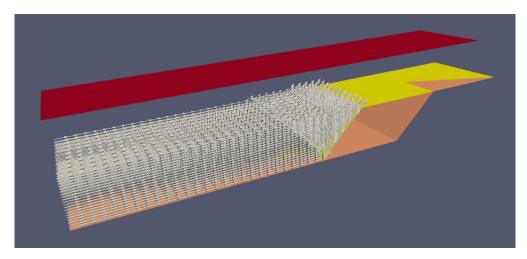

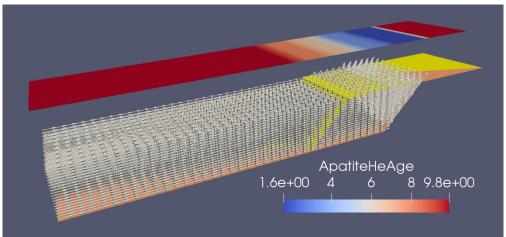



To display the velocity field with Paraview, you need to open the series of veloxxx.vtk files stored in the VTK folder. You then need to apply a Glyph filter to it to display the arrows. Importantly, the Scalar mode must be set to vector so that the arrows are scaled by the amplitude of the velocity.

In this example we transform input files from the previous version of **Pecube** into the single input file for the current version. The "old" input files topo_parameters.txt and fault_parameters.txt have been placed in the old_input folder. Note that the run name in the topo_parameters.txt input file is EXMP4. This mean that a new folder called EXMP5 will be created or overwritten with the version input file.

To perform the translation, the user should issue the following command:

bin/Pecube324

The new format input file Pecube.in will be stored as EXMP5/input/Pecube.in



Note that it is recommended to replace the topo_file_name Whataroa.dat by the generic Topo30 to use the global DEM.

EXMP6

In this example Pecube.in we show how to include a simple dataset into Pecube. The example is otherwise identical to that of EXMP3. The data is in a file stored in the folder that is given by the data_folder parameter, in this case KGHelium. The data file is named KingsCanyon.csv. It contains He ages collected by House et al (1988) in the Kings Canyon area. The data file contains three compulsory columns names SAMPLE, LON and LAT that are needed to identify each data point/age and to position it in the model. The Apatite Helium data is stored in a column called AHE; the uncertainty in age in DAHE, the height of the sample location in HEIGHT and the grain size in the column SIZE. Units are given in the section near the Data types. Note that the data file could contain empty columns or lines, or columns containing other information. These extra columns could be other ages (other chronometric systems) or a fission track length distribution. Columns that do not correspond to anything meaningful for Pecube are simply ignored.

When running **Pecube** (with the option <code>echo_input_file = 1</code>, it echoes to the screen the number of data points for each type of data. Note that all data types are considered as having potentially age information and are therefore added up to give the <code>Number of ages samples</code>. While reading the data, <code>Pecube</code> might produce comments concerning the data in a file called <code>data/xxx.txt</code> where <code>xxx</code> is the name of the data folder. These messages include information on the data that has been neglected because it is not located in the area modeled by <code>Pecube</code> or because it cannot be located (no <code>LAT</code> or <code>LON</code> column).

The comparison between the predicted and observed ages is given in the file output/CompareAGE.csv. It contains many columns that are now paired between an observation column and a prediction column. For example the AHEOBS column contains the observed Apatite Helium ages and the AGEPRED column contains the equivalent predicted ages.

We see that the predicted ages do not compare well with the data. A measure of this misfit is indicated by **Pecube**. The misfit is 4.93 as indicated by **Pecube**.


In this example, we will try to improve the fit to data obtained in EXMP6. For this we will use **Pecube** in *Inversion* mode. To achieve this, all that is needed is to replace one of several of the model parameters in the Pecube.in file by a range. A range is specified by giving two numbers/values separated by a colon ":" rather than a single number/value. Here we will attempt to improve the fit to data by inverting for the exhymation rate in the second, slow phase of exhumation and the time at which that pahse starts (time_start1_2). We would like however the timing of the topographic scenario (defined by the time_topoi parameters). To achieve this, we synchronize the timing by specifying time_start1_2 = time_topo2 in the input file and specify a range for the time_topo2 parameter, in this case time_topo2 = 70:100.



To perform this inversion in a reasonable (computing) time, we increased the nskip parameter.

To perform this inversion, **Pecube** will trigger not one but many model runs, varying the value of the model parameters between the two values given in the range. The values generated are produced by the Neighbourhood Algorithm (Sambridge, 1999). This algorithm first generates random parameter values in an attempt to explore parameter space in as uniform a manner as possible. **Pecube** estimates the misfit functionm for each of these parameter sets. The value of the model parameters and the misfit are echoed to the screen. Note that the misfit is made of 4 different parts (see section Inversion) that are given separately to the screen, to help the user in determing the values of the various misfit_weight_xxx parameters (see section Inversion parameters).

The results are shown in the following figure obtained using the NA.R R-script provided in the tools folder. It shows that the values of the second phase exhumation rate and its onset that best fit the data are 0.02 km/Myr and 85 Ma.

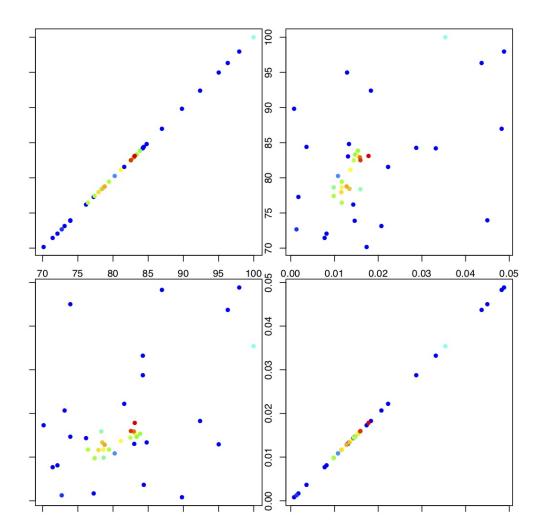

To perform inversions faster, we recommend that you use multiple processors/cores/threads on your computer as forward models can be performed simultaneously. Once you have installed MPI on your computer, you can use the multi-processor version of Pecube by running:



```
mpiexec -np xxx bin/PecubeMPI EXMP7
```


where xxx is the number of processors/cores/threads available on your computer/cluster.

EXMP8

In this example, we use thermal histories as constraint for an inversion. The data stored in the K6Tpaths is made of 4 samples for which we assumed time-temperature paths have been obtained using Hefty or QTQT (KC1.csv, KC7.csv and KC3-10.csv). Note that one file contains two sample thermal histories.

The input file is here.

The results are shown in the following figure.

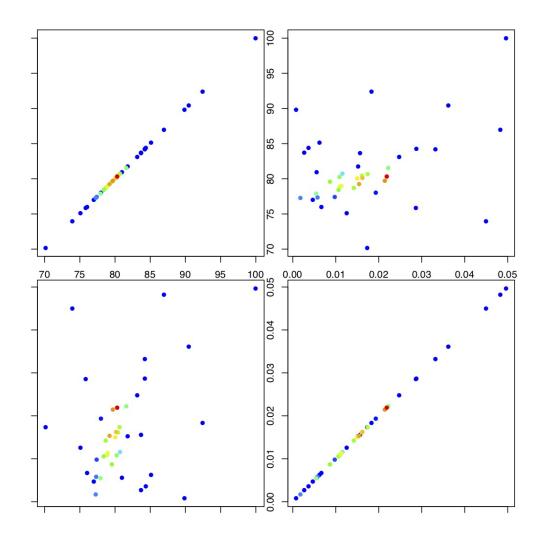

In this other simple example Pecube.in,we show how to extract predicted ages and a fission track length distribution at any point at the surface of the model. For this we introduce a fake' data file that contains a point for which only the Lat-Lon information is given. We also change the value of the `FT_code_flag to compare fission track length predictions from the two models used in **Pecube**, one by Peter van der Beek and one by Ritch Ketcham.

The code should be run twice, changing the value of FT_code_flag (0 or 1).


The results are stored in the file output/CompareAGE.csv (with FT_code_flag=0:

LON	LAT	AHEPRE D	AFTPRE D	ZHEPRE D	ZFTPRE D	KARPRE D	BARPRE D	MARPR ED	HARPRE D
0.100000	0.100000	2.36905	3.43820	6.19110	8.76516	3.86970	71.9712	18.5794	98.4899

FT01PR	FT02PR	FT03PR	FT04PR	FT05PR	FT06PR	FT07PR	FT08PR	FT09PR	FT10PR
ED									
0.033482	0.029608	0.023200	00.19446	0.013500	0.015174	0.021249	0.036285	0.045293	0.059852

FT11PR	FT12PR	FT13PR	FT14PR	FT15PR	FT16PR	FT17PR	FT18PR	FT19PR	FT20PR
ED	ED	ED	ED	ED	ED	ED	ED	ED	ED
0.057581 7	0.056948 2	0.099721 4	0.130928	0.169413	0.174763	0.013551 7	0.00000	0.00000	0.00000

The difference between the two predicted track length distributions is shown in the following figure.

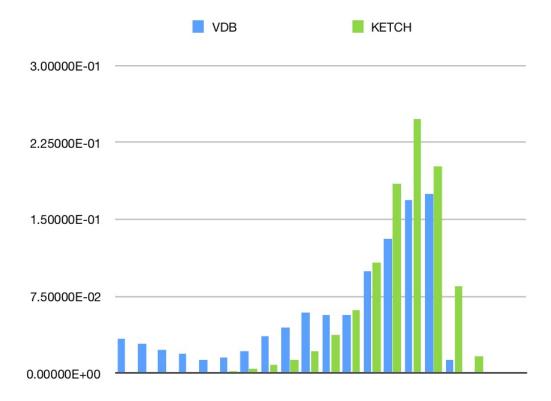


EXMPA

Here we produce TL/OSL data, i.e. relative number of trapped electrons, at the surface of the topographic grid. The scenario (shown here) involves the slow exhumation of rock under a flat topography, the rise of that topography to form a plateau at 6 km altitude and the incision of that plateau to form a very high relief topography (taken from one of the Himalayan syntaxes) over a relatively short amount of time. This scenario is created by changing both the amplification and the offset parameters used to describe topographic evolution in the input file.

Note that to predict TL/OSL data, values are needed for a range of parameters such as TL_doser, TL_D0, TL_a, TL_b, TL_Et, TL_logs, and TL_logrho. These can be set in the input file. They also have default values (see section Output parameters).

The results are shown in the following figure as contour of relative number of trapped electrons. The red areas corresponds to regions where **Pecube** predicts that he signal is saturated.

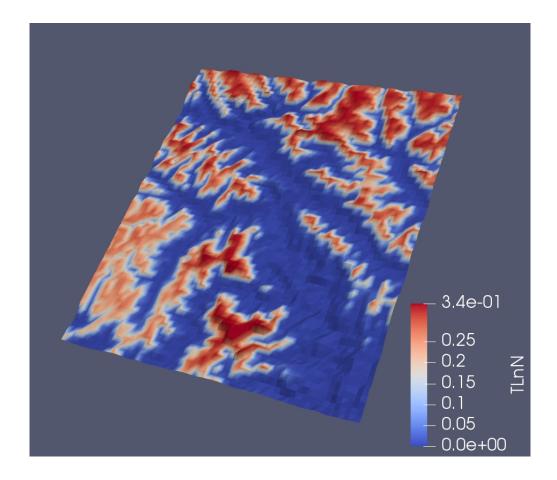

EXMPB

This example uses a series of topographic files (and uplift files) generated by a landscape evolution model, in this case FastScape. FastScape has a direct interface to **Pecube** allowing to sample a synthetic landscape generated by FastScape at any spatial and temporal resolution. For this one needs to specify the area to be extracted from the synthetic model as well as the spatial resolution (number of points in the x- and y-directions) and temperal resolution (frequency of output). This is shown in the FastScape input file that was used by FastScape to generate the synthetic landscapes used in this example by **Pecube**.

To access these synthetic landscapes, the resulting topoxxx, tempxxx and upliftxxx files must be stored in a subfolder of the data folder, in this case BLCKU. In the **Pecube** input file, the topo_file_name has to be followed by a slash "/" to indicate that it is a folder.



Although the uplift function is specified in the upliftxxx files, the user is required to specify that there is a fault in the Pecube.in input file, i.e. nfault = 1, when using multiple files to provide topography and uplift at will.

The results are shown in the following figure as predicted Apatite Helium ages on top of the final topography predicted by FastScape.

