

FORD **TRUCKS** 1833 LR EURO3



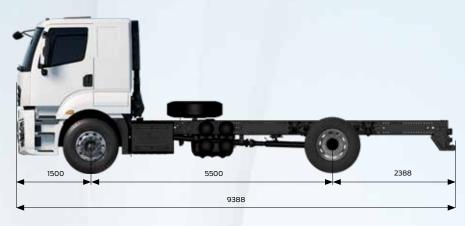

| Basic Features | | | | |
|--------------------|----------------------------|--|--|--|
| Vehicle Type | Light Road Truck | | | |
| Axle | 4x2 | | | |
| Emission | Euro 3 | | | |
| Cabin Type | Sleeper Cab | | | |
| Wheelbase (mm) | 5500 | | | |
| Engine | | | | |
| Туре | Ecotorq 9 liters | | | |
| Displacement (cc) | 8974 | | | |
| Diameter x Stroke | 115 mm x 144 mm | | | |
| Power | 330 PS (243 kW) @ 1900 rpm | | | |
| Torque | 1300 Nm @ 1200-1700 rpm | | | |
| Compression Ratio | 17,6 : 1 | | | |
| Oil Filling Volume | 30 L | | | |
| Coolant Volume | 46 L | | | |
| Transmission | | | | |
| Clutch | 430 mm Single Disc | | | |

Manuel Transmission / Ratios (1. gear - 9. gear)

Automated Transmission / Ratios (1. gear - 9. gear)

9+1 Speed (9,48 - 0,75)

9+1 Speed (9,48 - 0,75)

Steering

Power Assisted Single Circuit

| Chassis | | | | |
|---------------------------|--|--|--|--|
| Chassis Thickness | 7 mm | | | |
| Chassis Strength | 355 MPa | | | |
| Suspension (Front / Rear) | Parabolic Leaf Spring / Air Suspension | | | |
| Axle | Standard Single Reduction | | | |
| Axle Ratio | 4,11 | | | |
| Tyres | 315/60 R 22,5 | | | |
| Wheel Rim | 22,5 x 9 Steel | | | |

Braking System

Brakes (Front / Rear) (Ø.mm x mm. Length)

430 x 45 - Disc Brake

Braking System

Dual Brake Circuit - Air Processing Unit with Integrated Oil Seperator and Heater

Engine Brake Power max. 180 kW (Engine Level)

Electrical System

Battery 225 Ah
Alternator / Starter Motor 130 A / 6,5 kW

Tanks

Fuel Tank 350 L Aluminium



| Dimensions (mm) | | | |
|---|---------|---------|-------|
| Front Overhang | | 1500 | |
| Wheelbase | | 5500 | |
| Overall Length | | 9388 | |
| Overall Cab Length | | 2305 | |
| Overall Vehicle Height | | 3040 | |
| Overall Vehicle Width (Excluding Mirrors) | | 2540 | |
| Chassis Width | | 866 | |
| Rear Overhang | | 2388 | |
| Useful Chassis Length | | 6635 | |
| Chassis Height - Front | | 1079 | |
| Chassis Height - Rear | | 1093 | |
| Ground Clearance - Front | | 242 | |
| Ground Clearance - Rear | | 303 | |
| Turning Radius | | 8400 | |
| Weights (kg) | 1. Axle | 2. Axle | Total |
| Technically Permissible Weights | 7100 | 12600 | 19000 |
| Kerb Weight | 4640 | 2201 | 6841 |
| Payload | 2460 | 10399 | 12159 |

STANDARD EQUIPMENT

- Air Conditioner
- 1DIN Radio (Bluetooh, USB, Hands-free, Remote Control)/CD/MP3 Player
- Cruise Control
- Auxiliary Cabin Heater (Dry Type)
- Disc Brake
- Engine Brake
- Electronic Brake System (EBS) and Anti-Lock Brake System (ABS)
- Hill Launch Assist
- Differential Lock
- Electrically Operated Windows
- Electrically Operated and Heated Side Mirrors
- Electrically Operated Headlight Levelling
- Rake and Reach Adjustable Steering Column
- Heated and Air Suspended Driver Seat
- Lumbar Support
- Manually Operated Sunroof
- Brake Lining Wear Sensor
- Immobilizer
- Approach Light
- Front Fog Lamps
- Tachograph
- Spare Wheel
- Rear Air Suspension
- Axle Load Indicator

OPTIONAL EQUIPMENT

- Firefighter Pack
- Transmission Driven PTO Options & Interior Control Unit
- ADR Pack
- Cold Climate Pack
- Auxiliary Cabin Heater (Wet Type)
- Power Cab Tilting
- Metallic Paint / Special Colors
- Digital Tachograph
- 315/80 R22.5 Tyre Option
- Electronic Stability Control (ESP)
- 4250 mm Wheelbase Option (with ADR only)
- 7,5T Front Axle Technical Capacity
- Tinted Glass
- Roof Beacon Light
- Automated Transmission
- 8T Front Axle Technical Capacity
- Less Front Spare Wheel Option
- DAB Radio
- Multimedia System with 9" Touch Screen & Navigation (Radio, Bluetooth, USB (A Type - C Type), Apple CarPlay, Android Auto, Remote Control)
- Led Headlamps