
# FORD TRUCKS 4443M EURO3



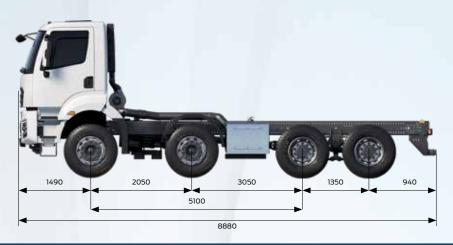

Basic Features	
Vehicle Type	Mixer
Axle	8x4
Emission	Euro 3
Cabin Type	Day Cab
Wheelbase (mm)	5100

Engine	
Type	Ecotorq 12,7 Litres
Displacement (cc)	12740
Diameter x Stroke	130 mm x 160 mm
Power	430 PS (316,3 kW ) / 1800 rpm
Torque	2150 Nm / 1000-1300 rpm
Compression Ratio	17 +/- 0,5 : 1
Oil Filling Volume	50 L

Coolant Volume
Transmission

Clutch 430 mm Single Disc Manuel Transmission / Ratios (1. gear - 16. gear) ZF 16S 2530 (13,805-0,836) Automated Transmission / Ratios (1. gear - 16. gear) Ecotorq 16S 2600 OD AMT (14,107 - 0,823)

## Steering

Power Assisted Single Circuit

57 L (77 L with Retarder)

CHassis	
Chassis Thickness	10 mm
Chassis Strength	500 MPa
Suspension (Front / Rear)	90 mm Parabolic Leaf Springs / 100 mm Parabolic Tandem Suspension
Axle	Hub Reduction
Axle Ratio (Manual / Automatic)	4,08
Tyres	385/65R 22.5
Wheel Rim	22,5 x 11,75 Steel

### Braking System

Brakes (Front / Rear) (Ø.mm x mm. Length)	410 X 200, Z-Cam Brake System				
Braking System	Dual Brake Circuit - Air Processing Unit with Integrated Oil Seperator and Heater				
Engine Brake Power	max. 320 kW (Engine Level)				
Hydraulic Retarder Power	max. 450 kW / continuous 160 kW				
Flectrical System					

Battery	225 Ah
Alternator / Starter Motor	130 A / 6,5 kW
Tanks	

Fuel Tank 315 L Steel



Dimensions (mm)					
Front Overhang			1490		
Wheelbase			5100		
Overall Length			8885		
Distance Between 1st and 2nd Wheel Centers			2050		
Distance Between 2 <sup>nd</sup> and 3 <sup>th</sup> Wheel Centers			3050		
Distance Between 3 <sup>th</sup> and 4 <sup>th</sup> Wheel Centers			1350		
Overall Cab Length			1820		
Overall Vehicle Height			3271		
Overall Vehicle Width (Excluding Mirrors)			2574		
Chassis Width			770		
Rear Overhang			940		
Useful Chassis Length			6532		
Chassis Height - Front			1208		
Chassis Height - Rear			1233		
Ground Clearance - Front			456		
Ground Clearance - Rear			380		
Turning Radius			10640		
Weights (kg)	1. Axle	2. Axle	3. Axle	4. Axle	Total
Technically Permissible Weights	9000	9000	13400	13400	44000

3938

5062

### STANDARD EQUIPMENT

Air Conditioner

Kerb Weight

Payload

- 1DIN Radio (Bluetooh, USB, Hands-free, Remote Control)/CD/MP3 Player
- Engine Driven PTO & Interior Control Unit
- Cruise Control
- Drum Brake
- Engine Brake
- Electrically Operated Windows
- Electrically Operated and Heated Side Mirrors
- Electrically Operated Headlamp Leveling
- Rake and Reach Adjustable Steering Column
- Heated and Air Suspended Driver Seat
- Lumbar Support
- Front and Rear Vehicle Antiroll Bar
- Anti-Lock Brake System (ABS)
- Brake Lining Wear Indicator
- Immobilizer
- Home Safe Light
- Approach Light
- Differential Lock
- Tachograph
- Rear Window \*\*
- Short Bumper
- Electro-Hydraulic Power-Assisted Steering System (EHPAS)
- Automatic Traction Control

### **OPTIONAL EQUIPMENT**

1934

11466

- Automated Transmission (with Normal Mode, Off-Road Mode, Rocking Mode)
- Hydraulic Retarder
- ADR Pack

3932

5068

- Wet Type Cab Heater
- Cold Pack with Wet Type Cab Heater
- Cold Pack with Dry Type Cab Heater \*
- Power Cab Tilting
- Switchable Air Compressor for Improved Fuel Economy

1822

11578

11627

32373

- Transmission Driven PTO Options
- Interior Control Unit
- Digital Tachograph
- Manually Operated Sunroof
- Tinted Glass
- Less Front Spare Wheel Option
- Rear Towing Hook
- DAB Radio
- 325/95R 24
- Multimedia System with 9" Touch Screen & Navigation (Radio, Bluetooth, USB (A Type - C Type), Apple CarPlay, Android Auto, Remote Control)
- Led Headlamps

<sup>\*</sup> Only Available with Low Roof Sleeper Cab Version.

<sup>\*\*</sup> Not Available with Low Roof Sleeper Cab Version.