

- NOTES
1. EPS노출형 분전반의 외함 전면은 STEEL 1.6t, 측면은 STEEL 1.6t로 제작
 2. EPS의 매입형 분전반의 외함 전면은 STS 1.5t, 측면 STEEL 1.6t로 한다.
 3. 손잡이는 누름버튼형(자물식 매입형) 나사등은 녹이 생기지 않는 재질로 한다.
 4. 정격전압이 3P, 4P MCCB 600V, 2P MCCB 250V, ELB 220V 이상 제품 설치하도록 한다.
(프레임, 트립전류 및 차단용량은 사용전압 기준임)
 5. 차단기의 변경, 추가, 삭제 등의 발생시 별도의 가공을 하지 않고 변경작업이 용이하도록 가공된 내판을 사용한다.

분기 차단기 적용 차단 용량	
30AF	5KA 이상
50AF	10KA 이상
100AF	25KA 이상
125AF	25KA 이상
250AF	25KA 이상
400AF	35KA 이상
600AF	50KA 이상


- 제품에 따라 변경이 가능함

△		
△		
△		
△		
△		
△		
△		
△		
△		
△		
NO.	DESCRIPTION	DATE


생산동력(3Ø 380V)
분전반 결선도-1

DRAWN	SCALE
CHECK 1 안 동 식	A1 : NONE A3 : NONE
CHECK 2 이 은 진	DATE 2024.04
APPR 정 용 재	


PANEL BOARD	P-A-3PP	COVER TYPE	노출형(STEEL)
PANEL LOCATCION	1층 Drive 시험실	BOX SIZE	—

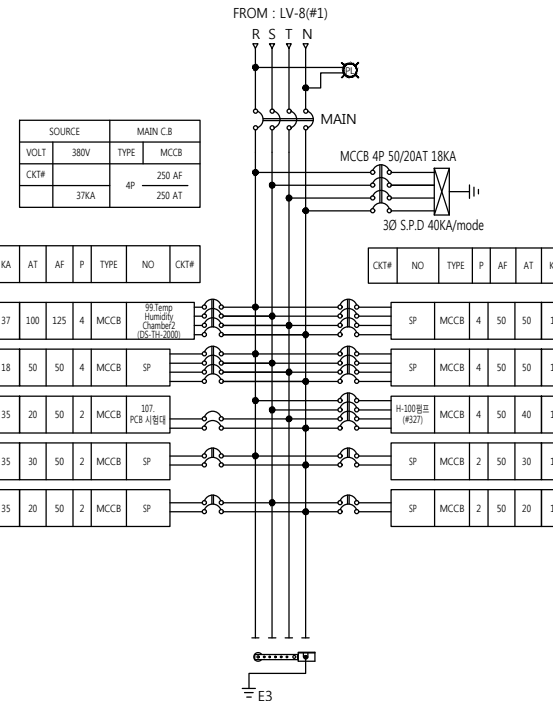


PANEL BOARD	P-F-3PP	COVER TYPE	노출형(STEEL)
PANEL LOCATCION	1층 진동시험실	BOX SIZE	—

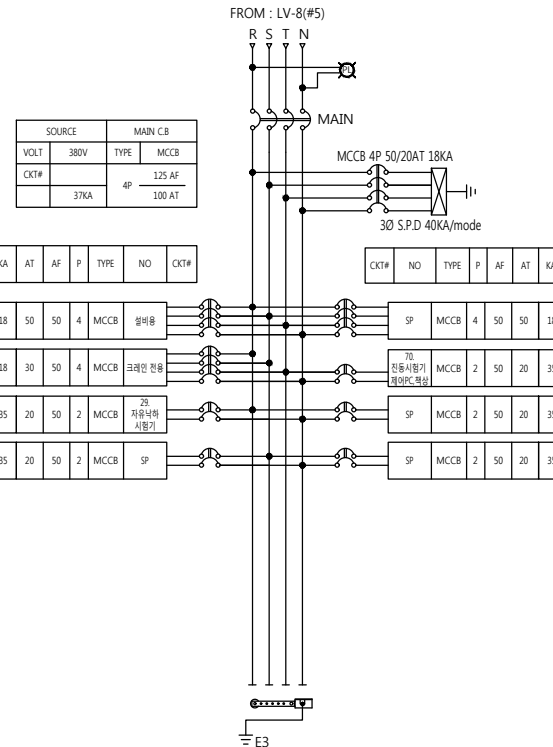


PANEL BOARD	P-AC-3PP	COVER TYPE	노출형(STEEL)
PANEL LOCATCION	1층 대용량 모터부하실(방음)	BOX SIZE	—

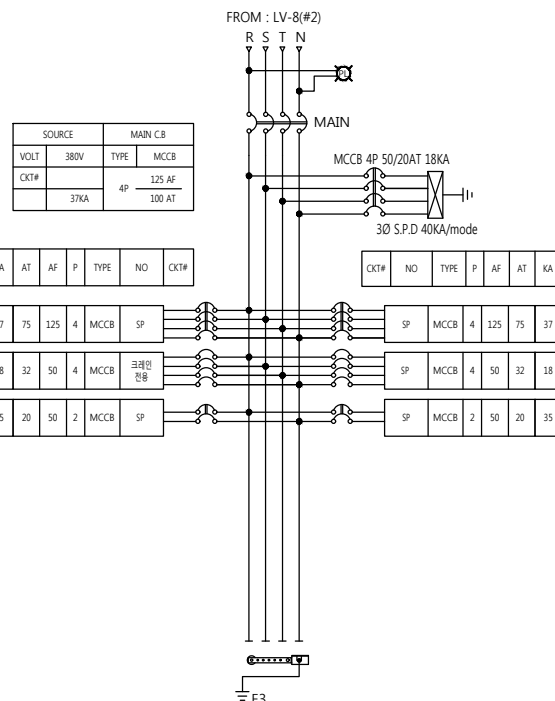


PANEL BOARD	P-G-3PP	COVER TYPE	노출형(STEEL)
PANEL LOCATCION	1층 관측시스템·전기차/방도체/AZS In-Line검증시스템	BOX SIZE	—

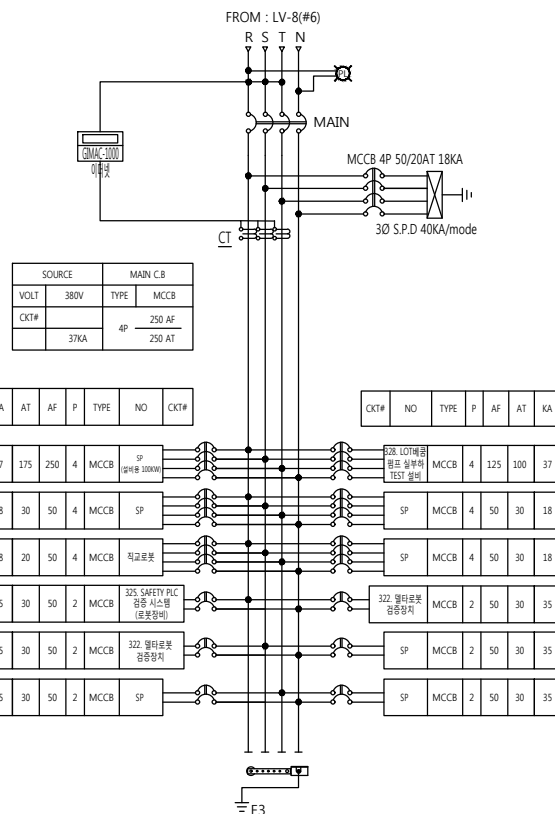


PANEL BOARD	P-D-3PP	COVER TYPE	노출형(STEEL)
PANEL LOCATCION	1층 전기적 기능시험실	BOX SIZE	—

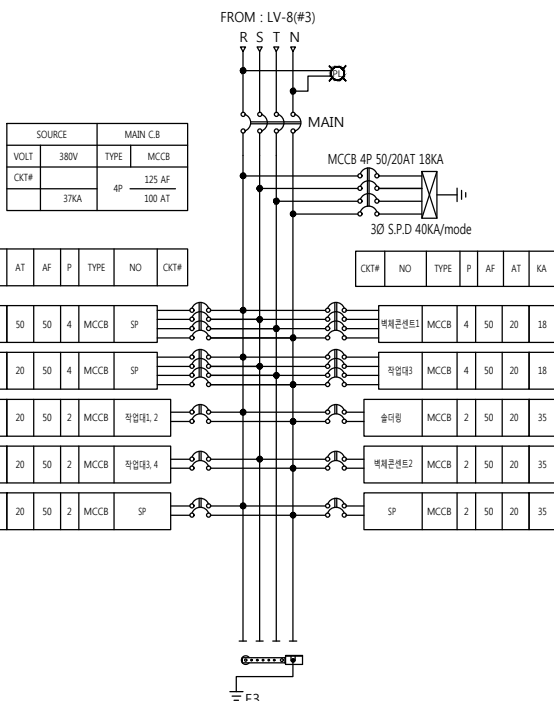

PANEL BOARD	P-I-3PP	COVER TYPE	노출형(STEEL)
PANEL LOCATCION	1층 PLC/Drive 검증시스템 및 시사업 검증시스템	BOX SIZE	—

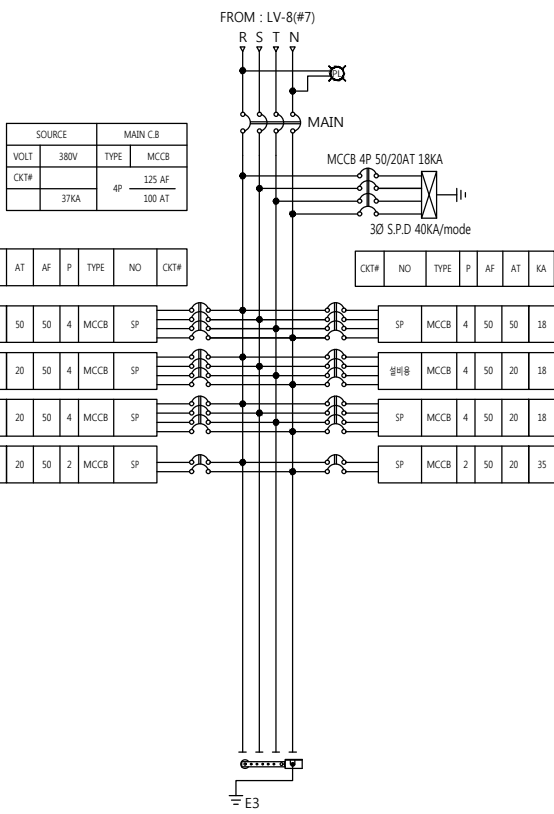

PANEL BOARD	P-E-3PP	COVER TYPE	노출형(STEEL)
PANEL LOCATCION	1층 환경시험실	BOX SIZE	—

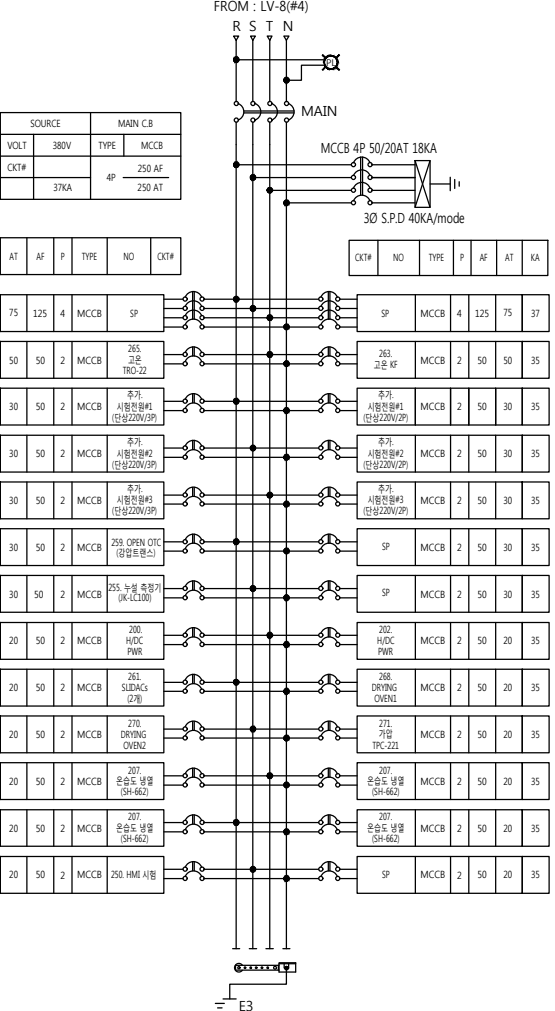

PANEL BOARD	P-C-3PP	COVER TYPE	노출형(STEEL)
PANEL LOCATCION	첨배름	BOX SIZE	—

