


| DRAWING LIST | | | |
|---|---|---|---|
| ITEM | QTY | PART NUMBER | DESCRIPTION |
| 1 | 1 | S1101EFA1607 | THERMOCOUPLE NEAR/FAR RAKE HARNESS ASSEMBLY |
| 2 | 1 | S1101MFA1606 | THERMOCOUPLE NEAR RAKE ASSEMBLY |
| 3 | 1 | S1101MFA1613 | THERMOCOUPLE RAKE MOUNTING BRACKET ASSEMBLY |
| 4 | 1 | S1101MFA1632 | THERMOCOUPLE RAKE COVER ASSEMBLY |
| 5 | 1 | S1101MFD1637 | THERMOCOUPLE RAKE COVER MOUNTING BRACKET |
| 6 | 1 | S1101MFT1605-01 | BAG CONTENTS LABEL |
| 7 | 1 | S1101MFT1605-02 | PART NUMBER LABEL |
| 8 | 1 | S1101MFT1605-XX | SERIAL NUMBER LABEL |
| 9 | 1 | S1101MFT1605-14 | CONNECTOR LABEL |
| 10 | 1 | S1101MFT1605-XXX | IMS LABEL |

| COMMERCIAL PART LIST | | | |
|---|---|---|---|
| ITEM | QTY | MIL SPEC/VENDOR PART NUMBER | DESCRIPTION |
| C1 | 2 | NAS620C4L | #4 REDUCED THICKNESS FLAT WASHER REDUCED O.D. |
| C2 | 2 | NAS1352N04-6 | #4-40(.112) UNRC-3A X .625 SOCKET HEAD CAP SCREW |
| C3 | A/R | PLT1M-M702Y | CABLE TIE, HALAR FLUOROPOLYMER, PANDUIT CORP. |
| C4 | - | REMOVED | REMOVED |
| C5 | 1 | 600X518009X | D-SUB 9 POS F SHIELDED PLASTIC CAP |
| C6 | 1 | 4744-S | BITRAN SARANEX SERIES S BAG, 9 IN. X 12 IN. |
| C7 | 1 | SDG32112207-001 | ZIPLOCK STOWAGE LABEL |

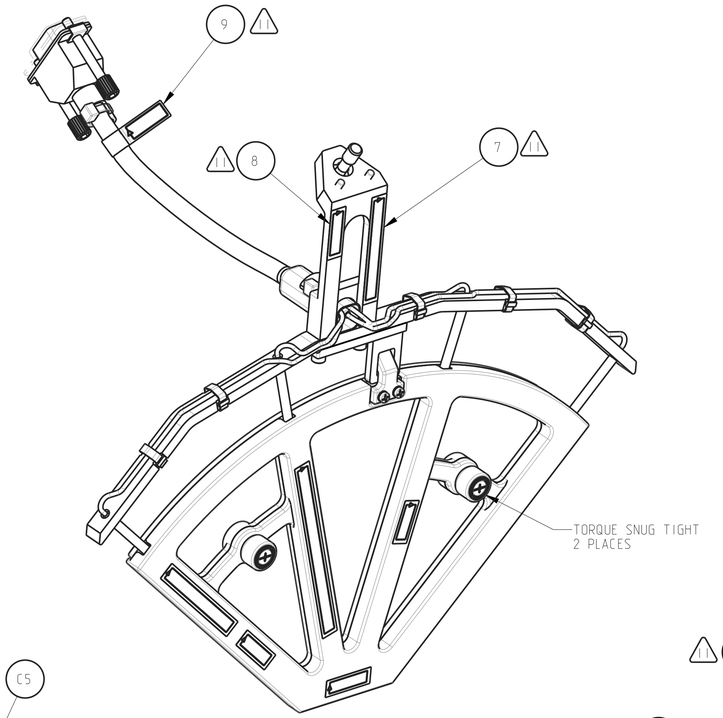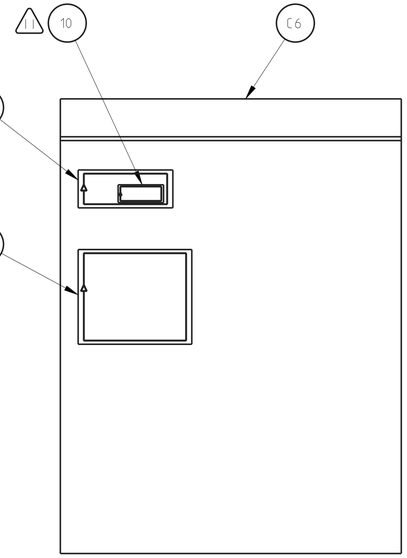



SCALE 1/2

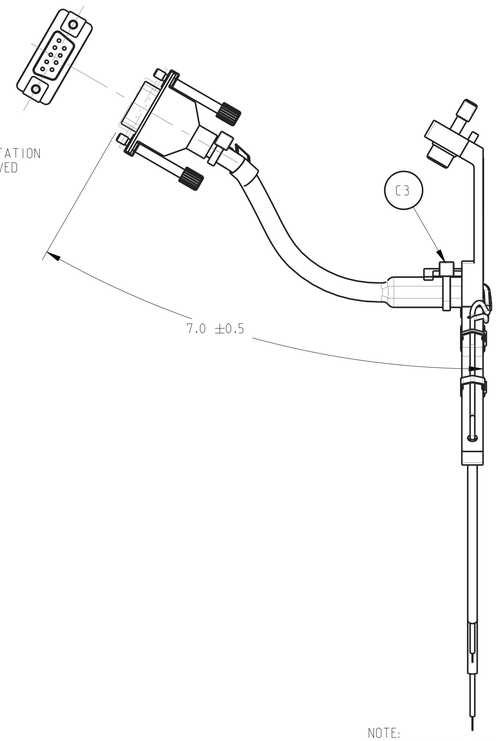


NOTE:
COVER REMOVED FOR CLARITY

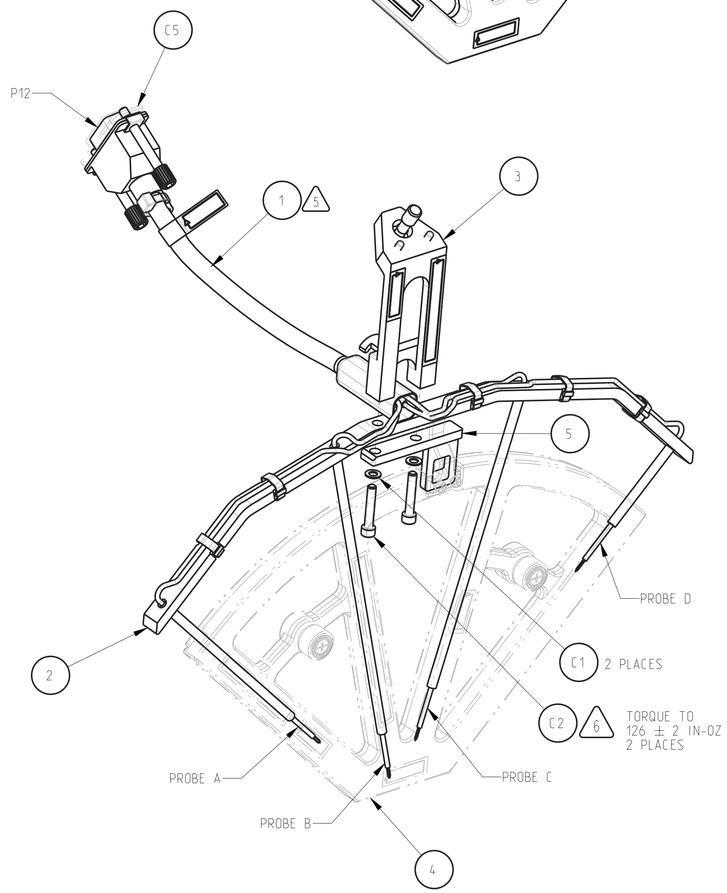


NOTES:

1. MATERIAL AND PROCESS CERTIFICATION REQUIRED PER QUALITY LEVEL SPECIFIED IN WORK ORDER/SOW.
2. ASSEMBLE PER APPROVED PROCESS PLAN FOR INITIAL BUILD.
3. ESD HANDLING AND CONTROL PER ESTABLISHED PROCEDURES.
4. REMOVED

5. REFER S1101EFA1607 FOR WIRING INTERCONNECT.
6. TORQUE VALUES NOTED ON THE DRAWING ARE EFFECTIVE TORQUE ONLY. RUNNING TORQUE IS REQUIRED FOR SELF LOCKING DEVICES AND BOLT FRICTION. RUNNING TORQUE MUST BE MEASURED AND ADDED TO THE EFFECTIVE TORQUE. RECORD RUNNING TORQUE AND FINAL TORQUE ON DRAWING OR ASSEMBLY PROCEDURE.

7. CHEMICAL CONVERSION COAT ANY DAMAGED OR MACHINED AREAS ON ALUMINUM PARTS PER MIL-DTL-5541, TYPE I, CLASS 3.
8. CLEAN ALL SURFACES WITH ISOPROPYL ALCOHOL AND LET AIR DRY. WIPE WITH CLEAN COTTON SWABS AND/OR LINT-FREE CLOTH.
9. HANDLE ALL PARTS AND ASSEMBLIES WITH CLEAN, LINT-FREE, ANTI-STATIC GLOVES OR FINGER COTS.
10. BEFORE STORAGE, PROTECT WITH CONTAMINATION BARRIER. USE CLEAN, NEW, ESD BAG, TOTES OR APPROVED ESD PACKAGING. MARK PART NUMBER, A DASH, AND A SERIAL/LOT NUMBER AS SPECIFIED IN WORK ORDER/SOW, BY TAGGING PER SAE-AS478-35D.

11. APPLY LABEL TO CLEAN, DRY SURFACE IN LOCATION SHOWN.

| REVISION HISTORY | | |
|---|---|---|
| REV | DESCRIPTION | APPROVED |
| D | INCORPORATED ACME-ECO-614. | LF 11/17/16<br>AK 11/17/16<br>AD 11/21/16 |
| C | INCORPORATED ACME-ECO-528 AND ACME-ECO-565. | JO 04/13/16<br>AD 04/13/16<br>AR 04/22/16 |
| B | INCORPORATED ACME-ECO-437 | JO 04/27/15<br>AD 04/27/15<br>GF 04/30/15 |
| A | INCORPORATED ACME-ECO-311 & ACME-ECO-339 | KR 10/10/14<br>AD 10/14/14<br>GF 10/15/14 |

S1101MFA0100
NEXT ASSEMBLY

UNLESS OTHERWISE SPECIFIED:
1. ALL DIMENSIONS ARE IN INCHES
2. BREAK EDGES .010-.020
3. INSIDE CORNERS R.02 MAX
4. LINEAR TOLERANCES:
   .X ± .03
   .XX ± .01
   .XXX ± .005
5. ANGULAR TOLERANCE ± .5°

THIRD ANGLE PROJECTION

THIS DRAWING IS UNDER CONFIGURATION CONTROL. DO NOT REVISE WITHOUT AN APPROVED ECO.
APPROVED: *C. McCLOSKEY 11/21/2016*
PRIOR TO USE, CHECK WITH CONFIGURATION MANAGEMENT FOR ANY OUTSTANDING ECOS.

| | | | |
|---|---|---|---|
| DESIGNER | *K. RHODES 1/23/13* | QUALITY | *D. SEELEY 1/31/13* |
| REVIEWER | *M. PREVITE 1/24/13* | MATERIALS | *M. WILKINSON 1/23/13* |
| MECHANICAL | *A. DRAKE 1/23/13* | PROJ LEAD | *B. BOROWSKI 2/5/13* |
| ELECTRICAL | *T. GOBELI 1/24/13* | | |
| STRUCTURAL | *C. WERNER 1/30/13* | | |
| SAFETY | *W. BORRELLI 1/24/13* | | |

DIMENSIONS AND TOLERANCING PER ASME Y14.5M-1994

ZIN TECHNOLOGIES
8745 ENGLE ROAD
AIRPORT EXECUTIVE PARK
CLEVELAND, OHIO 44130
(440) 625-2200
www.zin-tech.com

CONTRACT NUMBER: NNC09BA02B
PROJECT CODE: SPACE110

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION
JOHN H. GLENN RESEARCH CENTER
LEWIS FIELD
CLEVELAND, OHIO

TITLE: THERMOCOUPLE NEAR ARRAY ASSEMBLY

| SIZE | CAGE CODE | DWG NO | REV |
|---|---|---|---|
| D | 0SG68 | S1101MFA1605 | D |

SCALE 1/1 & NOTED | INITIAL REL DATE 2/5/13 | SHEET 1 OF 1

RELEASE LEVEL: ECO
MODEL: S1101MFA1605

PRO/E VERSION: Wildfire 2.0

REV D | SH 1 | DWG NO S1101MFA1605

ZIN_D_2012.frm