NOTES:

1. MATERIAL:

   316L STAINLESS STEEL TUBING PER ASTM A269.
   .125 O.D. X .028 WALL


2. MATERIAL CERTIFICATION REQUIRED PER QUALITY LEVEL SPECIFIED IN WORK ORDER/SOW.

3. 125 µIN Ra ALL MACHINED SURFACES PER ANSI/ASME B46.1 UNLESS OTHERWISE SPECIFIED.

4. CLEAN ALL SURFACES WITH ISOPROPYL OR ETHYL ALCOHOL AND LET AIR DRY. WIPE WITH CLEAN COTTON SWABS AND/OR LINT-FREE CLOTH.

5. HANDLE WITH CLEAN, LINT-FREE GLOVES.

6. BEFORE STORAGE, PROTECT WITH CONTAMINATION BARRIER. USE CLEAN, NEW, TRANSPARENT POLYETHYLENE BAG FOR SMALL ITEMS OR 4 MIL THICK MINIMUM POLYETHYLENE SHEET AND SEAL. MARK PART NUMBER, A DASH, AND A SERIAL/LOT NUMBER AS SPECIFIED IN WORK ORDER/SOW, BY TAGGING PER SAE-AS478-35D.

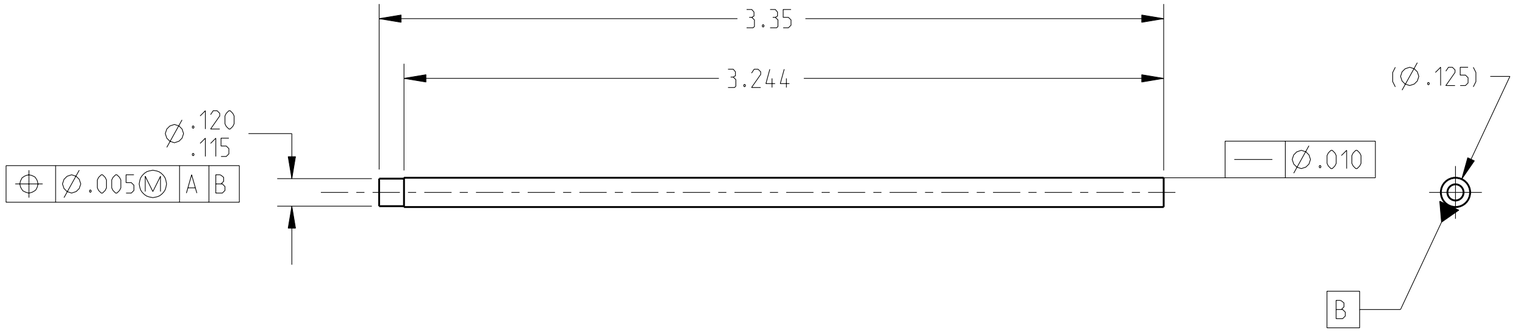

REV	DESCRIPTION	APPROVED

REVISION HISTORY

S1101MFA1608

NEXT ASSEMBLY

UNLESS OTHERWISE SPECIFIED:
1. ALL DIMENSIONS ARE IN INCHES
2. BREAK EDGES .010-.020
3. INSIDE CORNERS R.02 MAX
4. LINEAR TOLERANCES:
   .X ± 0.03
   .XX ± 0.01
   .XXX ± 0.005
5. ANGULAR TOLERANCE ± 0.5°

THIRD ANGLE PROJECTION

THIS DRAWING IS UNDER CONFIGURATION CONTROL: DO NOT REVISE WITHOUT AN APPROVED ECO.

APPROVED: E.McCLOSKEY 2/14/13

PRIOR TO USE, CHECK WITH CONFIGURATION MANAGEMENT FOR ANY OUTSTANDING ECOS.

DESIGNER	K.RHODES 1/22/13	QUALITY	D.SEELEY 2/12/13
REVIEWER	M.PREVITE 1/24/13	MATERIALS	M.WILKINSON 1/22/13
MECHANICAL	A.DRAKE 1/23/13	PROJ LEAD	B.BOROWSKI 2/12/13
ELECTRICAL	T.GOBELI 1/23/13		
STRUCTURAL	C.WERNER 1/25/13		
SAFETY	W.BORRELLI 1/24/13		

DIMENSIONS AND TOLERANCING PER ASME Y14.5M-1994

ZIN TECHNOLOGIES
6745 ENGLE ROAD
AIRPORT EXECUTIVE PARK
CLEVELAND, OHIO 44130
(440) 625-2200
www.zin-tech.com

CONTRACT NUMBER: NNC09BA02B
PROJECT CODE: SPACE110

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION
JOHN H. GLENN RESEARCH CENTER
LEWIS FIELD
CLEVELAND, OHIO

TITLE

THERMOCOUPLE SLEEVE, 50mm POSITION

SIZE	CAGE CODE	DWG NO	REV
C	0SG68	S1101MFD1618	-

SCALE 2/1 | INITIAL REL DATE 2/12/13 | SHEET 1 OF 1

RELEASE LEVEL: WORKING
MODEL: S1101MFD1618

PRO/E VERSION: Wildfire 2.0

DWG NO S1101MFD1618 | SH 1 | REV -

ZIN_C.frm