
COMMERCIAL PARTS LIST

ITEM	QTY	PART NUMBER	DESCRIPTION
C1	1	25544-05-004ENG	CAPTIVE LINEAR ACTUATOR, HAYDON KERK G4 25000 SERIES
C2	A/R	222MS	THREADLOCKER, LOCTITE
C3	4	MSI5795-803	FLAT WASHER, 300 SERIES SSTL, NASMI5795, .125 ID X .250 OD X .022 THK
C4	4	MSI5795-844	FLAT WASHER, 300 SERIES SSTL, NASMI5795, .094 ID X .218 OD X .020 THK
C5		REMOVED	REMOVED
C6	2	MS51576-10	SHOULDER SCREW, SOCKET HEAD, Ø.188 X .375 LG, .164-32 UNC-2A
C7	2	MS51576-12	SHOULDER SCREW, SOCKET HEAD, Ø.188 X .625 LG, .164-32 UNC-2A
C8	5	NASI149E0332R	NO. 10 FLAT WASHER .203" ID X .438" OD X .032" THK
C9	1	NASI291C08M	NUT, .164-32 UNJC-3B, SELF LOCKING, A286
C10	4	NASI352N02-6	#2-56(.086) UNRC-3A X .375 SOCKET HEAD CAP SCREW
C11	2	NASI352N04-4	#4-40(.112) UNRC-3A X .250 SOCKET HEAD CAP SCREW
C12	4	NASI352N04-8	#4-40(.112) UNRC-3A X .500 SOCKET HEAD CAP SCREW
C13	4	NAS620C4L	#4 REDUCED THICKNESS FLAT WASHER REDUCED O.D.
C14	1	PM-Y64	MICRO PHOTOELECTRIC SENSOR, PM-64 SERIES, SUNX
C15	2	NASI352N04-5	#4-40(.112) UNRC-3A X .312 SOCKET HEAD CAP SCREW
C16	2	9714K22	SPRING WAVE, DISC TYPE, 302 STAINLESS STEEL
C17	4	57155K335	MINI HI-PRECISION SS BALL BEARING, CLASS ABEC-5 3/16" ID X 3/8" OD, EXTENDED INNER RING, MCMASTER-CARR

DRAWING LIST

ITEM	QTY	DRAWING NUMBER	DESCRIPTION
1	1	SI101MFAI301	IGNITER MOUNTING BRACKET ASSEMBLY
2	1	SI101MFAI303	IGNITER BASE ASSEMBLY
3	1	SI101MFAI308	IGNITER LOWER ARM ASSEMBLY
4	1	SI101MFDI305	IGNITER MOTOR PIVOT
5	1	SI101MFDI306	IGNITER MOTOR TIP
6	1	SI101MFDI307	IGNITER MOTOR TIP SPACER
7	1	SI101MFDI310	IGNITER TIP CONNECTOR BRACKET
8	1	SI101MFDI311	IGNITER HOME SWITCH ENGAGEMENT BRACKET
9	4	SI101MFPI312	IGNITER PIVOT BUSHING

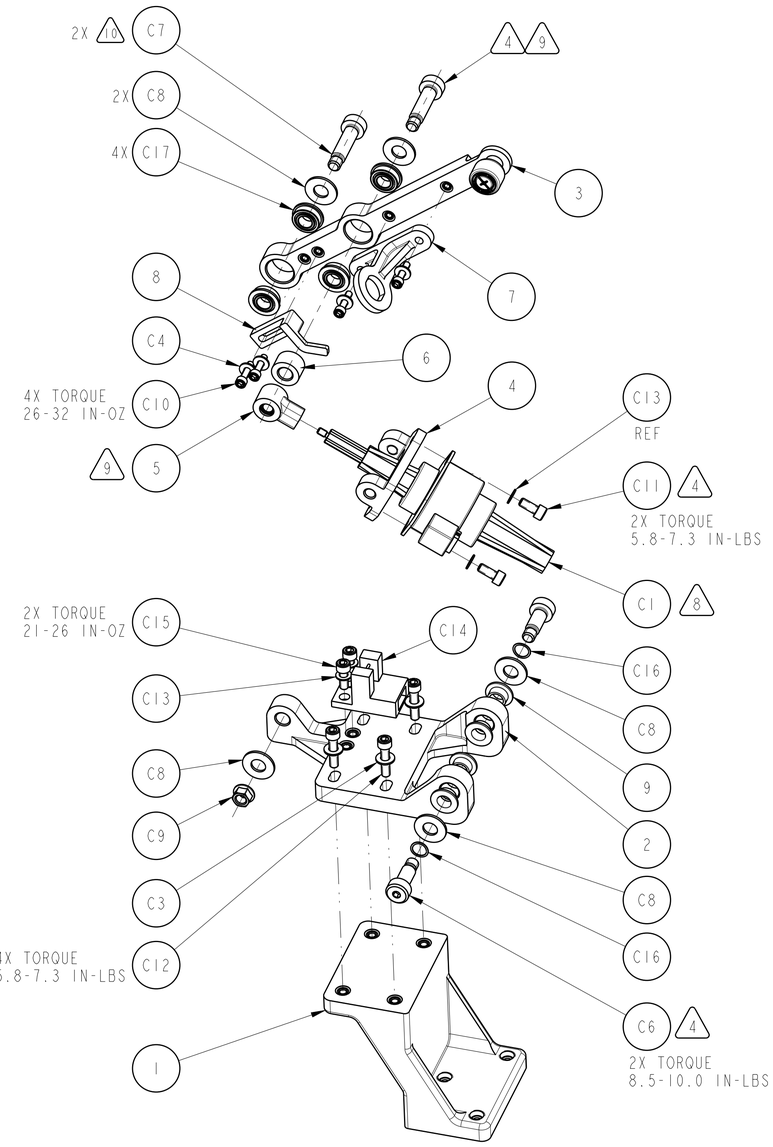

NOTES:

1. CERTIFICATE OF CONFORMANCE REQUIRED FOR ALL COMMERCIAL PARTS.
2. SURFACE TREAT ANY DAMAGED OR MACHINED AREAS ON ALUMINUM PARTS PER MIL-DTL-5541, TYPE I, CLASS 3. (GOLD COLOR). CERTIFICATE OF CONFORMANCE REQUIRED.
3. PRIOR TO ASSEMBLY, CLEAN ALL SURFACES WITH ISOPROPYL ALCOHOL AND LET AIR DRY. WIPE WITH CLEAN COTTON SWABS OR LINT FREE CLOTH.
4. APPLY ITEM C2 THREADLOCKING COMPOUND PER ASTM D 5363 TO COMPONENT THREADS.
5. TORQUE VALUES NOTED ON THE DRAWING ARE EFFECTIVE TORQUE ONLY. RUNNING TORQUE IS REQUIRED FOR SELF LOCKING DEVICES AND BOLT FRICTION. RUNNING TORQUE MUST BE MEASURED AND ADDED TO THE EFFECTIVE TORQUE. RECORD RUNNING TORQUE AND FINAL TORQUE ON DRAWING.
6. AFTER CLEANING, HANDLE ALL PARTS AND ASSEMBLIES WITH CLEAN LINT-FREE GLOVES.
7. BEFORE STORAGE, PROTECT WITH CONTAMINATION BARRIER. USE CLEAN, NEW, TRANSPARENT POLYETHYLENE BAG FOR SMALL ITEMS OR 4 MIL THICK MINIMUM POLYETHYLENE SHEET AND SEAL. IDENTIFY PART BY TAGGING WITH PART NUMBER AND SERIAL/LOT NUMBER AS SPECIFIED IN WORK ORDER/SOW PER SAE AS478, METHOD 35.
8. REMOVE AND DISCARD CONNECTOR AND WIRES IF SUPPLIED.
9. HOLD ITEM 5 IGNITER MOTOR TIP WHEN TIGHTENING ITEM C7 SHOULDER SCREW TO AVOID DAMAGING THREADS ON ITEM C1 LINEAR ACTUATOR.
10. TIGHTEN FASTENER UNTIL ALL SIDE TO SIDE PLAY IS REMOVED FROM THE JOINT WHILE BEARINGS STILL SPIN FREELY.

CHG	ZONE	DESCRIPTION	APP/DATE
C		INCORPORATED ACME-ECO-273	KR 02/04/14 GF 02/04/14 AD 02/04/14
B		INCORPORATED ACME-ECO-136	LF 04/09/13 GF 04/09/13 AD 04/10/13
A		INCORPORATED ACME-ECO-020	AD 02/08/12 JB 02/07/12 GF 02/07/12

REVISIONS

THIS DRAWING IS UNDER CONFIGURATION CONTROL: DO NOT REVISE WITHOUT APPROVED ECO

APPROVED: E.McCLOSKEY DATE: 2/6/14

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES

TOLERANCE ON	
.X	± 0.03
.XX	± 0.01
.XXX	± 0.005
FRACTION	± -
ANGULAR	± 0.50°
BREAK EDGES	N/A

DIMENSIONING AND TOLERANCING PER ASME Y14.5M-1994

PRIOR TO USE CHECK FOR ANY OUTSTANDING ECO'S WITH CONFIGURATION MANAGEMENT OFFICE

ZIN TECHNOLOGIES
6745 ENGLE ROAD
AIRPORT EXECUTIVE PARK
CLEVELAND, OHIO 44130
440 625-2200

PROJECT LEAD	B. BOROWSKI 05/20/11
QUALITY	D. SEELEY 05/20/11
SAFETY	W. BORRELLI 05/20/11
ENGINEER	A. DRAKE 05/18/11
DESIGNER	G. FEDEVICH 05/18/11
REVIEWER	M. PREVITE 05/18/11

CONTRACT NUMBER: NNC09BA02B
DELIVERY ORDER: SPACE 110
MODEL NAME: SI101MFAI300

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION
JOHN H. GLENN RESEARCH CENTER
LEWIS FIELD
CLEVELAND, OHIO

ACME CHAMBER INSERT ASSEMBLY, LAUNCH CONFIGURATION

SI101MFA0100

IGNITER ASSEMBLY

SIZE	DRAWING NUMBER	REV	BLDG	AREA
D	SI101MFAI300	C	ZIN	GRC


UNITS: INCH


SCALE:	INITIAL REL DATE	SHEET	DISCIPLINE
1/1	05/20/2011	1 OF 2	MECHANICAL


PRO/E VERSION: Wildfire 2.0

SIZE D DRAWING NUMBER SI101MFAI300 REV C

FOR NOTES SEE SHEET 1

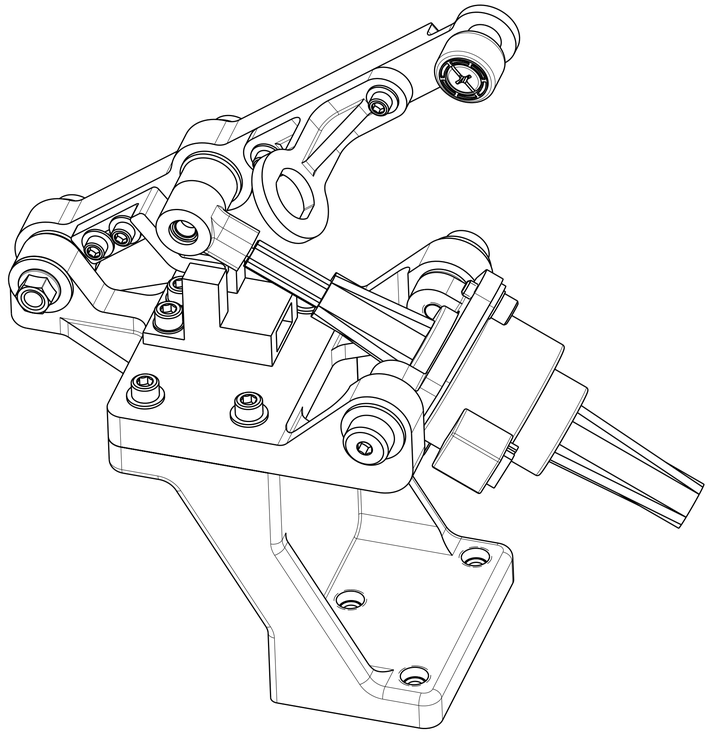


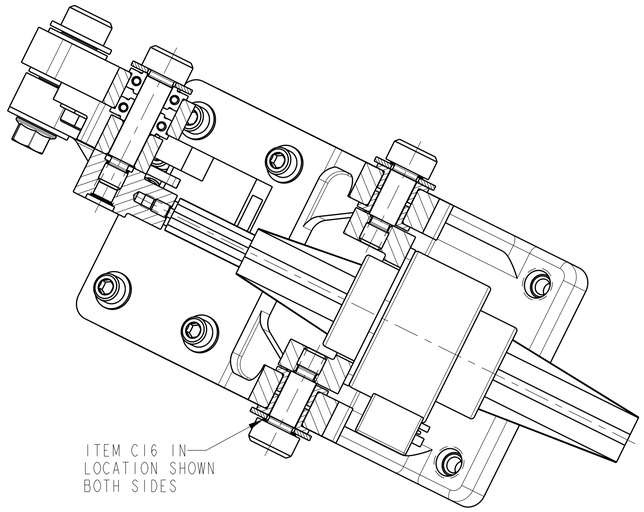

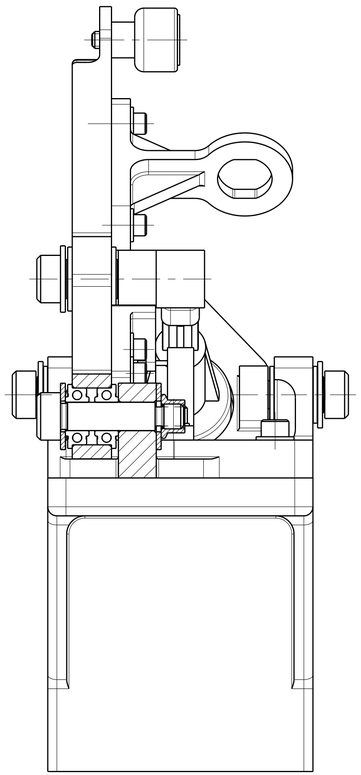

SECTION A-A

SECTION B-B

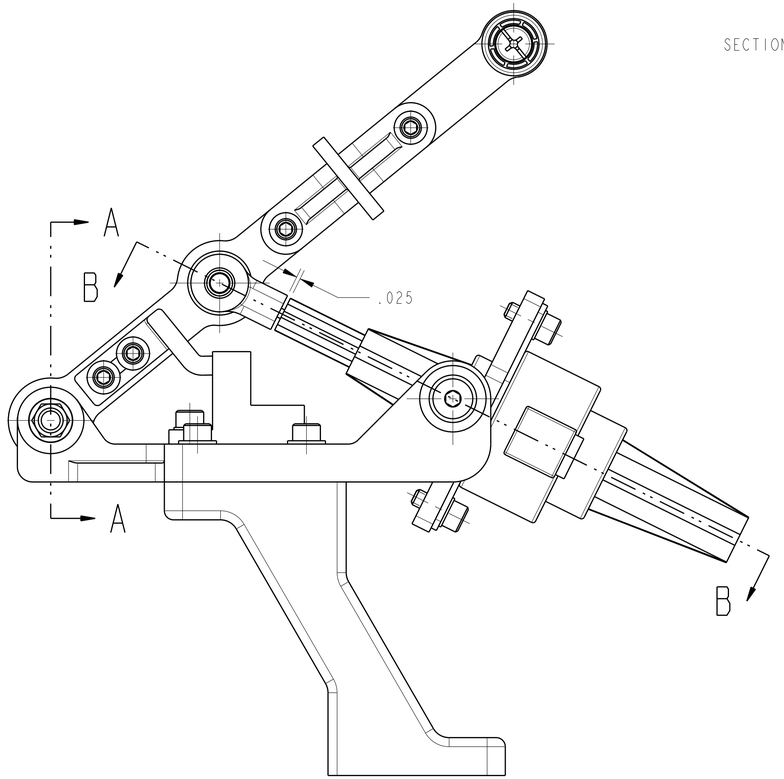

CHG	ZONE	DESCRIPTION	APP/DATE
REVISIONS			

SIZE	DRAWING NUMBER	REV	BLDG	AREA
D	S1101MFA1300	C	ZIN	GRC
			UNITS: INCH	
SCALE: 2/1	INITIAL REL DATE 05/20/2011	SHEET 2 OF 2	DISCIPLINE MECHANICAL	

PRO/E VERSION: Wildfire 2.0

SIZE D | DRAWING NUMBER S1101MFA1300 | REV C