PARTS LIST

Item	Qty	REFERENCE DESIGNATOR	PART NUMBER	DESCRIPTION	MANUFACTURER
1	1		S1101EFF1410	BARE BOARD	ZIN TECHNOLOGIES
2	3	D1, D2, D3	OVSAWBCR4	LED DIODE SMD WHITE 200mW 120° VIEWING ANGLE PCLL-4	TT ELECTRONICS
3	1	R4	ERJ-8ENF1000V	RESISTOR, 100 OHM, 1/4W, 1%, 1206 SMD	PANASONIC - ECG
4	A/R		TZ-211	LABEL, 1/4" BLK LETTERS WHT BACKROUND	BROTHER
5	A/R		3140	RTV FOR CONFORMAL COATING	DOW CORNING
6	A/R		PR-1204	PRIMER FOR CONFORMAL COATING	DOW CORNING
7	A/R		SN63PB37/RMA	SOLDER	
8	16"		M22759/11-22-2	WIRE, 22 AWG, RED	QPL
9	16"		M22759/11-22-0	WIRE, 22 AWG, BLK	QPL
10	A/R		3145	RTV, GRAY	DOW CORNING

8. CONFORMAL COATING, STAKING AND INSPECTION SHALL BE IN ACCORDANCE WITH NASA-STD-8739.1 AND THE FOLLOWING NOTES:
   - A. PERFORM CLEANLINESS TEST.
   - B. BAKE PWA AT 93°C ±5.5°C (200°F ±10°F) FOR 4 HOURS PRIOR TO CONFORMAL COATING.
   - △C STAKE WIRES FOR STRAIN RELIEF WITH ITEM 10 PRIOR TO CONFORMAL COATING.
   - △D MASK OFF ALL DESIGNATED AREAS USING KAPTON TAPE. ALL MASKING OPERATIONS SHALL BE PERFORMED UNDER AN AIR IONIZER.
   - △E MEASURE CONFORMAL COATING THICKNESS AT DESIGNATED AREAS.
   - F. CONFORMAL COAT THE COMPLETE ASSEMBLY USING ITEM 5 AND ITEM 6.
   - G. TEST PER TEST PROCEDURE ACME-TST-015 AFTER CONFORMAL COATING.
9. PLACE THE COMPLETED ASSEMBLY IN CLEAN, STATIC DISSIPATIVE PACKAGING. IDENTIFY PART BY TAGGING WITH PART NUMBER AND SERIAL/LOT NUMBER AS SPECIFIED IN WORK ORDER PER SAE AS478, METHOD 35. STORE IN A PROJECT APPROVED STORAGE AREA.
10. REFERENCE SCHEMATIC: S1101EFS1410
11. EXPEDITION CONTROL FILES: S1101EFA1410_REV_A.ZIP

NOTES: UNLESS OTHERWISE SPECIFIED

1. CERTIFICATE OF CONFORMANCE REQUIRED FOR ALL COMMERCIAL PARTS.
2. ESD HANDLING AND CONTROL PER ESTABLISHED PROCEDURES.
3. HANDLE ALL PARTS AND ASSEMBLIES WITH CLEAN, LINT-FREE, ANTI-STATIC GLOVES OR FINGER COTS.
4. DEMOISTURIZE (BAKE OUT) PWB (ITEM 1) FOR A MINIMUM OF 2 HOURS AT 93°C ±5.5°C (200°F ±10°F.) PERFORM SOLDERING IMMEDIATELY AFTER BAKING, OR STORE IN A CLEAN, DRY, SEALED STATIC DISSIPATIVE BAG OR CONTAINER.
5. △5 MARK THE ASSEMBLY WITH REV AND S/N USING ITEM 4.
6. ASSEMBLY, SOLDERING AND INSPECTION SHALL BE IN ACCORDANCE WITH NASA-STD-8739.2, NASA-STD-8739.3, AND THE FOLLOWING NOTES:
   - A. INSTALL AND SOLDER ALL SURFACE MOUNT (SMT) PART BEFORE THROUGH HOLE PARTS USING SOLDER (ITEM 7.)
   - B. FOR THROUGH HOLE PARTS, LEAD TERMINATIONS SHALL BE STRAIGHT THROUGH (NOT LAPPED OR CLINCHED.)
7. FUNCTIONALLY TEST THE COMPLETED ASSEMBLY PRIOR TO CONFORMAL COATING PER TEST PLAN ACME-TST-015.

REV	DESCRIPTION	APPROVED
A	REVISE PER ACME-ECO-158	TAG 5/2/14 DAS 5/7/14 RJP 5/1/14

REVISION HISTORY

.

S1101MFA1406

NEXT ASSEMBLY

UNLESS OTHERWISE SPECIFIED:
1. DIMENSIONS ARE IN INCHES
2. BREAK EDGES .010-.020
3. INSIDE CORNERS R.02 MAX
4. LINEAR TOLERANCES:
   .X ± 0.03
   .XX ± 0.01
   .XXX ± 0.005
5. ANGULAR TOLERANCES: ± 0.5°

THIRD ANGLE PROJECTION

THIS DRAWING IS UNDER CONFIGURATION CONTROL: DO NOT REVISE WITHOUT AN APPROVED ECO.

APPROVED: E. McCLOSKEY 5/7/14

PRIOR TO USE, CHECK WITH CONFIGURATION MANAGEMENT FOR ANY OUTSTANDING ECOS.

DESIGNER	R. PFEIFFER 10/12/12	QUALITY	D. CHOVAN 10/12/12
REVIEWER	D. STRANG 10/12/12	MATERIALS	M. WILKINSON 10/12/12
MECHANICAL	A. DRAKE 10/16/12	PROJ LEAD	B. BOROWSKI 10/17/12
ELECTRICAL	T. GOBELI 10/15/12	-	-
STRUCTURAL	W. DIAL 10/12/12	-	-
SAFETY	W. BORRELLI 10/15/12	-	-

DIMENSIONING AND TOLERANCING PER ASME Y14.5M-1994

CONTRACT NUMBER: NNC09BA02B
DELIVERY CODE: SPACE110

ZIN TECHNOLOGIES
6745 ENGLE ROAD
AIRPORT EXECUTIVE PARK
CLEVELAND, OHIO 44130
(440) 625-2200
WWW.ZIN-TECH.COM

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION
JOHN H. GLENN RESEARCH CENTER
LEWIS FIELD
CLEVELAND, OHIO

TITLE

ACME
ANALOG CAMERA LED BOARD
ASSEMBLY DRAWING


SIZE	CAGE CODE	DWG NO	REV
C	OSG68	S1101EFA1410	A

SCALE: NONE | INITIAL REL DATE 10/17/12 | SHEET 1 OF 2


RELEASE LEVEL: .
MODEL NAME: S1101EFA1410_REV_A.bpd

BLUEPRINT
VERSION 3.0

DWG NO S1101EFA1410 SH 1 REV A

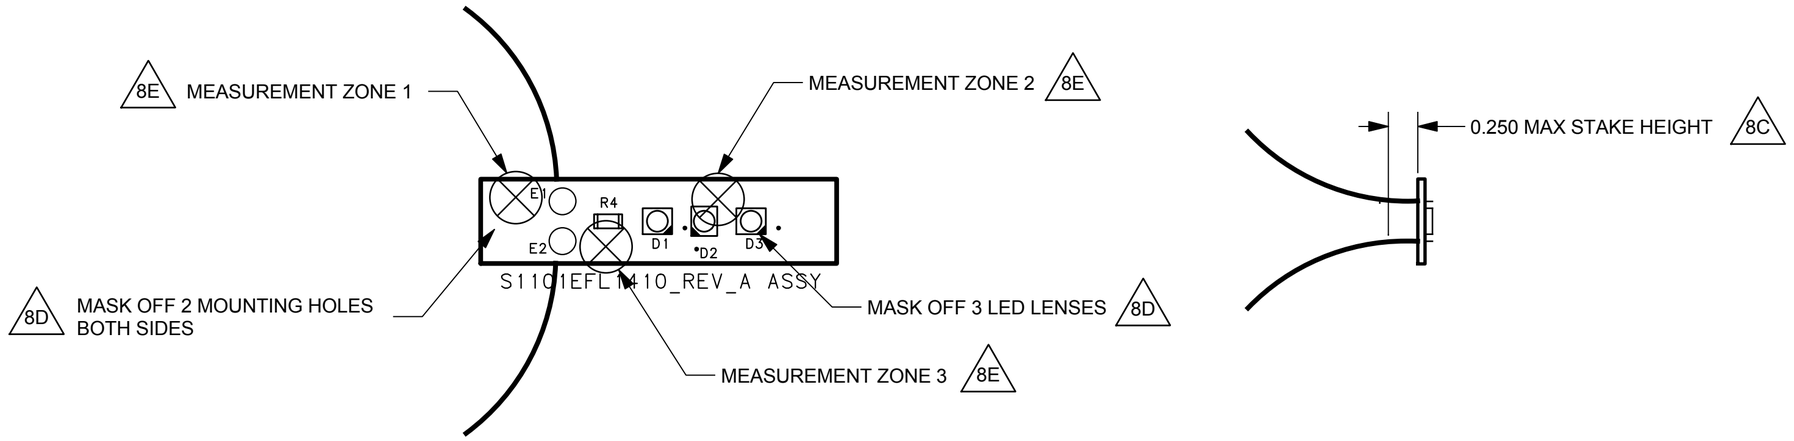

PRIMARY SIDE VIEW

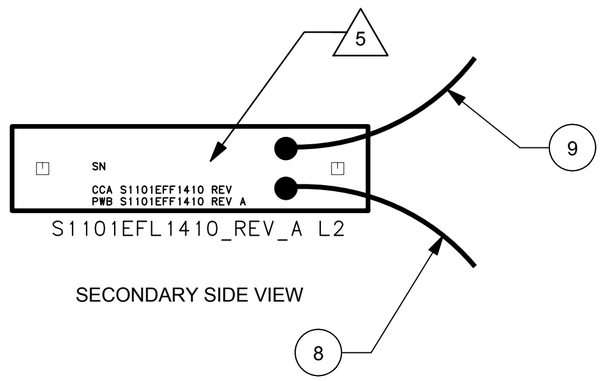

SECONDARY SIDE VIEW

SIZE	CAGE CODE	DWG NO	REV
C	OSG68	S1101EFA1410	A
SCALE: NONE	INITIAL REL DATE 10/17/12	SHEET 2 OF 2	

BLUEPRINT
VERSION 3.0

REV A
SH 2
DWG NO S1101EFA1410