
DRAWING LIST

ITEM	QTY	DRAWING NUMBER	DESCRIPTION
1	1	S1101EFA1215	BURNER HARNESS ASSEMBLY
2	1	S1101MFA1200	BURNER BASE ASSEMBLY
3	1	S1101MFA1221	3/8" SPHERICAL BURNER STEM ASSEMBLY
4	1	S1101MFT1220-01	NAME LABEL
5	1	S1101MFT1220-02	PART NUMBER LABEL
6	1	S1101MFT1220-XX	SERIAL NUMBER LABEL
7	1	S1101MFT1220-08	CABLE LABEL
8	1	S1101MFT1220-09	CONNECTOR LABEL
9	1	S1101MFT1220-XXX	IMS LABEL
10	1	S1101MFD1269	BURNER STEM COVER


COMMERCIAL PARTS LIST


ITEM	QTY	PART NUMBER	DESCRIPTION
C1	1	AS3208-02	O-RING, 75 DUROMETER FLUOROCARBON, .239 ID X .064 W
C2	1	92420308-705	.010 DIA. TYPE "K" THERMOCOUPLE ASSEMBLY, MARLIN MFG. CORP.
C3	1	NAS620C4L	#4 REDUCED THICKNESS FLAT WASHER REDUCED O.D.
C4	1	NAS1102E02-7	.086-56 UNJC-3A X .438 FLAT 100 DEG HEAD MACHINE SCREW
C5	1	NAS1352N04-4	#4-40(.112) UNRC-3A X .250 SOCKET HEAD CAP SCREW
C6	A/R	MIL-PRF-27617	DUPONT KRYTOX 240AC TYPE III LUBRICANT
C7	A/R	DURABOND 954FS-1	STAINLESS STEEL METALLIC ADHESIVE, COTRONICS CORP.
C8	A/R	222MS	THREADLOCKER, LOCTITE
C9	1	SDG32104805-009	DECAL, ELECTROSTATIC SYMBOL .5 IN X .5 IN, METAL PHOTO AND ADHESIVE (JSC)
C10	1	667-261-M-N8	PROTECTIVE COVER, PLUG, SHELL SIZE 8 (GLENAIR)
C11	1	1210-K	MINI 2-POLE JACK (MARLIN MFG.)

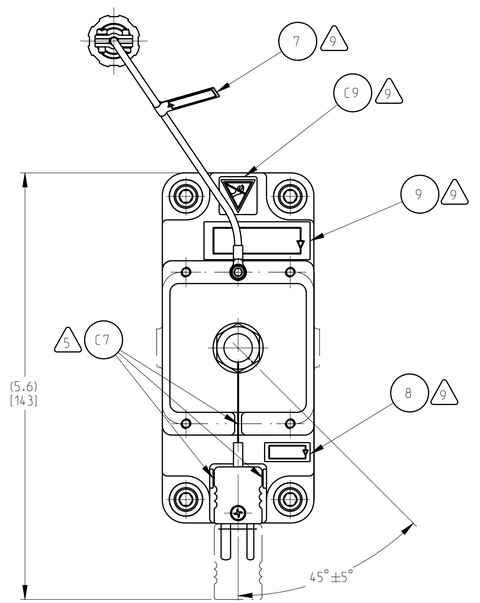


NOTES:


1. MATERIAL CERTIFICATION REQUIRED PER QUALITY LEVEL SPECIFIED IN WORK ORDER/SOW.
2. ASSEMBLE PER APPROVED PROCESS PLAN FOR INITIAL BUILD.
3. APPLY O-RING LUBRICANT PER ESTABLISHED PROCEDURES.
4. APPLY THREAD LOCKING COMPOUND PER ESTABLISHED PROCEDURES.
5. STAKING, BONDING AND INSPECTION SHALL BE IN ACCORDANCE WITH NASA-STD-8739.1.
6. CLEAN ALL SURFACES WITH ISOPROPYL ALCOHOL AND LET AIR DRY. WIPE WITH CLEAN COTTON SWABS AND/OR LINT-FREE CLOTH.
7. HANDLE WITH CLEAN, LINT-FREE GLOVES.
8. BEFORE STORAGE, PROTECT WITH CONTAMINATION BARRIER. USE CLEAN, NEW, TRANSPARENT POLYETHYLENE BAG FOR SMALL ITEMS OR 4 MIL THICK MINIMUM POLYETHYLENE SHEET AND SEAL. MARK PART NUMBER, A DASH, AND A SERIAL/LOT NUMBER AS SPECIFIED IN WORK ORDER/SOW, BY TAGGING PER SAE-AS478-35D.
9. APPLY LABEL TO CLEAN, DRY SURFACE IN LOCATION SHOWN.
10. TEST ASSEMBLY PER ACME-TST-045



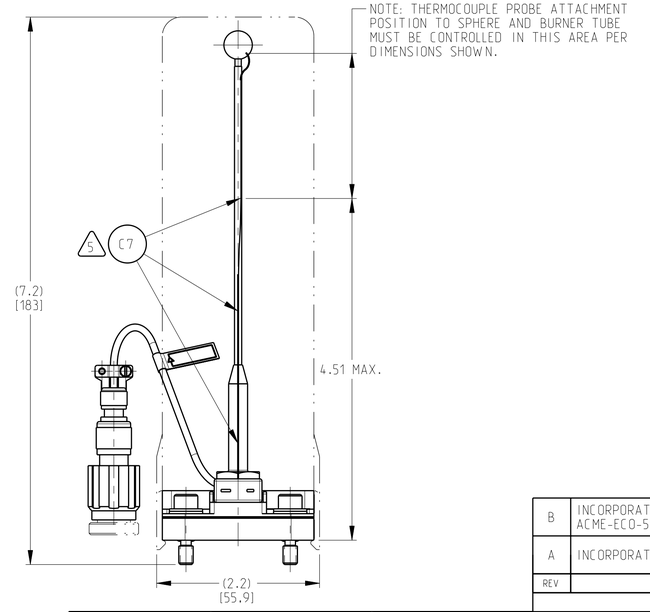

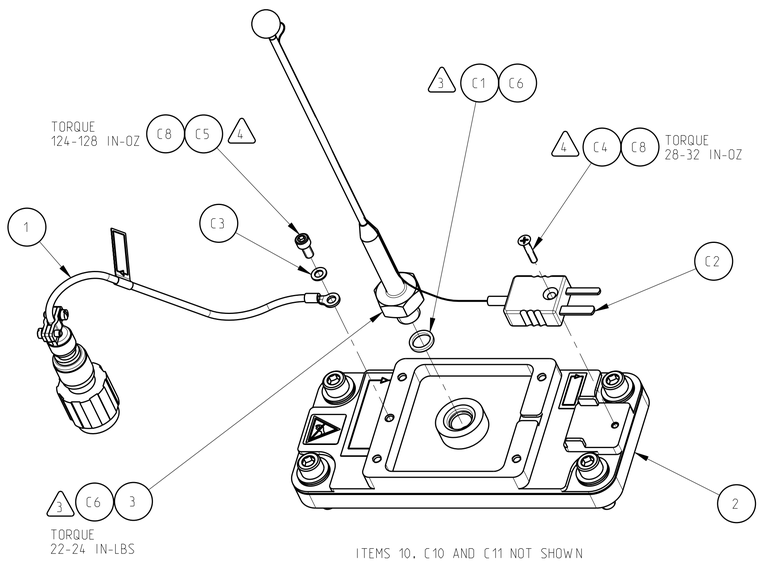

ITEMS 10, C10 AND C11 NOT SHOWN

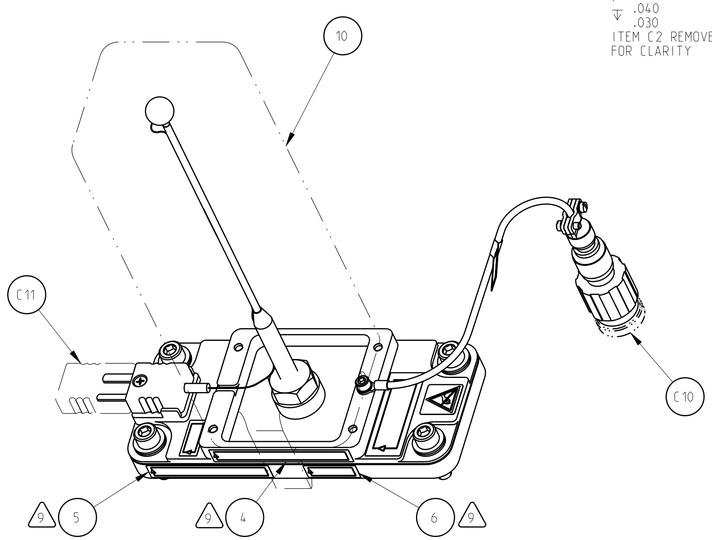

S1101MFA0100	
NEXT ASSEMBLY	
UNLESS OTHERWISE SPECIFIED: 1. ALL DIMENSIONS ARE IN INCHES 2. BREAK EDGES .010-.020 3. INSIDE CORNERS R.02 MAX 4. LINEAR TOLERANCES: .X ± .03 .XX ± .01 .XXX ± .005 5. ANGULAR TOLERANCE ± .5°	
THIRD ANGLE PROJECTION	

THIS DRAWING IS UNDER CONFIGURATION CONTROL: DO NOT REVISE WITHOUT AN APPROVED ECO.

APPROVED: *E.McCLOSKEY 12/14/15*

PRIOR TO USE, CHECK WITH CONFIGURATION MANAGEMENT FOR ANY OUTSTANDING ECOS.

DESIGNER	G.FEDEVICH 10/09/13	QUALITY	D.SEELEY 10/10/13
REVIEWER	M.AYNIK 10/09/13	MATERIALS	M.WILKINSON 10/09/13
MECHANICAL	A.DRAKE 10/09/13	PROJ LEAD	B.BOROWSKI 10/17/13
ELECTRICAL	T.GOBELI 10/09/13		
STRUCTURAL	C.WERNER 10/11/13		
SAFETY	M.BORRELLI 10/09/13		

DIMENSIONS AND TOLERANCING PER ASME Y14.5M-1994

ZIN TECHNOLOGIES
8745 ENGLE ROAD
AIRPORT EXECUTIVE PARK
CLEVELAND, OHIO 44130
(440) 625-2200
www.zin-tech.com

CONTRACT NUMBER: NNC09BA02B
PROJECT CODE: SPACE110

REV	DESCRIPTION	APPROVED
B	INCORPORATED ACME-ECO-526 AND ACME-ECO-547.	KR 12/11/15 JD 12/14/15 AD 12/11/15
A	INCORPORATED ACME-ECO-399	KR 12/8/14 GF 12/10/14 AD 12/11/14

REVISION HISTORY

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION
JOHN H. GLENN RESEARCH CENTER
LEWIS FIELD
CLEVELAND, OHIO

TITLE: 3/8" SPHERICAL BURNER ASSEMBLY

SIZE	CAGE CODE	DWG NO	REV
D	0SG68	S1101MFA1220	B

SCALE 1/1 | INITIAL REL DATE 10/17/2013 | SHEET 1 OF 1

RELEASE LEVEL: ECO
MODEL: S1101MFA1220

PRO/E VERSION: Wildfire 5.0

REV B | SH 1 | DWG NO S1101MFA1220

ZIN_D_2012.frm