
COMMERCIAL PARTS LIST

ITEM	QTY	PART NUMBER	DESCRIPTION
C1	1	M85049/95-10A	NUT PLATE, 3/4 PERIMETER, FLANGE MOUNT RECEPTACLE, SHELL SIZE A
C2	1	M85049/95-12A	NUT PLATE, 3/4 PERIMETER, FLANGE MOUNT RECEPTACLE, SHELL SIZE B
C3	1	M85049/95-18A	NUT PLATE, 3/4 PERIMETER, FLANGE MOUNT RECEPTACLE, SHELL SIZE E
C4	1	M85049/95-22A	NUT PLATE, 3/4 PERIMETER, FLANGE MOUNT RECEPTACLE, SHELL SIZE G
C5	16	NASI101E04-7	SCREW, MACHINE-FLAT FILLISTER HEAD .112-40 UNJC-3A X .438 LENGTH
C6	3	NASI102E06-10	.138-32 UNJC-3A X .625 FLAT 100 DEG HEAD MACHINE SCREW
C7	12	NAS620C4	#4 FLAT WASHER REDUCED OUTER DIAMETER
C8	16	NAS620C4L	#4 REDUCED THICKNESS FLAT WASHER REDUCED O.D.
C9	8	NASI352N04-3	#4-40(.112) UNRC-3A X .188 SOCKET HEAD CAP SCREW
C10	4	NASI352N04-6	#4-40(.112) UNRC-3A X .375 SOCKET HEAD CAP SCREW
C11	A/R	222MS	THREADLOCKER, LOCTITE
C12	A/R	3145 GRAY	RTV ADHESIVE/SEALANT, GRAY, DOW CORNING
C13	1	SDG32104805-009	DECAL, ELECTROSTATIC SYMBOL .5 IN X .5 IN, METAL PHOTO AND ADHESIVE (JSC)
C14	A/R	S768AOBLA	BLACK POLYAMIDE / ACRYLIC TAPE, 1"
C15	A/R	11181	COPPER FOIL TAPE 1/2 " WIDTH (3M)

DRAWING LIST

ITEM	QTY	DRAWING NUMBER	DESCRIPTION
1	1	SI101EFA0209	CUBE POWER HARNESS ASSEMBLY
2	1	SI101EFA0210	CUBE ETHERNET HARNESS ASSEMBLY
3	1	SI101EFA0211	CUBE INPUT/OUTPUT HARNESS ASSEMBLY
4	1	SI101MFA0201	MODIFIED CUBE ASSEMBLY
5	1	SI101MFA0202	CUBE BASE ASSEMBLY
6	1	SI101MFA0204	CUBE WIRING COVER ASSEMBLY
7	1	SI101MFD0206	CUBE INSULATOR
8	4	SI101MFD0207	CUBE FASTENER INSULATING SLEEVE
9	1	SI101MFT0200-XX	COMBO LABEL
10	1	SI101MFT0200-05	CONNECTOR ID LABEL
11	1	SI101MFT0200-06	CONNECTOR ID LABEL
12	1	SI101MFT0200-07	CONNECTOR ID LABEL
13	1	SI101MFT0200-08	CONNECTOR ID LABEL

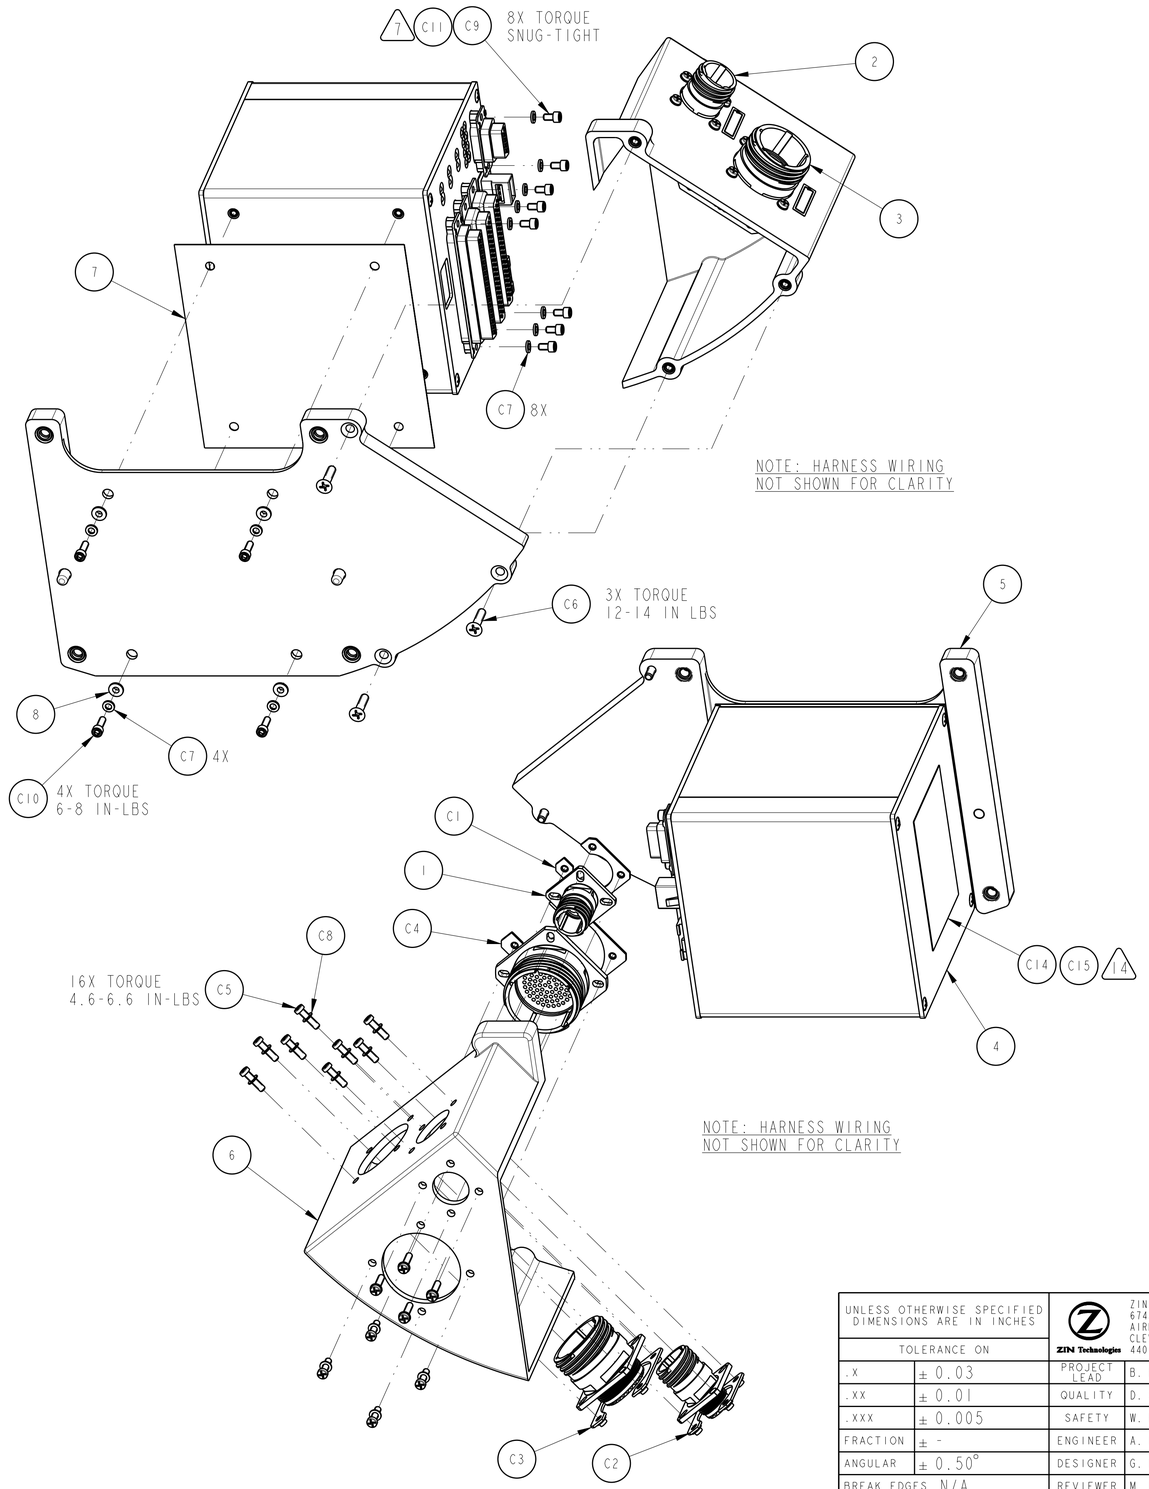

NOTES:

1. CERTIFICATE OF CONFORMANCE REQUIRED FOR ALL COMMERCIAL PARTS.
2. ESD HANDLING AND CONTROL PER ESTABLISHED PROCEDURES.
3. CHEMICAL CONVERSION COAT ANY DAMAGED OR MACHINED AREAS ON ALUMINUM PARTS PER MIL-DTL-5541, TYPE I, CLASS 3.
4. CLEAN ALL SURFACES WITH ISOPROPYL ALCOHOL AND LET AIR DRY. WIPE WITH CLEAN COTTON SWABS AND/OR LINT-FREE CLOTH.
5. HANDLE ALL PARTS AND ASSEMBLIES WITH CLEAN, LINT-FREE, ANTI-STATIC GLOVES OR FINGER COTS.
6. STAKING, BONDING AND INSPECTION SHALL BE IN ACCORDANCE WITH NASA-STD-8739.1.
7. APPLY THREAD LOCKING COMPOUND PER ESTABLISHED PROCEDURES.
8. TORQUE VALUES NOTED ON THE DRAWING ARE EFFECTIVE TORQUE ONLY. RUNNING TORQUE IS REQUIRED FOR SELF LOCKING DEVICES AND BOLT FRICTION. RUNNING TORQUE MUST BE MEASURED AND ADDED TO THE EFFECTIVE TORQUE. RECORD RUNNING TORQUE AND FINAL TORQUE ON DRAWING.
9. BEFORE STORAGE, PROTECT WITH CONTAMINATION BARRIER. USE CLEAN, NEW, ESD BAG, TOTES OR APPROVED ESD PACKAGING. MARK PART NUMBER, A DASH, AND A SERIAL/LOT NUMBER AS SPECIFIED IN WORK ORDER/SOW, BY TAGGING PER SAE-AS478-35D.
10. REMOVE ALL EXTERIOR MANUFACTURER APPLIED LABELING FROM ITEM 4.
11. APPLY LABEL TO CLEAN, DRY SURFACE IN LOCATION SHOWN.
12. SEE SHEET 2 FOR ADDITIONAL INFORMATION.
13. TEST COMPLETED ASSEMBLY PER ACME-TST-018.
14. APPLY COPPER FOIL TAPE TO COVER OPENINGS, THEN APPLY BLACK TAPE OVER TOP OF THE COPPER FOIL.
15. COMPLETELY COVER GAP ON ALL 3 SIDES WITH THE FOLLOWING MATERIAL:
    1ST LAYER BLACK KAPTON, ITEM C14
    2ND LATER COPPER FOIL, ITEM C15
    3RD LAYER BLACK KAPTON, ITEM C14.

REV	ZONE	DESCRIPTION	APP/DATE
D		INCORPORATED ACME-ECO-564 AND ACME-ECO-589	JO 6/28/16 AD 7/14/16 AR 7/20/16
C		INCORPORATED ACME-ECO-450 AND ACME-ECO-452.	J.OGRIN 08/31/15 A.DRAKE 09/02/15 J.FORTUNA 09/16/15
B		INCORPORATED ACME-ECO-165	KR 6/11/13 AD 6/11/13 GF 6/12/13
A		INCORPORATED ACME-ECO-112	A.D. 02/13/13 M.P. 02/13/13 G.F. 02/12/13

REVISIONS

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES

TOLERANCE ON	
.X	± 0.03
.XX	± 0.01
.XXX	± 0.005
FRACTION	± -
ANGULAR	± 0.50°
BREAK EDGES	N/A

ZIN TECHNOLOGIES
6745 ENGLE ROAD
AIRPORT EXECUTIVE PARK
CLEVELAND, OHIO 44130
440 625-2200

PROJECT LEAD	B. BOROWSKI	04/16/12
QUALITY	D. SEELEY	04/16/12
SAFETY	W. BORRELLI	04/13/12
ENGINEER	A. DRAKE	04/16/12
DESIGNER	G. FEDEVICH	04/13/12
REVIEWER	M. PREVITE	04/13/12

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION
JOHN H. GLENN RESEARCH CENTER
LEWIS FIELD
CLEVELAND, OHIO

ACME CHAMBER INSERT ASSEMBLY, LAUNCH CONFIGURATION

SI101MFA0100

CUBE ASSEMBLY

THIS DRAWING IS UNDER CONFIGURATION CONTROL: DO NOT REVISE WITHOUT APPROVED ECO

APPROVED: E.MCCLOSKEY DATE: 7/14/16

DIMENSIONING AND TOLERANCING PER ASME Y14.5M-1994

CONTRACT NUMBER: NNC09BA02B
DELIVERY ORDER: SPACE 110
MODEL NAME: SI101MFA0200

PRIOR TO USE CHECK FOR ANY OUTSTANDING ECO'S WITH CONFIGURATION MANAGEMENT OFFICE

SIZE	DRAWING NUMBER	REV	BLDG	AREA
D	SI101MFA0200	D	ZIN	GRC

UNITS: INCH


SCALE:	INITIAL REL DATE	SHEET	DISCIPLINE
3/4	04/16/2012	1 OF 2	MECHANICAL


PRO/E VERSION: Wildfire 2.0


SIZE D DRAWING NUMBER SI101MFA0200 REV D


NOTES:

1. SEE SHEET 1 FOR ADDITIONAL INFORMATION, GENERAL NOTES AND TOLERANCES.

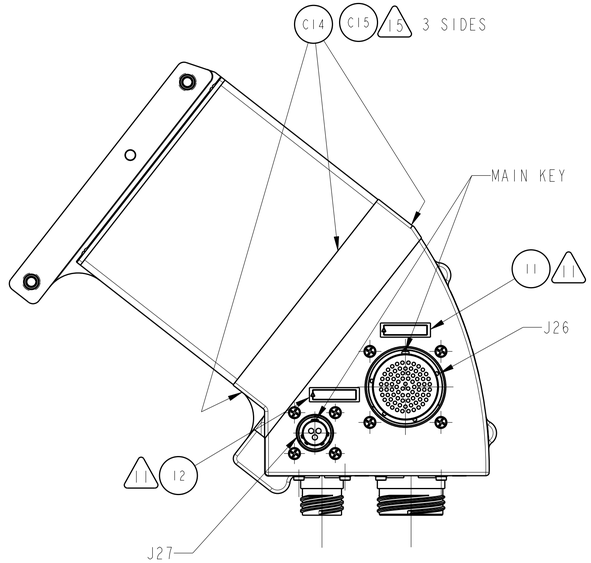

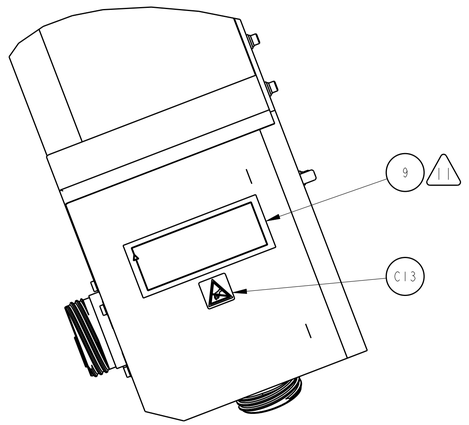

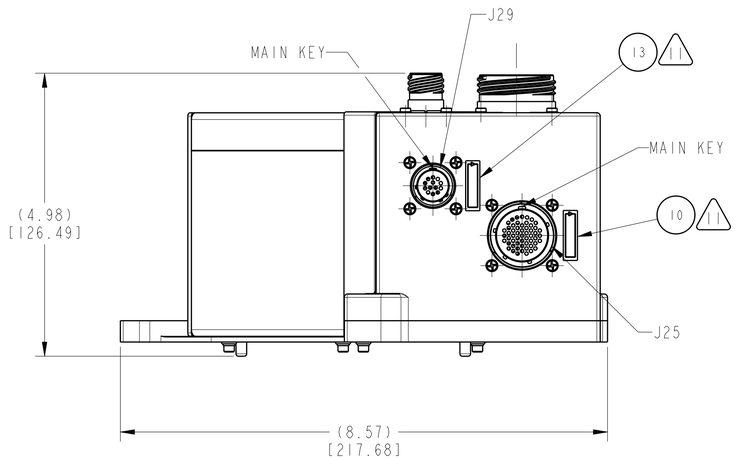

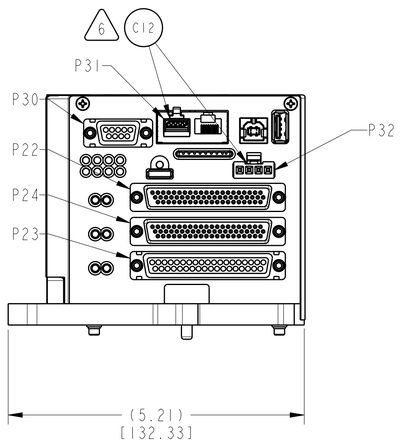

CHG	ZONE	DESCRIPTION	APP/DATE
REVISIONS			

SIZE	DRAWING NUMBER	REV	BLDG	AREA
D	S1101MFA0200	D	ZIN	GRC
			UNITS: INCH	
SCALE: 3/4	INITIAL REL DATE 04/16/2012	SHEET 2 OF 2	DISCIPLINE MECHANICAL	

PRO/E VERSION: Wildfire 2.0

SIZE D DRAWING NUMBER S1101MFA0200 REV D