PARTS LIST

Item	Qty	REFERENCE DESIGNATOR	PART NUMBER	Description	MANUFACTURER
1	1		S1101EFF1527	BARE BOARD	ZIN TECHNOLOGIES
2	1	C1	C0805C104K1RACTU	CAPACITOR, CERAMIC, 0.1uF, 100V, 10%, 0805	KEMET
3	1	C2	T494B106K016AT	CAPACITOR 10.0uF 16V TANTALUM 10% B-SIZE SMD	KEMET
4	2	C3, C4	C2012X7S2A105K125AB	CAPACITOR 1.0uF 100V CERAMIC X7R 0805	TDK
5	1	R1	ERJ-6ENF1502V	RESISTOR, 15K, 1/8W, 1%, 0805	PANASONIC - ECG
6	2	R2, R3	ERJ-6ENF15R0V	RESISTOR 15.0 OHM 1/8W 1% 0805 SMD	PANASONIC - ECG
7	1	U1	AD8628ARTZ	SINGLE SUPPLY OP AMP, SOT-23	Analog Devices
8	1	U2	DX-0869	THERMOPILE DETECTOR, THIN FILM BASED	DEXTER RESEARCH CENTER
9	1	U3	LT1790ACS6-1.25	LOW DROPOUT REFERENCE SOURCE	LINEAR TECHNOLOGY
10	1	U4	LM20CIM7	TEMPERATURE SENSOR, 2.4V, 10uA, SC70	NATIONAL
11	A/R		TZ-211	LABEL, 1/4 BLK LETTERS WHT BACKROUND	BROTHER
12	A/R		3140	RTV FOR CONFORMAL COATING	DOW CORNING
13	A/R		PR-1204	PRIMER FOR CONFORMAL COATING	DOW CORNING
14	A/R		SN63PB37/RMA	SOLDER	
15	A/R		3145	RTV, GRAY	DOW CORNING
16	A/R		M22759/11-22-2	WIRE, 22 AWG, RED	QPL
17	A/R		M22759/11-22-0	WIRE, 22 AWG, BLACK	QPL
18	A/R		M22759/11-22-7	WIRE, 22 AWG, VIO	QPL
19	A/R		M22759/11-22-3	WIRE, 22 AWG, ORG	QPL

7. CONFORMAL COATING, STAKING AND INSPECTION SHALL BE IN ACCORDANCE WITH NASA-STD-8739.1 AND THE FOLLOWING NOTES:
   - A. PERFORM CLEANLINESS TEST.
   - B. BAKE PWA AT 93°C ±5.5°C (200°F ±10°F) FOR 4 HOURS PRIOR TO CONFORMAL COATING.
   - △C MASK OFF ALL DESIGNATED AREAS USING KAPTON TAPE. ALL MASKING OPERATIONS SHALL BE PERFORMED UNDER AN AIR IONIZER.
   - △D MEASURE CONFORMAL COATING THICKNESS AT DESIGNATED AREAS.
   - E. CONFORMAL COAT THE COMPLETE ASSEMBLY USING ITEM 12 AND ITEM 13.
   - △F STAKE WIRES FOR STRAIN RELIEF WITH ITEM 15 PRIOR TO CONFORMAL COATING.
8. PLACE THE COMPLETED ASSEMBLY IN CLEAN, STATIC DISSIPATIVE PACKAGING. IDENTIFY PART BY TAGGING WITH PART NUMBER AND SERIAL/LOT NUMBER AS SPECIFIED IN WORK ORDER PER SAE AS478, METHOD 35. STORE IN A PROJECT APPROVED STORAGE AREA.
9. REFERENCE SCHEMATIC: S1101EFS1527
10. EXPEDITION CONTROL FILES: S1101EFA1527_REV_D.zip

△11 POSITION ITEM 7 DIRECTLY ITEM 9 WITH BOTTOM ITEM 7'S TO-5 PACKAGE APPROXIMATELY EVEN WITH TOP OF ITEM 9.

NOTES: UNLESS OTHERWISE SPECIFIED

1. CERTIFICATE OF CONFORMANCE REQUIRED FOR ALL COMMERCIAL PARTS.
2. ESD HANDLING AND CONTROL PER ESTABLISHED PROCEDURES.
3. HANDLE ALL PARTS AND ASSEMBLIES WITH CLEAN, LINT-FREE, ANTI-STATIC GLOVES OR FINGER COTS.
4. DEMOISTURIZE (BAKE OUT) PWB (ITEM 1) FOR A MINIMUM OF 2 HOURS AT 93°C ±5.5°C (200°F ±10°F.) PERFORM SOLDERING IMMEDIATELY AFTER BAKING, OR STORE IN A CLEAN, DRY, SEALED STATIC DISSIPATIVE BAG OR CONTAINER.

△5 MARK THE ASSEMBLY WITH REV AND S/N USING ITEM 11.

6. ASSEMBLY, SOLDERING AND INSPECTION SHALL BE IN ACCORDANCE WITH NASA-STD-8739.2, NASA-STD-8739.3, AND THE FOLLOWING NOTES:
   - A. INSTALL AND SOLDER ALL SURFACE MOUNT (SMT) PART BEFORE THROUGH HOLE PARTS USING SOLDER (ITEM 14.)
   - B. FOR THROUGH HOLE PARTS, LEAD TERMINATIONS SHALL BE STRAIGHT THROUGH (NOT LAPPED OR CLINCHED.)

CHG	ZONE	DESCRIPTION	APP/DATE
D		REVISED PER ACME-ECO-343 AND ACME-ECO-421	MH 5/1/15 DS 5/1/15 TG 5/1/15
C		REVISED PER ACME-ECO-293 AND ACME-ECO-320	DS 6/20/14 TG 6/23/14 RP 6/20/14
B		REVISED PER ACME-ECO-137	MH 1/29/14 TG 1/29/14 RP 1/29/14
A		REVISED PER ACME-ECO-052 AND ACME-ECO-055.	MH 12/11/13 RP 12/12/13 TG 12/12/13

REVISIONS

THIS DRAWING IS UNDER CONFIGURATION CONTROL: DO NOT REVISE WITHOUT APPROVED ECO

APPROVED: E. McCLOSKEY DATE: 5/4/15

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES			
TOLERANCE ON			
.X	± .05	PROJECT LEAD	B. BOROWSKI 2/15/2012
.XX	± .01	QUALITY	D. SEELEY 2/13/2012
.XXX	± .005	SAFETY	W. BORRELLI 2/9/2012
FRACTION	± X/XX	ENGINEER	T. GOBELI 2/9/2012
ANGULAR	± X° XX'	DESIGNER	R. PFEIFFER 2/9/2012
BREAK EDGES	.XX-.XX	REVIEWER	D. STRANG 2/9/2012

DIMENSIONING AND TOLERANCING PER ASME Y14.5M-1994

CONTRACT NUMBER: NNC09BA02B
DELIVERY NUMBER: SPACE110
FILE LOCATION: S1101EFA1527_REV_D.bpd
CAD PACKAGE: BLUEPRINT

PRIOR TO USE CHECK FOR ANY OUTSTANDING ECO'S WITH CONFIGURATION MANAGEMENT OFFICE

ZIN TECHNOLOGIES
6745 ENGLE ROAD
AIRPORT EXECUTIVE PARK
CLEVELAND, OHIO 44130
440 625-2200

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION
JOHN H. GLENN RESEARCH CENTER
LEWIS FIELD
CLEVELAND, OHIO

NEXT ASSEMBLY
ACME
60 DEGREE RADIOMETER ASSEMBLY
S1101MFA1526


TITLE
ACME
60 DEGREE RADIOMETER BOARD
ASSEMBLY DRAWING

SIZE	DRAWING NUMBER	REV	BLDG	AREA
C	S1101EFA1527	D	ZIN	GRC


UNITS: INCH


SCALE:	INITIAL REL DATE	SHEET	DISCIPLINE
NONE	2/15/2012	1 OF 2	ELECTRICAL

REV D
DRAWING NUMBER S1101EFA1527
SIZE C

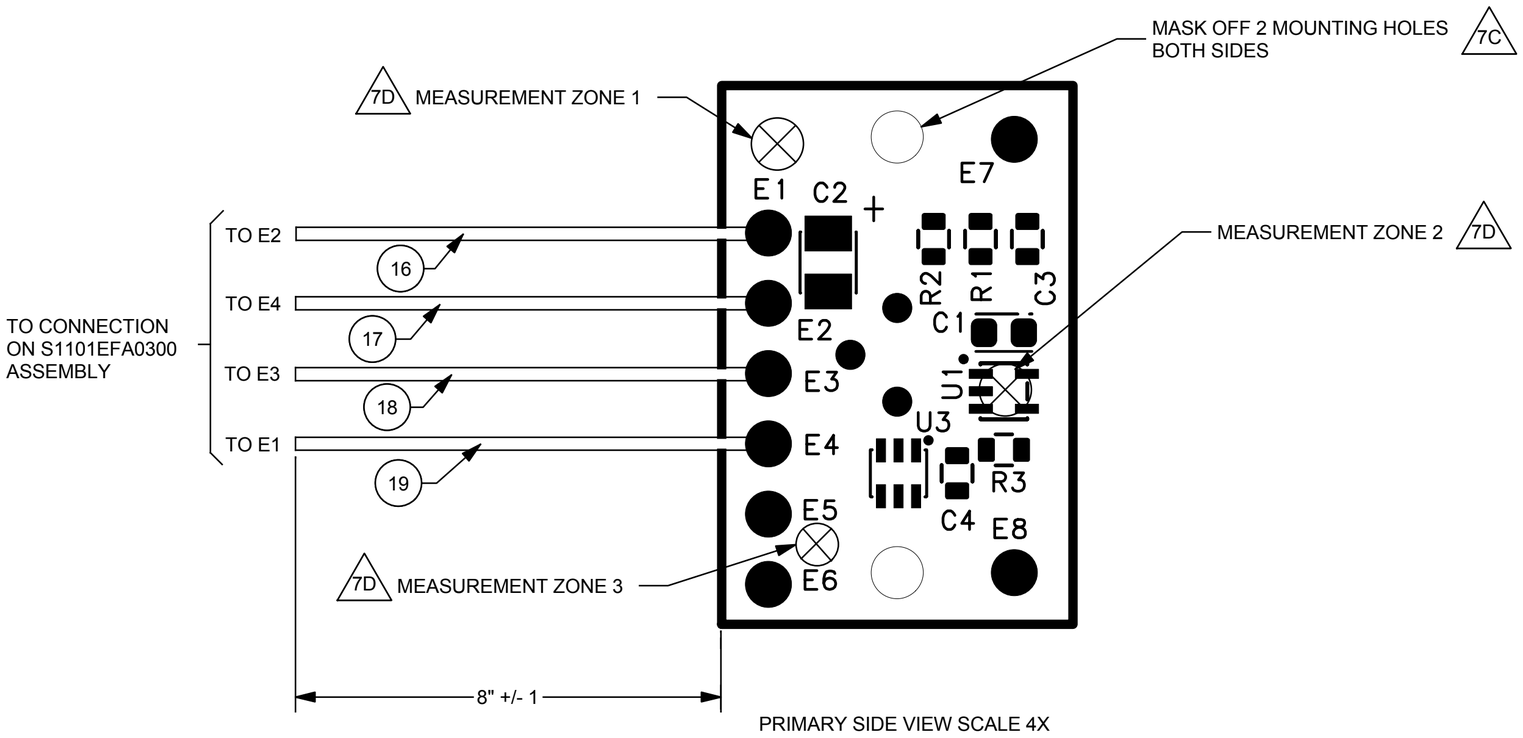

PRIMARY SIDE VIEW SCALE 4X

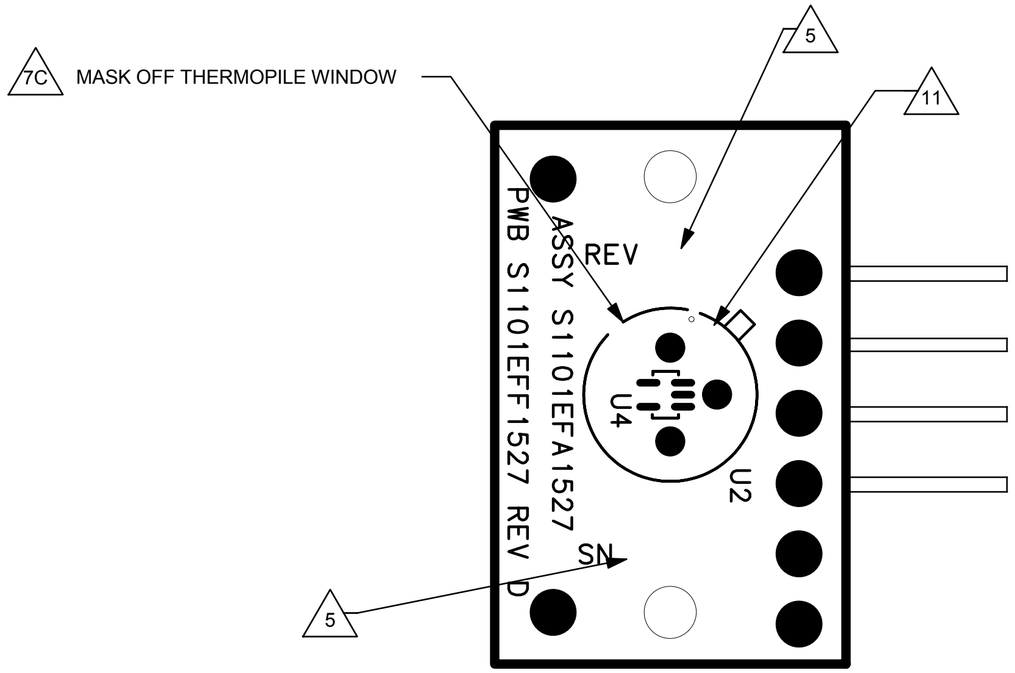

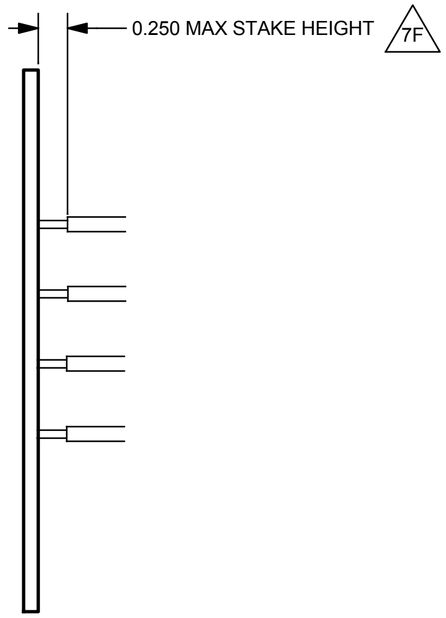

SECONDARY SIDE VIEW SCALE 4X

CHG	ZONE	DESCRIPTION	APP/DATE
REVISIONS			

SIZE	DRAWING NUMBER	REV	BLDG	AREA
C	S1101EFA1527	D	ZIN	GRC
			UNITS: INCH	
SCALE: NONE	INITIAL REL DATE 2/15/2012	SHEET 2 OF 2	DISCIPLINE ELECTRICAL	

SIZE C | DRAWING NUMBER S1101EFA1527 | REV D