

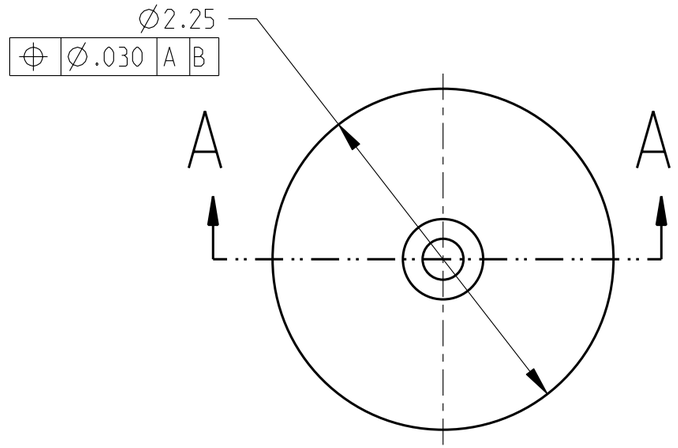


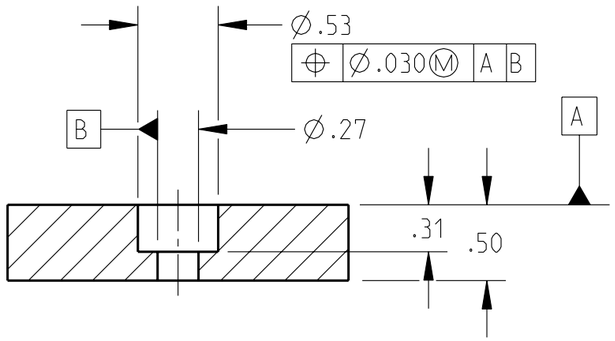

SECTION A – A

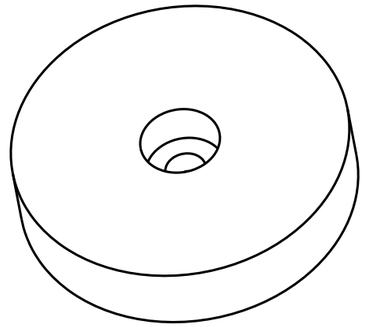

NOTES:

1. MATERIAL: 6061-T6 OR T651 ALUMINUM ALLOY PER ASTM B221.
2. MATERIAL CERTIFICATION REQUIRED PER QUALITY LEVEL SPECIFIED IN WORK ORDER/SOW.
3. 125 µIN Ra ALL MACHINED SURFACES PER ANSI/ASME B46.1 UNLESS OTHERWISE SPECIFIED.
4. CLEAN ALL SURFACES WITH ISOPROPYL OR ETHYL ALCOHOL AND LET AIR DRY. WIPE WITH CLEAN COTTON SWABS AND/OR LINT-FREE CLOTH.
5. HANDLE WITH CLEAN, LINT-FREE GLOVES.
6. BEFORE STORAGE, PROTECT WITH CONTAMINATION BARRIER. USE CLEAN, NEW, TRANSPARENT POLYETHYLENE BAG FOR SMALL ITEMS OR 4 MIL THICK MINIMUM POLYETHYLENE SHEET AND SEAL. MARK PART NUMBER, A DASH, AND A SERIAL/LOT NUMBER AS SPECIFIED IN WORK ORDER/SOW, BY TAGGING PER SAE-AS478-35D.

REV –
SH 1
DWG NO S1101MGD4556

REV	DESCRIPTION	APPROVED

REVISION HISTORY

S1101MGA4555

NEXT ASSEMBLY

UNLESS OTHERWISE SPECIFIED:
1. ALL DIMENSIONS ARE IN INCHES
2. BREAK EDGES .010-.020
3. INSIDE CORNERS R.02 MAX
4. LINEAR TOLERANCES:
   .X ± .03
   .XX ± .01
   .XXX ± .005
5. ANGULAR TOLERANCE ± .5°

THIRD ANGLE PROJECTION

THIS DRAWING IS UNDER CONFIGURATION CONTROL: DO NOT REVISE WITHOUT AN APPROVED ECO.

APPROVED: *E.McCLOSKEY 4/8/14*

PRIOR TO USE, CHECK WITH CONFIGURATION MANAGEMENT FOR ANY OUTSTANDING ECOS.

DESIGNER	*K.RHODES 4/4/14*	QUALITY	*D.SEELEY 4/7/14*
REVIEWER	*G.FEDEVICH 4/8/14*	MATERIALS	*M.WILKINSON 4/7/14*
MECHANICAL	*A.DRAKE 4/7/14*	PROJ LEAD	*B.BOROWSKI 4/8/14*
ELECTRICAL	*T.GOBELI 4/4/14*		
STRUCTURAL	*C.WERNER 4/7/14*		
SAFETY	*W.BORRELLI 4/4/14*		

DIMENSIONS AND TOLERANCING PER ASME Y14.5M-1994

CONTRACT NUMBER: NNC14A02C
PROJECT CODE: S2-BT3

ZIN TECHNOLOGIES
6745 ENGLE ROAD
AIRPORT EXECUTIVE PARK
CLEVELAND, OHIO 44130
(440) 625-2200
www.zin-tech.com

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION
JOHN H. GLENN RESEARCH CENTER
LEWIS FIELD
CLEVELAND, OHIO

TITLE

MANIFOLD STANDOFF BASE

SIZE	CAGE CODE	DWG NO	REV
B	0SG68	S1101MGD4556	–

SCALE	1/1	INITIAL REL DATE	4/8/14	SHEET	1 OF 1

RELEASE LEVEL: RELEASED
MODEL: S1101MGD4556

PRO/E VERSION: Wildfire 5.0

ZIN_B_2012.frm