

COMMERCIAL PARTS LIST

ITEM	QTY	PART NUMBER	DESCRIPTION	MANUFACTURER
C1	1	SDD26S1000G	CONNECTOR, FEMALE HD D-SUB, 26 CONTACTS	POSITRONICS
C2	1	557-398UCR2B	BACKSHELL, D-SUB	GLENAIR
C3	1	600-057	BACKSHELL BAND, MICRO	GLENAIR
C4	A/R	FC8022M2	CONTACT, SOCKET, SIZE 22, 22-30 AWG	POSITRONICS
C5	A/R	5011000632S	EXPANDABLE BRAIDED SLEEVING, 1/4"	BENTLEY HARRIS
C6	A/R	2146	BRAIDED EMI SHIELDING, 1/2"	ALPHA
C7	A/R	THFE4-365012	SHRINK TUBING, EXPANDED/PREHEAT ID 0.365"	SAINT GOBAIN
C8	A/R	M22759/11-22-0	1/C, 22 AWG, PTFE INSULATED, BLACK	QPL
C9	A/R	M22759/11-22-2	1/C, 22 AWG, PTFE INSULATED, RED	QPL
C10	A/R	M22759/11-22-3	1/C, 22 AWG, PTFE INSULATED, ORANGE	QPL
C11	A/R	M22759/11-22-4	1/C, 22 AWG, PTFE INSULATED, YELLOW	QPL
C12	A/R	M22759/11-22-6	1/C, 22 AWG, PTFE INSULATED, BLUE	QPL
C13	A/R	M22759/11-22-7	1/C, 22 AWG, PTFE INSULATED, VIOLET	QPL
C14	A/R	5011001332S	EXPANDABLE BRAIDED SLEEVING, 1/2"	BENTLEY HARRIS
C15	1	PLT1M-C702Y	CABLE TIE, HALAR	PANDUIT
C16	A/R	THFE4-500015	SHRINK TUBING, EXPANDED/PREHEAT ID 0.5"	SAINT GOBAIN
C17	A/R	2216B/A GRAY	EPOXY, 2 PART	3M
C18	2	687-316EMS2	1" JACKSCREW, KNURLED, SOCKET HEAD	GLENAIR

LABEL LIST	
ITEM	INSCRIPTION
L1	P17
L2	S1101EFA1554 SN xxxx

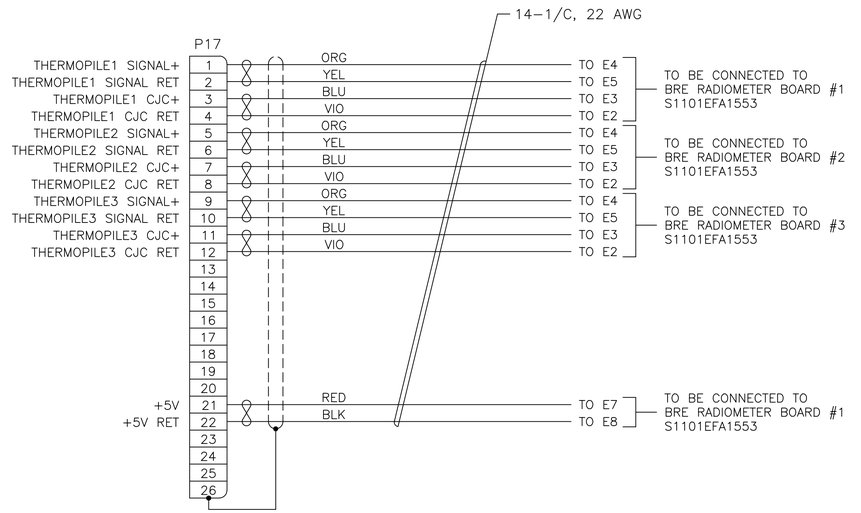

SCHEMATIC

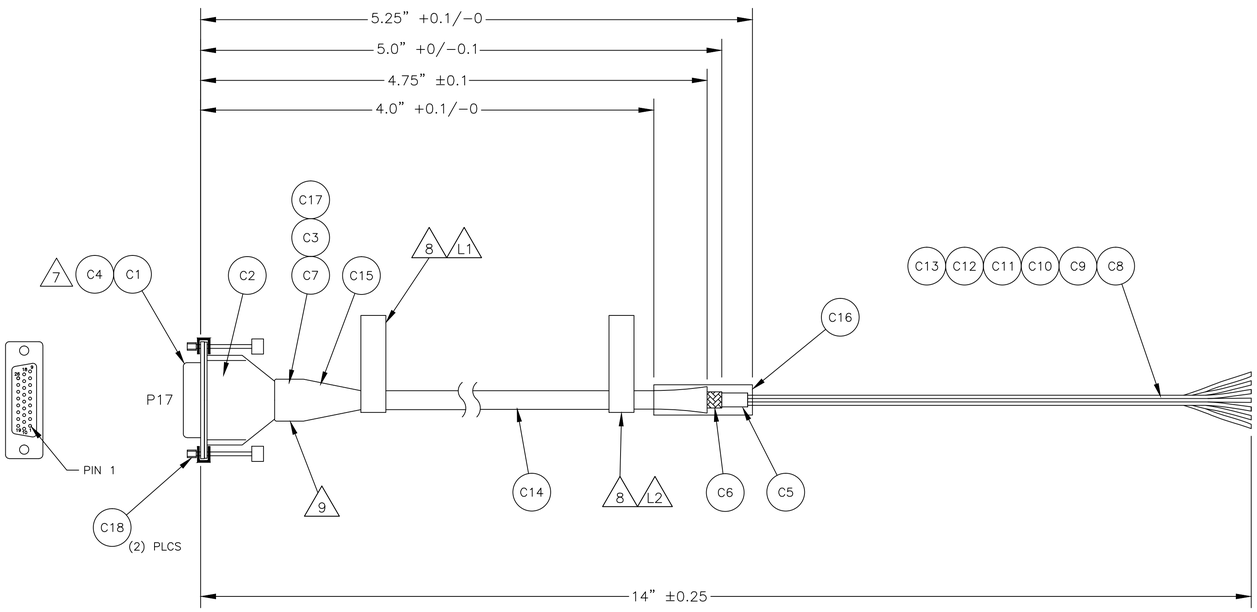

NOTES:

1. MATERIAL CERTIFICATION REQUIRED PER QUALITY LEVEL SPECIFIED IN WORK ORDER/SOW.
2. ESD HANDLING AND CONTROL PER ESTABLISHED PROCEDURES.
3. HANDLE ALL PARTS AND ASSEMBLIES WITH CLEAN, LINT-FREE, ANTI-STATIC GLOVES OR FINGER COTS.
4. HARNESS ASSEMBLY AND INSPECTION SHALL BE IN ACCORDANCE WITH NASA-STD-8739.4 AND THE FOLLOWING NOTES:
   A. WIRE TWIST SHALL BE BETWEEN 8 AND 16 TIMES THE OUTER DIAMETER OF THE HARNESS UNLESS OTHERWISE NOTED. (FROM NASA-STD-8739.4 PARA 7.3.20)
5. SEE TENSILE PULL STRENGTHS LIST PER NASA-STD-8739.4 AND/OR MANUFACTURER'S SPECIFICATION.
6. INSTALL CONTACTS IN ALL UNUSED POSITIONS OF D-SUB CONNECTOR.
7. PERFORM CONTACT RETENTION TEST PER NASA-STD-8739.4. CONTACTS REQUIRING A PULL TEST FOR RETENTION SHALL BE PERFORMED AS FOLLOWS: A GENTLE PULL ON THE WIRE SHALL BE USED TO DETERMINE IF THE CONTACT IS SEATED PROPERLY.
8. APPLY TEMPORARY CABLE IDENTIFICATION LABELS P/N TZE-211.
   NOTE: TO BE REMOVED AT INSTALLATION INTO FINAL ASSEMBLY.
9. APPLY EPOXY ITEM C17 TO SHARP EDGES OF ITEM C3.
10. TEST PER NASA-STD-8739.4 PARA 18.2.6
    CONTINUITY: < 5 OHMS
11. PLACE COMPLETED ASSEMBLY IN CLEAN, STATIC-SHIELDING PACKAGING. IDENTIFY PART BY TAGGING WITH PART NUMBER AND SERIAL/LOT NUMBER AS SPECIFIED IN WORK ORDER/STATEMENT OF WORK PER SAE AS478, METHOD 35D. STORE IN A PROJECT APPROVED STORAGE AREA.
12. BUILD IN CONJUNCTION WITH ASSEMBLY S1101MFA1550.

CRIMP TOOL LIST				
CONTACT P/N	CRIMP TOOL	POSITIONER	I/E TOOL	REF. DES.
FC8022M2	M22520/2-01	M22520/2-06	M81969/1-04	P17

TENSILE PULL STRENGTH LIST			
MANUFACTURER	CONTACT P/N	WIRE AWG	LBS
POSITIONICS	FC8022M2	22	12

REV	DESCRIPTION	APPROVED
B	REVISED PER ACME-ECO-525.	MH 3/22/16 DS 3/22/16 TG 3/23/16
A	REVISED PER ACME-ECO-408.	MH 3/11/15 DS 3/11/15 TG 3/11/15

REVISION HISTORY

DWG NO S1101EFA1554 SH 1 REV B

NEXT ASSEMBLY

UNLESS OTHERWISE SPECIFIED:
1. ALL DIMENSIONS ARE IN INCHES
2. BREAK EDGES .010-.020
3. INSIDE CORNERS R.02 MAX
4. LINEAR TOLERANCES:
   .X ± 0.03
   .XX ± 0.01
   .XXX ± 0.005
5. ANGULAR TOLERANCE ± 0.5°

THIRD ANGLE PROJECTION

THIS DRAWING IS UNDER CONFIGURATION CONTROL; DO NOT REVISE WITHOUT AN APPROVED ECO.
APPROVED: E. McCLOSKEY 3/23/16
PRIOR TO USE, CHECK WITH CONFIGURATION MANAGEMENT FOR ANY OUTSTANDING ECOS.

DESIGNER	M. HOMKO 11/21/14	QUALITY	D. SEELEY 11/25/14
REVIEWER	J. BRUEWER 11/25/14	MATERIALS	M. WILKINSON 11/24/14
MECHANICAL	A. DRAKE 11/21/14	PROJ LEAD	B. BORowski 11/25/14
ELECTRICAL	T. GOBELI 11/21/14	ENGINEER	M. SAVINA 11/21/14
STRUCTURAL	C. WERNER 11/21/14		
SAFETY	W. BORRELLI 11/21/14		

DIMENSIONS AND TOLERANCING PER ASME Y14.5M-1994

CONTRACT NUMBER: NNC14CA02C
PROJECT CODE: S2-BT3

ZIN TECHNOLOGIES
6745 ENGLE ROAD
AIRPORT EXECUTIVE PARK
CLEVELAND, OHIO 44130
(440) 625-2200
www.zin-tech.com

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION
JOHN H. GLENN RESEARCH CENTER
LEWIS FIELD
CLEVELAND, OHIO

TITLE
BRE RADIOMETER
HARNESS ASSEMBLY

SIZE	CAGE CODE	DWG NO	REV
D	0SG68	S1101EFA1554	B

SCALE NONE | INITIAL REL DATE 11/26/14 | SHEET 1 OF 1

RELEASE LEVEL: RELEASED
MODEL NAME: S1101EFA1554_REV_B.DWG

AutoCAD 2012