
DRAWING LIST

ITEM	QTY	DRAWING NUMBER	DESCRIPTION
1	1	S1101MFA1622	COLD JUNCTION COMPENSATION BOARD HEATSINK ASSEMBLY
2	1	S1101EFA1600	ACME TC COLD JUNCTION COMPENSATION BOARD ASSEMBLY
3	2	S1101MFD1630	200mm THERMOCOUPLE STRAIN RELIEF BASE
4	2	S1101MFD2215	SENSOR BOARD WIRE STRAIN RELIEF


COMMERCIAL PARTS LIST

ITEM	QTY	PART NUMBER	DESCRIPTION
C1	2	NAS620C4L	#4 REDUCED THICKNESS FLAT WASHER REDUCED O.D.
C2	2	NAS1352N04-6	#4-40(.112) UNRC-3A X .375 SOCKET HEAD CAP SCREW
C3	A/R	TRA-BOND 2151	EPOXY. THERMALLY CONDUCTIVE. ELECTRICALLY INSULATING. HENKEL
C4	3	1210-K	THERMOCOUPLE MINI CONNECTOR PLUG. MARLIN
C5	4	NAS1101E00-4	SCREW. MACHINE-FLAT FILLISTER HEAD .060-80 UNJF-3A X .250 LENGTH
C6	2	NAS1102E02-6	.086-56 UNJC-3A X .375 FLAT 100 DEG HEAD MACHINE SCREW
C7	1	1280	MINI-WIRE CLAMP. MARLIN
C8	A/R	3145 GRAY	RTV ADHESIVE/SEALANT. GRAY. DOW CORNING
C9	A/R	PLT1M-M702Y	CABLE TIE. HALAR FLUOROPOLYMER. PANDUIT CORP.
C10	A/R	SN10PB88AG02	SOLDER. HIGH TEMPERATURE. TIN/LEAD/SILVER
C11	A/R	THFE4-115009	HEAT SHRINK TUBING. .115" I.D.. SAINT-GOBAIN
C12	A/R	KK-24-EE40	THERMOCOUPLE WIRE. INSULATED. TYPE K. SOLID 24AWG. MARLIN
C13	A/R	222MS	THREADLOCKER. LOCTITE
C14	A/R	P-224-1	TAPE. KAPTON. 1.00". PERMACELL



BOTTOM VIEW


SOME ITEMS REMOVED FOR CLARITY

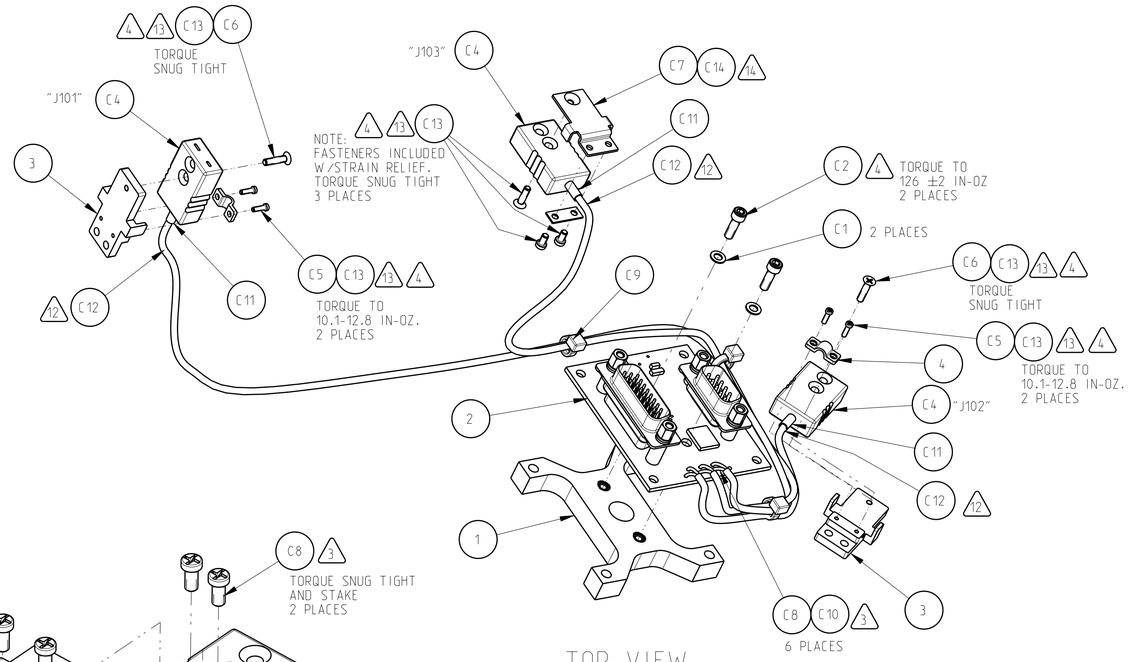

TOP VIEW




WIRING DIAGRAM

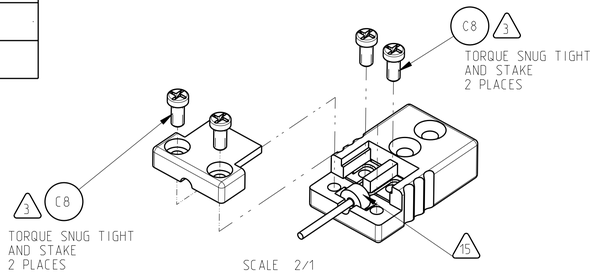

THERMOCOUPLE PLUG ASSEMBLY DETAIL

3 PLACES

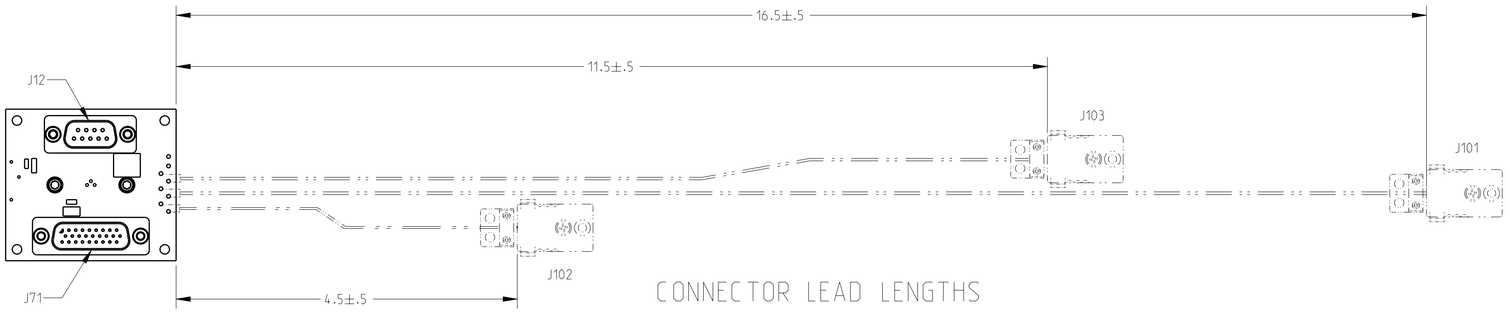

CONNECTOR LEAD LENGTHS

NOTES:

1. MATERIAL AND PROCESS CERTIFICATION REQUIRED PER QUALITY LEVEL SPECIFIED IN WORK ORDER/SOW.
2. ASSEMBLE PER APPROVED PROCESS PLAN FOR INITIAL BUILD.
3. POTTING, BONDING AND STAKING SHALL BE IN ACCORDANCE WITH NASA-STD-8739.1
4. TORQUE VALUES NOTED ON THE DRAWING ARE EFFECTIVE TORQUE ONLY. RUNNING TORQUE IS REQUIRED FOR SELF LOCKING DEVICES AND BOLT FRICTION. RUNNING TORQUE MUST BE MEASURED AND ADDED TO THE EFFECTIVE TORQUE. RECORD RUNNING TORQUE AND FINAL TORQUE ON DRAWING OR ASSEMBLY PROCEDURE.
5. CHEMICAL CONVERSION COAT ANY DAMAGED OR MACHINED AREAS ON ALUMINUM PARTS PER MIL-DTL-5541, TYPE I, CLASS 3.
6. FILL CAVITY OF COLD JUNCTION COMPENSATION BOARD HEAT SINK ASSEMBLY WITH EPOXY (ITEM C3).
7. CLEAN ALL SURFACES WITH ISOPROPYL ALCOHOL AND LET AIR DRY. WIPE WITH CLEAN COTTON SWABS AND/OR LINT-FREE CLOTH.
8. HANDLE WITH CLEAN, LINT-FREE GLOVES.
9. BEFORE STORAGE, PROTECT WITH CONTAMINATION BARRIER. USE CLEAN, NEW, TRANSPARENT POLYETHYLENE BAG FOR SMALL ITEMS OR 4 MIL THICK MINIMUM POLYETHYLENE SHEET AND SEAL. MARK PART NUMBER, A DASH, AND A SERIAL/LOT NUMBER AS SPECIFIED IN WORK ORDER/SOW, BY TAGGING PER SAE-AS478-35D.
10. ESD HANDLING AND CONTROL PER ESTABLISHED PROCEDURES.
11. ASSEMBLY, SOLDERING, AND INSPECTION SHALL BE IN ACCORDANCE WITH NASA-STD-8739.2 AND NASA-STD-8739.3
12. ACTUAL THERMOCOUPLE WIRE ROUTING TO BE DETERMINED BY TECHNICIAN AT TIME OF ASSEMBLY.
13. APPLY THREAD LOCKING COMPOUND PER ESTABLISHED PROCEDURES.
14. WRAP STRAIN RELIEF (ITEM C7) STRAP AND SCREWS IN KAPTON TAPE (ITEM C14) TO COVER SHARP EDGES.
15. DISCARD SMALL ID BUSHING SUPPLIED WITH ITEM C4.
16. AFTER ASSEMBLY TEST PER ACME-TST-014.

REV	DESCRIPTION	APPROVED
C	INCORPORATED ACME-ECO-437	JO 04/27/15 AD 04/27/15 GF 04/30/15
B	INCORPORATED ACME-ECO-319	KR 7/16/14 GF 7/23/14 AD 7/17/14
A	INCORPORATED ACME-ECO-193	KR 8/12/13 MA 8/14/13 AD 8/12/13

REVISION HISTORY

S1101MFA0100

NEXT ASSEMBLY

UNLESS OTHERWISE SPECIFIED:
1. ALL DIMENSIONS ARE IN INCHES
2. BREAK EDGES .010-.020
3. INSIDE CORNERS R.02 MAX
4. LINEAR TOLERANCES:
.X ± .03
.XX ± .01
.XXX ± .005
5. ANGULAR TOLERANCE ± .5°

THIRD ANGLE PROJECTION

THIS DRAWING IS UNDER CONFIGURATION CONTROL. DO NOT REVISE WITHOUT AN APPROVED ECO.

APPROVED: E.McCLOSKEY 04/30/15

PRIOR TO USE, CHECK WITH CONFIGURATION MANAGEMENT FOR ANY OUTSTANDING ECOS.

DESIGNER	K.RHODES 1/23/13	QUALITY	D.SEELEY 1/31/13
REVIEWER	M.PREVITE 1/24/13	MATERIALS	M.WILKINSON 1/23/13
MECHANICAL	A.DRAKE 1/23/13	PROJ LEAD	B.BOROWSKI 2/5/13
ELECTRICAL	T.GOBELI 1/24/13		
STRUCTURAL	C.WERNER 1/30/12		
SAFETY	W.BORRELLI 1/24/13		

DIMENSIONS AND TOLERANCING PER ASME Y14.5M-1994

CONTRACT NUMBER: NNC09BA02B
PROJECT CODE: SPACE110

ZIN TECHNOLOGIES
6745 ENGLE ROAD
AIRPORT EXECUTIVE PARK
CLEVELAND, OHIO 44130
(440) 625-2200
www.zin-tech.com

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION
JOHN H. GLENN RESEARCH CENTER
LEWIS FIELD
CLEVELAND, OHIO

TITLE

COLD JUNCTION COMPENSATION ASSEMBLY

SIZE	CAGE CODE	DWG NO	REV
D	0SG68	S1101MFA1601	C

SCALE 1/1 | INITIAL REL DATE 2/5/13 | SHEET 1 OF 1

RELEASE LEVEL: RELEASED
MODEL: S1101MFA1601

PRO/E VERSION: Wildfire 2.0

DWG NO S1101MFA1601 | SH 1 | REV C

ZIN_D_2012.frm