




8.4V/1.5A Switching Fast Charger with CC Detection

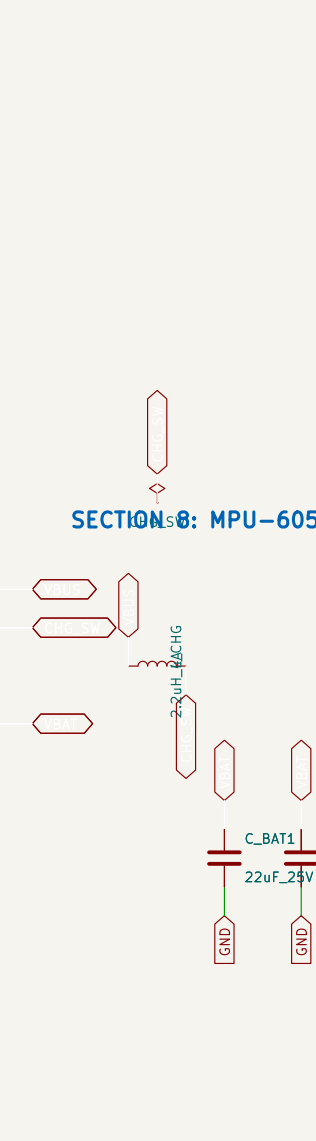


XT30 2S LiPo Input, Power Switch, Diode & 1% ADC Telemetry Divider

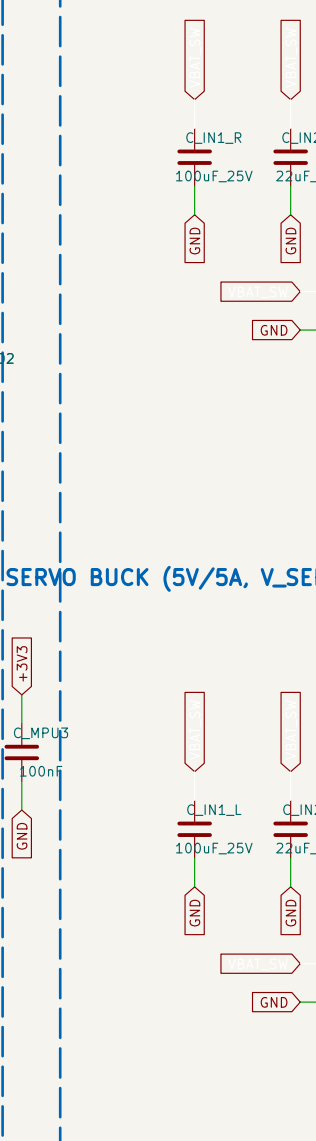


Dual XL4015 Converters: V_SERVO_R (Right Servos) & V_SERVO_L (Left Servos)

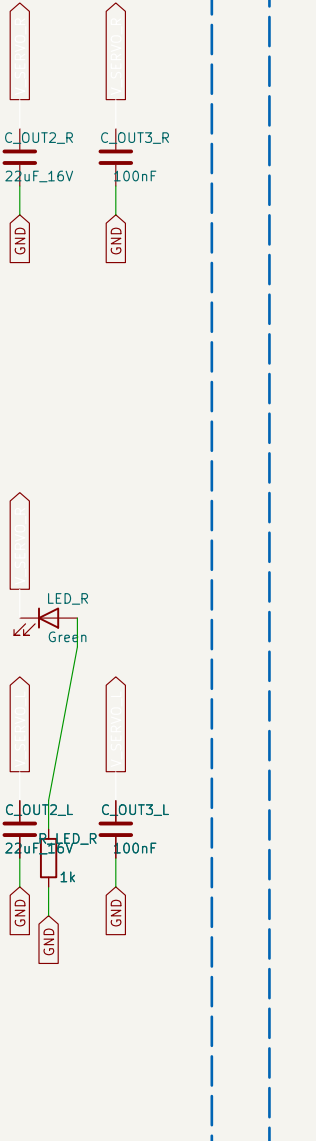


AMS1117-3.3 Low-Noise Supply for ESP32-S3 and PCA9685 Logic

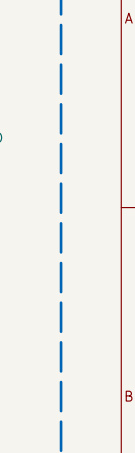[illegible]

z XTensa, Auto-Reset, Boot, UART & I2C Expansion

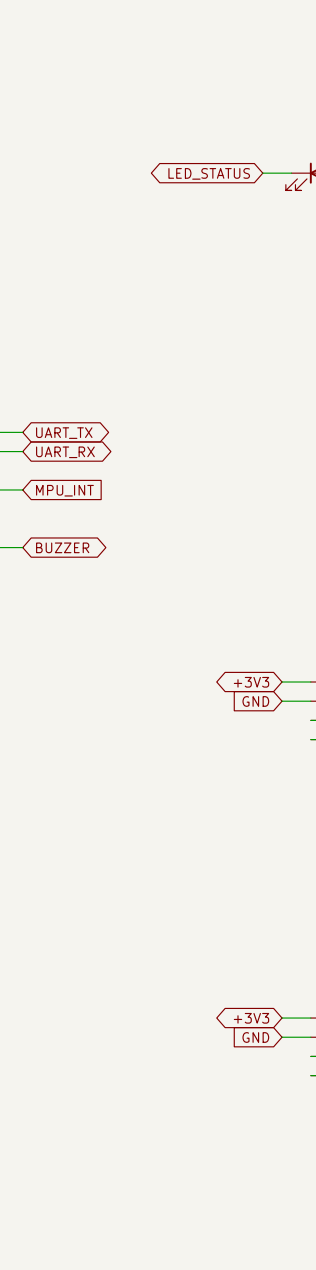

Dual PCA9685PW 12-Bit PWM Drivers (0x40 & 0x41)

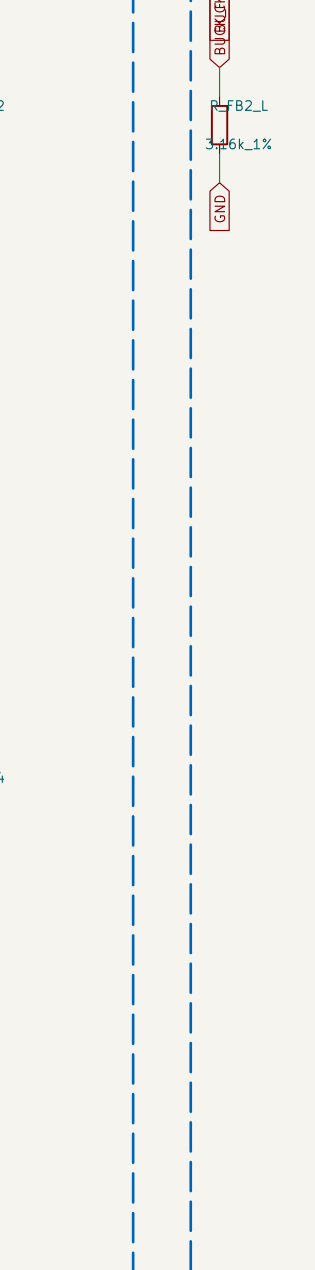

3-Pin Headers (GND, 5V, PWM): Legs 1-6 (Coxa, Femur, Tibia) + 6 AUX PWM

