

Indoor Rigid MIP 108"-216"




Specification


Serial Number	IR108" MIP	IR135" MIP	IR162" MIP	IR216" MIP
Display Size (inch)	108"	135"	162"	216"
Pixel Pitch (mm)	1.25	0.71/1.56	0.91/1.87	1.25/2.5
Diode	MIP	MIP	MIP	MIP
Resolution	HD	4K/HD	4K/HD	4K/HD
Pixel Density	2,073,600	8,294,400 / 2,073,600	8,294,400 / 2,073,600	8,294,400 / 2,073,600
Module Resolution	120x135	214x241/96x108	160x180/80x90	160x90 dots
Module Size (mm)	150x168.75	150x168.75	150x168.75	150x168.75
Brightness (nit)	600	600	600	600
Color Temperature	6500K	6500K	6500K	6500K
Horizontal Viewing Angle	≥160°	≥160°	≥160°	≥160°
Vertical Viewing Angle	≥140°	≥140°	≥140°	≥140°
Contrast Ratio	5000:1	5000:1	5000:1	5000:1
Bit Rate	14 bit	14 bit	14 bit	14 bit
Scan Rate	1/60	1/96 / 1/54	1/60 / 1/32	1/60 / 1/45
Refresh Rate	7680 Hz	7680 Hz	7680 Hz	7680 Hz
Lifetime	100,000 h	100,000 h	100,000 h	100,000 h
IP Rating	IP65/IP30	IP65/IP30	IP65/IP30	IP65/IP30
Operating Temperature	-20 °C to 50 °C	-20 °C to 50 °C	-20 °C to 50 °C	-20 °C to 50 °C
Operating Humidity	10 % - 80% RH	10 % - 80% RH	10 % - 80% RH	10 % - 80% RH
Storage Temperature	-20 °C to 60 °C	-20 °C to 60 °C	-20 °C to 60 °C	-20 °C to 60 °C
Operating Voltage	110-240V	110-240V	110-240V	110-240V
Maximum Power Consumption (W/sqm)	500 W/sqm	500 W/sqm	500 W/sqm	500 W/sqm
Average Power Consumption (W/sqm)	200 W/sqm	200 W/sqm	200 W/sqm	200 W/sqm
Operating System Options	Android 13	Intel i5	128gb 4/8GB	Intel i7
Interactivity Optional	Infrared Touch and Remote	Infrared Touch and Remote	Infrared Touch and Remote	-
Weight(kg)	145kg	192kg	265kg	353kg

108"

2444.38

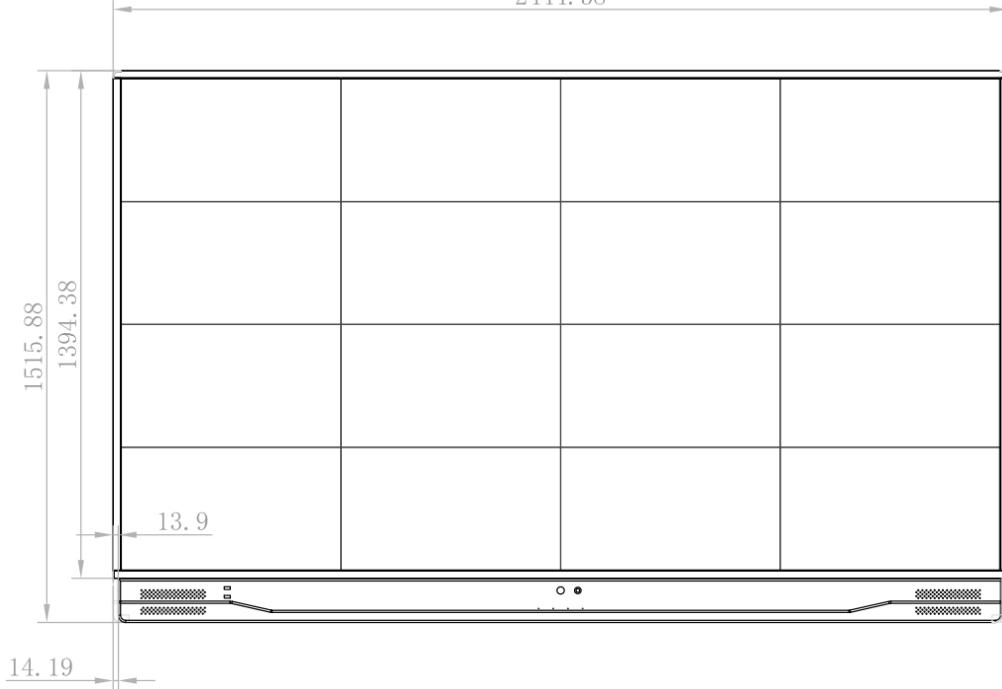

135"

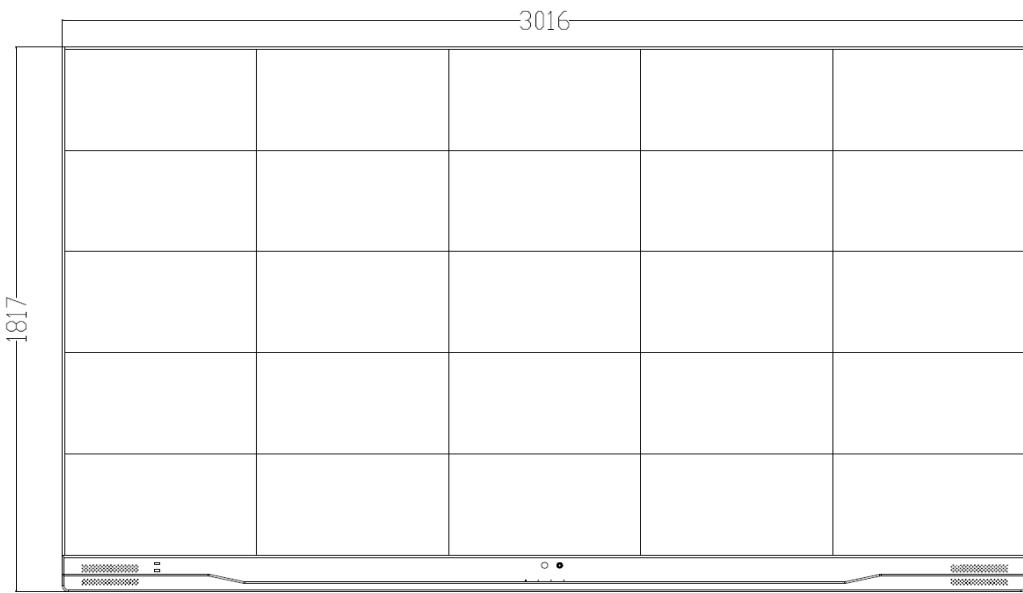

162"



216"

