MV-DP2470-03P

3D Laser Profile Sensor

Introduction

With built-in high-accuracy algorithm, image process algorithm of wide dynamic range, and data integration algorithm, MV-DP2470-03P can output high accurate 3D point cloud data in real-time by combining high frame rate chip and accurate laser control. With compact structure, high integration, and easy operation, it is widely applied into consumer electronics, electronics manufacturing, automobile, etc.
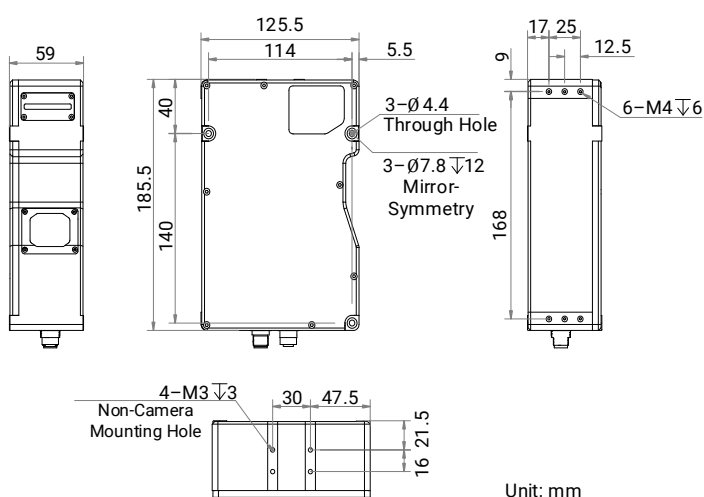
Available Model

- MV-DP2470-03P
- MV-DP2470-03P V2.0

Applicable Industry

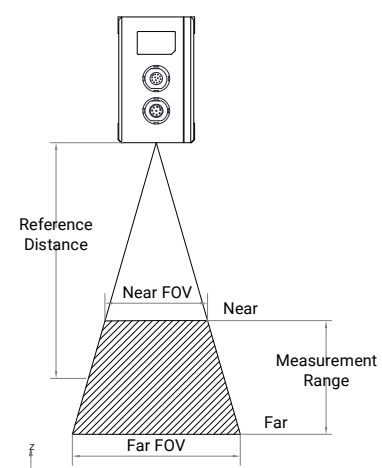Consumer electronics, electronics manufacturing, automobile, etc.

Key Feature

- Built-in high-accuracy algorithm and accuracy is up to submicron level.
- Adopts high frame rate chip with 23.9 kHz scan frame rate.
- Supports multiple exposure modes with good robustness.
- Adopts multiple-frame integration technology to provide complete profiles.
- Provides multiple filter modes with stable data.
- Supports ROI selection and auto setting for easier operation.

Dimension

Unit: mm

Measurement Range Diagram

Specification

Model Parameter	MV-DP2470-03P	MV-DP2470-03P V2.0
	3D Laser Profile Sensor	
Performance		
Data points/profile	2048	3200
Reference distance	565 mm	
Measurement range (Z-axis)	670 mm	
Measurement range (X-axis)	142 mm @ near field of view 315 mm @ reference distance 488 mm @ far field of view	
Resolution (Z-axis)	10.39 µm to 169.79 µm	
Repeatability (Z-axis)*	4.45 µm @ data that sensor tests gauge block on optical platform	
Linearity Z-axis (±% of MR)	0.01	
Profile data interval	68.6 µm to 277.0 µm	43.9 µm to 177.4 µm
Scan frame rate	660 Hz (within max. measurement range), max. 10 kHz (in ROI mode)	1.7 kHz to 23.9 kHz (high frame rate mode)
Data output	Profile data, depth image, brightness image	
Trigger mode	Software trigger, hardware trigger (differential encoder)	
Laser safety class	Class 3R	
Wavelength	650 nm	
Electrical feature		
Data interface	Gigabit Ethernet (1000 Mbit/s), compatible with Fast Ethernet (100 Mbit/s)	
Digital I/O	12-pin M12 interface provides power and I/O, including differential input × 3 (Line 0/3/6), differential output × 1 (Line 1), and RS-232 × 1	12-pin M12 interface provides power and I/O, including opto-isolated input × 2 (Line 0/9), differential input × 2 (Line 3/6), and differential output × 1 (Line 1)
Power supply	24 VDC	
Power consumption	Typ. 13.8 W @ 24 VDC	Typ. 15.2 W @ 24 VDC
Mechanical		
Dimension	185.5 mm × 125.5 mm × 59 mm (7.3" × 4.9" × 2.3")	
Weight	Approx. 1450 g (3.2 lb.)	
Ingress protection	IP67	
Temperature	Working temperature: 0 °C to 45 °C (32 °F to 113 °F) Storage temperature: −30 °C to 80 °C (−22 °F to 176 °F)	
Humidity	20% RH to 85% RH (no condensation)	
General		
Client software	3DMVS, VM3D, or third-party software	
Operating system	32/64-bit Windows 7/10, 64-bit Windows 11 (8 GB memory and above, and i5 CPU recommended)	

*This data is obtained via testing gauge blocks in a laboratory, and it is an average from 4096 tests.