



# Technical Service Information

## FORD AXOD/AXOD-E FORWARD CLUTCH WAVE PLATE CHANGE

**CHANGE:** The forward clutch wave plate has changed 3 times since the transaxle was introduced in model year 1986.

**REASON:** To help improve garage shift engagement and to help improve 4-2 and 3-2 forced downshifts.

### PARTS AFFECTED:

#### FORWARD CLUTCH WAVE PLATE:

1ST DESIGN - Has 4 external teeth, an inside diameter of 4.715", material thickness of .062", and was used from 1986-1988. Refer to Figure 1.

2ND DESIGN - Has 21 external teeth, an inside diameter of 4.730", material thickness of .075", identified with the letter "X" stamped on 1 tooth, and was used from 1989-1991 (See Figure 2).

3RD DESIGN - Has 21 external teeth, an inside diameter of 4.930", material thickness of .083", identified with the letter "A" stamped on 1 tooth, and was used in 1992 and later models (See Figure 3).

### INTERCHANGEABILITY:

The 2nd design forward clutch wave plate will retro-fit back to previous models and is the recommended wave plate for the AXOD.


The 3rd design forward clutch wave plate was associated with a change in the entire forward clutch pack and should be used ONLY on these models.

### SERVICE INFORMATION:

Forward Clutch Wave Plate (1st Design) .....	E6DZ-7E085-B
Forward Clutch Wave Plate (2nd Design) .....	F0DZ-7E085-A
Forward Clutch Wave Plate (3rd Design) .....	F2DZ-7E085-A

Copyright © 1999 ATSG


**FORWARD CLUTCH WAVE PLATE  
AXOD 1986 - 1988**

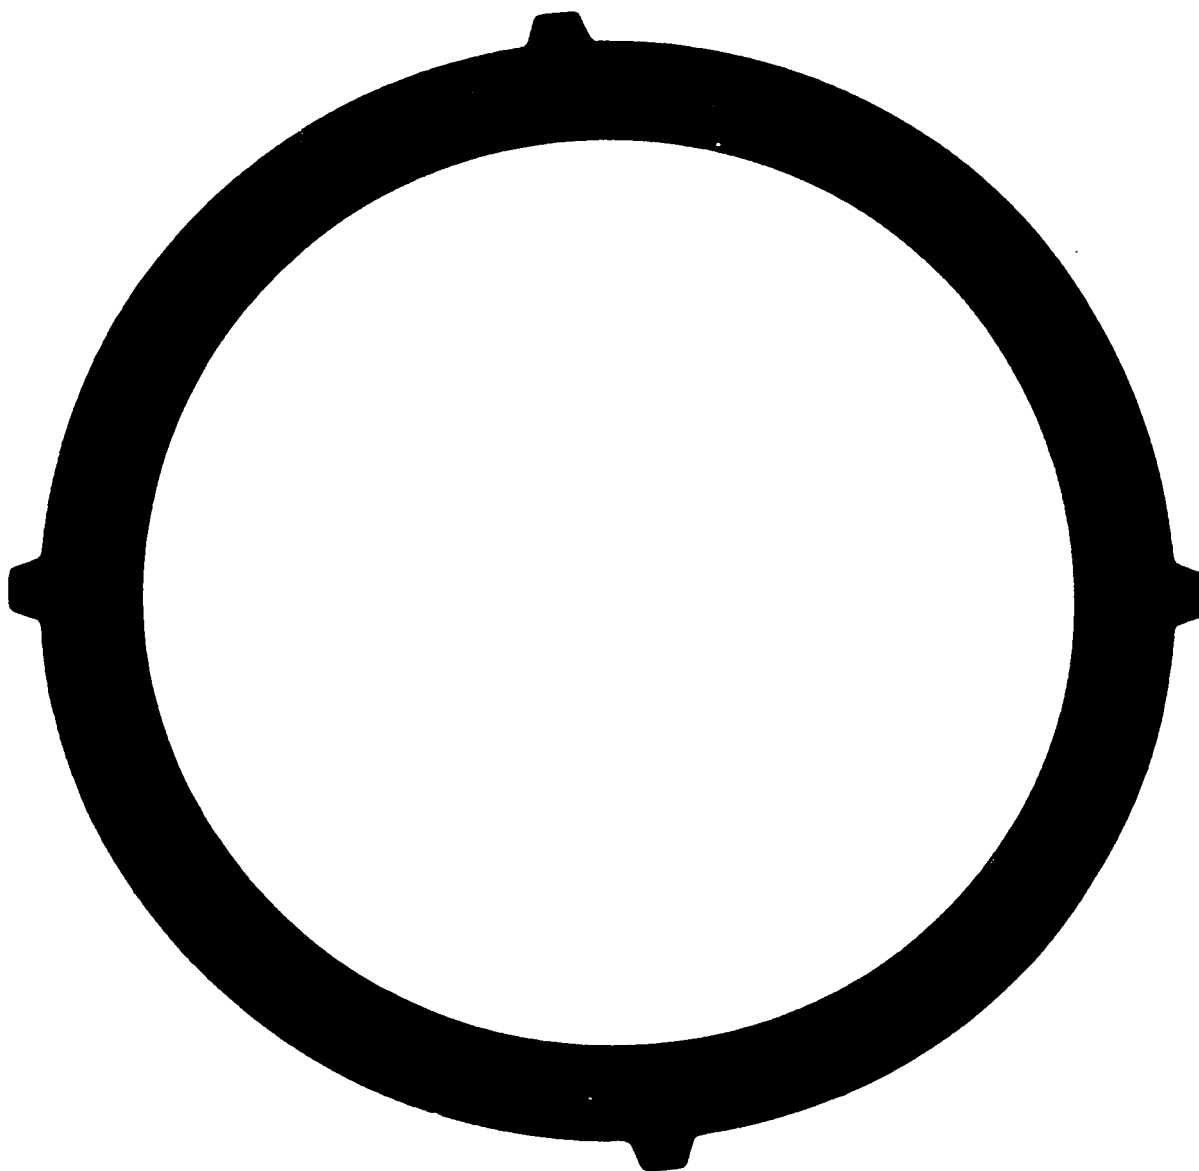

**FIRST DESIGN**

**4 EXTERNAL TEETH  
INSIDE DIAMETER 4.715"  
.062" THICK  
PART # E6DZ-7E085-B**


**FORWARD CLUTCH WAVE PLATE  
AXOD 1989 - 1991**

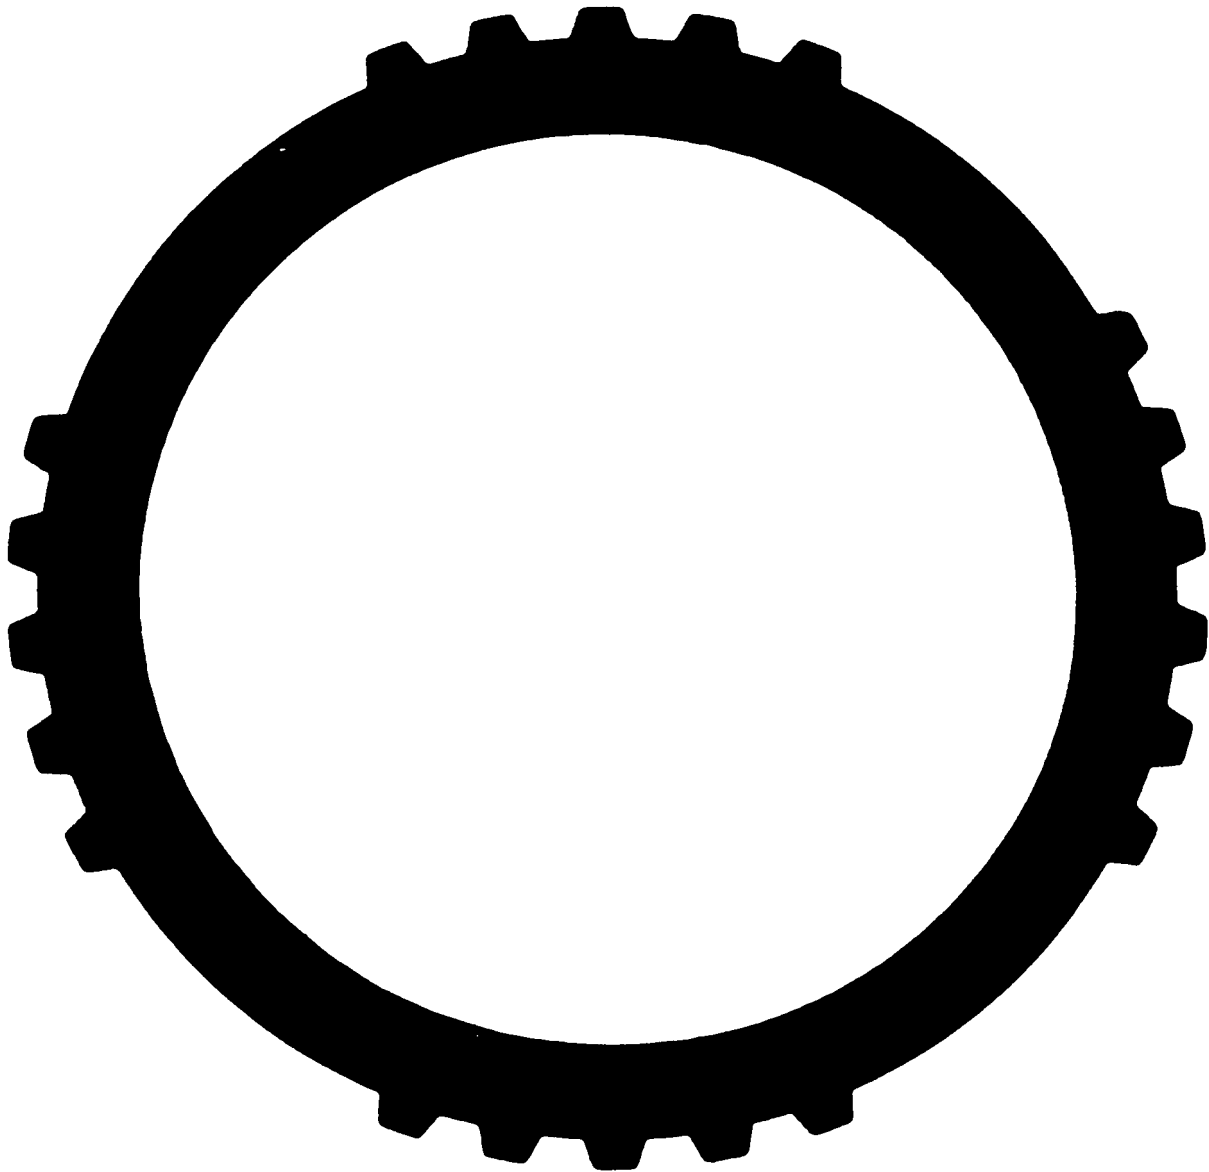

**SECOND DESIGN**

**21 EXTERNAL TEETH  
INSIDE DIAMETER 4.730"  
.075" THICK  
I.D. STAMPED "X" ON ONE TOOTH  
PART # F0DZ-7E085-A**

**FORWARD CLUTCH WAVE PLATE  
AXOD 1992 - UP**

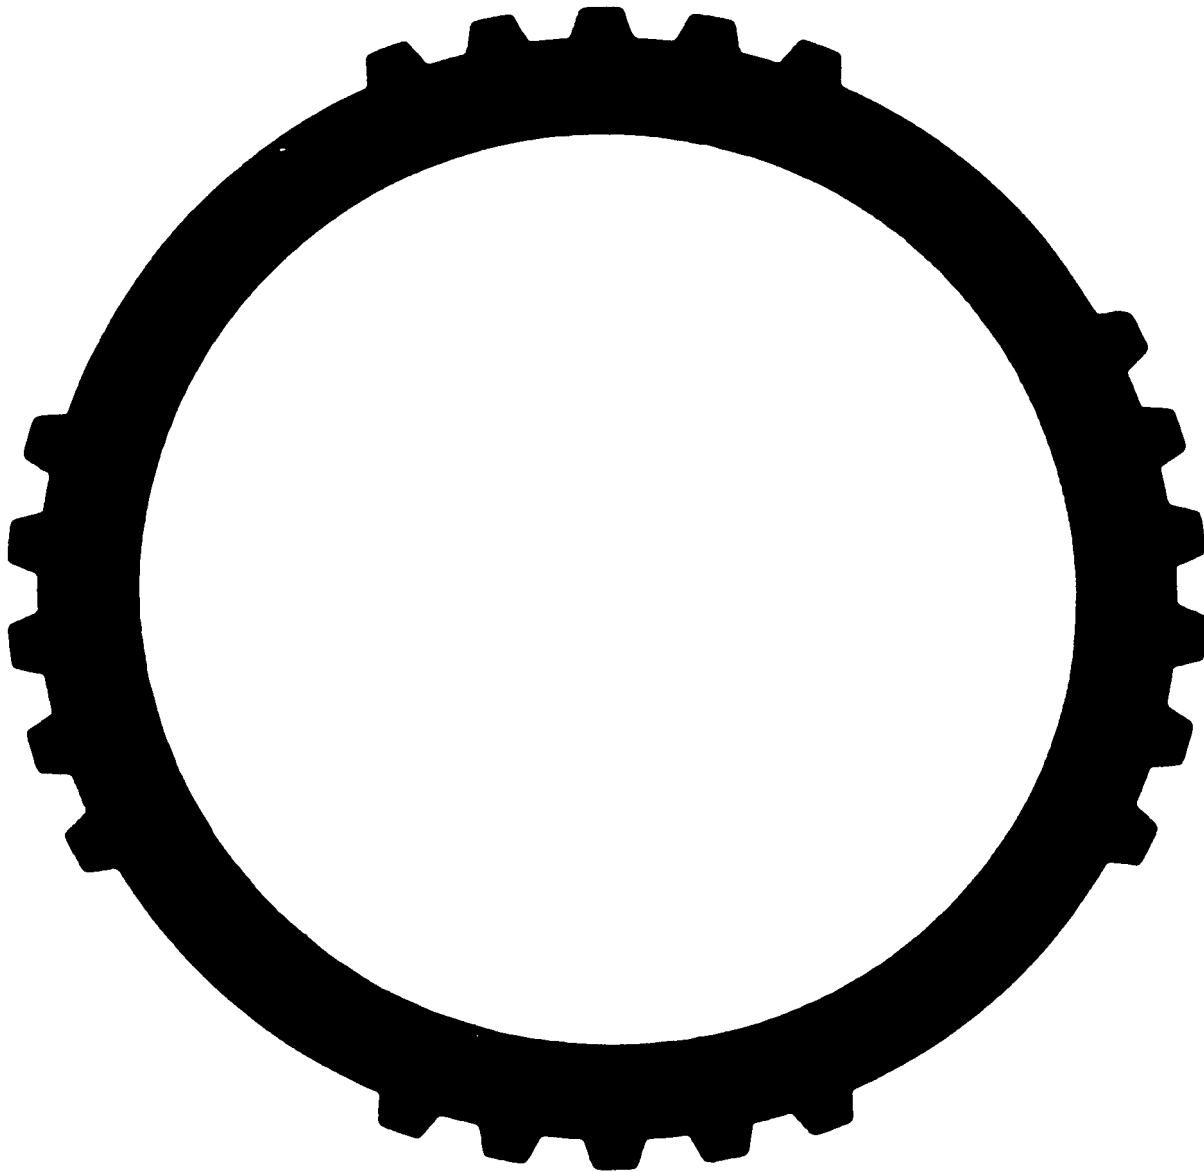

**THIRD DESIGN**

**21 EXTERNAL TEETH  
INSIDE DIAMETER 4.930"  
.083" THICK  
I.D. STAMPED "A" ON ONE TOOTH  
PART # F2DZ-7E085-A**