
PERMEABLE INFRASTRUCTURE FOR PEDESTRIAN ROUTES

Typical Section Reference Detail

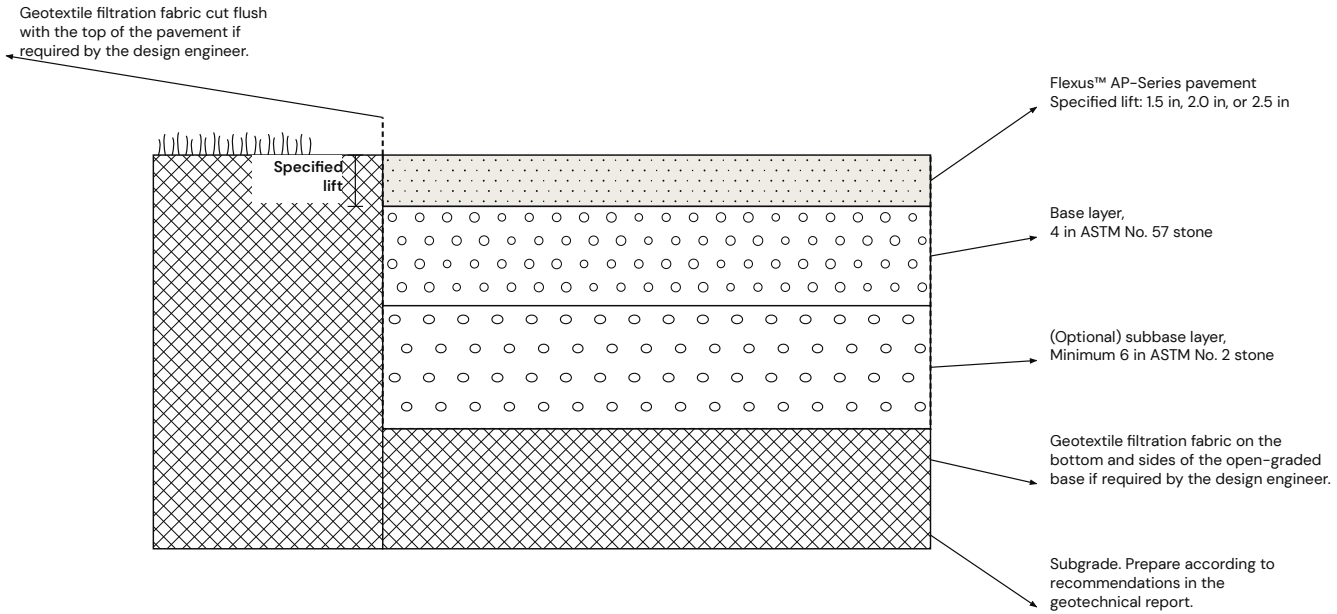

REFERENCE NOTES

1. This detail is provided as a typical installation reference for Flexus™ AP-Series (architectural pavement) systems and is not intended to represent final construction design.
2. Flexus™ AP-Series is a pedestrian surface material; structural section design, aggregate layer thicknesses, and drainage configuration shall be determined by the Engineer of Record based on site-specific conditions.
3. Subgrade preparation, proof-rolling, stabilization, and compaction shall be performed in accordance with the geotechnical report and applicable project specifications.
4. Where filtration fabric is specified by the Engineer of Record, material selection shall be compatible with open-graded aggregate systems and appropriate for long-term infiltration performance.
5. Aggregate gradation types and layer configurations shown are representative only; alternate gradations or layer assemblies may be used where approved by the Engineer of Record for pedestrian applications.
6. This detail does not address construction means, methods, sequencing, or temporary works, which remain the responsibility of the installing contractor.

Flexus surface thickness is the specified model lift (1.5 in, 2.0 in, or 2.5 in). The original drawing labeled this Min 4 in, which is not a published model thickness and is not used here. Drawings are not to scale.


Scale	N.T.S.	Drawing	AP_STD

Issued 17 September 2025. Revised 12 November 2026.

© 2026 Flexus Materials Ltd Co. All rights reserved.

PERMEABLE INFRASTRUCTURE FOR PEDESTRIAN ROUTES

Above-Grade Edge Reference Detail

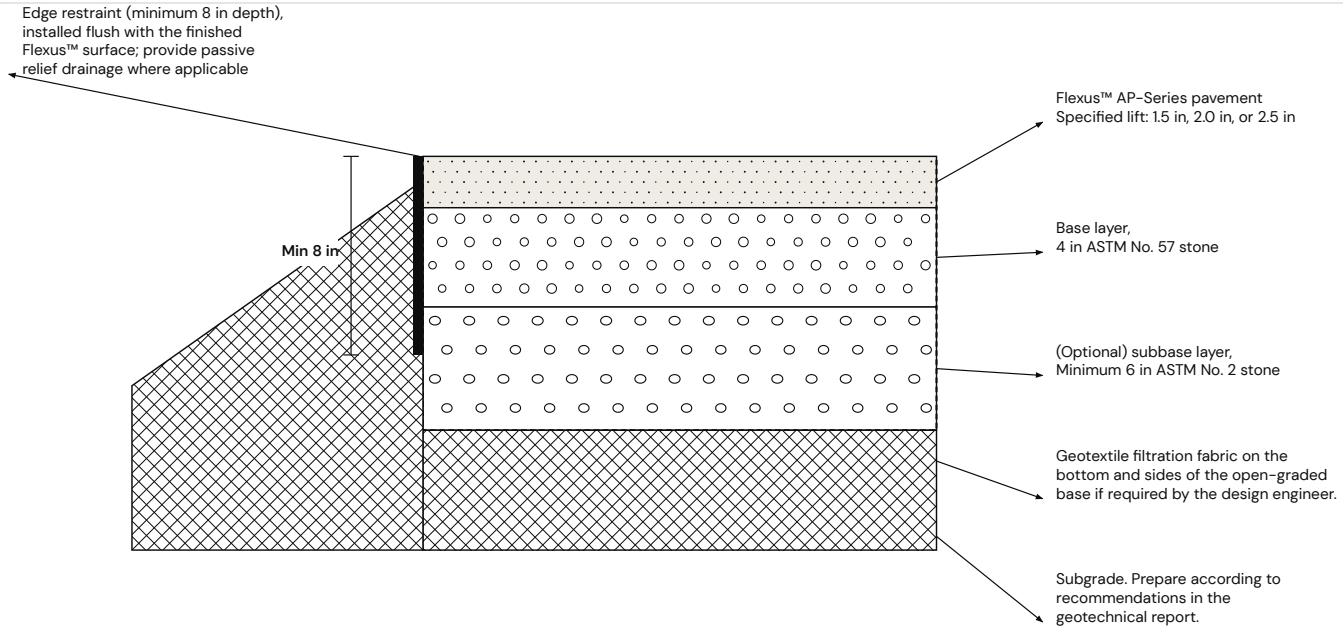

REFERENCE NOTES

1. This detail is provided as a typical above grade installation reference for Flexus™ AP-Series (architectural pavement) systems and is not intended to represent final construction design.
2. Flexus™ AP-Series is a pedestrian surface material; structural section design, aggregate layer thicknesses, and drainage configuration shall be determined by the Engineer of Record based on site-specific conditions.
3. Subgrade preparation, proof-rolling, stabilization, and compaction shall be performed in accordance with the geotechnical report and applicable project specifications.
4. Where filtration fabric is specified by the Engineer of Record, material selection shall be compatible with open-graded aggregate systems and appropriate for long-term infiltration performance.
5. Aggregate gradation types and layer configurations shown are representative only; alternate gradations or layer assemblies may be used where approved by the Engineer of Record for pedestrian applications.
6. This detail does not address construction means, methods, sequencing, or temporary works, which remain the responsibility of the installing contractor.

The 8 in dimension is the edge-restraint depth from the finished Flexus surface. It is not a second base thickness. Typical base is 4 in ASTM No. 57 stone unless the engineer of record sets another section. Drawings are not to scale.


Scale	N.T.S.	Drawing	AP_AG

Issued 17 September 2025. Revised 12 November 2026.

© 2026 Flexus Materials Ltd Co. All rights reserved.

PERMEABLE INFRASTRUCTURE FOR PEDESTRIAN ROUTES

Beveled Edge Reference Detail

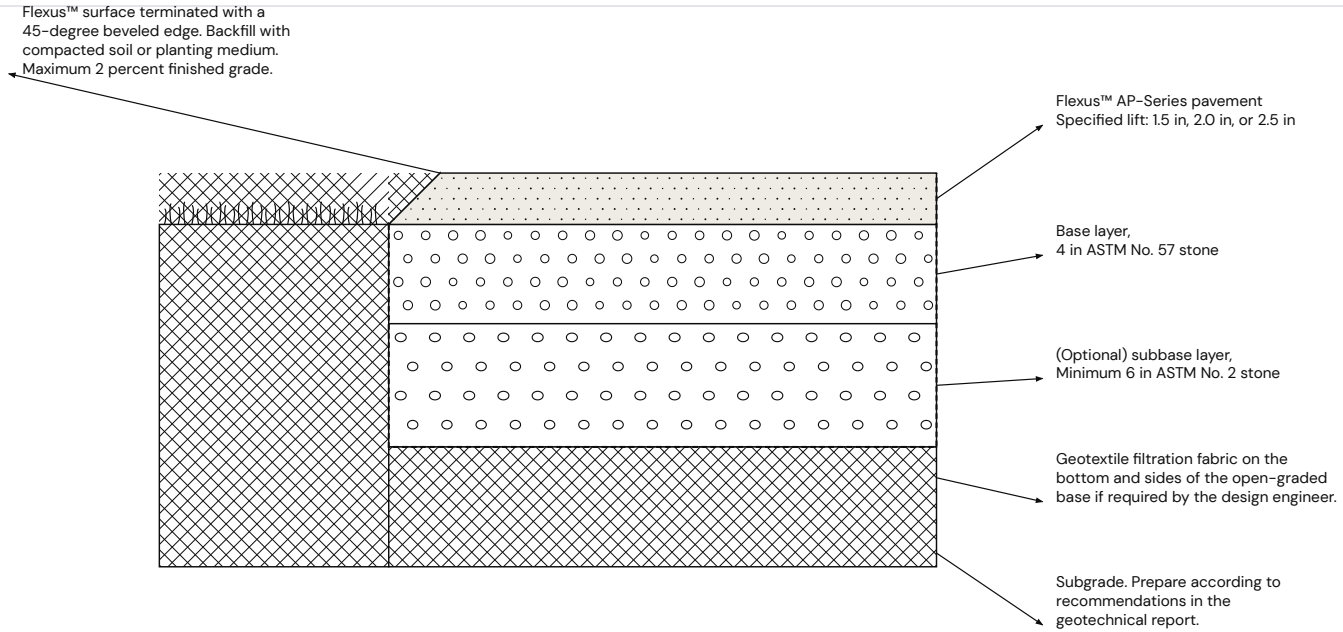

REFERENCE NOTES

1. This detail is provided as a typical installation reference for Flexus™ AP-Series (architectural pavement) systems and is not intended to represent final construction design.
2. Flexus™ AP-Series is a pedestrian surface material; structural section design, aggregate layer thicknesses, and drainage configuration shall be determined by the Engineer of Record based on site-specific conditions.
3. Subgrade preparation, proof-rolling, stabilization, and compaction shall be performed in accordance with the geotechnical report and applicable project specifications.
4. Where filtration fabric is specified by the Engineer of Record, material selection shall be compatible with open-graded aggregate systems and appropriate for long-term infiltration performance.
5. Aggregate gradation types and layer configurations shown are representative only; alternate gradations or layer assemblies may be used where approved by the Engineer of Record for pedestrian applications.
6. This detail does not address construction means, methods, sequencing, or temporary works, which remain the responsibility of the installing contractor.

The original drawing stated a maximum 2 degree finished grade. The installation guides specify a 1 to 2 percent surface slope and a 2 percent maximum cross slope. This sheet uses 2 percent so both agree. Drawings are not to scale.

Scale	N.T.S.	Drawing	AP_AGB

Issued 17 September 2025. Revised 12 November 2026.

© 2026 Flexus Materials Ltd Co. All rights reserved.