


Top Fabrication (Scale 1:1)

	Material	Layer	Thickness	Dielectric	Type	Gerber
		F.Paste			Paste Mask	
		F.Silkscreen			Legend	GBR
		F.Mask	0.02mm		Solder Mask	GBR
	Copper	F.Cu (Sig, PWR)	0.07mm (2.00oz)	Direct Printing	Signal	GBR
		Prepreg	0.1mm	FR4_7628	Dielectric	
	Copper	In1.Cu (GND)	0.035mm (1.00oz)		Plane	GBR
		Core	1.828mm	FR4	Dielectric	
	Copper	In2.Cu (Sig, PWR)	0.035mm (1.00oz)		Plane	GBR
		Prepreg	0.1mm	FR4_7628	Dielectric	
	Copper	B.Cu (Sig, PWR)	0.07mm (2.00oz)		Signal	GBR
		B.Mask	0.02mm	Solder Resist	Solder Mask	GBR
		B.Silkscreen		Direct Printing	Legend	GBR
		B.Paste			Paste Mask	

Total thickness: 2.278mm
Note: external layer thicknesses are specified after plating

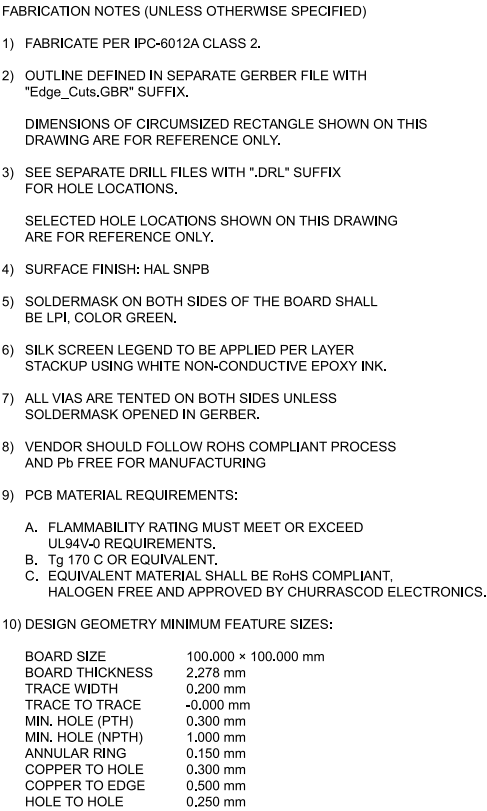

Comments:	Company: ChurrasCod Electronics		Variant: CHECKED	Git Hash: bb50385
	Board Name: Main board		Project Name: 1 kV strobe	
Sheet Title: Top Fabrication (Scale 1:1)	File Name: Strobe_main.kicad_pcb	Designer: FR	Date: 2024-04-13	Revision: 1.0.0+ (Unreleased)
Sheet Path:		Reviewer:	Size: A3	Sheet: 1 of 10