









EcoFlow DELTA Pro

The EcoFlow DELTA Pro is the world's first portable home battery with an expandable ecosystem for home backup, smart energy management, lower energy bills, and more. It's the next leap in portable power technology.

GENERAL:

Capacity: 3600Wh (expandable up to 10.8kWh with

2 DELTA Pro Smart Extra Battery) **Weight:** Approx. 99 lbs (45.0kg)

Dimensions: 25 × 11.2 × 16.4in (63.5 × 28.5 × 41.6 cm)

OUTPUTS:

AC Output (×5): 3600W (Surge 7200W),

100-120Vac (50Hz/60Hz)/High voltage region (×4): 3600W (Surge 7200W), 220-240Vac (50Hz/60Hz)

Max Device(s) Power Supported by X-Boost:

4500W

USB-A Output (×2): 12W Max per port, 5V DC, 2.4A

USB-A Fast Charge (×2): 18W Max per port, 5V DC,

2.4A/9V DC, 2A/12V DC, 1.5A

USB-C Output (×2): 100W Max per port,

5V/9V/12V/15V/20V DC, 5A

Car Power Output (×1): 126W Max, 12.6V DC, 10A

DC5521 Output (×2): 12.6V DC, 3A

Anderson Port: 12.6V, 30A

INPUTS:

AC Charge Input Voltage: 100-120Vac (50Hz/60Hz)

(High voltage region 220-240Vac)

AC Charge Input Power: X-Stream Charge 1800W Max/High voltage region: X-Stream Charge 2900W

Max

Solar Charge Input: 1600W Max, 11-150V, 15A Car Charger Input: 12V/24V DC, Default 8A

BATTERY:

Cell Type: LFP

Life Cycle: 3500 Cycles to 80%+ capacity





3.6kWh
DELTA Pro



DELTA Pro + DELTA Pro Smart Extra Battery

7.2kWh



DELTA Pro + DELTA Pro Smart Extra Battery x 2

10.8kWh



12kWh

DELTA Pro + DELTA Pro Smart Extra Battery + Smart Generator



25kWh

DELTA Pro x 2+ DELTA Pro Smart
Extra Battery x 2 + Smart Home Panel
+ Smart Generator x 2

3600-7200W

All the AC output you'll need.

A single DELTA Pro unit packs a 3600W AC output. Power devices at home, outdoors, or at work. That covers air compressors, electric grills, or other high-voltage devices.



7200W, 240V

Power pretty much anything with your home circuits.

If you're looking for more power during an outage, you can connect two DELTA Pro units to the Smart Home Panel. This method gives you up to 7200W through your home circuits and provides power for 240V devices.

7200W, 240V

Power heavy-duty devices with the Double Voltage Hub.

The Double Voltage Hub gives you another option to double your output to 7200W and power 240V devices. Connect two DELTA Pro units together with the Double Voltage Hub to power your electric heaters, well pumps, and other heavy-duty devices during any situation.

6500W MultiChargeThe world's fastest charging portable power station.

DELTA Pro is the world's fastest charging portable power station. Multiple charging delivers record-breaking speeds at 6500W. To reach 6500W, you can opt for one of these multiple charging methods.



Requires DELTA Pro to be connected to a DELTA Pro Smart Extra Battery.

DELTA SERIES COMPARISONS







DELTA



DELTA Max



DELTA Pro

Capacity	882Wh	1260Wh	2016Wh	3600Wh
Battery Type	NCM Li-ion	NCM Li-ion	NCM Li-ion	LFP
Shelf Life	1 Year	1 Year	1 Year	1 Year
Life Cycles	800 cycles to 80%+ capacity	800 cycles to 80%+ capacity	800 cycles to 80%+ capacity	3500 cycles to 80%+ capacity
AC Output	1400W (Surge 2100W)	1800W (Surge 3300W)	2400W (Surge 5000W)	3600W (Surge 7200W)
AC Output Sockets	5/High Voltage Version 2	6/High Voltage Version 4	6/High Voltage Version 4	5/High Voltage Version 4
Total Ports	12/High Voltage Version 9	13/High Voltage Version 11	15/High Voltage Version 13	15/High Voltage Version 14
Wall Charging	900W Max	1200W Max	1800W Max	3000W Max /1800W Max
Wall Charging Time	1.6 Hours	1.6 Hours	1.8 Hours	1.8 Hours (at 3000W) 2.7 Hours (at 1800W)
Universal Solar Charging (MC4)	✓	✓	✓	✓
Solar Panel Charging	300W Max, 11-75V, 10A	400W Max, 10-65V, 10A	800W Max, 11-100V, 10A	1600W Max, 11-150V, 15A
Solar Panel Charging Time	3-6 Hours (400W×1)	4-8 Hours (400W×2)	3.2-6.3 Hours (400W×2)	4-8 Hours (400W×3)
APP	✓	×	✓	✓
Weight	23.6lbs	30.9lbs	48lbs	99lbs

RUN TIMES

	DELTA mini	DELTA	DELTA Max	DELTA Pro
Lightbulb 10W	30+ Hours	35+ Hours	60+ Hours	108+ Hours
CPAP Mask 40W	13 Hours	20 Hours	28 Hours	50 Hours
Television 110W	6 Hours	8 Hours	15 Hours	27 Hours
Refrigerator 150W	5 Hours	6 Hours	11 Hours	20 Hours
Coffee Maker 1000W	35-40 Cups	50-60 Cups	90-100 Cups	150-170 Cups
Circular Saw 1400W (2300W)	0.5 Hours	0.8 Hours	1.3 Hours	2.3 Hours
Hair Dryer 1600W (1900W)	0.5 Hours	0.7 Hours	1.2 Hours	2 Hours
Grill 1650W	0.5 Hours	0.7 Hours	1.1 Hours	2 Hours

^{*}The appliance run times and durations of use provided in the table above have been calculated with an AC Output. The data is for reference only. Please conduct tests to confirm actual run time of your appliances.

CHARGING TIMES





DELTA Max



DF	I TA	AΡ	ro

	Ų.	′_		
AC	Wall	0	utlet	

1.6	Hours
(9	00W)



(1200W)



2.7Hours (1800W)/ 1.8Hours (3000W)



Gas Generator**

1.6 Hours	1.6 Hours
(900W)	(1200W)

1.8 Hours (1800W)

2.7 Hours (1800W)



Car Charger

Solar Panel

9.5	Hours	

13.5 Hours

21 Hours

37.5 Hours




3-6 Hours (400W×1) 4-8 Hours (400W×1) 3.2-6.3 Hours (400W×2)

4-8 Hours (400W×3)

*The data above is for reference only.

SOLAR CHARGING RECOMMENDATIONS

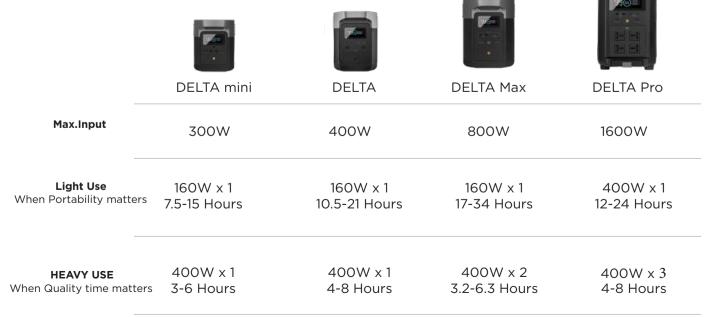

^{**}The rated output power of the gas generator should be higher than the power station max input power.

EcoFlow DELTA Pro Smart Extra Battery

Double or triple the capacity of DELTA Pro to 7.2kWh or 10.8kWh, longer runtime for your key appliances. DELTA Pro's Smart Extra Battery benefits from all the charging methods DELTA Pro has, that means you can charge anytime.







GENERAL:

Capacity: 3600Wh

Weight: Approx. 84 lbs (38kg)

Dimensions: 25 × 11.2 × 16.4in (63.5 × 28.5 × 41.6cm)

BATTERY:

Cell Type: LFP

Life Cycle: 3500 cycles to 80% capacity