


EcoFlow Solar Panels are expertly designed to provide users with an efficient, reliable, and eco-friendly way to charge power stations and electrical devices. Made up of monocrystalline cells, our solar panels keep your adventure going, wherever you are.

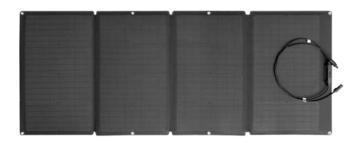

160W SOLAR PANEL

The EcoFlow 160W solar panel is portable, foldable, and compact, weighing just 11 lbs(5kg). From camping to outdoor activities, unfold the solar panel and start capturing solar power in seconds.

GENERAL:

Rated Power: 160W(±5W)*

Open Circuit Voltage: 21.4V (Vmp 18.2V) **Short Circuit Current:** 9.6A (Imp 8.8A)

Efficiency: 21-22% Connector Type: MC4

Cell Type: Monocrystalline silicon

Weight:

Approx. 15.4 lbs (7kg) Solar Panel 11 lbs (5kg) Waterproof IP Ratings: IP67 Unfolded Dimensions: 2

 $6.8 \times 61.8 \times 1.0$ in (68 × 157 × 2.4cm)

Folded Dimensions:

 $26.8 \times 16.5 \times 1.0$ in $(68 \times 42 \times 2.4$ cm)

* Rated Power is tested under Standard Test Conditions: 1000W/m2 AM1.5 25°C









Smart Solar Tracker

EcoFlow Solar trackers are unique solar racking and mounting devices that offer a higher efficiency than their standard model counterparts. The First Mobile Solar Tracker that can be placed and moved to anywhere at any time with only easy installation needed.



DIMENSIONS:

Holding Capacity: Approx. 55lbs (25Kg) Support third part solar panel size:

43.3 × 94.5in (1.1 × 2.4m)

Support third part solar panel weight: 44lbs (20kg)

Pitch axis range: 0°~85° Y-axis range: 0°~345° Waterproof Level: IP44

GENERAL:

Dimensions: 98 × 59 × 59in (250 × 150 × 150cm)

Weight: Approx. 77lbs (35kg)