


APX100

Digital Imaging System

The APEXVIEW APX100 digital imaging system makes it fast and simple to acquire expert-quality microscope images to make your research more efficient. Built with renowned Olympus optics, an intuitive user interface, a powerful AI, and a suite of smart features, the APX100 system combines the ease of use of an all-in-one-microscope with high-quality image data to fit your research needs.

Observation Images

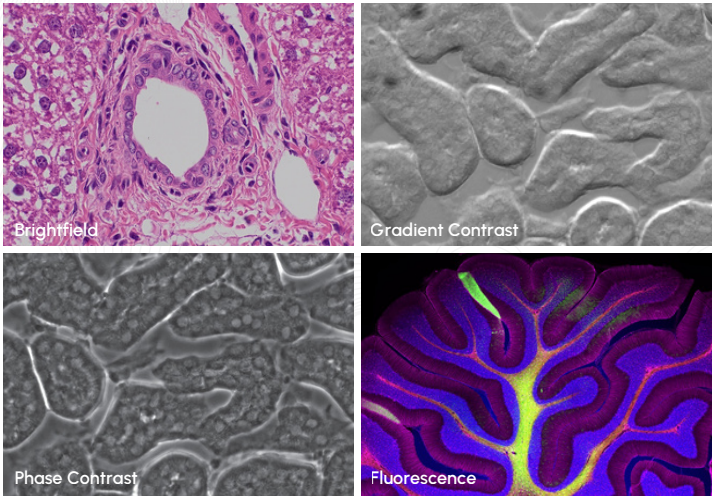

Specifications

Microscope	Observation Method	Brightfield, fluorescence, phase contrast, gradient contrast
	Sample holder	Glass slides (3 slides), 35 mm dish (3 dishes), microplate, general
	Objectives	Choose from 25 available objectives (4X–100X) Six-position motorized revolving nosepiece
	Motorized aberration correction	One motorized position, five standard positions for objectives
	Transmitted illuminator	Built-in Köhler illumination for transmitted light, high color rendering LED Condenser: WD 45 mm, including PHL, PHI, PH2, and PH3
	Stage	Motorized XY stage with automatic control
	Focusing	Motorized focusing with automatic control
	Magnification changer	Color/Monochrome 0.5x fixed
	Fluorescence	Fluorescence illuminator with fly-eye lens Choose from 18 mirror cubes, eight-position motorized mirror turret High brightness light guide light source (U-LGPS), motorized ND filter changer (100%, 25%, and 6%)
	Macro optical system	Built-in, 0.07x macro optics
Camera	Anti-vibration mechanism	Built-in
	Color camera	6.41 megapixels, 1/1.8 color CMOS
	Monochrome camera	6.41 megapixels, 1/1.8 monochrome CMOS



EVIDENT
OLYMPUS

LABEX
FLUOCCA
IMARIS

GREINER
BIOSCIENCE

APPLIED
SPECTRAL
IMAGING

SAKURA
FINETEK

ZTEC
CRAFTEK

TEKSQRAY
FEATHER

DYNAMICA
FROILABO

FASTER
ARCTIKO
KUHNER
HETTICH

HBK
CAMECA
IX CAMERAS

THERMO EM
CRYSTAL