



Technical Proposal For:

OXY ROCK

TALL GRASS 8JM

12/5/2025

Technical Proposal

WELL CONDITIONS	
WELL NAME:	TALL GRASS 8JM
ALS:	Rod Pump
CASING OD/WEIGHT:	5-1/2" - 20.00 lb/ft
CASING ID:	4.778 in
TUBING:	2-7/8" in
FLUID PRODUCTION:	225 BFPD
WATER CUT:	64.44 %
OIL FLOW:	80.01 BOPD
WATER FLOW:	144.99 BWPD
GAS FLOW:	320 MCFD
GOR:	3999.5 SCF/STB
GLR:	1422.222 SCF/STB
Seating Nipple	6683 FT MD

Tool Description




"Your source for fluid conditioning systems"

G-FORCE PACKERLESS

The G-Force Packerless Gas Separator is the only gas separator in the market which maximizes phase separation area where it matters. The change in the flow direction is the key to separate the free gas from the liquid. The innovative intake and the great casing annular area will guarantee an effective gas separation before enter the chamber.

The simplistic and effective design is installed easily below the seating nipple and it can be combined with the Vortex Sand Shield to separate gas and solids

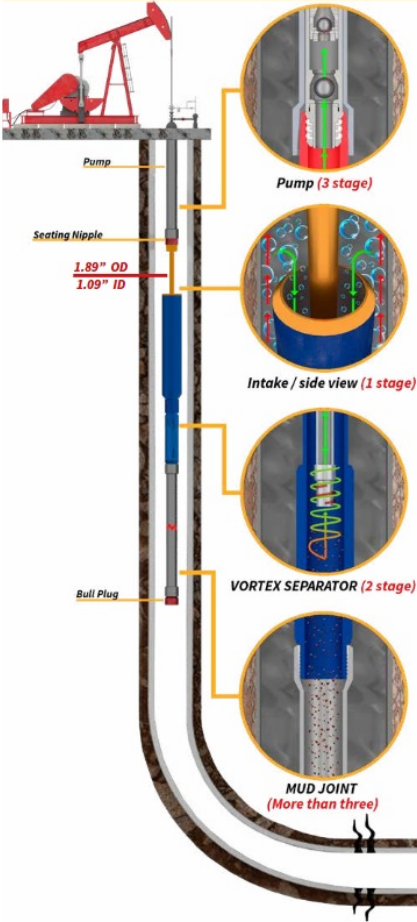

BENEFITS

- Mitigates the gas slugs.
- Reduces or Eliminates the Gas locking.
- Multiple stages of gas separation.

BENEFITS

- Highly efficient Gas Separator design.
- Separate the free gas to the backside.
- Yield strength of 72,210 lb
- In combined system, The Dual Flow system is used to improve the installation time and functionality of the tool
- Allows sand & gas separation when is combined with the Vortex Sand Shield.




Top View (internal)

Use your device by scanning the QR code



AUGMENTED REALITY

HOW IT WORKS

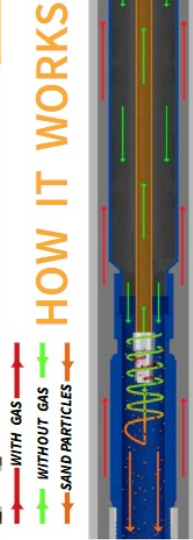


WITH GAS
WITHOUT GAS
SAND PARTICLES

Gas Separation Efficiency Calculator

12/5/2025

INPUT		
G-Force Packerless Size	400	Series
Number of Gas Bodies	-	(NA)
Gas Body Dimensions	-	(NA)
Plunger Size	1.75	in
Stroke Length	192	in
Pump Speed	3.3	spm
Pump Capacity	226.19	BFPD
Pump Capacity / Stroke	1.999	Gal/Stroke
BFPD	225	BFPD
Water Cut	64.44	%
Oil Rate	80.01	BOPD
Water Rate	144.99	BWPD
Gas Rate	320	MSCFD
Temperature	180	F
PIP	400	psi
Casing I.D.	4.778	in
Neck O.D.	1.89	in
Gas Separator O.D.	4	in
Gas Separator I.D.	3.4	in
OD Dip Tube	1.3	in
Water SPGr	1.05	(NA)
Gas SPGr	0.8	(NA)
Oil API	38	(NA)
Oil SPGr	0.83	(NA)
Interfacial Tension	0.04	lb/s2
Gravitational Force	32	ft/s2
GLR	1422.222	scf/stb
Produced WOR	1.81	BWPD/STBPD
Produced GOR	3999.5	scf/STB

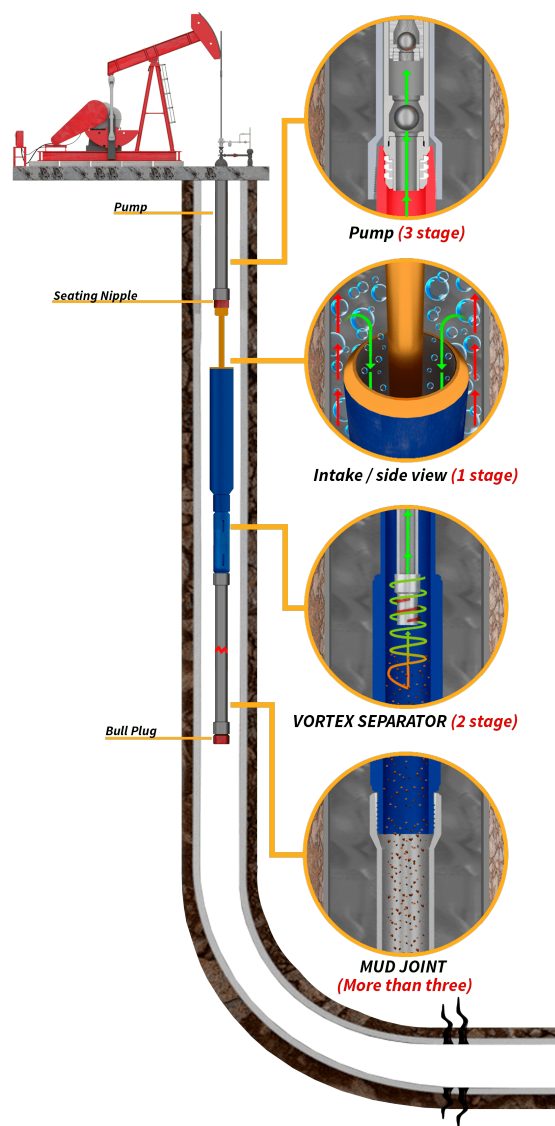

CALCULATED RESULTS		
Free Gas Entering Pump wo/Separator, q'g	11369.3439	scf/d
Gas Bubble Terminal Velocity, Vb	0.5412	ft/s
Cross Sectional Area in Annulus, A	0.106	ft2
In-situ Superficial Liquid Velocity Inside Casing Annular, Vsl	0.1449	ft/s
Natural Separation Efficiency	78.8752	%
Free Gas Entering Pump After Multistage Separator	2401.7539	SCF/D
Quiet Zone Volume	8.82	gal
Effective Strokes	4.414	(NA)
Retention Time	1.34	min




Tally Design

OXY ROCK
TALL GRASS 8JM
12/5/2025

Description	Supplier	Top Thread Connection	Bottom Thread Connection	Status	Max. OD (in)	Body OD (in)	Length (ft)	Top (ft)	Bottom (ft)	Weight (lb)
SEATING NIPPLE	OXY	2-7/8" EUE box	2-7/8" EUE pin	-	-	-	1	6682	6683	-
2-7/8" X 5-1/2" SLIM TAC	OXY	2-7/8" EUE box	2-7/8" EUE pin	-	-	-	3	6683	6686	-
2-7/8" X 2-3/8" CHANGE OVER	OSI	2-7/8" EUE box	2-3/8 EUE pin	NEW	2.875	2.875	0.52	6686	6686.52	6
TUBING JOINT QTY 15	OXY	2-3/8" EUE box	2-3/8" EUE pin	-	-	-	487.5	6686.52	7174.02	3168.75
2-3/8" X 2-7/8" CHANGE OVER	OSI	2-3/8" EUE box	2-7/8 EUE pin	NEW	2.875	2.875	0.52	7174.02	7174.54	6
2-7/8" X 20-1/2" OAL SPACER SUB	OSI	2-7/8" EUE box	2-7/8" EUE pin	NEW	3.668	2.875	2	7174.54	7176.54	13
G-FORCE PACKERLESS 400 SERIES W/VORTEX	OSI	2-7/8" EUE box	2-7/8" EUE box	NEW	4.000	4.000	25	7176.54	7201.54	320
2-7/8" VORTEX KIT WITH HE 2.3 HELIX	OSI	2-7/8" EUE pin	2-7/8" EUE pin	NEW	3.625	3.125	2	7201.54	7203.54	30
TAIL JOINT QTY 4	OXY	2-7/8" EUE box	2-7/8" EUE pin	-	-	-	130	7203.54	7333.54	845
2-7/8" COUPLING	OSI	2-7/8" EUE box	2-7/8" EUE box	NEW	3.668	3.668	0.5	7333.54	7334.04	10
2-7/8" OVERSIZE BULL PLUG	OSI	2-7/8" EUE Pin	N/A	NEW	3.668	3.668	0.5	7334.04	7334.54	12
Weight of sand in the mud joints (filled completely)										549
TOTAL							652.54	4960		



3D WELLBORE :

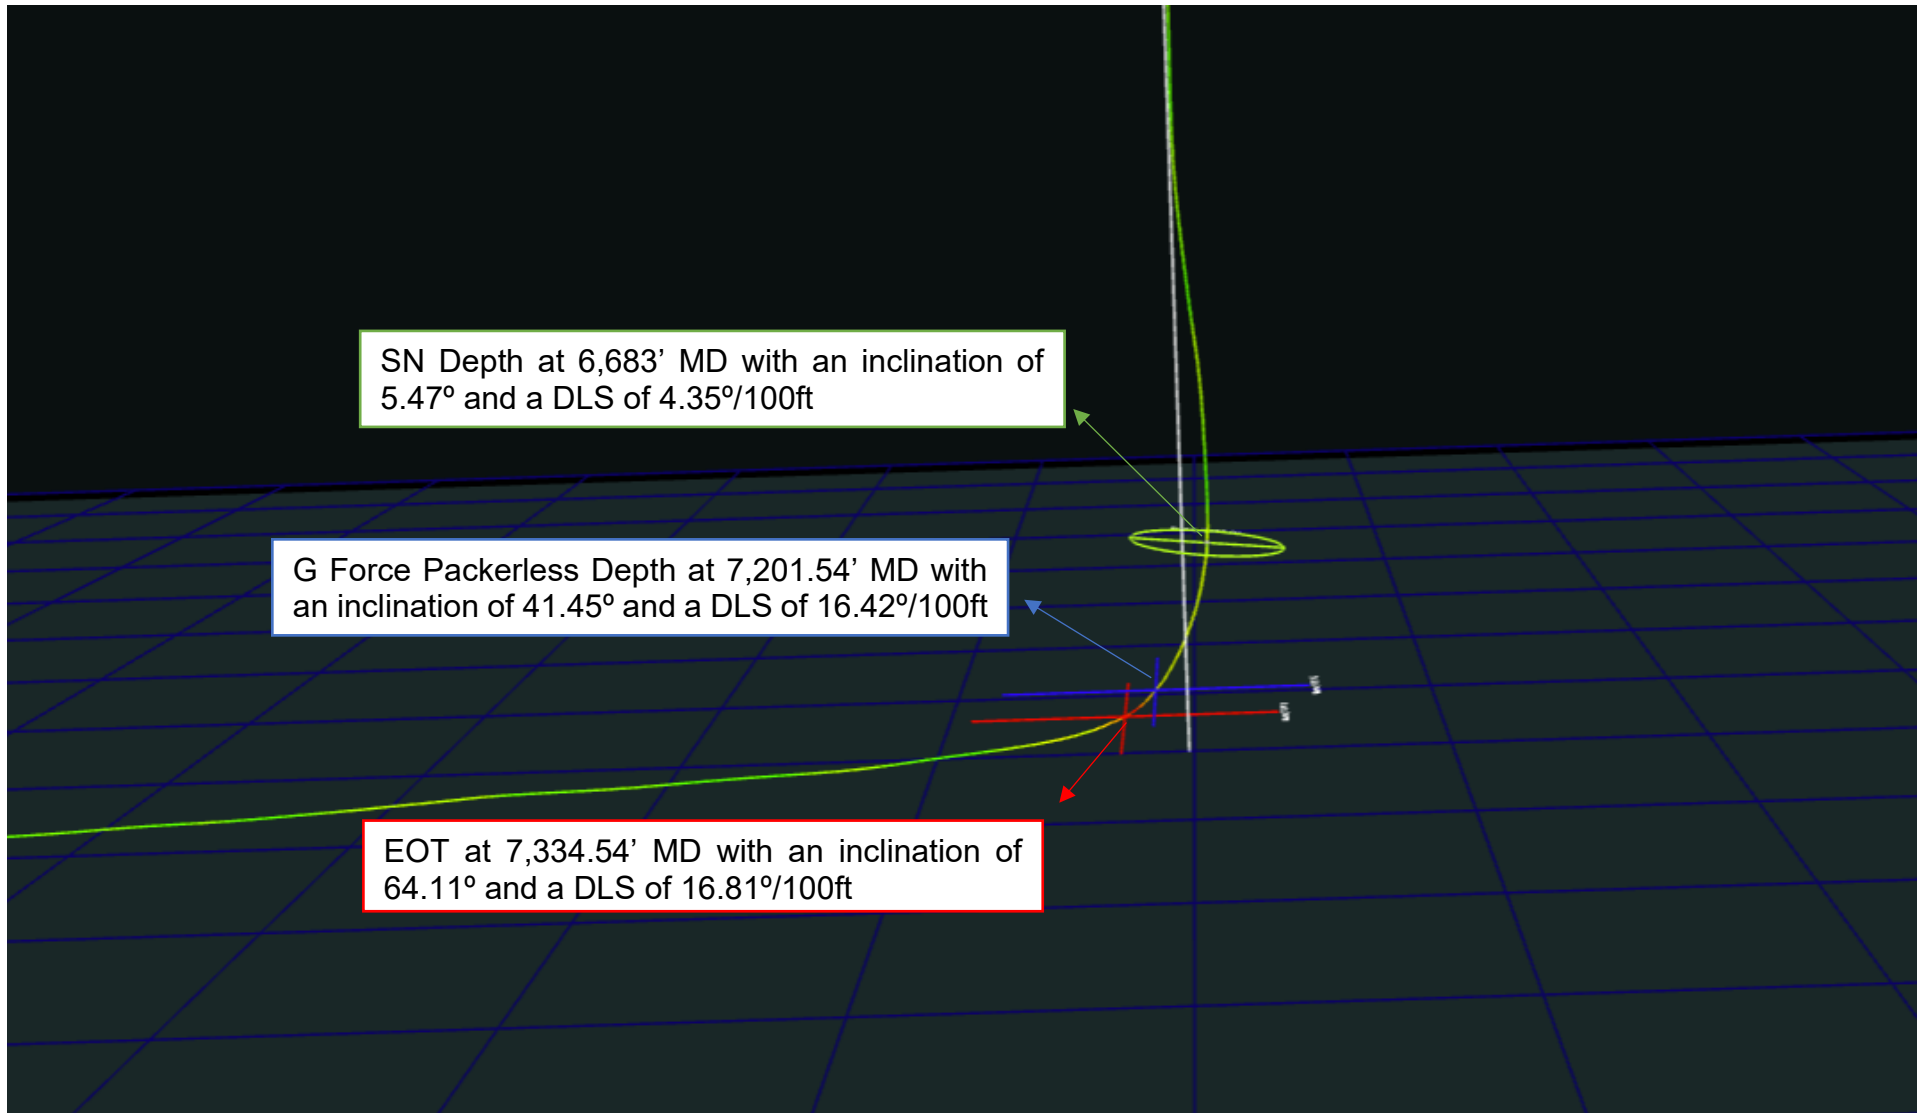

Wellbore Diagram

