

Thompson Submachine Gun

PAGES FROM THE ORIGINAL MANUAL

TM 9-2200, Small Arms, Light Field Mortars and 20-mm Aircraft Guns (War Department, 1943)

WHAT'S INSIDE

The Thompson M1A1 and M1928A1: drawings of both sides of each gun, with weights, measurements and technical data.

5 pages from the original follow: the manual's cover, then the section about this weapon. Original US Government publication (public domain). Scans courtesy of the Internet Archive and Wikimedia Commons.

ADVANCE COPY FOR USE IN
ORDNANCE OFFICE ONLY.
REGULAR DISTRIBUTION WILL
BE MADE BY YOUR LOCAL
ADJUTANT GENERAL OR
POST ADJUTANT.

TM 9-2200

WAR DEPARTMENT TECHNICAL MANUAL


Small Arms, Light Field Mortars and 20-mm Aircraft Guns

WAR DEPARTMENT, 11 OCTOBER 1943

★ RESTRICTED

★ *Dissemination of restricted matter.*—The information contained in restricted documents and the essential characteristics of restricted materiel may be given to any person known to be in the service of the United States and to persons of undoubted loyalty and discretion who are cooperating in Government work, but will not be communicated to the public or to the press except by authorized military public relations agencies. (See also par. 18 b, AR 380-5, 28 Sep 1942.)

SMALL ARMS, LIGHT FIELD MORTARS, AND 20-MM AIRCRAFT GUNS

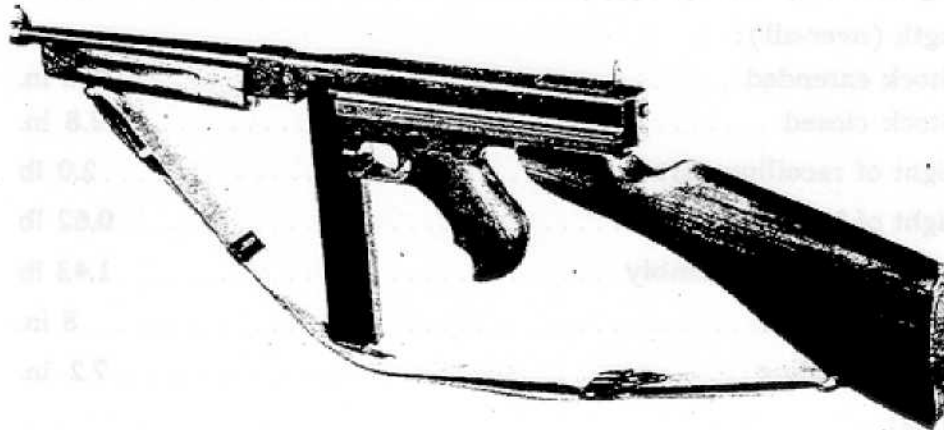

RA PD 82770

Left Side View—With 30-Round Magazine Attached



RA PD 82771

Right Side View—With 20-Round Magazine Attached

Figure 27—Gun, Submachine, Thompson, Cal. .45, M1A1

WEAPONS

29. GUN, SUBMACHINE, THOMPSON, CAL. .45, M1 AND M1A1.

Weight (approx.)	Without magazine, 10 lb
Weight, 20-round magazine	0.4 lb
Weight, 30-round magazine	0.5 lb
Length (over-all)	31.9 in.
Weight of barrel	0.95 lb
Length of barrel	10.52 in.
Length of rifling	21.6 cal; 9.74 in.
Rifling:	
Number of grooves	6
Right-hand twist: 1 turn in	36 cal; 16 in.
Depth of grooves	0.004 in.
Cross-sectional area of bore	0.1581 sq in.
Type of mechanism	Blowback
Feeding device	Magazine
Capacity of feeding device	20 or 30 rounds
Rate of fire	700 to 800 rounds per min
Cooling system	Air
Sight radius	21.2 in.
Trigger pull	14 lb max; 10 lb min
Ammunition type	Ball

NOTE: Gun, submachine, Thompson, cal. .45, M1A1, differs from Submachine Gun M1 only in having a fixed firing pin in place of a movable firing pin and hammer. The above data for the Submachine Gun M1A1 also applies to the Submachine Gun M1.

References

SNL A-32

Drawing No. 51-116-1

51-116-1A

51-116-2


Specification No. AXS-725

FM 23-41

TM 9-215

TM 9-1215

SMALL ARMS, LIGHT FIELD MORTARS, AND 20-MM AIRCRAFT GUNS

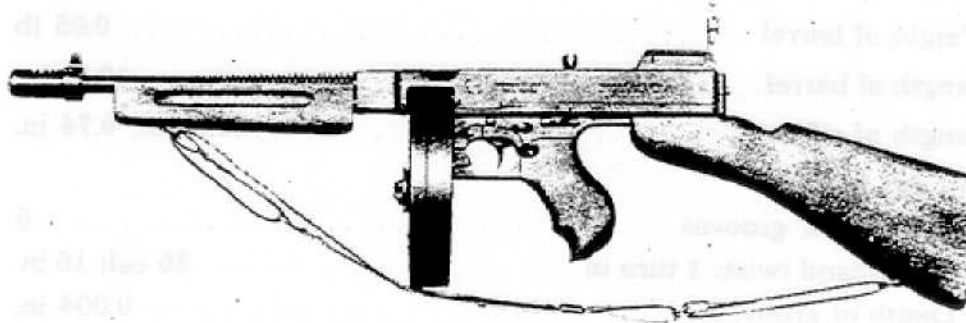

RA PD 4105

Left Side View—With 50-Round Magazine



RA PD 4106

Right Side View—With 20-Round Magazine

Figure 28—Gun, Submachine, Thompson, Cal. .45, M1928A1

WEAPONS

30. GUN, SUBMACHINE, THOMPSON, CAL. .45, M1928A1.

Weight without magazine	10.8 lb
Weight, 20-round magazine	0.4 lb
Weight, 30-round magazine	0.5 lb
Weight, 50-round magazine	2.6 lb
Length (over-all) (with compensator)	33.7 in.
Weight of recoiling parts	1.62 lb
Weight of barrel	0.75 lb
Length of barrel	10.52 in.
Length of rifling	22.8 cal; 10.12 in.
Rifling:	
Number of grooves	6
Right-hand twist: 1 turn in	36 cal; 16 in.
Depth of grooves	0.0035 in.
Cross-sectional area of bore	0.1581 sq in.
Type of mechanism	Blowback
Feeding device	Magazine
Capacity of feeding device	20- or 30-round box magazine
Rate of fire	50 round drum magazine 600 to 725 rounds per min
Cooling system	Air
Sight radius	22.3 in.
Trigger pull	14 lb. max; 10 lb min
Ammunition types	Ball

References

SNL A-32
 Drawing No. 51-63
 Specification No. 52-3-30
 FM 23-40
 TM 9-215
 TM 9-1215