

Biscayne Bay-Cape Florida to Monroe County Line Aquatic Preserve
SEACAR Habitat Analyses

Last compiled on 06 January, 2025

Contents

Threshold Filtering	2
Value Qualifiers	3
Water Quality - Continuous	5
Coral Reef	7
Species Richness	7

Threshold Filtering

Threshold filters, following the guidance of Florida Department of Environmental Protection's (*FDEP*) Division of Environmental Assessment and Restoration (*DEAR*) are used to exclude specific results values from the SEACAR Analysis. Based on the threshold filters, Quality Assurance / Quality Control (*QAQC*) Flags are inserted into the *SEACAR_QAQCFlagCode* and *SEACAR_QAQC_Description* columns of the export data. The *Include* column indicates whether the *QAQC* Flag will also indicate that data are excluded from analysis. No data are excluded from the data export, but the analysis scripts can use the *Include* column to exclude data (1 to include, 0 to exclude).

Table 1: Continuous Water Quality threshold values

<i>Parameter Name</i>	<i>Units</i>	<i>Low Threshold</i>	<i>High Threshold</i>	<i>Sensor Type</i>
Dissolved Oxygen	mg/L	0	50	YSI EXOs
Dissolved Oxygen	mg/L	0	50	Analysis Only - 2022-04-04
Dissolved Oxygen	mg/L	0	50	6600 Series
Salinity	ppt	0	70	6600 Series
Salinity	ppt	0	70	YSI EXOs
Salinity	ppt	0	70	Analysis Only - 2022-04-04
Water Temperature	Degrees C	-5	45	YSI EXOs
Water Temperature	Degrees C	-5	45	Analysis Only - 2022-04-04
Water Temperature	Degrees C	-5	45	6600 Series
pH	pH	2	14	Analysis Only - 2022-04-04
pH	pH	2	14	6600 Series
pH	pH	2	14	YSI EXOs
Dissolved Oxygen Saturation	%	0	500	YSI EXOs
Dissolved Oxygen Saturation	%	0	500	6600 Series
Dissolved Oxygen Saturation	%	0	500	Analysis Only - 2022-04-04
Specific Conductivity	mS/cm	0	100	6600 Series
Specific Conductivity	mS/cm	0	200	YSI EXOs
Turbidity	NTU	0	4000	YSI EXOs
Turbidity	NTU	0	1000	6600 Series
Turbidity	NTU	0	4000	Analysis Only - 2022-04-04

Table 2: Discrete Water Quality threshold values

<i>Parameter Name</i>	<i>Units</i>	<i>Low Threshold</i>	<i>High Threshold</i>
Dissolved Oxygen	mg/L	0.000001	22
Salinity	ppt	0	70
Water Temperature	Degrees C	3	40
pH		2	13
Dissolved Oxygen Saturation	%	0.000001	310
Specific Conductivity	mS/cm	0.005000001	100
Turbidity	NTU	0	-
Total Suspended Solids (TSS)	mg/L	0	-
Chlorophyll a uncorrected for pheophytin	ug/L	0	-
Chlorophyll a corrected for pheophytin	ug/L	0	-
Secchi Depth	m	0.000001	50
Light Extinction Coefficient	m ⁻¹	0	-
Colored dissolved organic matter, CDOM	PCU	0	-
Fluorescent dissolved organic matter, FDOM	QSE	0	-
Total Nitrogen	mg/L	0	-
Total Kjeldahl Nitrogen TKN	mg/L	0	-
NO2+3 Filtered	mg/L	0	-
NH4 Filtered	mg/L	0	-
Total Phosphorus	mg/L	0	-

<i>Parameter Name</i>	<i>Units</i>	<i>Low Threshold</i>	<i>High Threshold</i>
PO4 Filtered	mg/L	0	-
Ammonia- Un-ionized (NH3)	mg/L	0	-
Nitrate (N)	mg/L	0	-
Nitrite (N)	mg/L	0	-
Nitrogen, organic	mg/L	0	-

Table 3: Quality Assurance Flags inserted based on threshold checks listed in Table 1 & 2

<i>SEACAR QAQC Description</i>	<i>Include</i>	<i>SEACAR QAQCFlagCode</i>
Exceeds Maximum threshold. Not verified in raw data	No	2Q
Exceeds Maximum threshold. Verified in raw data	No	3Q
Below Minimum threshold. Not verified in raw data	No	4Q
Below Minimum threshold. Verified in raw data	No	5Q
Within threshold tolerance	Yes	6Q
No defined thresholds for this parameter	Yes	7Q

Value Qualifiers

Value qualifier codes included within the data are used to exclude certain results from the analysis. The data are retained in the data export files, but the analysis uses the *Include* column to filter the results.

STORET and WIN value qualifier codes

Value qualifier codes from *STORET* and *WIN* data are examined with the database and used to populate the *Include* column in data exports.

Table 4: Value Qualifier codes excluded from analysis

<i>Qualifier Source</i>	<i>Value Qualifier</i>	<i>Include</i>	<i>MDL</i>	<i>Description</i>
STORET-WIN	H	No	0	Value based on field kit determination; results may not be accurate
STORET-WIN	J	No	0	Estimated value
STORET-WIN	V	No	0	Analyte was detected at or above method detection limit
STORET-WIN	Y	No	0	Lab analysis from an improperly preserved sample; data may be inaccurate

Discrete Water Quality Value Qualifiers

The following value qualifiers are highlighted in the Discrete Water Quality section of this report. An exception is made for **Program 476 - Charlotte Harbor Estuaries Volunteer Water Quality Monitoring Network** and data flagged with Value Qualifier **H** are included for this program only.

H - Value based on field kit determination; results may not be accurate. This code shall be used if a field screening test (e.g., field gas chromatograph data, immunoassay, or vendor-supplied field kit) was used to generate the value and the field kit or method has not been recognized by the Department as equivalent to laboratory methods.

I - The reported value is greater than or equal to the laboratory method detection limit but less than the laboratory practical quantitation limit.

Q - Sample held beyond the accepted holding time. This code shall be used if the value is derived from a sample that was prepared or analyzed after the approved holding time restrictions for sample preparation or analysis.

S - Secchi disk visible to bottom of waterbody. The value reported is the depth of the waterbody at the location of the Secchi disk measurement.

U - Indicates that the compound was analyzed for but not detected. This symbol shall be used to indicate that the specified component was not detected. The value associated with the qualifier shall be the laboratory method detection limit. Unless requested by the client, less than the method detection limit values shall not be reported

Systemwide Monitoring Program (SWMP) value qualifier codes

Value qualifier codes from the *SWMP* continuous program are examined with the database and used to populate the *Include* column in data exports. *SWMP* Qualifier Codes are indicated by *QualifierSource=SWMP*.

Table 5: SWMP Value Qualifier codes

<i>Qualifier Source</i>	<i>Value Qualifier</i>	<i>Include</i>	<i>Description</i>
SWMP	-1	Yes	Optional parameter not collected
SWMP	-2	No	Missing data
SWMP	-3	No	Data rejected due to QA/QC
SWMP	-4	No	Outside low sensor range
SWMP	-5	No	Outside high sensor range
SWMP	0	Yes	Passed initial QA/QC checks
SWMP	1	No	Suspect data
SWMP	2	Yes	Reserved for future use
SWMP	3	Yes	Calculated data: non-vented depth/level sensor correction for changes in barometric pressure
SWMP	4	Yes	Historical: Pre-auto QA/QC
SWMP	5	Yes	Corrected data

Water Quality - Continuous


The following files were used in the continuous analysis:

- *Combined_WQ_WC_NUT_cont_Dissolved_Oxygen_SE-2024-Dec-08.txt*
- *Combined_WQ_WC_NUT_cont_Dissolved_Oxygen_Saturation_SE-2024-Dec-08.txt*
- *Combined_WQ_WC_NUT_cont_pH_SE-2024-Dec-08.txt*
- *Combined_WQ_WC_NUT_cont_Salinity_SE-2024-Dec-08.txt*
- *Combined_WQ_WC_NUT_cont_Turbidity_SE-2024-Dec-08.txt*
- *Combined_WQ_WC_NUT_cont_Water_Temperature_SE-2024-Dec-08.txt*

Continuous monitoring locations in Biscayne Bay-Cape Florida to Monroe County Line Aquatic Preserve

Table 6: Water Temperature on Coral Reefs in the Florida Keys (986)

<i>ProgramLocationID</i>	<i>Years of Data</i>	<i>Use in Analysis</i>	<i>Parameters</i>
6	10	TRUE	TempW

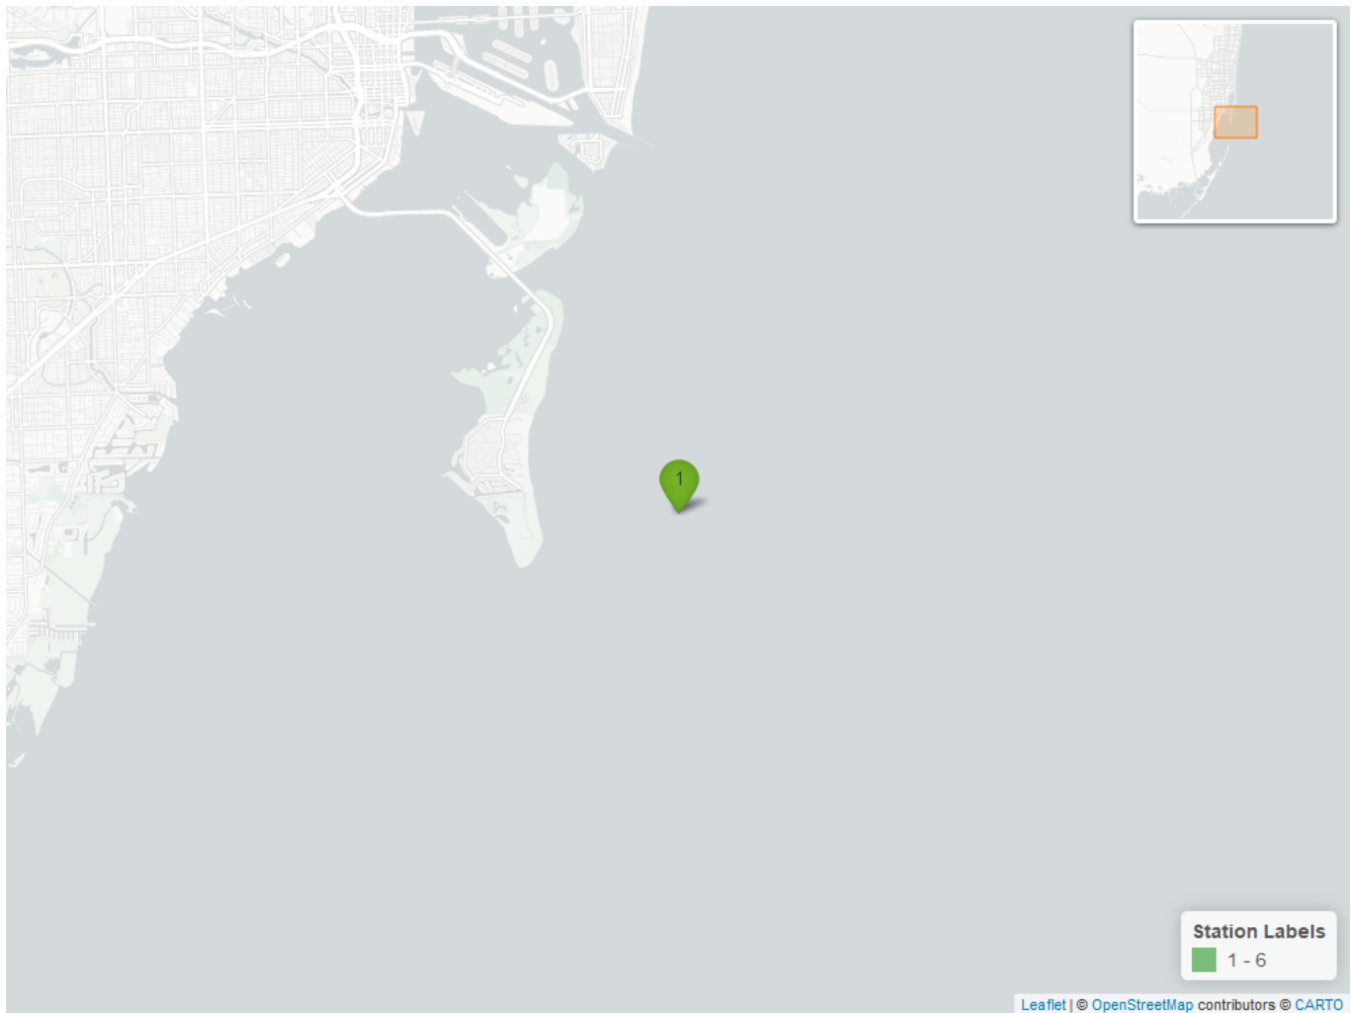

Map showing Continuous Water Quality Monitoring sampling locations within the boundaries of Biscayne Bay-Cape Florida to Monroe County Line Aquatic Preserve. Sites marked as *Use In Analysis* are featured in this report.

Coral Reef

The data file used is: All_CORAL_Parameters-2024-Dec-08.txt
Percent Cover

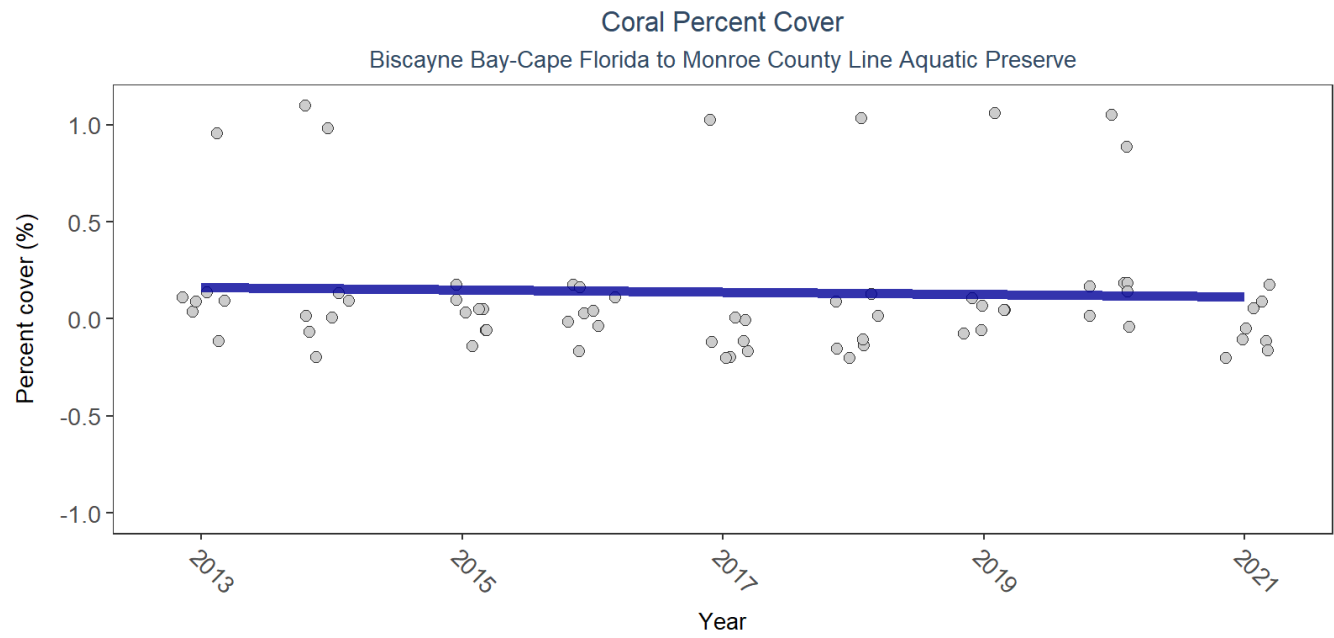


Table 7: Coral Percent Cover

N-Years	SufficientData	EarliestYear	LatestYear	N-Data	Min	Max	Median	Mean	StDev	LME-Intercept	LME-Slope	LME-p
9	TRUE	2013	2021	72	0	1	0	0.14	0.35	12.75	-0.01	0.6972

Species Richness

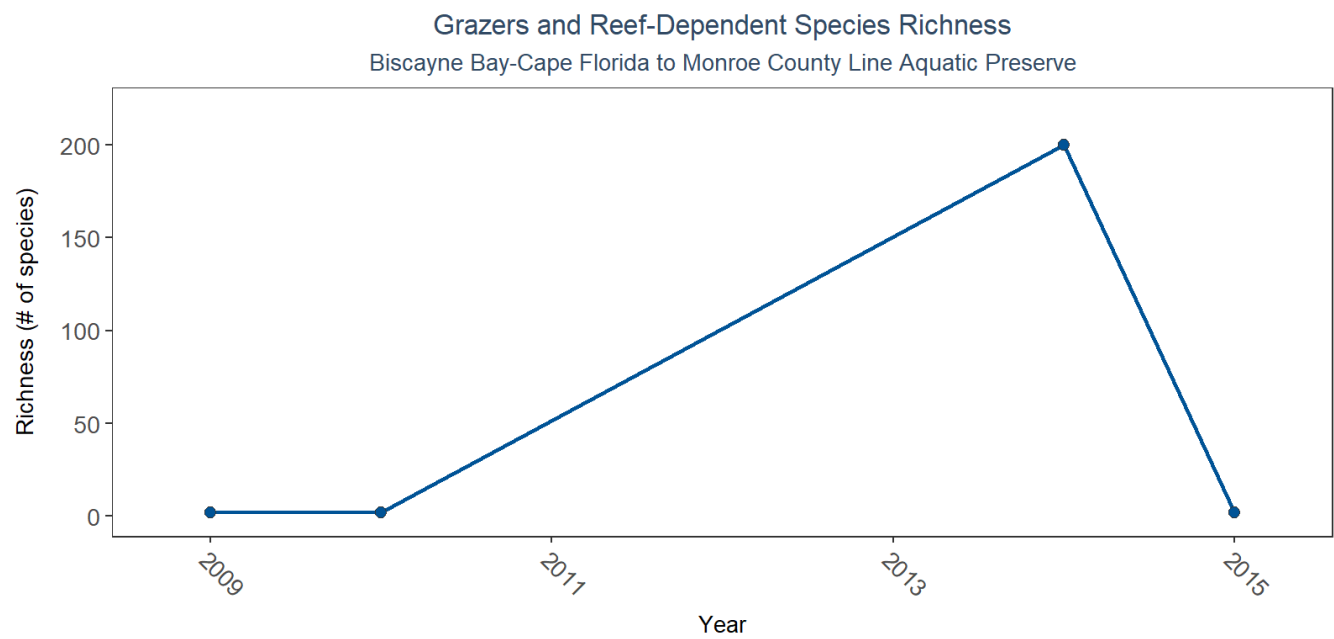


Table 8: Coral Species Richness

N-Years	EarliestYear	LatestYear	N-Data	Min	Max	Median	Mean	StDev	Year-MinRichness	Year-MaxRichness
4	2009	2015	5	2	200	2	81.2	108.45	2009	2014