
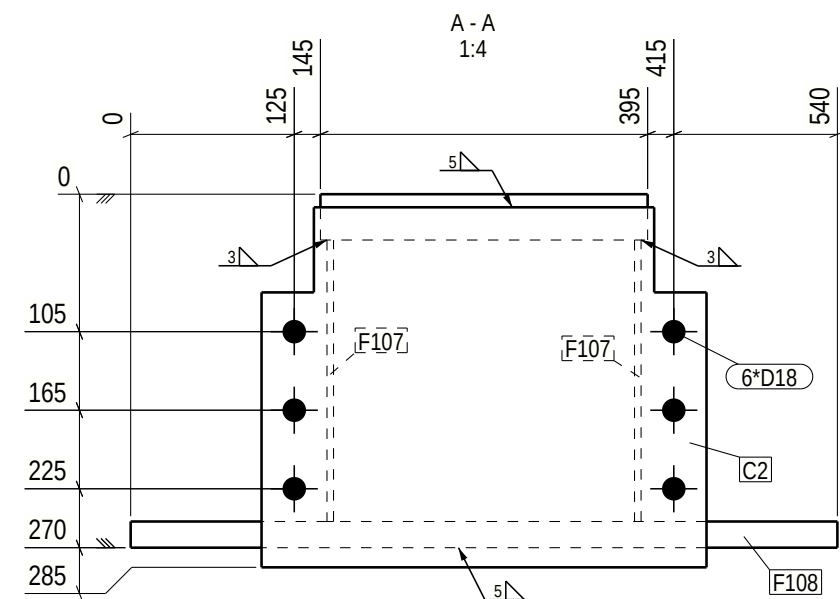
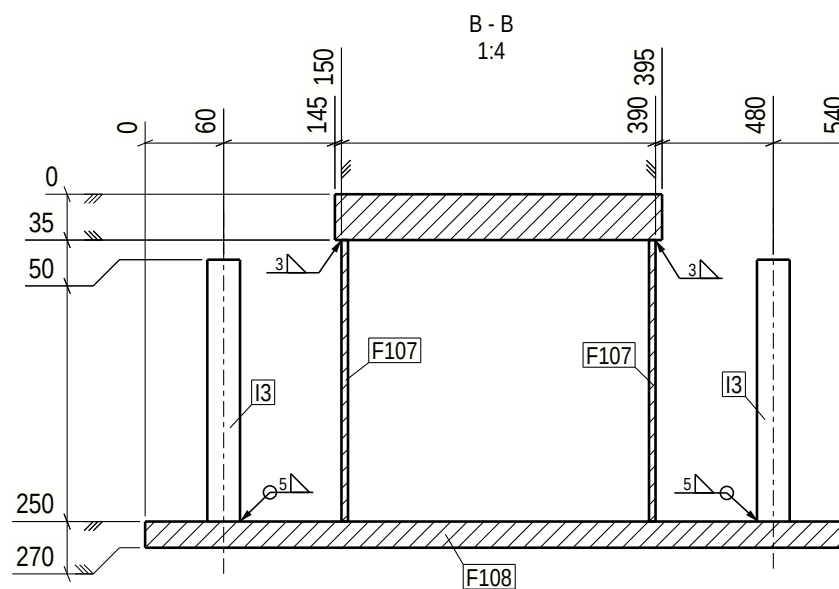
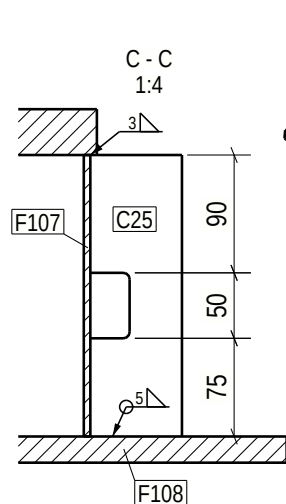
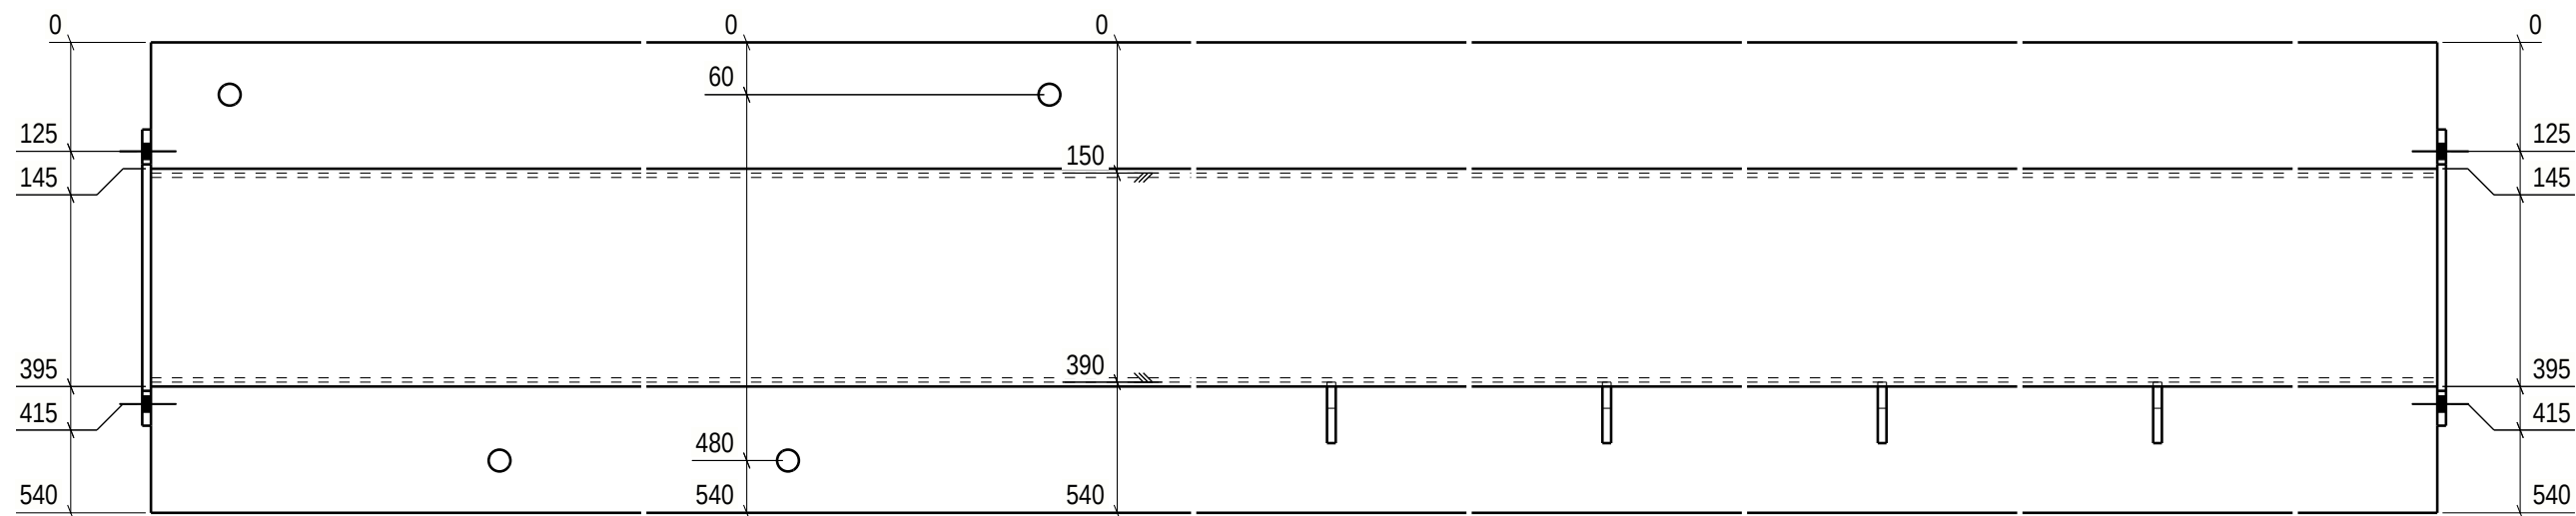


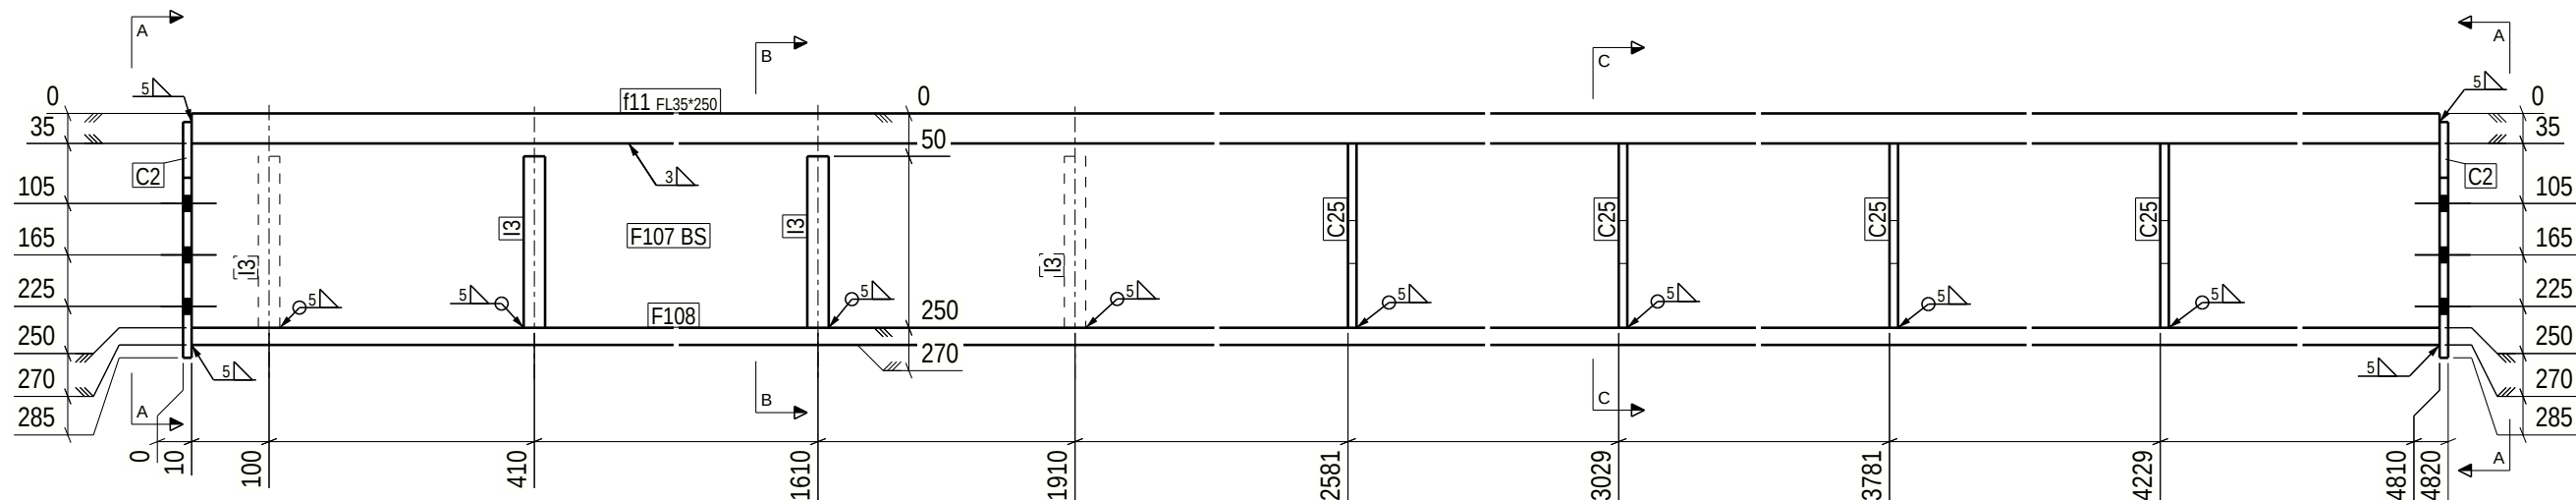

! NDT test:
Part thickness >30mm
f11

GENERAL NOTES: For your safety, check weight before handling:
0-5kg Light 5-15kg Normal 15+kg Heavy

ALL WELDS ARE 4 UNLESS NOTED ON DRAWING

MATERIAL LIST FOR ASSEMBLY MK'D f.11 1 No. Required

Mark	Profile	Material	No.	Length	Area	Weight
f11	FL35*250	S355J2	1	4800	2.8	329.7 !!
C2	PL10*275	S355J2	2	340	0.2	6.9
C25	PL10*70	S355J2	4	215	0.0	1.1
F107	FL5*215	S355J2	2	4800	2.1	40.5 !!
F108	FL20*540	S355J2	1	4800	5.4	406.9 !!
I3	REBAR25	B550B	4	200	0.0	0.7
Total				13.0		838.7

Finish Class
Standard

Surface treatment info:
Overall Painting

Thickness/start point-> length
Primerµm whole asse*** 1



Special
surface treatment



weld a = 4

OPSVEJST EMNE

* o 3 0 4 8 0 - 1 *		 DS Skalkonstruktion		* A f 1 1 *	
PROJECT	Akkasæter Lager- og vedlikeholdshall			EXEC. CLASS	EXC 2
MEMBER	HSQ	QUANTITY:	1	PROJECT No	30480-1
REVISION		ISSUED: 07.11.2025	DRAFTER: BIM control: SST	ZLL DRAWING No.	f.11