
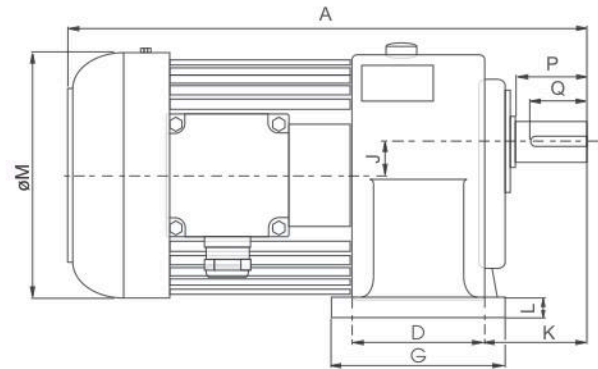


HELICAL GEAR MOTOR


SPECIFICATION HELICAL GEAR MOTOR

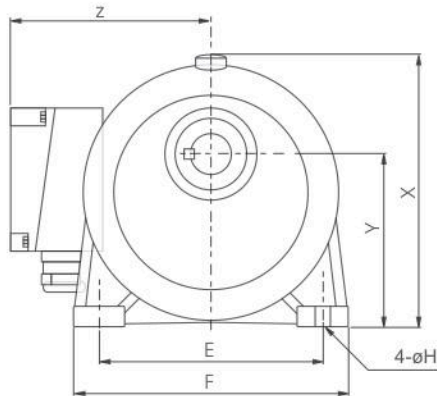

CE IEC


HORIZONTAL type with aluminum 3-phase motor


Size	Output Shaft					
	Shaft		Keyway			Key
	Sh6	P	W	T	Q	B x H x L
ø18	18	30	5	20.2	27	5 x 5 x 27
ø22	22	40	7	25	35	7 x 7 x 35
ø28	28	45	7	31.1	40	7 x 7 x 40
ø32	32	55	10	35.5	50	10 x 8 x 50
ø40	40	65	10	43.5	60	10 x 8 x 60
ø50	50	80	14	54	75	14 x 9 x 75

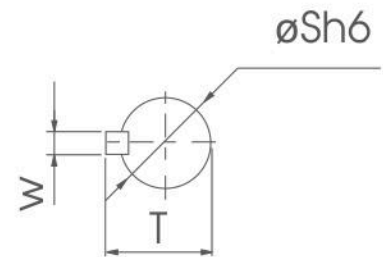

Unit : (mm)


Power	Ratio	Code	Size	A	D	E	F	G	H	J	K	L	M	X	Y	Z
100W 1/8 HP	3 - 50	1#	ø18	250	40	110	135	65	9	16	50	10.5	133	138	88.5	120
	60 - 200	2#	ø22	280	65	130	158	90	11	17.5	60	13	133	152	97.5	120
200W 1/4HP	3 - 10	1#	ø18	280	40	110	135	65	9	16	50	10.5	133	138	88.5	120
	15 - 90	2#	ø22	315	65	130	158	90	11	17.5	60	13	133	152	97.5	120
	100 - 200	3#	ø28	350	90	140	178	120	11	23	68	17	133	178	116	120
400W 1/2HP	3 - 10	2#	ø22	330	65	130	158	90	11	17.5	60	13	167	152	97.5	135
	15 - 90	3#	ø28	360	90	140	178	120	11	23	68	17	167	178	116	135
	100 - 200	4#	ø32	395	130	170	210	165	13	30	70	21	167	216	138.5	135
750W 1HP	3 - 25	3#	ø28	380	90	140	178	120	11	23	68	17	167	178	116	135
	30 - 120	4#	ø32	410	130	170	215	165	13	30	70	21	167	216	138.5	135
	125 - 200	5#	ø40 (45)	465	150	210	265	198	15	36	85	23	167	250	160	135
1500W 2HP	3 - 30	4#	ø32	450	130	170	210	165	13	30	70	21	192	216	138.5	146
	40 - 100	5#	ø40 (45)	510	150	210	265	205	15	36	85	23	192	250	160	146
2200W 3HP	3 - 40	5#	ø40 (45)	530	150	210	265	205	15	36	85	23	220	250	160	160
	45-100	6#	ø50 (55)	580	170	265	335	230	18	51	120	30	220	306	200	160
3700W 5HP	3-10	5#	ø40 (45)	560	150	210	265	205	15	36	89	23	220	250	160	160
	15-60	6#	ø50 (55)	620	170	265	335	230	18	51	120	30	220	306	200	160

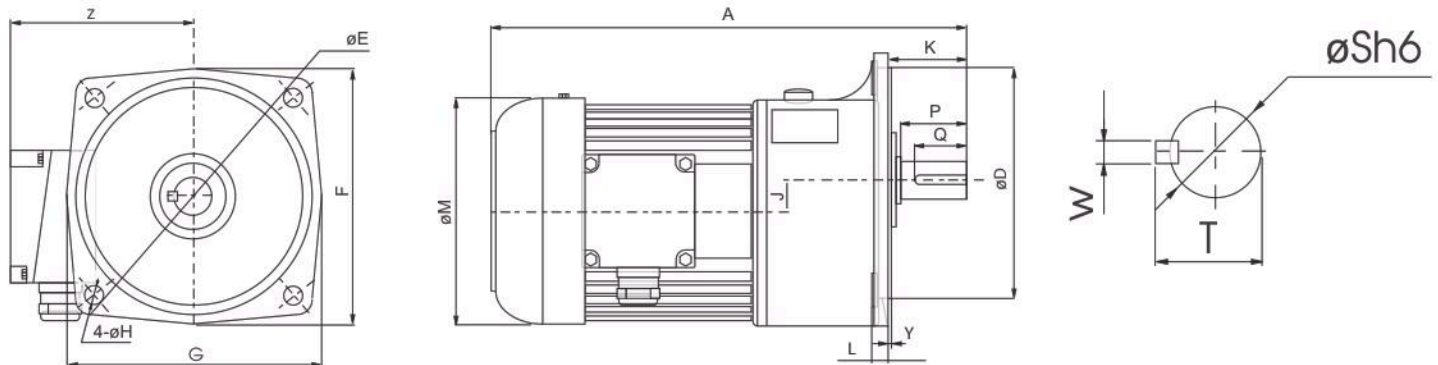VERTICAL type with aluminum 3-phase motor


Size	Output Shaft					
	Shaft		Keyway			Key
	Sh6	P	W	T	Q	B x H x L
ø18	18	30	5	20.2	27	5 x 5 x 27
ø22	22	40	7	25	35	7 x 7 x 35
ø28	28	45	7	31.1	40	7 x 7 x 40
ø32	32	55	10	35.5	50	10 x 8 x 50
ø40	40	65	10	43.5	60	10 x 8 x 60
ø50	50	80	14	54	75	14 x 9 x 75

Unit : (mm)


Power	Ratio	Code	Size	A	D	E	F	G	H	J	K	L	M	Y	Z
100W 1/8HP	3 - 50	1#	ø18	250	50	140	120	120	9	16	40	12	133	6	120
	60 - 200	2#	ø22	280	148	185	175	165	11	17.5	50	12	133	3	120
200W 1/4HP	3 - 10	1#	ø18	280	50	140	120	120	9	16	40	12	133	6	120
	15 - 90	2#	ø22	315	148	185	175	165	11	17.5	50	12	133	3	120
	100 - 200	3#	ø28	350	170	220	205	195	11	23	60	13	133	3	120
400W 1/2HP	3 - 10	2#	ø22	330	148	185	175	165	11	17.5	50	12	167	3	135
	15 - 90	3#	ø28	360	170	220	205	195	11	23	60	13	167	3	135
	100 - 200	4#	ø32	395	185	255	248	225	13	30	70	16	167	3	135
750W 1HP	3 - 25	3#	ø28	380	170	220	205	195	11	23	60	13	167	3	135
	30 - 120	4#	ø32	410	185	255	248	225	13	30	70	16	167	3	135
	125 - 200	5#	ø40 (45)	465	230	310	290	268	15	36	85	21	167	5	135
1500W 2HP	3 - 30	4#	ø32	450	185	255	248	225	13	30	70	16	192	3	146
	40 - 100	5#	ø40 (45)	510	230	310	290	268	15	36	85	21	192	5	146
2200W 3HP	3 - 40	5#	ø40 (45)	520	230	310	290	268	15	36	85	21	220	5	160
	45-100	6#	ø50 (55)	580	280	390	360	335	18	51	92	25	220	5	160
3700W 5HP	3-10	5#	ø40 (45)	560	230	310	290	268	15	36	85	21	220	5	160
	15-60	6#	ø50 (55)	620	280	390	360	335	18	51	92	25	220	5	160

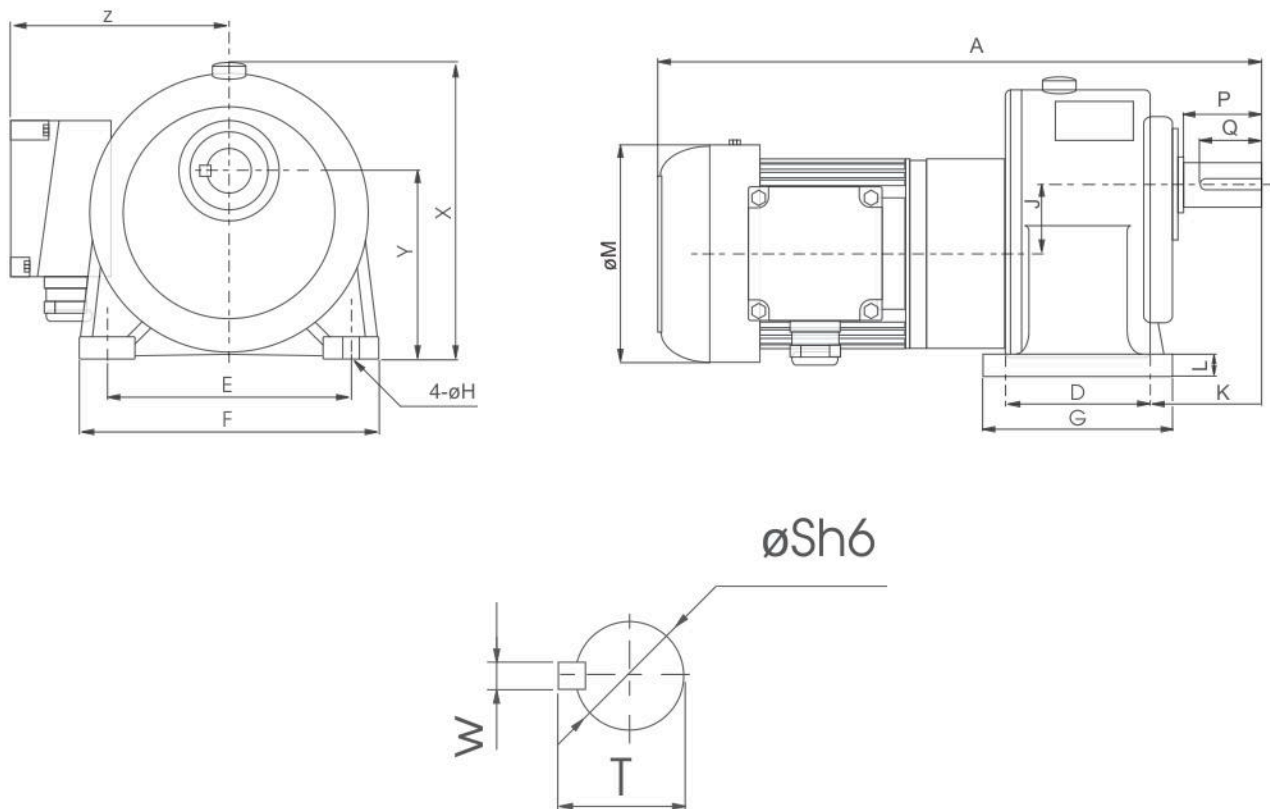HORIZONTAL High Ratio type with aluminum 3-phase motor


Size	Output Shaft					
	Shaft		Keyway			Key
	Sh6	P	W	T	Q	B x H x L
ø28	28	45	7	31.1	40	7 x 7 x 40
ø32	32	55	10	35.5	50	10 x 8 x 50
ø40	40	65	10	43.5	60	10 x 8 x 60
ø50	50	80	14	54	75	14 x 9 x 75

Unit : (mm)

Power	Ratio	Code	Size	A	D	E	F	G	H	J	K	L	M	X	Y	Z
100W 1/8HP	250 - 1800	1# + 3#	ø28	370	90	140	178	120	11	39	68	17	133	178	116	120
200W 1/4HP	250 - 1800	2# + 4#	ø32	470	130	170	210	165	13	47.5	70	21	133	216	138.5	120
400W 1/2HP	250 - 1800	3# + 5#	ø40	550	150	210	265	198	15	59	85	23	167	250	160	135
750W 1HP	250 - 1800	3# + 6#	ø50	620	170	265	321	238	18	74	120	30	167	306	200	135

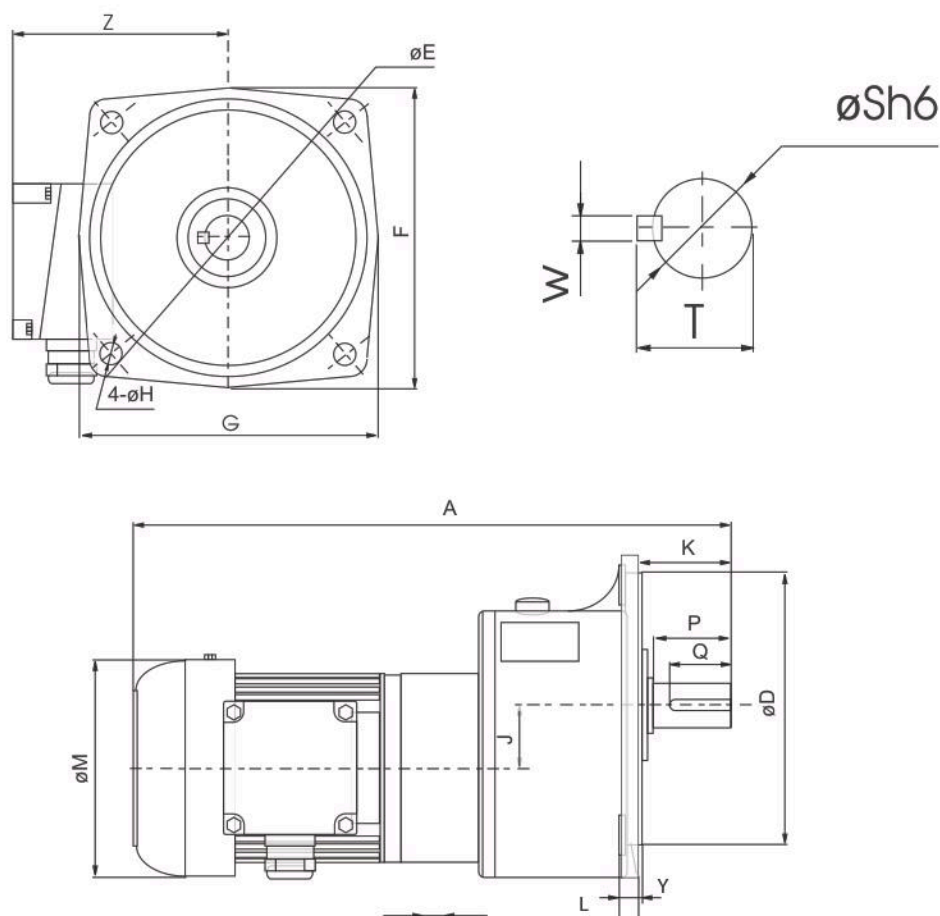VERTICAL High Ratio type with aluminum 3-phase motor


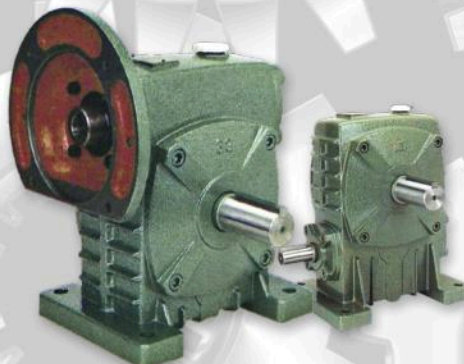
Size	Output Shaft					
	Shaft		Keyway			Key
	Sh6	P	W	T	Q	B x H x L
ø28	28	45	7	31.1	40	7 x 7 x 40
ø32	32	55	10	35.5	50	10 x 8 x 50
ø40	40	65	10	43.5	60	10 x 8 x 60
ø50	50	80	14	54	75	14 x 9 x 75

Unit : (mm)


Power	Ratio	Code	Size	A	D	E	F	G	H	J	K	L	M	Y	Z
100W 1/8HP	250 - 1800	1# + 3#	ø28	370	170	220	205	195	11	39	60	13	133	3	120
200W 1/4HP	250 - 1800	2# + 4#	ø32	470	185	255	248	225	13	47.5	70	16	133	3	120
400W 1/2HP	250 - 1800	3# + 5#	ø40	550	230	310	290	268	15	59	85	21	167	5	135
750W 1HP	250 - 1800	3# + 6#	ø50	620	280	390	390	335	18	74	92	25	167	5	135



ALUMINIUM WORM GEAR REDUCER



WORM GEAR REDUCER

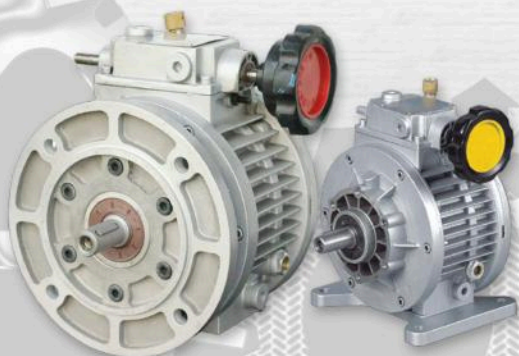

VARIABLE SPEED GEAR MOTOR



HYPOID GEAR MOTOR



AC&DC RIGHT ANGLE GEAR MOTOR



HYPONIC/HYPOID GEAR MOTOR

