


Crater report 169 of RG2

General information

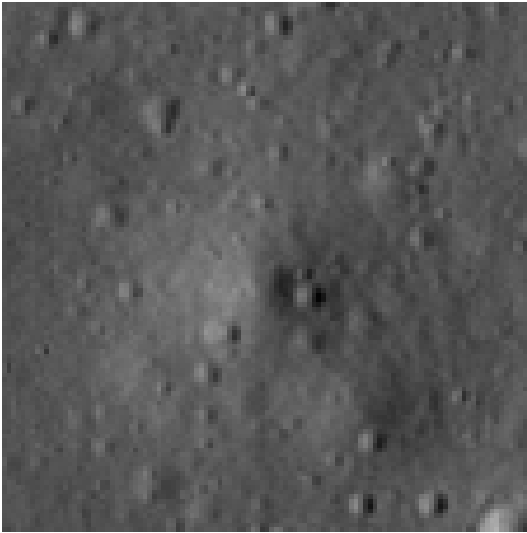

ID : 169

Study area : RG2

Swirl : off-swirl

Morphology : Bowl-shaped

Estimate state of degradation : C

Mean Diameter : 60m \pm 4.0m

Mean depth : 1.5m \pm 0.2m

d/D ratio : 0.025 \pm 0.004

Circularity index : 0.92

Slope : Between 1.76° et 6.03°

Mean value of TRI on the rim crest : 0.07

Geometric center coordinates : (3658238.967343969, 235394.84267165526)

Coordinates of the crater's lowest point : (3658239.000001101, 235391.0000000695)


Slopes data

North orientation	Slope (°)	Uncertainty (°)
0/360°	5.29	0.57
10°	4.13	0.54
20°	3.73	0.52
30°	3.42	0.49
40°	3.04	0.46
50°	2.97	0.43
60°	2.85	0.48
70°	3.54	0.52
80°	3.99	0.57
90°	3.45	0.57
100°	2.73	0.55
110°	2.43	0.5

120°	2.27	0.48
130°	2.22	0.43
140°	2.1	0.43
150°	1.76	0.47
160°	2.15	0.53
170°	2.41	0.55
180°	2.63	0.57
190°	2.61	0.55
200°	2.56	0.52
210°	2.98	0.48
220°	3.49	0.45
230°	3.81	0.4
240°	4.34	0.48
250°	5.25	0.51
260°	5.56	0.55
270°	6.03	0.57
280°	5.45	0.55
290°	5.64	0.51
300°	5.5	0.49
310°	5.55	0.44
320°	5.89	0.44
330°	5.28	0.49
340°	5.55	0.52
350°	5.32	0.53

Topographic roughness index (TRI)

The Topographic Roughness Index (TRI) is a measure used to quantify the ruggedness or the unevenness of terrain. It reflects how much elevation change over a given area.

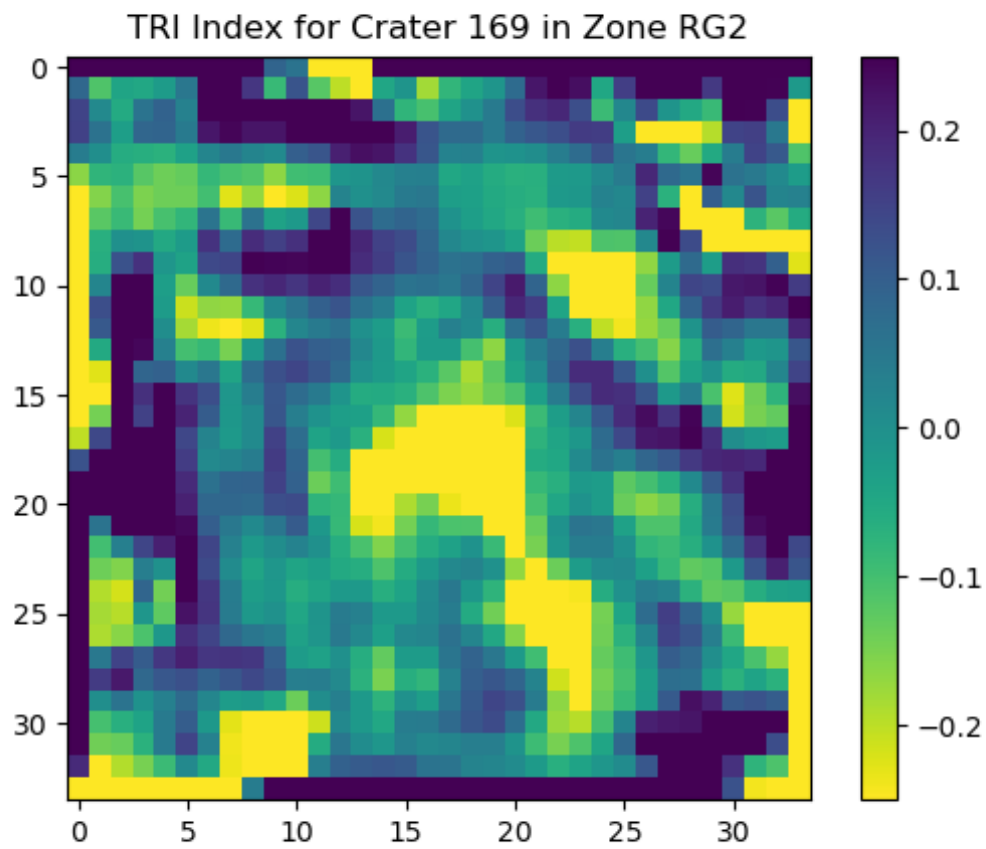

Topographic profiles

