Frequency Response Report

AKG Q350

Measured by G.A.L. Acoustics • 2026-03-14

Metadata

Device

Manufacturer	AKG
Model	Q350
Variant	Quincy Jones Signature
Freq. Range	11.5–23,000 Hz
Connector	3.50 mm TRS
Plug	Gold-plated
Cable	1.00 m OFC cable with inline remote
Config	Dynamic (single)
Impedance	16.00 Ω
Sensitivity	121 dB SPL/V
Tips	KZ silicone tips, M
Fit / Seal	Standard insertion, good seal on 711 coupler

Measurement System

Coupler	B&K 4199 (IEC 60318-4 / 711)
Coupler Cal.	Feb 2026
SPL Calibrator	ND09, 94.00 dB @ 1 kHz (factory cal. 2025)
Calibration	SPL reference set @ 1 kHz, applied in ARTA
Preamp / Cond.	B&K 1704
Interface	PreSonus AudioBox 22VSL
Input Path	4199 → 1704 → AudioBox
Output Path	AudioBox → IEM
Software	ARTA
Sample Rate	96.00 kHz / 24-bit
Sweep	Log sweep, 256k length, 3 averages
Smoothing	1/6 octave
Reference	Absolute SPL
Compensation	None (raw)

Notes

Compensation/target: none (raw). Channel matching: N/A (left channel only).

FR Graph

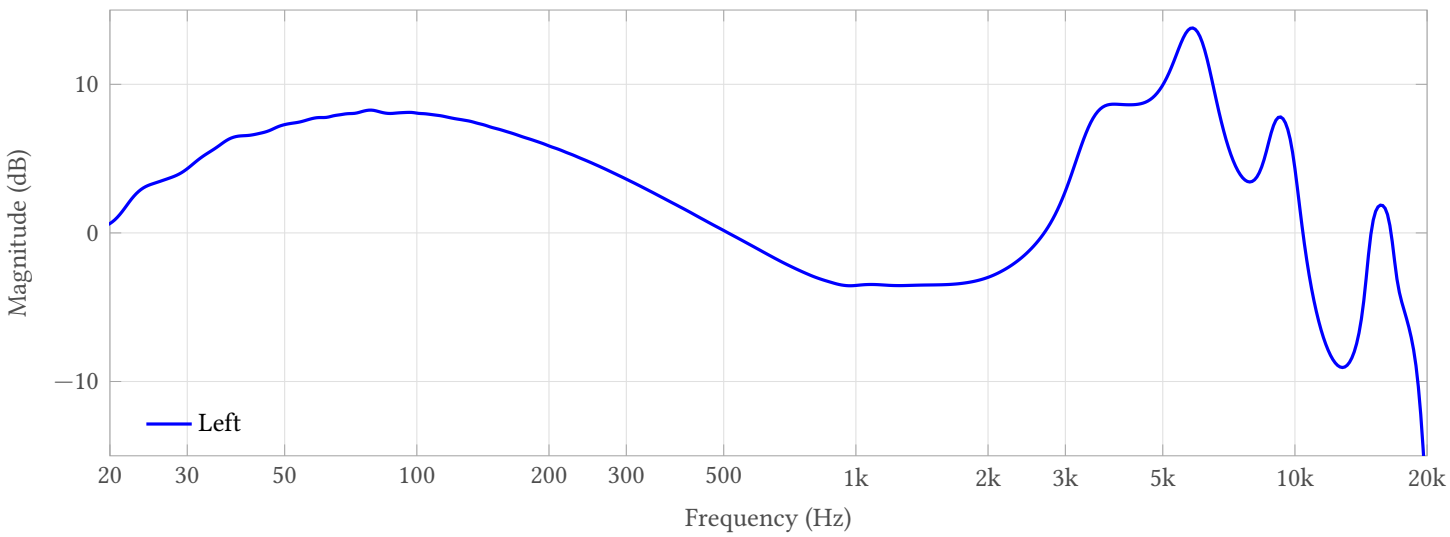

Frequency response

Fit and seal dependent. Coupler and compensation affect interpretation. Single unit measurement; not a perceptual listening review.

© 2026 G.A.L. Acoustics. Provided “as is” for informational purposes; reuse permitted with attribution.