

Rinse water for Inlet : 1/2" FPT

Maximum pressure 150 PSI(10 bar)

Minimum 3GPM (11.3 L/min) @

10 PSI(0.7 bar)

Discharge : 1 1/2" Hose

Maximum height 15 feet (4.5 meter)



Average Water consumption per use:

1 pint (.47L) for liquid, 3/4 G (2.8L) for solid use

Shipping weights:


Model 25M000 - 22 Lbs (10 Kg)

Model 25H000 - 26.5 Lbs (12 Kg)

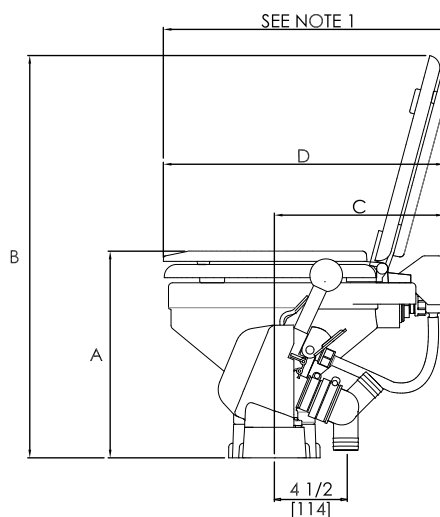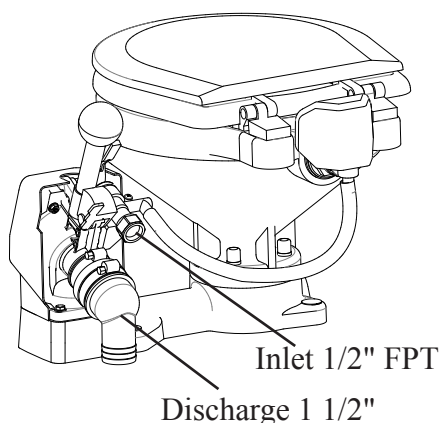

BOWL TYPE	A	B	C	D	E	F
MARINE	13 (330)	24 3/4 (629)	10 3/8 (264)	17 1/4 (438)	17 3/4 (451)	6 1/2 (165)
HOUSEHOLD	13 1/8 (334)	27 7/8 (708)	11 1/2 (292)	20 (508)	18 1/4 (464)	7 (179)

INCHES
(MM)

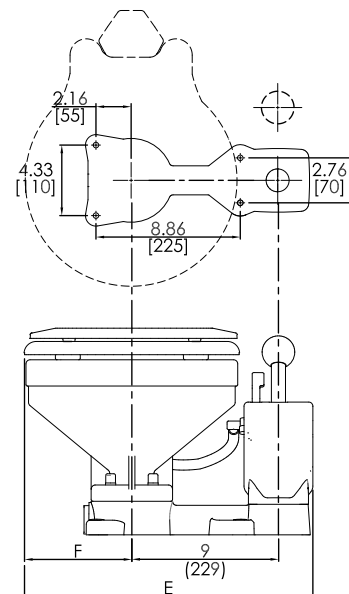

NOTE:

1. THE SEAT WILL OPEN WITHIN THE DEPTH OF THE BOWL (D). HOWEVER, IT MAY BE DESIRABLE TO INCREASE THIS ANGLE BY ALLOWING MORE ROOM AT THE BACK OF THE BOWL FOR THE SEAT TO OPEN.

2. DIMENSIONS ARE FOR REFERENCE AS VITREOUS CHINA DIMENSIONS MAY VARY +/- 5%.

PARTS LIST

ITEM # PART# DESCRIPTION


1	25101	Base
2	25102	Base Drain Plug
3	25103	Base Drain Plug O-Ring Seal*
4	25104	Base Mounting Hole Plugs (4)
5	25105	Bowl Gasket O Ring*
6	F081	Bowl Bolt 1/4" - 20 X 2" S/S Hex Head (4)
7	RNI	Nylon Shoulder Washer (4)*
8	1226B	Nut: 1/4"-20 S/S (4)
9	VCAP	Vinyl Cap (4)*
10	221300	Vacuum Breaker Assembly
11	25309	Nut: Nylon Ribbed
12	221360	BSP Nut: O Ring
13	168006	Cover, Vacuum Breaker Assembly
14	PLH-50P	Hose, 1/2"
15	25215	Inlet Valve Lever
16	25300	Inlet Valve Assembly
17	F409	Screw: Phil. Thread-Forming, #8 X 1" S/S (2)
18	25310	Inlet Valve Bracket
19	F403	Screw: Phil. Thread-Forming, #8 X 1/2" S/S (6)
20	25220	Discharge Pump Flush Handle
22	F408	Screw: 1/4"-20 X 5/8", S/S (4)
23	1228F	Flapper Valve*
24	25212	Discharge Elbow
25	25213	Joker Valve*

ITEM # PART# DESCRIPTION

26	25216	Joker Valve Hose Clamp (Small)
27	25217	Joker Valve Hose Clamp (Large)
28	25214	Pump Cover
29	25200	Pump Assembly
30	25201	Pump Base
31	25202	Pump Top
32	25203	Diaphragm Piston
33	25204	Diaphragm Piston Cap
34	25206	Discharge Shut Off Seal*
35	227015	Diaphragm*
36	25207	Piston Lever SS
37	F352	Socket Set Screw
38	25208	Clevis Pin
39	1210B	Cotter Pin, Rue Ring (3)
40	F400	Screw: #8-32 X 5/8" S/S (6)
41	F401	Screw: #8-32 X 3/4" S/S
42	F402	Nut: #8-32 S/S (7)
43	F404	Washer: 1/4" Flat S/S
44	F405	Lock Washer: 1/4" Split S/S
45	1124	Screw: 1/4-20 x 1/2" S/S
47	25209	Piston Shaft
48	25210	Shut Off Lever
49	25211	Shut Off Lever Pin

* = Included in 2500RK Repair Kit

EXPLODED PARTS VIEW

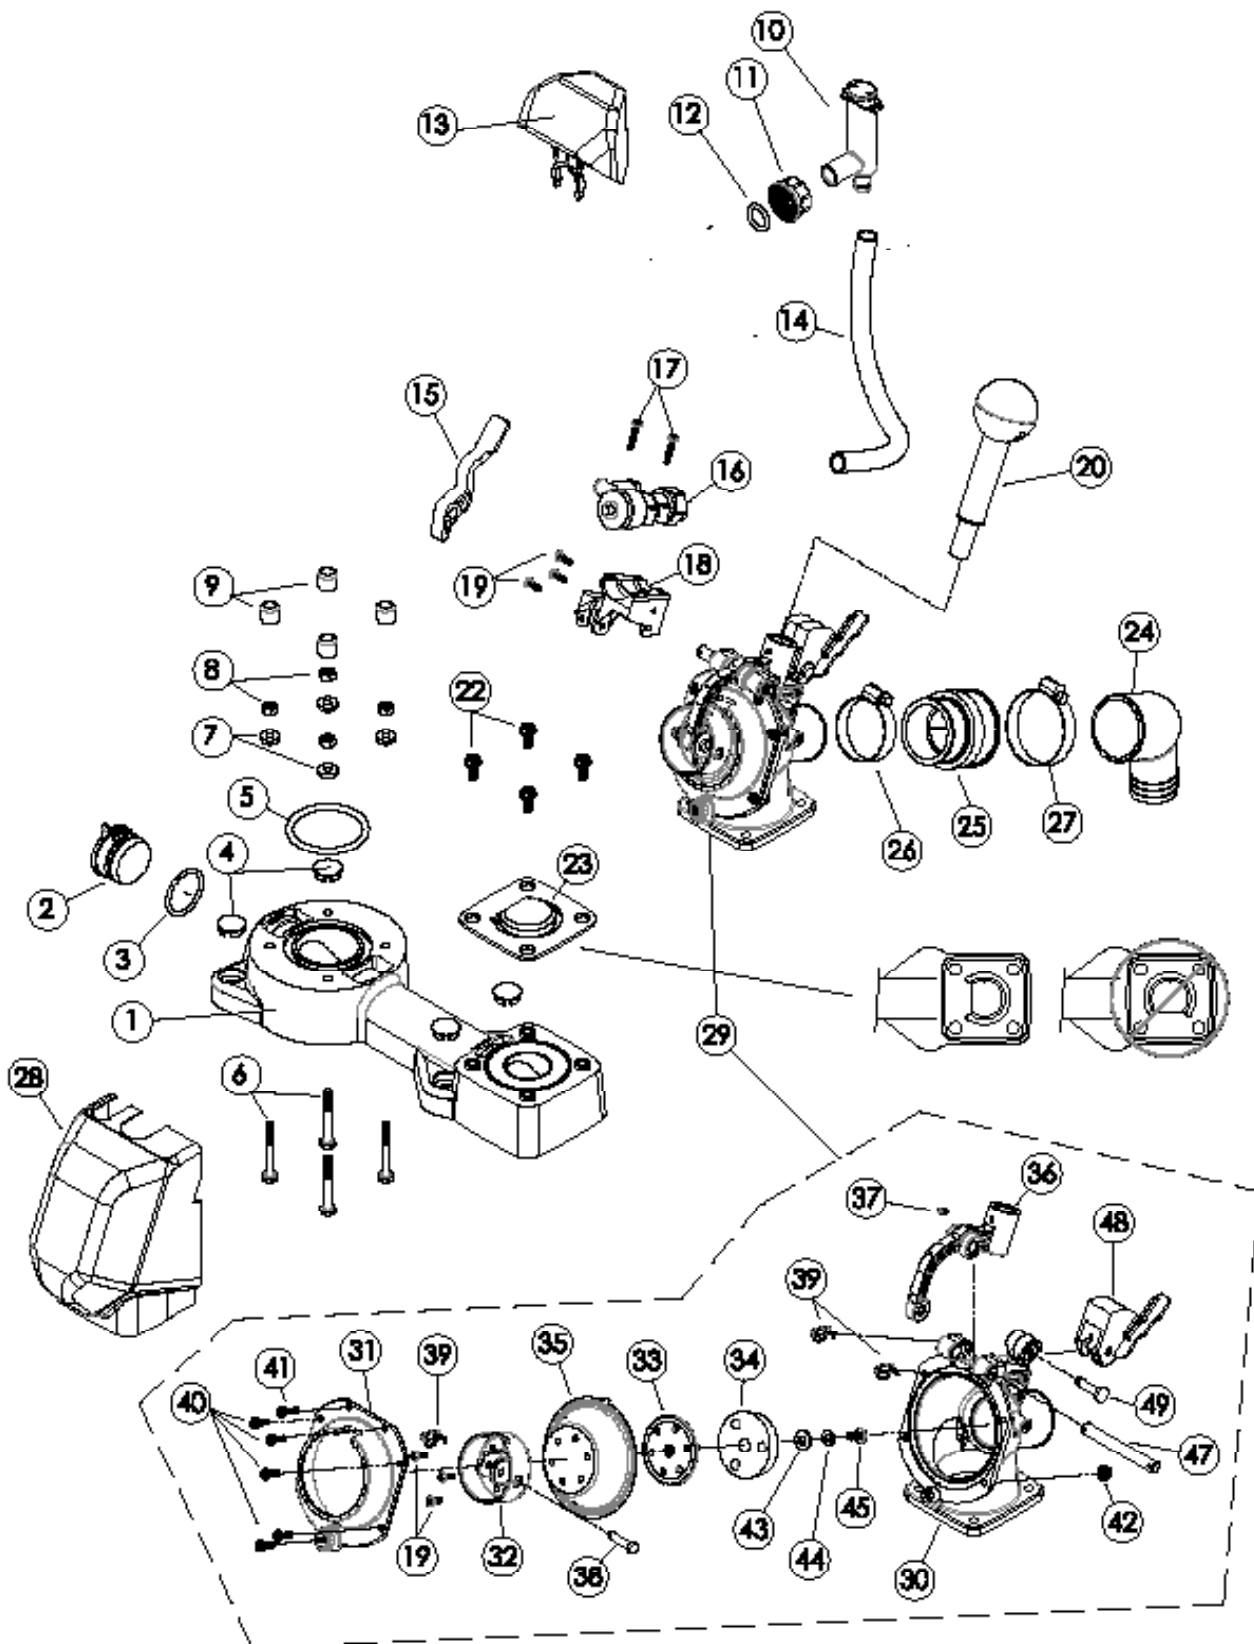

BOWL & SEAT

- | | |
|--------|-------------------------------------|
| 1236AW | Spud Assembly |
| 1237W | Marine-Size Bowl Assembly |
| 1244W | White Household-Style Bowl Assembly |
| 1238A | Marine-Size Seat & Cover |
| 1245 | White Household-Style Seat & Cover |

NOT SHOWN:

- | | |
|-------|------------------|
| 25306 | Inlet Diaphragm* |
| 25307 | Plunger O-ring* |

* = Included in 2500RK Repair Kit