

front (-y) (axes in mm from the view origin)




top (+z) (axes in mm from the view origin)

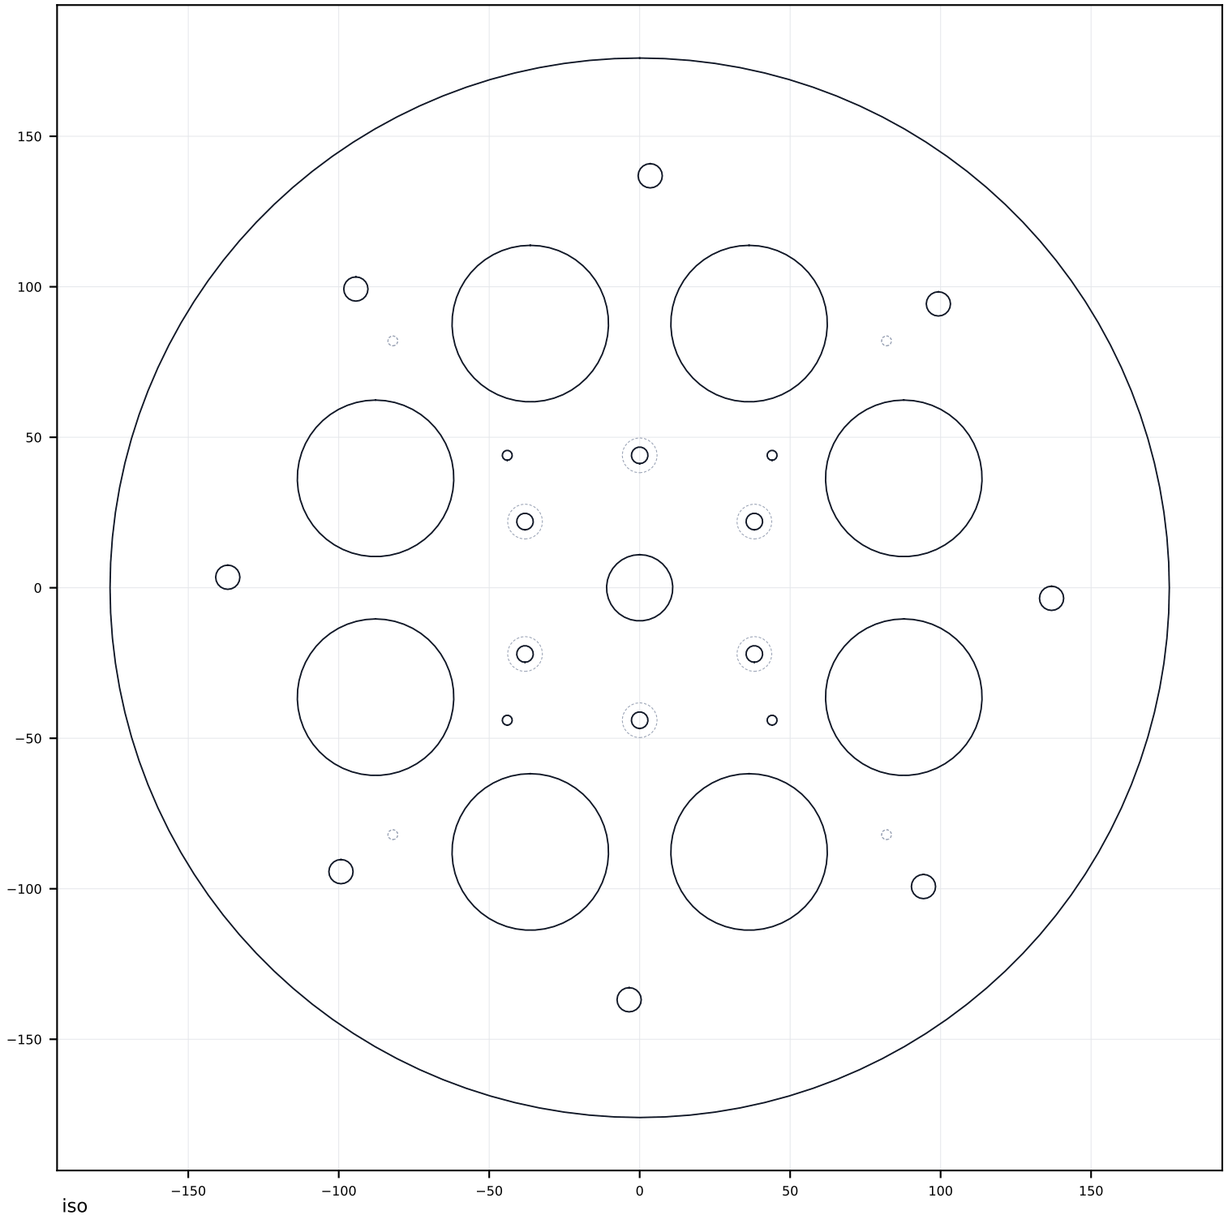

side (+x) (axes in mm from the view origin)



iso

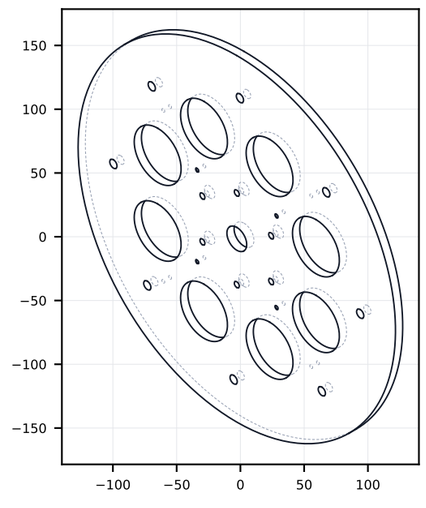

DRAWING pod_plate
qty per robot: 2 (R-hand part = this one mirrored about XZ)
material: 6061-T6 plate 8 mm
process: waterjet + CNC finish (stud holes reamed 8 H7)
finish: black anodise
mass: 1711.7 g overall: 352.0 x 8.0 x 352.0 mm (x, y, z)
note:
general tolerances ISO 2768-mK, edges broken 0.3 x 45, units mm
geometry master: parts/pod_plate.step
view origin = bounding-box centre = robot (0.00, 334.00, 0.00)

HOLE TABLE (view coords of the screw seat, mm)

feature	x	y	z	axis
M4 tapped 8.0 deep (drill 3.3)	-44.00	9.00	-44.00	-y
M4 tapped 8.0 deep (drill 3.3)	-44.00	9.00	44.00	-y
M4 tapped 8.0 deep (drill 3.3)	44.00	9.00	-44.00	-y
M4 tapped 8.0 deep (drill 3.3)	44.00	9.00	44.00	-y
d5.5 through, csk 90 deg	-38.10	4.00	-22.00	-y
d5.5 through, csk 90 deg	-38.10	4.00	22.00	-y
d5.5 through, csk 90 deg	-0.00	4.00	-44.00	-y
d5.5 through, csk 90 deg	0.00	4.00	44.00	-y
d5.5 through, csk 90 deg	38.10	4.00	-22.00	-y
d5.5 through, csk 90 deg	38.10	4.00	22.00	-y