TRANSLATION

(1) EU-Type Examination Certificate

according to Module B Paragraph 6.1 of PPE Regulation (EU) 2016/425

(2) Regulation of the European Parliament and of the Council of 9 March 2016 relating to personal protective equipment (PPE) - Regulation (EU) 2016/425

(3) No. of EU-Type Examination Certificate: **ZP/B054/25**

(4) Product: **Guided-type fall arrester, type: Quickset including rigid anchor line, type: Securope for Quickset**

(5) Manufacturer: **Fallprotec S.A.**

(6) Address: **2-4 rue Gustave Loosé, 8346 Grass, LUXEMBOURG**

(7) Risk category: **III**

(8) The design and construction of this personal protective equipment and any acceptable variation thereto are specified in the appendix to this EU type-examination certificate.

(9) The certification body of DEKRA Testing and Certification GmbH, Notified Body No. 0158 according to Chapter V of Regulation (EU) 2016/425 of 9 March 2016, certifies that this personal protective equipment has been found to comply with the essential Health and Safety Requirements given in Annex II to the Regulation. The evaluation results are recorded in report PB 25-052. Other possibly applicable Union legislations applicable to the specified personal protective equipment have not been taken into account in this EU-type examination certificate.

(10) The essential Health and Safety Requirements are assured in consideration of

DIN EN 353-1:2018

(11) This EU type-examination certificate relates only to the design, examination and tests of the specified personal protective equipment in accordance to Regulation (EU) 2016/425.
For category III personal protective equipment, this EU type-examination certificate may only be used in conjunction with one of the conformity assessment procedures referred to Article 19 (c).

(12) When applying the CE Marking according to Article 16 and 17 of Regulation (EU) 2016/425 to the products that conform to the types examined, the client is obliged to add, in accordance with the attached pattern, the identification number of the Notified Body engaged in the conformity assessment according to Module C2 or D.
Furthermore, the manufacturer is obliged to issue an EU declaration of conformity in accordance with Article 15 of Regulation (EU) 2016/425 and to enclose it with the personal protective equipment, or to indicate the Internet address in the manual and in the instructions in Annex II, point 1.4., at which the EU declaration of conformity can be accessed.

(13) This EU-Type Examination Certificate is valid until 2030-04-07

DEKRA Testing and Certification GmbH
Bochum, 2025-04-08

Signed: Brumm
Managing director

We confirm the correctness of the translation from the German original. In the case of arbitration only the German wording shall be valid and binding.

Managing director

This certificate may only be published in its entirety and without any change.
DEKRA Testing and Certification GmbH, Handwerkstraße 15, 70565 Stuttgart, Germany
Certification Body: Dinnendahlstraße 9, 44809 Bochum, Germany
Telephone +49.234.3696-400, Fax +49.234.3696-110, DTC-Certification-Body@dekra.com

(14) Appendix to

(15) **EU-Type Examination Certificate**
ZP/B054/25

(16) 16.1 Subject and type
Guided-type fall arrester, type: Quickset including rigid anchor line,
type: Securope for Quickset

16.2 Description
The guided-type fall arrester, type: Quickset including rigid wire-rope anchor line of type Securope for Quickset (Fig. 1-2) is used to protect one person against falls from a height.
The user connects his own PPE to the fastener of the guided-type fall arrester to protect himself against falls from a height. The maximum permitted nominal load is 150 kg, the minimum permitted nominal load is 50 kg. With the help of an opening mechanism it is possible to fix and remove the guided-type fall arrester at any position of the rigid anchor line. A symbol shows how to place the guided-type fall arrester on the rigid anchor line in the direction intended. Possible wire ropes (Ø 8 mm) to be used for the rigid anchor lines can be made of stainless steel (7x7) or galvanised steel (7x19). The upper and lower ends of the anchor line are each equipped with a pressed end stop and fastened to the upper anchor point using the brackets. At the lower end of the anchor line, a rope-tensioning device is mounted which helps to pretension the system. The anchor line is supported by intermediate brackets along its running length. It is not possible to accidentally override the upper and lower ends of the anchor line as those are closed by the end stops of the anchor line.
The system is available in two variants: the first variant features an energy absorber which is mounted to the guided-type fall arrester. The second variant features a force absorber which is fastened between the anchor line and the upper anchor point. This variant has the guided-type fall arrester without the energy absorber. If the system features an integrated energy absorber at the guided-type fall arrester, then up to four people can climb at the same time while being protected.



Fig. 1: Guided-type fall arrester, type Quickset without energy absorber



Fig. 2: Guided-type fall arrester, type Quickset with energy absorber

This certificate may only be published in its entirety and without any change.
DEKRA Testing and Certification GmbH, Handwerkstraße 15, 70565 Stuttgart, Germany
Certification Body: Dinnendahlstraße 9, 44809 Bochum, Germany
Telephone +49.234.3696-400, Fax +49.234.3696-110, DTC-Certification-Body@dekra.com



Fig. 3: Absorber



Fig. 4: Tensioning device

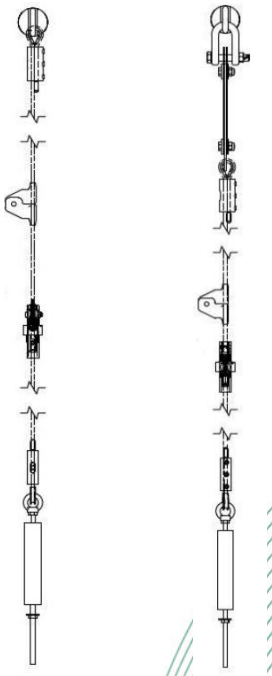


Fig. 4-5:Two variants of the guided-type fall arrester including rigid anchor line

(17) Report

PB 25-052, 2025-04-08

This certificate may only be published in its entirety and without any change.
DEKRA Testing and Certification GmbH, Handwerkstraße 15, 70565 Stuttgart, Germany
Certification Body: Dinnendahlstraße 9, 44809 Bochum, Germany
Telephone +49.234.3696-400, Fax +49.234.3696-110, DTC-Certification-Body@dekra.com