fuel tank there is the possibility of catching fire. Fig 9.2.1 shows the Gravity System.

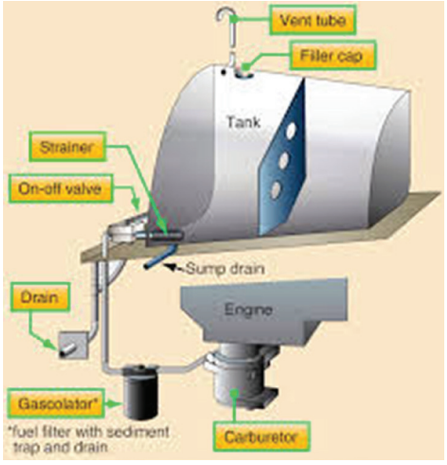


Figure 9.2.1 Gravity System

9.2.2 Vacuum Feed System

This method is actuated by the Vacuum in the engine. The vacuum created in the inlet manifold sucks the petrol from the tank and saved in the small substitute tank from there it is sent to the Carburettor by gravity method. But this method is not used in engine now a days.

9.2.3 Pump System

In this method the petrol from the tank is pumped by a pump. The pump may be mechanically or electrically actuated. In this method the tank can be fixed at any place in the engine and the pump can pump the fuel from the tank. So it is not necessary that the engine should be placed below the petrol tank as in the two former methods. The fuel can be supplied continuously even in any level. There is no chance of catching fire. So that all the vehicle now a days use this method only.


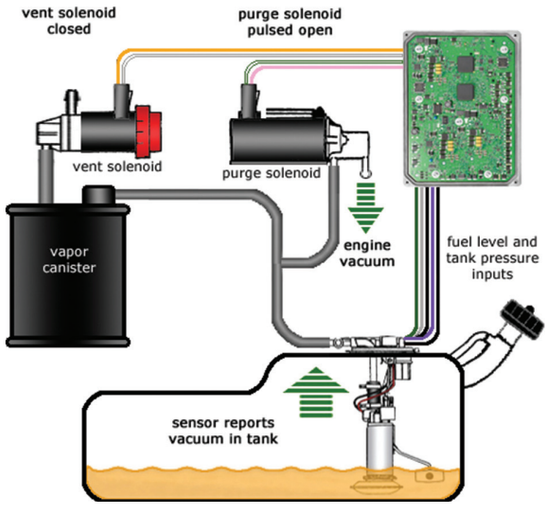


Figure 9.2.3 Pump system



What is Direct injection system?

- In a direct injection engine, the fuel skips the waiting period it would have to endure inside a standard engine and proceeds straight to the combustion chamber.
- It was used mainly during World War II in aero-engines such as the Junkers Jumo 210, the Daimler-Benz DB 601 and BMW 801.
- With gasoline engine it needs fuel, air (oxygen) and spark in order to operate.

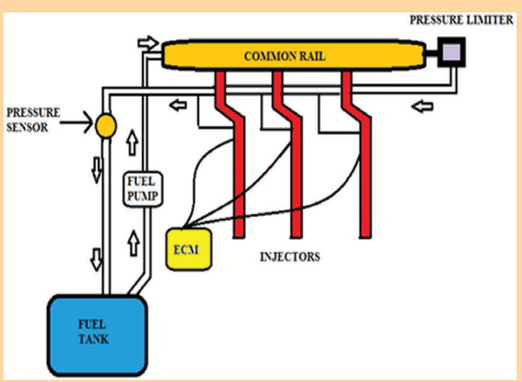

AM_Unit_09.indd 175 31-01-2019 18:02:26