
container. When the part starts rotating, the oil is splashed and the moving parts are lubricated. Bearings are generally lubricated by this method. Little spoons are attached to the rotating parts to get more quantity of oil to the part to be lubricated.

Grease lubrication

Grease lubrication is done with the help of grease guns. Another way of doing it simply is so fill a container with grease and the container is connected to the parts to be lubricated by means of a small tube. When a screw is screwed into the container, a good amount of grease is taken to the required place.

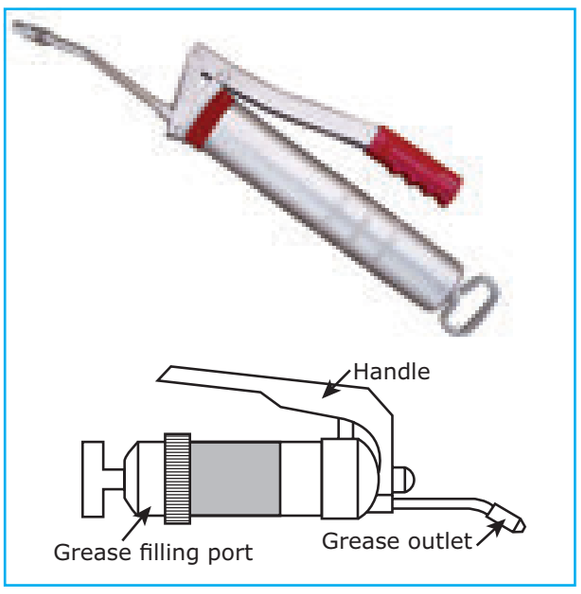

Grease gun

Lubrication oil and grease are manufactured under several trade names by the Indian oil companies. Suitable lubricants are used for specific purposes.

6.10 Central maintenance department

The primary aim of maintenance department is to ensure the machine tools, instruments, tools and accessories in good working conditions. More maintenance attention is needed when the work load increases. If the machines are maintained properly, we can lookout for more production.

Separate maintenance department will be functioning in major machine shops and industries. Experienced engineers, supervisors, technicians will be working in this department. Separate equipments and instruments will be used in the department.

6.11 Types of maintenance

There are different types of maintenance and they are

UKXHGI

1. Routine maintenance
   a. Daily maintenance
   b. Weekly maintenance
2. Preventive maintenance
3. Breakdown maintenance
4. Capital repairs or Corrective maintenance

6.12 Routine maintenance

Routine maintenance is done to avoid unnecessary breakdown of machine tools. It involves regular works like cleaning and lubricating, making minor adjustments and doing small repair works.

It is important to chart out what are all to be done, daily, weekly and monthly.

6.13 Daily maintenance

1. Cleaning all the parts of the machine tool.

XII BME_English version CHAPTER 06.indd 123 1/8/2020 1:41:20 PM