work is held on the table and grinding is done.

The base of the machine is a box like casting. The base is very similar to the one of the horizontal spindle grinding machine. It houses all the table drive mechanism.

The table is mounted on the base on top of the work table a magnetic chuck is mounted. A grinding wheel is mounted on the wheel head which slides vertically on the column. The table is made to reciprocate or rotate to bring the work surface below the grinding wheel to perform grinding.

Tool and cutter grinding machine

Tool and cutter grinders are used mainly to sharpen the cutting edges of various tools and cutters. They can also do light surface. Cylindrical and internal grinding to finish jigs, fixtures, dies and gauges.

Base

The base of the machine gives rigidity and stability to the machine. It is bolted rigidly to the floor. It supports all the other parts of the machine. The base is a box type and houses all the mechanisms for the saddle movements.

Saddle


The saddle is mounted directly on the top of the base and slides over it. The column supporting the wheel head is mounted on the saddle. It can be moved up or down and swiveled to each side.

Table

The table rests and moves on a top base, which is mounted over the saddle. The table has two layers. The work table is mounted on the sub-table which has 'T' slots for mounting the work and attachments used on the machine. The work table can be swiveled while grinding tapers.

Wheel head

The wheel head is mounted on a column on the back of the machine. It can be swiveled and positioned in the base for different set-up. A straight wheel and a cup wheel are mounted on either sides of the wheel head.

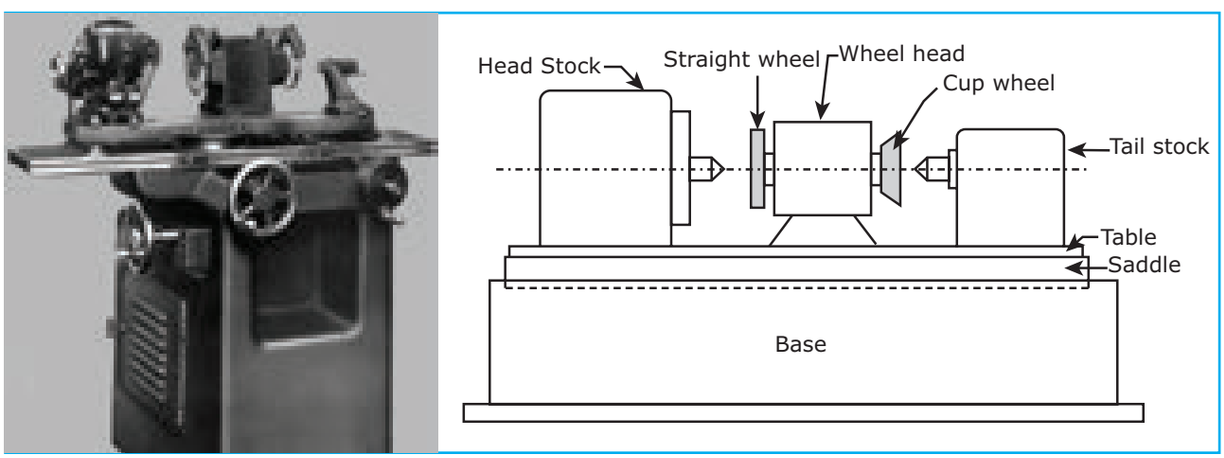

Tool and cutter grinding machine

XII BME_English version CHAPTER 04.indd 83 1/8/2020 1:43:06 PM