

that does not help, try updating the drivers for your modem from the manufacturer's Web site.

Internet & Communications


+ No private key

I recently signed up for a free digital certificate from www.digicert.com for encrypting e-mail messages. It was working fine until I had to format my hard disk. I had taken a backup of the certificate, but when I tried to reinstall it, the message "You don't have the private key" was displayed. Is there any way I can backup a certificate along with its private key?

Amit Samarth

Via e-mail

R When you export a digital certificate, the wizard asks you whether you wish to

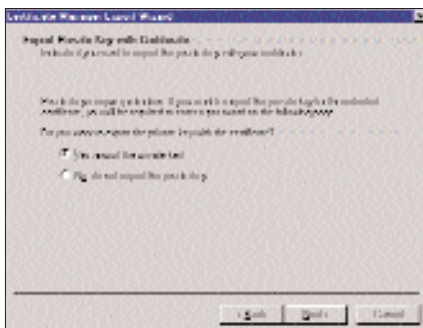

Back up the private key of your digital certificate

include your private key. By default, this option is selected. This will ensure that your private key is included in the backup. Be careful, though. Use this only for backup purposes. When exporting the certificate for distribution, make sure you don't include the private key.

Windows

+ Shut down blues

I have machine with a P-III 733 MHz processor, i810e chipset based motherboard, 128 MB RAM, and 20 GB hard disk (ATX). Recently, I removed my RAM for cleaning. I placed it again in the same location on the motherboard. Now, every time I shut down my computer, it restarts. But when I shut it down again, it shuts down properly. I formatted my hard disk and reinstalled all the components but the problem continues. I am told that this may be because of a problem with my motherboard. Please give me a solution.

Sachin

Via e-mail

R The problem of the damaged RAM slot is unrelated to Windows behaving the way it is. Had the RAM slot been damaged

completely, your PC wouldn't boot at all. However, you can try removing the RAM and installing it in another slot. If this does not solve your problem then the trouble could be with your power management.

Try disabling power management and the ACPI from the BIOS. The ACPI can be disabled from the BIOS only if the option is available. Or you can even try disabling fast shutdown. Go to Start > Programs > Accessories > System Tools and click on System Information. In the Tools menu, go to System Configuration Utility and select Advanced in the General tab. Here select Disable Fast Shutdown, click OK, and then click OK. Restart the computer.

Windows

+ In a flash

I have a PC with a Celeron 800 MHz processor, an 815e Mercury motherboard, 128 MB RAM, and a 20 GB hard disk. I had kept a password for the system, but unfortunately forgot it. To log in to the system, I removed the CMOS battery and tried to short it. I then put the battery back in the machine, but now I get an error message: "CMOS check sum error. Press F1 to load default or Del to enter setup." What's wrong?

Raju

Via e-mail

R You get this error message because your battery has been discharged. You should have your battery replaced to clear this problem. If the problem persists even after changing your battery, go to your BIOS settings where you will find an option to load the default settings. If in spite of doing this, you continue to get the error, there could be a high probability

that your BIOS is corrupt. You will have to flash your BIOS. To do this, find the exact model number of your motherboard.

Then go to the manufacturer's Web site, download the utility and the latest BIOS and save it on a floppy. Follow the instructions given on the Web site with regards to flashing your BIOS. Take great care while doing this as you could severely damage your motherboard if you do not flash it the right way.

Windows

+ No driver for this one

I have four HP brio 410 P-III 933 MHz machines preloaded with Windows 98. When I uninstalled Windows 98 and installed Windows 2000 Professional on these PCs, I could not change my display settings from 256 colours to 16-bit, 24-bit or higher. I have a Matrox - PM133 PS Prosavage Display card. I could not locate the driver for this for Windows 2000.

Nilesh

Via e-mail

R Unfortunately the particular display card on your machine does not have any support for Windows 2000. You will have to stick to your previous OS or communicate with H-P directly regarding this matter.

Hardware

+ Misbehaving monitor

I have a Celeron 433 MHz system with a 2 GB hard disk, 64 MB RAM, and an LG Studioworks 44m monitor. I am using Windows 98 SE as the OS. My picture tube began to have problems and so I got it changed. Now it can have 800x600 or 1024x728 resolution but not 640x480.

Applications


+ Using multilingual fonts

I would like to use multilingual fonts on my Web pages, for which I want to use dynamic fonts. But I've heard that only Netscape Navigator supports dynamic fonts. What must I do to be able to use multilingual fonts that are also supported by Internet Explorer?

V. Srinivasa Reddy

Via e-mail

R In order to use dynamic fonts that are visible on Internet Explorer you will have to save them in .eot format. To do so you will require a utility called WEFT (Windows Embedded Font Technology) which is available on the Microsoft Web site (<http://www.microsoft.com/typography/web/>)

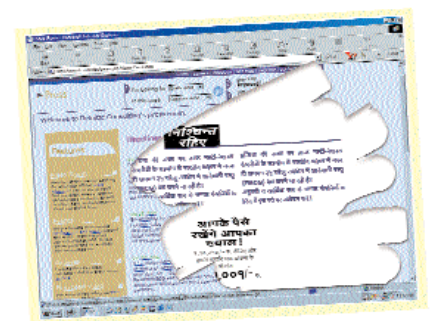

[embedding/veft3/default.htm?fname=%20&fsize=\).](http://embedding/veft3/default.htm?fname=%20&fsize=).) If you are interested in knowing more about this, you can go to http://msdn.microsoft.com/workshop/author/fonte/mbed/font_embed.asp and read the details.