
3 Click OK to finish the setting. If your ISP has given you a DNS address, add that under the DNS tab and then click OK. You will now see the main KPPP window with a connect button and all the information you entered. Click on Connect to dial in to the ISP. If the connection is authenticated, you'll get a message verifying your connection. Syslog writes error messages to /var/log/messages. If you see a message in /var/log/messages that states:

The remote system (ppp0) is required to authenticate itself but I couldn't find any suitable secret (password) for it to use to do so

then you need to configure ppp to use the "noauth" switch. Click on Setup and then, in the Account Setup box, highlight the account name you want to edit. Now go to Edit > Arguments. Type in "noauth" in the text field under Arguments, and click Add to finish reconfiguring.

4 If you are using KDE, you can add KPPP to the Kpanel next to the clock on the desktop either by right-clicking on the panel to add the item to the menu, or just by choosing "Dock into panel on connect" by clicking on the Setup button.

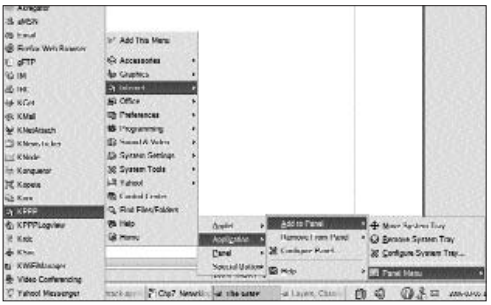

Use Panel Menu properties to add KPPP to the Panel

7.2.3 Do it the command line way

As we said earlier, many Linux distros have different methods of setting up a network. Where do all the entries go? Which files are edited? If you are a Windows user, we should tell you that the process is the same in Windows. When you add TCP/IP settings in Network Connections, it actually edits a file called Hosts. Very few people know this! So let's call this a geek's way of setting up a network.