


Keysight U8903B Performance Audio Analyzer

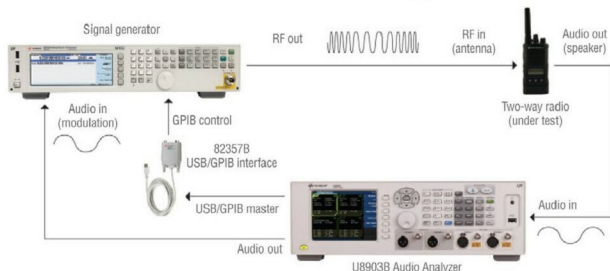

What are audio analyzers, and what do they test?

Audio analyzers provide essential measurement capabilities that enable efficient analysis of audio amplifiers and other devices in the audio chain. This allows test engineers to measure and quantify audio performance for applications such as IC components and module design in consumer electronics, wireless audio for mobile phones and other network equipment, and telecom systems in military vehicles or satellites.

Audio analyzers include balanced and unbalanced outputs and inputs, and provide an array of filters, sweep functions and flexible data display formats for each measurement. And with additional options such as digital audio interfaces or speech and audio quality measurements, you'll be ready to address a wide range of challenging audio applications.

Why it is important to test audio quality?

For more information: Call: 1800 11 2626 (toll free), (0124) 229 2010 or email: tm_india@keysight.com

Audio quality directly impacts an individual's experience with the audio product, especially for consumer electronics and telecommunication devices. Whether listening to mono, stereo or surround, the human ear knows what sounds good. Measuring "how good," however, can be a challenge. Audio analyzers help to characterize audio quality and ensure that the necessary quality standard is met.

Measuring audio quality helps developers to design high quality devices, maintain and verify that the device works, and to troubleshoot – to find the potential issue before the network or device completely breaks.

What are important measurements/parameters?

Amplitude, frequency response, THD+N, S/N ratio, Phase, crosstalk, time domain and frequency domain measurements are important for audio applications in most industries. Additional measurements include SINAD and voice

quality standards, PESQ and POLQA.

Introducing the U88903B performance audio analyzer

The next-generation U8903B performance audio analyzer enables you to effortlessly test wireless communication, component and integrated circuit audio applications. A low residual distortion of < -110 dB allows you to measure the most demanding devices, while the built-in test sequence function automates testing and removes the need to write complicated code during product development. The U8903B comes with an array of options to expand its capability, such as four, six or eight analog analyzer channels, digital options and an expanded bandwidth to 1.5 MHz with 24-bit resolution and one million point FFT. And with ITUT-T standards POLQA and PESQ, you can easily make speech and audio quality measurements.



Unlocking Measurement Insights