


Extensive Product Range & Industry-leading Performance

Meet Diverse Application Requirements

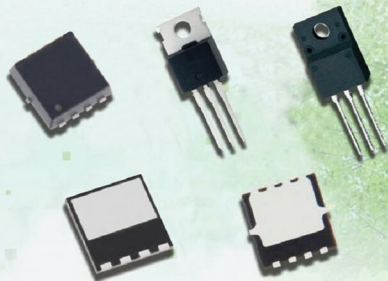

Toshiba has developed the Gen-4 super-junction 600V, 650V and 800V DTMOS IV MOSFET series. Fabricated using the state-of-the-art single epitaxial process, DTMOS IV provides a 30% reduction in $R_{DS(on)}$, a figure of merit (FOM) for MOSFETs, compared to its predecessor, DTMOS III.

A reduction in $R_{DS(on)}$ leads to smaller $R_{DS(on)}$ chips in the same packages. This helps users to improve efficiency and reduce the size of power systems. Fast switching X-type and fast body-diode 5-type versions are also available.

MOSFETs Line-ups

600V Rating

I_D (A)	$R_{DS(on)}$ MAX (Ω)	TO-220		I_D (A)	$R_{DS(on)}$ MAX (Ω)	TO-220SIS	
5.4	0.9			5.2	1.2		TK5A60W
6.2	0.75			5.8	1.0		TK6A60W
7	0.6			6.8	0.78		TK7A60W
8	0.5			7.8	0.65		TK8A60W
9.8	0.38	TK10E60W	TK10A60W	9.3	0.5		TK9A65W
11.5	0.3	TK12E60W	TK12A60W	11.1	0.39		TK11A65W
15.8	0.19	TK16E60W	TK16A60W	13.7	0.25	TK14E65W	TK14A65W
20	0.155	TK20E60W	TK20A60W	17.3	0.2	TK17E65W	TK17A65W
				27.6	0.11	TK28E65W	TK28A65W

Super Junction
DT-MOSIV (600V)

650V Rating

I_D (A)	$R_{DS(on)}$ MAX (Ω)	TO-220		I_D (A)	$R_{DS(on)}$ MAX (Ω)	TO-220SIS	
5.2	1.2			5.2	1.2		TK5A65W
5.8	1.0			5.8	1.0		TK6A65W
6.8	0.78			6.8	0.78		TK7A65W
7.8	0.65			7.8	0.65		TK8A65W
9.3	0.5			9.3	0.5		TK9A65W
11.1	0.39			11.1	0.39		TK11A65W
13.7	0.25	TK14E65W	TK14A65W	13.7	0.25	TK14E65W	TK14A65W
17.3	0.2	TK17E65W	TK17A65W	17.3	0.2	TK17E65W	TK17A65W
27.6	0.11	TK28E65W	TK28A65W	27.6	0.11	TK28E65W	TK28A65W

Super Junction
DT-MOSIV (650V)

800V Rating

I_D (A)	$R_{DS(on)}$ MAX (Ω)	TO-220		I_D (A)	$R_{DS(on)}$ MAX (Ω)	TO-220SIS	
4	3.5			4	3.5		TK4A80E
5	2.4			5	2.4		TK5A80E
6	1.7			6	1.7		TK6A80E
10	1.0			10	1.0		TK10A80E
6.5	0.95	TK7E80W	TK7A80W	6.5	0.95	TK7E80W	TK7A80W
9.5	0.55	TK10E80W	TK10A80W	9.5	0.55	TK10E80W	TK10A80W
11.5	0.45	TK12E80W	TK12A80W	11.5	0.45	TK12E80W	TK12A80W
17	0.29	TK17E80W	TK17A80W	17	0.29	TK17E80W	TK17A80W

Super Junction
DT-MOS IV (800V)