

Fig. 5: Endpoints display window in Wireshark

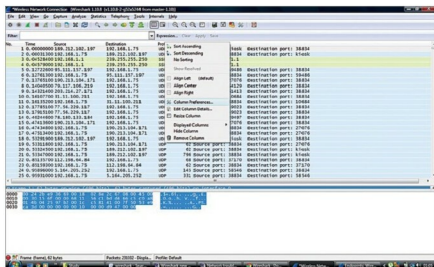


Fig. 6: Setting Column Preferences in Wireshark

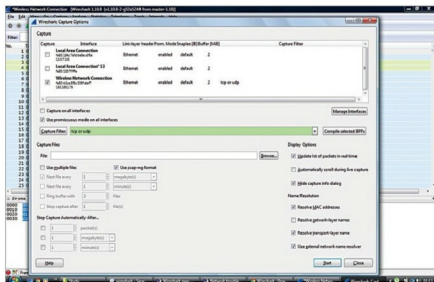


Fig. 7: Capture filter in Wireshark

know that the fault in the system was during x time, say, between 7.30 pm and 8.30pm. By changing time characteristics, we can see and study the packets for that period of time only.

For seeing different timing formats, click View→Time Display Format.

2. To find out whether the trace you have conducted has devices you are looking for, click Statistics→Endpoints. Hence, we can check the source or from where the data is coming and the destination.

We can also convert MAC address to names of devices as shown in Fig. 5. To see the MAC address, click to turn off Name resolution checkbox at the bottom of the window. You can also see your devices according to the IP address by clicking on IPV4 tab. UDP packets can also be checked.

3. You can also right-click on Title bar of data and change column properties by clicking Column Preferences, according to your need, as shown in Fig. 6.

4. In Wireshark, we can filter out only the required data from the pool of data using filters, namely, Capture and Display.

Capture filter is important if you know exactly what kind of data you want. It restricts the basic capturing of non-required packets. Here, we do not have other pool of packets and we capture only the packets that fulfill the filter criteria.

To set capture filter, click Capture→Interfaces→Options and set the one that you wish to have. We can also use OR and AND like operators for multiple filter options like 'tcp.port eq 80' as shown in Fig. 7.

5. Display filters are used if after sending and capturing a trace, you need to filter out packets based on some conditions (say, protocols or port numbers). For example, we can give 'tcp.port eq 80' to see non-Web data. We can even run a display filter while taking a trace we can also set the filter as 'tcp.port eq 80' as shown in Fig. 8.