B.M. Yavorsky, A.A. Detlaf

A MODERN HANDBOOK OF PHYSICS

Mir Publishers Moscow

A Modern Handbook of Physics

B.M. Yavorsky, A.A. Detlaf



This work is released under a
CC BY NC 4.0 License by
THE MIR TITLES PROJECT
https://mirtitles.org
Source files for the project:
https://gitlab.com/mirtitles/physics-handbook
Typeset in LaTeX by *Damitr Mazanav*.

Contents

Preface xv

I. Mechanics 1

1. Kinematics 3
- 1.1. Mechanical Motion. The Subject Matter of Mechanics 3
- 1.2. Frames of Reference. Path, Path Length 6
- 1.3. Velocity 11
- 1.4. Acceleration 16
- 1.5. Translational and Rotary Motion of a Rigid Body 20

2. Newton's Laws 29
- 2.1. Newton's First Law. Inertial Frames of Reference 29
- 2.2. Force 31
- 2.3. Mass. Momentum 36

2.4. Newton's Second Law 38
2.5. Newton's Third Law. Motion of the Centre of Mass 41
2.6. Motion of a Body of Variable Mass 43
2.7. Law of Conservation of Momentum 47
2.8. Galilean Transformations 49

3. Work And Mechanical Energy 57
3.1. Energy, Work and Power 57
3.2. Kinetic Energy 65
3.3. Potential Energy 69
3.4. Law of Conservation of Mechanical Energy 75
3.5. Perfectly Elastic and Inelastic Collisions 81

4. Dynamics of Rotary Motion 87
4.1. Moment of Force and Angular Momentum 87
4.2. Moment of Inertia 94
4.3. The Fundamental Law in the Dynamics of Rotary Motion 98
4.4. Law of Conservation of Angular Momentum 104

5. Fundamentals of the Special Theory of Relativity 111
5.1. Postulates of the Special Theory of Relativity 111
5.2. Simultaneity of Events. Synchronization of Clocks 115
5.3. Lorentz's Transformations 118
5.4. Relativity of Lengths and Time Intervals. 121
5.5. Transformation of Velocities and Accelerations 131
5.6. Basic Law of Relativistic Dynamics 135
5.7. Mass-Energy Relation 139

6. Gravitation **145**
6.1. Law of Universal 145
6.2. Gravitational Field 148
6.3. Kepler's Laws. Space Velocities 156

7. Motion in non-inertial Frames of Reference **161**
7.1. Kinematics of Relative Motion 161
7.2. Inertial Forces 164
7.3. Frame of Reference Fixed to the Earth 168
7.4. Principle of Equivalence 174

II. Fundamentals of Molecular Physics and Thermodynamics **179**

8. Ideal Gases **181**
8.1. Subject Matter of Molecular Physics. Thermal Motion 181
8.2. Statistical and Thermodynamic Methods 184
8.3. Thermodynamic Variables 186
8.4. Equation of State of an Ideal Gas 192

9. First law of Thermodynamics **197**
9.1. Total and Internal Energy 197
9.2. Heat and Work 201
9.3. First Law of Thermodynamics 206
9.4. Graphical Representation 208
9.5. Heat Capacity of Matter 211

10. Kinetic Theory of Gases **223**
10.1. Certain Information on Classical Statistical Physics 223
10.2. Basic Equation 225
10.3. Maxwell's Distribution Law 228
10.4. Boltzmann Distribution 234
10.5. Mean Free Path of Molecules 237
10.6. Equipartition of Energy 239
10.7. Heat Capacity of Gases 244
10.8. Transport Phenomena in Gases 252
10.9. Properties of Rarified Gases 259

11. Second Law Of Thermodynamics **263**
11.1. Cycles. The Carnot Cycle 263
11.2. Reversible and Irreversible Processes 270
11.3. Second Law of Thermodynamics 273
11.4. Entropy and Free Energy 276
11.5. Statistical Interpretation of the Second Law of Thermodynamics 281
11.6. Fluctuations 283
11.7. Brownian Movement 287
11.8. Third Law of Thermodynamics 289

12. Real Gases And Vapours **293**
12.1. Forces of Intermolecular Interaction 293
12.2. Van der Waals Equation of State 301
12.3. Isothermals of Real Gases. Phase Transitions 304
12.4. Superfluidity Of Helium 310

13. Liquids **313**
13.1. Certain Properties of Liquids 313

13.2. Frenkel's Hole Theory of the Liquid State 315
13.3. Diffusion and Viscosity Phenomena in Liquids 318
13.4. Surface Tension of Liquids 321
13.5. Wetting and Capillary Phenomena 324
13.6. Vaporization and Boiling of Liquids 329

III. Electrodynamics 335

14. Electric Charges. Coulomb's Law 337
14.1. Introduction 337
14.2. Coulomb's Law 339

15. Electric Field Strength And Displacement 345
15.1. Electric Field. Field Strength 345
15.2. Principle of Superposition of Electric Fields 349
15.3. Electric Displacement. Ostrogradsky-Gauss Electric Flux Theorem 353

16. Electric Field Potential 359
16.1. Work in Moving Electric Charge 359
16.2. Electrostatic Field Potential 362
16.3. Field Potential and Strength Relation 367
16.4. Conductors in an Electrostatic Field 370

17. Capacitance 373
17.1. Capacitance of an Isolated Conductor 373
17.2. Mutual Capacitance. Capacitors 375

18. Dielectrics In An Electric Field 381
18.1. Dipole Moments of Molecules of a Dielectric 381

18.2. Polarization of Dielectrics 385
18.3. Relation Between Displacement, Field Strength and Polarization Vectors 389
18.4. Ferroelectric Materials 393

19. Energy Of An Electric Field 397
19.1. Energy of a Charged Conductor and an Electric Field 397
19.2. Energy of a Polarized Dielectric 401

20. Direct Electric Current 403
20.1. Concept of an Electric Current 403
20.2. Current and Current Density 405
20.3. Electron Theory of Electrical Conduction 408

21. Direct Electric Current 415
21.1. Extraneous Forces 415
21.2. Ohm's Law and the Joule-Lenz Law 417
21.3. Kirchhoff's Laws 422

22. Electric Current In Liquids And Gases 427
22.1. Faraday's Laws of Electrolysis. Electrolytic Dissociation 427
22.2. Atomicity of Electric Charges 430
22.3. Electrolytic Conduction of Liquids 431
22.4. Electrical Conduction in Gases 433
22.5. Various Types of Gas Discharges 435
22.6. Certain Information on Plasma 439

23. Magnetic Field Of Direct Current 447
23.1. Magnetic Field. Ampere's Law 447
23.2. The Biot-Savart-Laplace Law 451

23.3. Simplest Cases of Magnetic Fields 455
23.4. Interaction of Conductors 462
23.5. Total Current Law. Magnetic Circuits 465
23.6. Work Done in a Magnetic Field 471

24. Motion Of Charged Particles In Electric And Magnetic Fields 475
24.1. Lorentz Force 475
24.2. Hall Effect 481
24.3. Charge-to-Mass Ratio of Particles. Mass Spectroscopy 483
24.4. Charged Particle Accelerators 486

25. Electromagnetic Induction 495
25.1. Basic Law of Electromagnetic Induction 495
25.2. Phenomenon of Self-Induction 500
25.3. Mutual Induction 504
25.4. Energy of a Magnetic Field 507

26. Magnetic Materials In A Magnetic Field 511
26.1. Magnetic Moments of Electrons and Atoms 511
26.2. An Atom in a Magnetic Field 515
26.3. Magnetic Materials in a Magnetic Field 518
26.4. Magnetic Field in Magnetic Materials 524
26.5. Ferromagnetic Materials 527

27. Fundamentals of Maxwell's Theory 533
27.1. General Features o! Maxwell's Theory 533
27.2. Maxwell's First Equation 535
27.3. Displacement Current. Maxwell's Second Equation 538

27.4. Complete Set of Maxwell's Equations 543

IV. Oscillations and Waves 549

28. Free Harmonic Oscillations 551
28.1. Harmonic Oscillations 551
28.2. Mechanical Harmonic Vibrations 557
28.3. Free Harmonic Oscillations in an Oscillatory Electric Circuit 564
28.4. Adding Harmonic Oscillations 568

29. Damped And Forced Oscillations 581
29.1. Damped Oscillations 581
29.2. Forced Mechanical Vibration 587
29.3. Forced Electrical Oscillation 594

30. Elastic Waves 601
30.1. Waves in an Elastic Medium 601
30.2. Travelling Wave Equation 606
30.3. Phase Velocity and Energy of Elastic Waves 614
30.4. Superposition of Waves 620
30.5. Interference of Waves 624
30.6. Doppler Effect in Acoustics 634

31. Electromagnetic Waves 637
31.1. Properties of Electromagnetic Waves 637
31.2. Energy of Electromagnetic Waves 644
31.3. Electromagnetic Radiation 648
31.4. Electromagnetic Spectrum 651
31.5. Reflection and Refraction 655

31.6. Doppler Effect 661

V. Optics 667

32. Interference of Light 669
32.1. Monochromaticity and Time Coherence of Light 669
32.2. Interference of Light. Spatial Coherence of Light 673
32.3. Interference of Light in Thin Films 682
32.4. Multiwave Interference 689

33. Diffraction of Light 695
33.1. Huygens-Fresnel Principle 695
33.2. Fresnel Diffraction 701
33.3. Fraunhofer Diffraction 703
33.4. Diffraction by a Space Lattice 713
33.5. Resolving Power of Optical Instruments 717
33.6. Holography 720

34. Absorption, Scattering And Dispersion Of Light 725
34.1. Interaction of Light With Matter 725
34.2. Absorption of Light 727
34.3. Scattering of Light 732
34.4. Normal and Anomalous Light Dispersion 735
34.5. Classical Electron Theory of Light Dispersion 737
34.6. Vavilov-Cherenkov Radiation 741

35. Polarization of Light **747**
35.1. Polarization of Light in Reflection and Refraction at the Interface Between Two Dielectric Media 747
35.2. Birefringence (Double Refraction) 751
35.3. Interference of Polarized Light 759
35.4. Artificial Optical Anisotropy 765
35.5. Rotation of the Plane of Polarization 767

36. Thermal Radiation **771**
36.1. Thermal Radiation. Kirchhoff's Law 771
36.2. Stefan-Boltzmann and Wien Laws 777
36.3. Planck's Formula 780
36.4. Optical Pyrometry 784

37. Fundamentals Of Quantum Optics **789**
37.1. External Photoelectric Effect 789
37.2. Mass and Momentum of the Photon. Light Pressure 795
37.3. Compton Effect 797
37.4. Wave-Particle Duality of the Properties of Light 801

VI. Atomic and Molecular Physics **805**

38. Elements Of Quantum Mechanics **807**
38.1. Wave-Particle Dualism 807
38.2. Schrödinger Wave Equation 812
38.3. Motion of a Free Particle 815

38.4. A Particle in a One-Dimensional Infinitely Deep Potential Well 817
38.5. Linear Harmonic Oscillator 820
38.6. Heisenberg Indeterminacy Principle 826
38.7. Tunnel Effect 831

39. Structure Of Atoms And Molecules 835
39.1. The Hydrogen Atom and Hydrogen-Like Ions 835

Preface

The basic sciences and physics, in particular, are of prime importance today in the training of engineers for the various branches of the national economy. This has led to fundamental changes in recent years in the teaching of physics in engineer ing institutes, and to the students of other educational institutions in which they do not major in physics. The scope and scientific level of physics courses have been substantially supplemented and cover the main trends in the development of modern physics. Consequently, the physics textbooks for engineering students have inevitably become three-volume editions of almost fifteen hundred pages. The need has arisen, in this connection, for a concise handbook on this subject. The aim of the authors was to fulfill this need.

In scope and depth this handbook includes all of the definitions, formulas and information covered in the most comprehensive and up-to-date physics courses of engineering institutes and the physics departments of universities and colleges. Physical laws are concisely formulated, all the necessary explanations are given and, in many cases,

derivations as well. Though it plays a vital role in the teaching of physics, experimental material has been omitted. This is due only to a lack of space. All the units and symbols comply with the requirements of the SI. Units of physical quantities and systems of units are listed and dealt with in a short appendix.

This handbook is designed primarily for engineering students, as well as college and university students studying, but not majoring in physics. It can be used to advantage by engineers and graduate students, as well as by instructors and lecturers of intermediate schools and colleges.

Mathematical knowledge required in using the handbook is within the scope of the ordinary mathematics courses of engineering institutes. The detailed index and the numerous cross references, indicating the chapter, section and subsection, are of aid in finding any required information. The authors are sincerely grateful to the translator, N. Weinstein, and the science editor, T. Baranovskaya, for their comprehensive and expert work in the publication of the English edition of this handbook, as well as for their valuable suggestions, which should facilitate its use by the reader.

B. Yavorsky
A. Detlaf

Parts One, Four, Five and the appendices were written by Prof. A. A. Detlaf; Parts Two, Three, Six, Seven and Eight, by Prof. B. M. Yavorsky.

Part I.

Mechanics

1 Kinematics

1.1 Mechanical Motion. The Subject Matter of Mechanics

1.1.1

The simplest form of motion in nature is *mechanical motion*. It consists of changes in the relative positions of bodies or their parts in space in the course of time. The branch of physics dealing with the laws of mechanical motion is called *mechanics*. In a more narrow sense of the word, this is often under stood to mean *classical mechanics*, which deals with the motion of macroscopic bodies travelling at velocities a great many times less than that of light in free space. Classical mechanics is based on Newtons laws and is therefore frequently referred to as *Newtonian mechanics*. The laws of motion of bodies at velocities close to that of light in free space are taken up in *relativistic mechanics* (5.1.1), and the laws of motion of micro particles (for example, the electrons in atoms, molecules, crystals, etc.) are the subject matter

of *quantum mechanics* (38.1.1).

1.1.2

Classical mechanics comprises three basic branches: statics, kinematics and dynamics. Statics deals with the laws for the composition of forces and the conditions for the equilibrium of bodies. *Kinematics* provides a mathematical description of all possible kinds of mechanical motion, regardless of what causes each particular kind of motion. *Dynamics* investigates the effect of the interaction between bodies on their mechanical motion.

1.1.3

The mechanical properties of bodies are determined by their chemical nature, internal structure and state. These are beyond the scope of mechanics and are studied in other branches of physics. Hence, in accordance with the conditions of each specific problem on hand, various simplified models are employed to describe real bodies in motion. These include the particle, the perfectly rigid body, the perfectly elastic body, the perfectly inelastic body and others.

A *material point*, or *particle*, is a body whose shape and size are of no consequence under the conditions of the problem being considered. For example, in a first approximation, the motion of a ship from one point to another can be dealt with as the motion of a particle. If, however, it becomes necessary to take into account such details of this motion as the pitching and rolling of the

ship by swells or heavy seas, the ship should be dealt with as an extended body of definite shape. In the literature the word particle is more frequently used than material point.

Any extended body or system of such bodies, making up the *mechanical system* being investigated, can be regarded as a *system of particles*. For this purpose, ail the bodies of the system can be conceived of as being broken down into such a large number of parts that the size of each part is negligibly small compared to the sizes of the bodies themselves.

1.1.4

A *perfectly rigid body*, or simply *rigid body*, is one whose deformation can be neglected under the conditions of the given problem. The distance between any two points of a rigid body remains constant no matter what action the body is subjected to. A perfectly rigid body can be regarded as a system of particles rigidly connected to one another.

A *perfectly elastic body* is one whose deformation obeys Hookes law (**??**). After the external forces applied to such a body have been removed, its initial size and shape are completely restored.

A *perfectly inelastic body* is one that completely retains its deformed state, caused by external forces applied to the body, when these forces have been removed.

1.2 Frames of Reference. Path, Path Length and Displacement Vector of a Particle

1.2.1

The position of a body in space can be specified only in reference to other bodies. It makes sense, for instance, to speak of the location of the planets with respect to the sun, that of an air liner or steamship with respect to the earth, but we cannot indicate their position in space "in general" without reference to some specific body. A perfectly rigid body in which a coordinate system is rigidly fixed, furnished with a "clock" and employed to determine the position of bodies and particles being investigated in space at various instants of time, is called a frame of reference. Sometimes the frame of reference is the coordinate system itself if it is provided with a "clock" and the solid in which the system is rigidly fixed is called the body of reference. In each specific problem the frame of reference is selected so as to simplify the problem to the maximum extent. Inertial frames of reference (2.1.2) are the most commonly used in physics.

1.2.2

Most extensively employed is the Cartesian rectangular system of coordinates (Figure 1.1) whose orthonormal (normal orthogonal) basis is formed by the three vectors **i**, **j** and **k**, which are unit vectors with respect to their magnitudes, mutually orthogonal and pass through the

origin O of coordinates. The position of an arbitrary point M is specified by the radius vector $\mathbf{r}$, which connects the origin O of coordinates to point M. Vector $\mathbf{r}$ can be resolved along the axes $\mathbf{i}$, $\mathbf{j}$ and $\mathbf{k}$ of the basis as follows:

$$\mathbf{r} = x\mathbf{i} + y\mathbf{j} + z\mathbf{k}$$

where $x\mathbf{i}$, $y\mathbf{j}$ and $z\mathbf{k}$ are the components of vector $\mathbf{r}$ along the coordinate axes. The coefficients of resolution, x, y and z, are the Cartesian coordinates of point M and, due to the orthogonality of the vectors of the basis, the projections of radius vector $\mathbf{r}$ on the corresponding coordinate axes.

The motion of a particle is completely specified if three continuous and single-valued functions of the time t,

$$x = x(t),\ y = y(t) \text{ and } z = z(t),$$

are given to describe the changes in the coordinates of the particle with time.

These equations are said to be the *kinematic equations of motion of a particle*. They are equivalent to the single vector equation $\mathbf{r} = \mathbf{r}(t)$, for a moving particle.

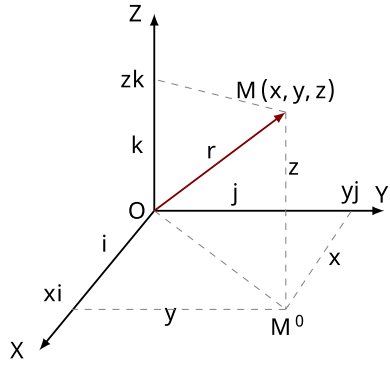


Figure 1.1.: Cartesian system of coordinates.

1.2.3

The line described by a moving particle in space is called its *path*. The kinematic equations of motion of a particle specify the equation of its path in parametric form (the parameter being the time t). Depending upon the shape of the path, distinction is made between *rectilinear* and *curvilinear* motion. The motion of a particle is said to be *plane* if its path lies completely in a single plane.

The mechanical motion of a body is relative, i.e. the nature of the motion and, in particular, the kind of path travelled by the points of the body depend upon the chosen frame of reference.

1.2.4

In the general case, the path of a moving particle is a spatial, rather than plane, curve. Introduced for such curves is the concept of an *osculating plane*. The osculating plane at the arbitrary point M of a curve is in the limiting position of a plane passing through any three points of the curve when these points approach point M without limit.

An *osculating circle* at point M of a curve is the limit of a circle passing through three points of the curve being considered when these points approach point M without limit. The osculating circle lies in the osculating plane. The centre of the osculating circle and its radius are called the *centre of curvature* and *radius of curvature*, at point M, of the curve being considered. The straight line connecting point M to the centre of curvature is called the *principal normal* to the curve at point M. The tangent to the curve at point M is perpendicular to the principal normal and also lies in the osculating plane.

1.2.5

The *path length* is the sum of the lengths of all the portions of the path over which the particle passes m the given interval of time. The instant of time $t = t_0$, from

which we begin to consider the motion of a particle, is called the initial instant of time, and the position of the particle at this instant (point A in Figure 1.2) is called its initial position. Owing to the arbitrary nature of the time reference point it is usually assumed that $t_0 = 0$.

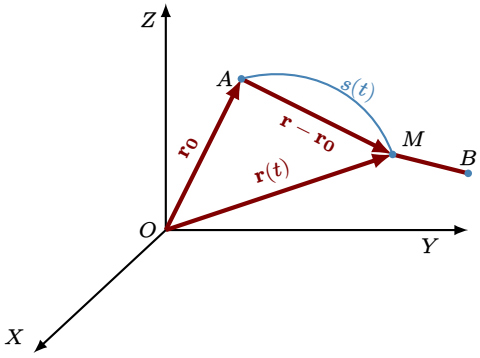


Figure 1.2.: A particle moving on a curve.

The path length s, travelled by the particle from its initial position, is a scalar function of time: $s = s(t)$. As is obvious from its definition, the path length of a particle cannot be a negative quantity. If the particle travels along an arc of the path AB (Figure 1.2), always in the same direction and is at point M at the instant of time t,then $s(t) = \widehat{AM}$. If the particle travels along the path in a more complicated way, for example if it travels from A to B, reaching B at the instant of time $t_1 < t$, and then reverses, returning to point M at instant t, then

$$s(t) = \overset{\frown}{AB} + \overset{\frown}{BM}.$$

1.2.6

The displacement vector of a moving particle during the time interval from $t = t_1$ to $t = t_2$ is the vector from the, position of the particle at the instant of time t_1 to its position at instant t_2. It is equal to the increment in the radius vector of the particle during the time interval being considered:

$$\mathbf{r_2} - \mathbf{r_1} = \mathbf{r}(t_2) - \mathbf{r}t_1$$

The displacement vector is always directed along the chord subtending the corresponding portion of the path.

Shown in Figure 1.2 is the displacement vector of the particle for the time interval from t_0 to t. It is equal to $\mathbf{r} - \mathbf{r_0} = \mathbf{r}(t) - \mathbf{r}(t_0)$.

The displacement vector of a moving particle for the time interval from t to $t + \Delta t$ equals

$$\Delta r = r(t + \Delta t) - r(t) = \Delta x \times \mathbf{i} + \Delta y \times \mathbf{j} + \Delta z \times \mathbf{k}$$

where Δx, Δy and Δz are the increments (changes) in the coordinates of the particle during the time interval being considered.

1.2.7

A particle travelling freely in space can accomplish only three *independent motions*, i.e. motions that cannot be represented as combinations of the other two. As a matter of fact, the motion of a particle along each of the axes

of a Cartesian rectangular coordinate system cannot be obtained by its motion along the other two axes. The number of independent motions that a mechanical system can accomplish is called the *number of degrees of freedom* of the system. Hence, a free particle has three degrees of freedom.

1.3 Velocity

1.3.1

The concept of velocity is introduced in mechanics to characterize the rate of motion of bodies. It is the time rate of change in the position of moving bodies. The *average velocity* of a moving particle in the time interval from t to $t+\Delta t$ is the vector $\mathbf{v_{av}}$, equal to the ratio of the increment $\Delta\mathbf{r}$ in the radius vector of the particle during this time interval to the length of the time interval Δt:

$$\mathbf{v_{av}} = \frac{\Delta \mathbf{r}}{\Delta t}$$

Vector $\mathbf{v_{av}}$ has the same direction as $\Delta\mathbf{r}$, i.e. along the chord subtending the corresponding portion of the particles path.

1.3.2

The *velocity* (or *instantaneous velocity*) of a moving particle is the vector quantity $\mathbf{v}$, equal to the first time derivative of the radius vector $\mathbf{r}$ of the particle being considered:

$$\mathbf{v} = \frac{\mathrm{d}\mathbf{r}}{\mathrm{d}t}$$

The velocity of the particle at the instant of time t is the limiting value that the average velocity $\mathbf{v_{av}}$ approaches for an infinitely small value of the time interval Δt. Thus

$$\mathbf{v} = \lim_{\Delta t \to 0} \frac{\Delta \mathbf{r}}{\Delta t} = \lim_{\Delta t \to 0} \mathbf{v_{av}}$$

The velocity vector $\mathbf{v}$ of the particle has the direction along a tangent to the path toward the motion in the same way as the vector $d\mathbf{r} = \mathbf{v}dt$ of infinitely small displacement of the particle during an infinitely short time interval dt.

The path length ds travelled by the particle during the length of time dt is equal to the magnitude of the displacement vector: $ds = |d\mathbf{r}|$. Therefore the magnitude of the velocity vector of a moving particle is equal to the first time derivative of the path length:

$$v = |\,\mathbf{v}\,| = \frac{\mathrm{d}s}{\mathrm{d}t}$$

1.3.3

The resolution of vector $\mathbf{v}$ along the basis of a Cartesian rectangular coordinate system is of the following form:

$$\mathbf{v} = v_x \times \mathbf{i} + v_y \times \mathbf{j} + v_z \times \mathbf{k}$$

The projections of the velocity of a moving particle on the coordinate axes are equal to the first time derivative of the corresponding coordinates of the particle:

$$v_x = \frac{\mathrm{d}x}{\mathrm{d}t},\ v_y = \frac{\mathrm{d}y}{\mathrm{d}t},\ v_z = \frac{\mathrm{d}z}{\mathrm{d}t}$$

and the magnitude of the velocity vector, sometimes called the *speed*, is

$$v = |\,\mathbf{v}\,| = \sqrt{\left(\frac{\mathrm{d}x}{\mathrm{d}t}\right)^2 + \left(\frac{\mathrm{d}y}{\mathrm{d}t}\right)^2 + \left(\frac{\mathrm{d}x}{\mathrm{d}t}\right)^2}$$

1.3.4

In rectilinear motion of a particle, the direction of its velocity vector remains constant. The motion of a particle is said to be *uniform* if the magnitude of its velocity does not change with time: $v = ds/dt = \text{const}$. The path length s travelled by a uniformly moving particle is a linear function of time: $s = vt$ (provided that $t_0 = 0$, see (1.2.5)).

If the magnitude of the particles velocity, i.e. its speed, increases with time ($dv/dt > 0$), the motion is said to be *accelerated*; if the speed decreases with time ($dv/dt < 0$), the motion is said to be *decelerated*.

1.3.5

The *average velocity of nonuniform motion* of a particle over a given portion of its path is the scalar v_{av}, called the *travelling speed*, which is equal to the ratio of the length Δs of this portion to the length Δt of the time interval required to travel over this portion:

$$v_{\text{av}} = \frac{\Delta s}{\Delta t}.$$

It is equal to the speed of uniform motion in which the time required to travel the same path length As is the same as in the nonuniform motion being considered.

In curvilinear motion of a particle $|\Delta\mathbf{r}| < \Delta s$. Therefore, in the general case, the average velocity (travelling speed) v_{av} of the particle is not equal to the magnitude of its average velocity $\mathbf{v_{av}}$ over the same portion of its path (1.3.1): $v_{\text{av}} \geqslant |\mathbf{v}|$ where the equality sign corresponds to a rectilinear portion of the path.

1.3.6

In the case of plane motion of a particle M (1.2.3), it often proves convenient to use the polar coordinates r and φ, where r is the distance from pole O to particle M and φ is the vectorial angle measured from polar axis OA (Figure 1.3). The velocity $\mathbf{v}$ of particle M can be resolved into two mutually perpendicular components: the *radial velocity* $\mathbf{v}_r$ and the *transverse velocity* $\mathbf{v}_\varphi$:

$$\mathbf{v} = \mathbf{v}_r + \mathbf{v}_\varphi,$$

in which

$$\mathbf{v}_r = \frac{1}{r}\frac{\mathrm{d}r}{\mathrm{d}t}\mathbf{r}, \text{ and } \mathbf{v}_\varphi = \frac{\mathrm{d}\varphi}{\mathrm{d}t}[\mathbf{kr}],$$

where $\mathbf{r}$ is the polar radius vector of particle M, and $\mathbf{k}$ is the unit vector directed perpendicular to the plane of motion of the particle so that the rotation of radius vector $\mathbf{r}$ upon an increase in angle φ is seen, from the head of unit vector $\mathbf{k}$, to be counterclockwise.

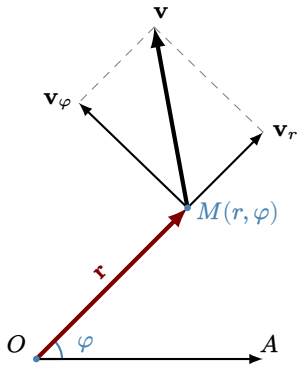


Figure 1.3.: Polar coordinates of a moving particle.

The magnitude v of the velocity vector of particle M, in plane motion, is

$$v = \sqrt{\left(\frac{\mathrm{d}r}{\mathrm{d}t}\right)^2 + \left(r\frac{\mathrm{d}\varphi}{\mathrm{d}t}\right)^2}.$$

During the infinitely short length of time dt, polar radius vector $\mathbf{r}$ of the particle in plane motion sweeps over a sector of a circle, the area of the sector being $dS = r^2\, d\varphi/2$. Hence, the quantity

$$\sigma = \frac{\mathrm{d}S}{\mathrm{d}t} = \frac{1}{2}r^2\frac{\mathrm{d}\varphi}{\mathrm{d}t} = \frac{1}{2}rv_\varphi,$$

is called the *areal* velocity.

1.4 Acceleration

1.4.1

The concept of acceleration is introduced in mechanics to characterize the rate of change of the velocity vector of a mov ing particle. The *average acceleration* in the time interval from t to $t + \Delta t$ is the vector $\mathbf{a}_{\text{av}}$, which is equal to the ratio of the increment $\Delta\mathbf{v}$ of the velocity vector of the particle, during the lime interval, to the length of the time interval Δt:

$$\mathbf{v}_{\text{av}} = \frac{\Delta \mathbf{v}}{\Delta t}$$

1.4.2

Acceleration (or *instantaneous acceleration*) of a moving particle is the vector quantity $\mathbf{a}$, equal to the first time derivative of the velocity $\mathbf{v}$ of the particle being considered or, other wise, the second time derivative of the particles radius vector $\mathbf{r}$:

$$\mathbf{a} = \frac{\mathrm{d}\mathbf{v}}{\mathrm{d}t} = \frac{\mathrm{d}^2\mathbf{r}}{\mathrm{d}t^2}.$$

The acceleration of a moving particle at the instant of time t is the limiting value that the average acceleration $\mathbf{a}_{\text{av}}$ approaches for an infinitely small time interval Δt. Thus

$$\mathbf{a} = \lim_{\Delta t \to 0} \frac{\Delta \mathbf{v}}{\Delta t} = \lim_{\Delta t \to 0} \mathbf{a}_{\text{av}}.$$

1.4.3

The resolution of vector $\mathbf{a}$ along the basis of a rectangular Cartesian coordinate system is of the form:

$$\mathbf{a} = a_x\mathbf{i} + a_y\mathbf{j} + a_z\mathbf{k}.$$

The projections of the acceleration vector of a moving particle on the coordinate axes are equal to the first time derivatives of the corresponding velocity projections or, otherwise, the second time derivatives of the corresponding coordinates of the particle:

$$a_x = \frac{\mathrm{d}v_x}{\mathrm{d}t} = \frac{\mathrm{d}^2x}{\mathrm{d}t^2},\ a_y = \frac{\mathrm{d}v_y}{\mathrm{d}t} = \frac{\mathrm{d}^2y}{\mathrm{d}t^2},\ a_z = \frac{\mathrm{d}v_z}{\mathrm{d}t} = \frac{\mathrm{d}^2z}{\mathrm{d}t^2}.$$

The magnitude of the acceleration vector is

$$\begin{aligned} a = |\,a\,| &= \sqrt{\left(\frac{\mathrm{d}v_x}{\mathrm{d}t}\right)^2 + \left(\frac{\mathrm{d}v_y}{\mathrm{d}t}\right)^2 + \left(\frac{\mathrm{d}v_z}{\mathrm{d}t}\right)^2} \\ &= \sqrt{\left(\frac{\mathrm{d}^2x}{\mathrm{d}t^2}\right)^2 + \left(\frac{\mathrm{d}^2y}{\mathrm{d}t^2}\right)^2 + \left(\frac{\mathrm{d}^2z}{\mathrm{d}t^2}\right)^2}. \end{aligned}$$

1.4.4

The acceleration vector of a moving particle lies in the osculating plane (1.2.4) passing through point M of the path being considered and is direct ed toward the concavity of the path BC (Figure 1.4). In this plane the acceleration vector $\mathbf{a}$ can be resolved into two mutually perpendicular components $\mathbf{a}_\tau$ and $\mathbf{a}_n$:

$$\mathbf{a} = \mathbf{a}_\tau + \mathbf{a}_n.$$

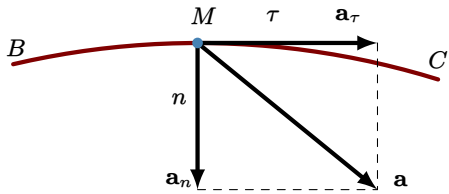


Figure 1.4.: Tangential and normal components of the acceleration of a moving particle.

1.4.5

Component $\mathbf{a}_\tau$ is called the *tangential acceleration* of the moving particle. It is directed along the tangent to the path and equals

$$\mathbf{a}_\tau = \frac{\mathrm{d}v}{\mathrm{d}t}\tau \quad \text{and} \quad \mathbf{a}_t = \frac{\mathrm{d}v}{\mathrm{d}t},$$

where $\tau = \mathbf{v}/v$ is the unit vector of the tangent, from point M of the path in the direction of velocity $\mathbf{v}$ of the particle, and a_τ is the projection of the tangential acceleration on the direction of vector $\mathbf{v}$. The tangential acceleration characterizes the rate of change of the magnitude of the particles velocity vector. Vectors $\mathbf{a}_\tau$ and $\mathbf{v}$ coincide in direction, i.e. $a_\tau > 0$, in accelerated motion (1.3.4); vectors $\mathbf{a}_\tau$ and $\mathbf{v}$ are opposite in direction $a_\tau < 0$, in decelerated motion of the particle; and $a_\tau = 0$ in its uniform motion. If $a_\tau = \text{const} \neq 0$, the motion is said to be uniformly variable. In uniformly variable motion the magnitude of the particles velocity is linearly time-

dependent:

$$v = v_0 + a_\tau t,$$

where $v_0 = v(0)$ is the magnitude of the initial velocity, i.e. the velocity at the initial instant of time $t = 0$. If $a_\tau = \text{const} > 0$, the motion of the particle is said to be *uniformly accelerated*, whereas if $a_\tau = \text{const} < 0$, it is said to be *uniformly decelerated*.

1.4.6

Component $\mathbf{a}_n$ of acceleration $\mathbf{a}$ of the moving particle is called its *normal acceleration*. It is directed along the principal normal to the path at point M being considered, toward the centre of curvature (1.2.4) of the path. Therefore, an is often called the *centripetal acceleration* of the particle. The normal acceleration equals

$$\mathbf{a}_n = \frac{v^2}{R}\mathbf{n},$$

where $\mathbf{n}$ is the unit vector of the principal normal, and R is the radius of curvature of the path. The normal acceleration characterizes the rate of change in direction of the particles velocity vector.

If the particle travels in a straight line the normal acceleration $\mathbf{a}_n = 0$ and the acceleration is equal to the tangential acceleration of the particle: $\mathbf{a} = \mathbf{a}_\tau$.

1.5 Translational and Rotary Motion of a Rigid Body[1]

1.5.1

Translation is the kind of motion of a rigid body in which any straight line rigidly fixed in the body (for instance, line AB in Figure 1.5), remains parallel to its initial position (A_0B_0). With respect to the earth, a lift cabin (elevator car), lathe tool, and many other items have translational motion. In the translational motion of a rigid rigid body all of its points are displaced in an identical way.

During the infinitely short time dt the radius vectors of these points are changed by the same amount dr. Hence the velocity of all points of the body is the same in each instant of time and is equal to d$\mathbf{r}$/dt and consequently, their accelerating is also the same. For this reason, a kinematic discussion of the translational motion of a rigid body reduces to the investigation of the motion of any one of its points, or particles. Dynamics usually deals with the motion of the centre of mass of the body (2.3.3). A rigid body travel ling freely in space has three translational degrees of freedom (1.2.7), corresponding to its translational motions along the three coordinate axes.

1.5.2

The motion of a rigid body in which two of its points, A and B, remain fixed is called *rotation (or rotary motion)*

[1] Only perfectly rigid bodies are dealt with in this section; for the sake of brevity, they have been called simply “rigid bodies”.

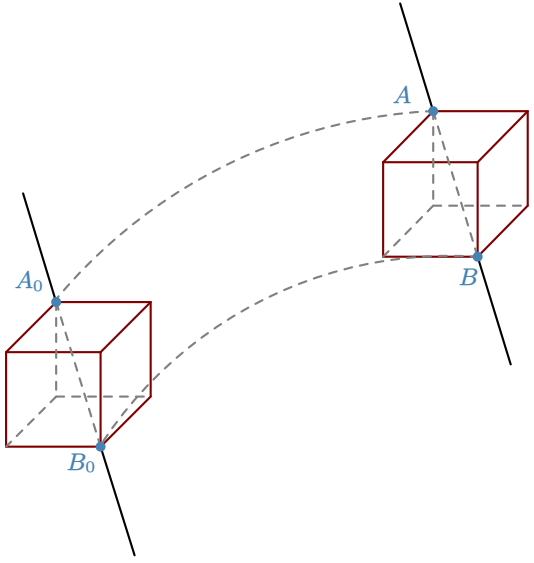


Figure 1.5.: Translational motion of a rigid body.

of the body about a fixed axis. The fixed straight line AB is the axis of rotation. In the rotation of a rigid body about a fixed axis all the points of the body describe circles whose centres lie on the axis of rotation and whose planes are perpendicular to this axis. The rotors of turbines, motors and generators, for example, have rotary motion with respect to the earth if these machines are rigidly mounted.

A rigid body rotating about a fixed axis has only one degree of freedom (1.2.7). Its position in space can be completely defined by specifying the angle of rotation (position angle) φ from some definite (initial) position.

1.5.3

The angular velocity serves to characterize the rate and direction of rotation of a body about an axis. The *angular velocity* is the vector $\boldsymbol{\omega}$, which is equal in magnitude to the first derivative of the angle of rotation φ with respect to time t and is directed along the fixed axis of rotation in such a way that from its head the rotation of the body is counterclockwise (Fig. 1.6)[2]:

$$\boldsymbol{\omega} = \frac{\mathrm{d}\boldsymbol{\varphi}}{\mathrm{d}t} \text{ and } \omega = \frac{\mathrm{d}\varphi}{\mathrm{d}t}.$$

Here $\mathrm{d}\boldsymbol{\varphi}$ is the vector of an element of rotation of the body during the time dt. This vector is directed along the axis of rotation, also according to the right-hand screw rule (Figure 1.6). Axial vectors $\mathrm{d}\boldsymbol{\varphi}$ and $\boldsymbol{\omega}$ have no definite points of application: they can be laid off from any point

[2]The direction of vector $\boldsymbol{\omega}$ can also be determined by the *right-hand screw rule*. It coincides with the direction of translational motion of a right-hand screw rotating together with the body. Vectors like $\boldsymbol{\omega}$, whose direction is related to the direction of rotation and is reversed in transforming from a right-handed to a left-handed system of coordinates, are called *pseudovectors*, or *axial vectors* (in distinction to ordinary, *polar vectors*, which are not reversed in the above-mentioned transformation of coordinates). For example, the vector product of two polar vectors is a pseudovector, and that of a pseudovector and a polar vector is a polar vector.

on the axis of rotation. In Figure 1.6 they are laid off from a certain point O of the fixed axis of rotation. This point is also taken as the origin of the reference frame.

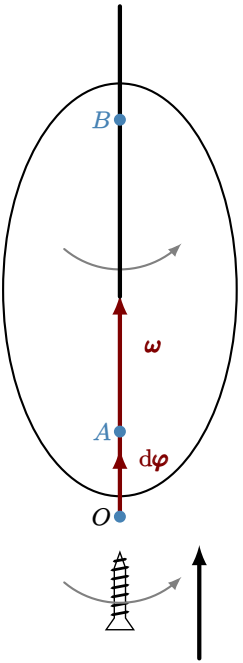


Figure 1.6.: Angular velocity and right-hand rule.

Rotation of a body is said to be *uniform* if the magnitude of its angular velocity remains constant with time

$\omega = \text{const}$. In this case the angle of rotation of the body is linearly dependent on time: $\varphi = \omega t$.

1.5.4

An arbitrary point M of a rigid body rotating about fixed axis OZ with the angular velocity $\boldsymbol{\omega}$ describes a circle of radius ρ with its centre at point O' (Figure 1.7). As distinct from the angular velocity of the body, the velocity $\mathbf{v}$ of point M is often called the *linear velocity*. It is perpendicular both to the axis of rotation (i.e. to vector $\boldsymbol{\omega}$) and to radius vector $\boldsymbol{\rho}$, from the centre O' of the circle to point M, and is equal to their vector product:

$$\mathbf{v} = [\boldsymbol{\omega}\boldsymbol{\rho}] = [\boldsymbol{\omega}\mathbf{r}] \text{ and } v = \omega\rho.$$

Here $\mathbf{r} = \mathbf{OO}' + \boldsymbol{\rho}$ and is the radius vector of point M, from point O of the axis of rotation. Point O is taken as the origin of coordinates.

1.5.5

The *period of revolution* is the time interval T required for a body, rotating uniformly at the angular velocity ω, to complete one revolution about its axis of rotation (i.e. to rotate through the angle $\varphi = 2\pi$):

$$T = \frac{2\pi}{\omega}.$$

The *rotational speed* $n = 1/T = \omega/2\pi$ is the number of revolutions made by a body in unit time in uniform rotation at the angular velocity ω.

1.5.6

The rotation of a rigid body in which one of its points remains fixed is said to be *rotation about a fixed point*. This point is usually taken as the origin of the fixed reference frame. In such rotation, all the points of the body travel along the surfaces of concentric spheres whose centre is at the fixed point.

At each instant of time, this motion of the rigid body can be regarded as rotation about a certain axis that passes through the fixed point and is called the instantaneous axis of rotation. In the general case, the position of the *instantaneous axis of rotation* varies with respect to both a fixed reference frame and one rigidly fixed in the rotating body.

The velocity $\mathbf{v}$ of arbitrary point M of such a body is

$$\mathbf{v} = [\boldsymbol{\omega}\mathbf{r}] \text{ and } v = \omega\rho.$$

Here $\boldsymbol{\omega} = \mathrm{d}\boldsymbol{\varphi}/\mathrm{d}t$ is the angular velocity of the body and is directed along the instantaneous axis of rotation as is the vector $\mathrm{d}\boldsymbol{\varphi}$ of an element of rotation of the body during the infinitely short time $\mathrm{d}t$, $\mathbf{r}$ is the radius vector from fixed point O, about which the body rotates, to point M, and ρ is the distance from point M to the instantaneous axis of rotation. Such a body can have three independent motions: it can rotate about each of three mutually perpendicular axes passing through fixed point O. It consequently has three degrees of freedom (1.2.7).

1.5.7

The *angular acceleration* vector $\boldsymbol{\epsilon}$ is introduced to indicate the rate of change of the angular velocity vector with time in nonuniform rotation of a body about a fixed axis or its rotation about a fixed point. Vector $\boldsymbol{\epsilon}$ is equal to the first derivative of the angular velocity $\boldsymbol{\omega}$ of the body with respect to the time t:

$$\boldsymbol{\epsilon} = \frac{\mathrm{d}\boldsymbol{\omega}}{\mathrm{d}t}.$$

If the body rotates about a fixed axis, vector $\boldsymbol{\epsilon}$ is directed along this axis. It coincides in direction with $\boldsymbol{\omega}$ in accelerated rotation ($\mathrm{d}\omega/\mathrm{d}t > 0$) and is opposite to $\boldsymbol{\omega}$ in direction in decelerated rotation ($\mathrm{d}\omega/\mathrm{d}t < 0$). The projection of the angular acceleration on the fixed axis OZ of rotation is equal to

$$\epsilon_z = \frac{\mathrm{d}\omega_z}{\mathrm{d}t},$$

where ω_z is the projection of vector $\boldsymbol{\omega}$ on the same axis.

1.5.8

As distinct from the angular acceleration, the acceleration $\mathbf{a}$ of arbitrary point M of a rigid body rotating about fixed point O, or about a fixed axis passing through point O, is often called the *linear acceleration*. It equals

$$\mathbf{a} = \frac{\mathrm{d}\mathbf{v}}{\mathrm{d}t} = \frac{\mathrm{d}}{\mathrm{d}t}[\boldsymbol{\omega}\mathbf{r}] = \mathbf{a}_r + \mathbf{a}_{\mathrm{ax}},$$

where $\mathbf{a}_r = [\boldsymbol{\epsilon}\mathbf{r}]$ is the *rotary acceleration* of the point, and $\mathbf{a}_{\mathrm{ax}} = [\boldsymbol{\omega}[\boldsymbol{\omega}\mathbf{r}]]$ is its *axipetal acceleration*, which is




Figure 1.7.: Relation between linear and rotational acceleration.

directed toward the instantaneous axis of rotation. If the body rotates about the fixed axis OZ (Figure 1.7), the rotary acceleration of point M coincides with its tangential acceleration $\mathbf{a}_\tau$ (1.4.5), and its axipetal acceleration coincides with its normal acceleration (1.4.6):

$$\mathbf{a}_\tau = [\boldsymbol{\epsilon}\mathbf{r}] = [\boldsymbol{\epsilon}\boldsymbol{\rho}] \text{ and } \mathbf{a}_n = -\boldsymbol{\omega}^2\boldsymbol{\rho}.$$

1.5.9

Any complex motion of a rigid body can be broken down into two simple motions: translational motion at the velocity $\mathbf{v}_A$ of a certain arbitrarily chosen point A of the body and rotation about an instantaneous axis passing through this point. The angular velocity $\boldsymbol{\omega}$ of rotation is independent of the choice of point A. The velocity of

arbitrary point M of the body is

$$\mathbf{v} = \mathbf{v}_A + [\boldsymbol{\omega}(\mathbf{r} - \mathbf{r}_A)],$$

where $\mathbf{r}$ and $\mathbf{r}_A$ are the radius vectors of points M and A.

In the dynamics of a rigid body it usually proves convenient to deal with its complex motion as the combination of two simultaneous motions: translational motion at the velocity of the bodys centre of mass (2.3.3) and rotation about the centre of mass.

The simplest case of complex motion of a body is *plane*, or *plane-parallel*, *motion*, in which all the points of the body travel in parallel planes. This is the motion, for instance, of a homogeneous circular cylinder rolling down an inclined plane. In plane motion the direction of the instantaneous axis of rotation of the body about point A remains constant and vectors $\boldsymbol{\omega}$ and $\mathbf{v}_A$ are perpendicular to each other.

2 Newton's Laws

2.1 Newton's First Law. Inertial Frames of Reference

2.1.1

As the *first law of dynamics* Newton took a law that had already been established by Galileo: a particle persistsing its state of rest or uniform motion in a straight line until the action of other bodies compel it to change that state.

Newtons first law indicates that no external action is required to maintain a state of rest or of uniform motion in a straight line. This manifests a special dynamic property of bodies, called their *inertia*. Newtons first law is consequently called the *law of inertia*, and the motion of a body not subject to the action of other bodies is said to be *inertial motion*.

2.1.2

Mechanical motion is relative: its nature may differ for different frames of reference (1.2.1) that are moving in relation to each other. An astronaut, for instance, on board a man-made satellite orbiting the earth, may be at rest in a reference frame fixed in the satellite. At the same time, he is travelling together with the satellite with respect to the earth along an elliptic orbit, i.e. not with uniform motion and not in a straight line. It is thus obvious that Newtons first law does not hold for any frame of reference. A ball, for example, lying on the smooth floor of a stateroom in a ship travelling with uniform motion at sea in a straight line, may suddenly start moving along the floor without being subject to the action of any other bodies. This will occur when the velocity of the ship, i.e. its speed and/or direction, begins to change.

A frame of reference with respect to which a particle, not subject to external action, remains at rest or moves uniformly in a straight line is called an *inertial frame of reference*. The content of Newtons first law reduces, in essence, to two statements: in the first place, that all material bodies possess the property of inertia, and secondly, that inertial reference frames exist.

2.1.3

Any two inertial reference frames can move only with translational motion with respect to each other, and only uniformly in a straight line. It has been experimentally

established that the *heliocentric frame of reference* is practically inertial. The origin of its coordinate system is located at the centre of mass (2.3.3) of the solar system (approximately at the centre of the sun) and the three axes extend in the directions of three distant stars selected, for example, so that these coordinate axes are mutually perpendicular.

A *laboratory frame of reference*, whose coordinate axes are rigidly fixed in the earth, is noninertial chiefly owing to the earths diurnal (daily) rotation. But the earth rotates so slowly that the maximum normal acceleration (1.4.6) of points on its surface due to diurnal rotation does not exceed $0.034\,\mathrm{m/s^2}$. Therefore, in the great majority of practical problems, the laboratory reference frame can be regarded as being approximately inertial.

2.1.4

Inertial reference frames are of prime importance in all branches of physics, not only mechanics. This is due to the fact that according to Einsteins principle of relativity (5.1.2) the mathematical expression of any physical law should have the same form in ail inertial reference frames. Hence, in the following we shall make use of only inertial frames of reference, without stipulation each time. The laws of motion of a particle with respect to a noninertial reference frame is dealt with in Chapter 7.

2.2 Force

2.2.1

Force is a vector quantity which is a measure of the mechanical action exerted on the body being considered by other bodies. Mechanical interaction can be accomplished either be tween bodies in direct contact (for instance, in friction, and in the pressure of bodies against one another), or between remote bodies. A special form of matter, connecting particles of matter into unified systems and transmitting the action of certain particles on others at finite velocities, is called a *physical field*, or simply *field*. Interaction between remote bodies is accomplished by the gravitational or electromagnetic fields they set up (for example, the attraction of the planets to the sun, and the inter action of charged bodies or current-carrying conductors). Mechanical action exerted on a given body by other bodies can be manifested in two ways. In the first place, it can lead to a change in the state of mechanical motion of the body being considered, and secondly, to its deformation. Both of these elects can serve as the basis for measuring forces. For example, the measurement of forces by means of a spring dynamometer is based on Hookes law (**??**) for axial tension.

Using the concept of force, we usually speak in mechanics of the motion and deformation of a body by the action of the forces applied to it. Here, of course, each force always corresponds to a certain body exerting this force on the body being considered.

Force $\mathbf{F}$ is completely specified by giving its magnitude, direction in space and point of application. The straight line along which a force is exerted is called its *line of*

action.

A field acting on a particle with the force $\mathbf{F}$ is said to be *steady*, or *stationary*, if it does not change in the course of time t, i.e. if force $\mathbf{F}$ is explicitly independent of time at any point in the held: $\partial\mathbf{F}/\partial t \equiv 0$. For a held to be steady it is necessary that the bodies which set it up are at rest with respect to the reference frame used in considering the held.

2.2.2

The simultaneous action of several forces, $\mathbf{F_1}$, $\mathbf{F_2}$, $\mathbf{F_3}$, ... $\mathbf{F_n}$ (Figure 2.1 (a)) on a particle M is equivalent to the action of a single force, called the *resultant force* and equal to the vector sum of the component forces. Thus

$$\mathbf{F} = \sum_{i=1}^{n} \mathbf{F_i}$$

It is the closing line of the polygon of forces $\mathbf{F_1}$, $\mathbf{F_2}$, $\mathbf{F_3}$, ... $\mathbf{F_n}$ (Figure 2.1 (b)).

If a body is perfectly rigid, the action of a force on it does not change when the point of application is displaced along the line of action, but within the limits of the body. In other words, forces applied to perfectly rigid bodies can be regarded as non-localized vectors.

2.2.3

A body is said to be *free* if no limitations are imposed on its position and motion in space. An airplane, for example, Hying in the air is a free body, as is a submarine

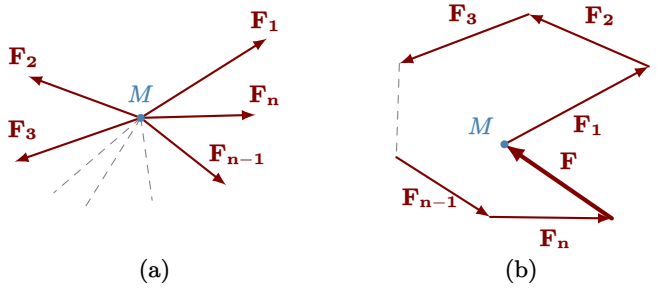


Figure 2.1.: Resultant force is equal to vector sum of the component forces.

travelling in the depths of the sea. Most bodies that we deal with are not free; certain limitations are imposed on their possible positions and motion. These limitations are called *constraints* in mechanics. A ball, for example, hung on a nonextensible thread, can not move away from its point of suspension by more than the length of the thread; a streetcar (tram) must travel only along its tracks. Constraints are realized due to the action on the body being considered exerted by other bodies attached to or contacting this body (for instance, the thread on the ball tied to it, the track on the streetcar, etc.).

In investigating the behaviour of constrained bodies or systems of bodies in mechanics, the *principle of releasability* is applied. It states that a restrained body (or system of bodies) can be treated as a free body (or system) if the bodies imposing the constraints are replaced by the corre-

sponding forces. These forces are called *reaction forces* of the constraints, or *constraint reactions*. All other forces exerted on the body are called *active forces*. Thus, the motion of the ball hung by the thread can be treated as the motion of a free ball subject, in addition to all the active forces applied to it (for instance, gravity), to the reaction of the thread as well.

In contrast to the active forces, which should he given in each specific problem, the constraint reactions are not known beforehand. They are to be determined in solving the problem. Their values should be such that under the combined effects of the active forces and constraint reactions, the motion of the "released" body completely agrees with the limitations imposed by the constraints on the constrained body being considered. There are no other distinctions between constraint reactions and active forces.

2.2.4

Bodies not included in the mechanical system being in vestigated are called *external bodies*. Forces exerted on the system by external bodies are called *external forces*. Correspondingly, forces of interaction between the parts or particles of the system being considered are called *internal forces*.

A mechanical system is said to be *closed*, or *isolated*, if it does not interact with external bodies. No external forces act on any of the bodies of a closed system.

2.3 Mass. Momentum

2.3.1

In classical (Newtonian) mechanics, the *mass of a particle* (material point) is a positive scalar quantity which is a measure of the inertia of this particle. Under the action of a force the velocity of a particle changes *gradually*, not instantaneously, i.e. it acquires an acceleration *finite* in magnitude and inversely proportional to the mass of the particle. To compare the masses, m_1 and m_2, of two particles, it is sufficient to measure the magnitudes a_1 and a_2 of the accelerations acquired by these particles when the same force is applied to them: $m_2/m_1 = a_1/a_2$. The mass of a body is ordinarily determined by weighing by beam scales.

Classical (Newtonian) mechanics contends that:

(a) the mass of a particle is independent of its state of motion, being its unalterable characteristic;

(b) mass is an additive quantity, i.e. the mass of a system (for instance, a body) is equal to the sum of the masses of all the particles making up the system;

(c) the mass of an isolated (closed) system (2.2.4) does not change with any processes occurring within the system (*law of conservation of mass*).

These propositions of Newtonian mechanics were reconsidered and revised in relativistic mechanics (5.6.1, 5.6.2, 5.7.3 and 5.7.6).

2.3.2

The density ρ of a body at a given point M is the ratio of the mass dm of an infinitely small element of the body, which includes point M, to the quantity dV, which is the volume of this element. Thus

$$\rho = \frac{dm}{dV}$$

The size of the element being considered should be so small that any variation of density within its limits can be neglected. On the other hand, this size should he a great many times larger than intermolecular distances.

A body is said to be *homogeneous* if the density is constant at all of its points. The mass of a homogeneous body is the product of its density by its volume: $m = \rho V$.

The mass of a nonhomogeneous body is

$$m = \int_{(V)} \rho dV$$

where ρ is a function of the coordinates, and integrating is carried out over the whole volume of the body. The average density $\langle \rho \rangle$ of a nonhomogeneous body is the ratio of its mass to its volume: $\langle \rho \rangle = m/V$.

2.3.3

The centre of inertia, or centre of mass, of a system of particles is point C, whose radius vector $\mathbf{r}_c$ equals

$$\mathbf{r}_C = \frac{1}{m} \sum_{i=1}^{n} m_i \mathbf{r}_i$$

where m_i and $\mathbf{r}_i$ are the mass and radius vector of the ith particle, n is the total number of particles in the system, and $m = \sum_{i=1}^{n} m_i$ is the mass of the whole system.

The velocity of the centre of mass is

$$\mathbf{v}_C = \frac{\mathrm{d}\mathbf{r}_C}{\mathrm{d}t} = \frac{1}{m}\sum_{i=1}^{n} m_i \mathbf{v}_i$$

2.3.4

The vector quantity $\mathbf{p}_i$, equal to the product of the mass m_i of a particle by its velocity $\mathbf{v}_i$, is called the *momentum of this particle*. The momentum of a system of particles is the vector $\mathbf{p}$, which is the geometric sum of the momenta of all the particles making up the system:

$$\mathbf{p} = \sum_{i=1}^{n} \mathbf{p}_i$$

The momentum of a system is equal to the product of the mass of the whole system by the velocity of its centre of mass: $\mathbf{p} = m\mathbf{v}_C$.

2.4 Newton's Second Law

2.4.1

The basic law of the dynamics of a particle is Newtons second law, which discusses how the mechanical motion of a particle is changed by the effect of forces applied to it. *Newton's second law* states: the rate of change in the

momentum p of a particle is equal to the force $\mathbf{F}$ acting on it. Thus

$$\frac{\mathrm{d}\mathbf{p}}{\mathrm{d}t} = \mathbf{F} \text{ or } \frac{\mathrm{d}}{\mathrm{d}t}(m\mathbf{v}) = \mathbf{F}$$

where m and $\mathbf{v}$ are the mass and velocity of the particle.

If several forces act simultaneously on a particle, the force $\mathbf{F}$ in Newtons second law is understood to he the geometric sum of all acting forces, both active forces and constraint reactions (2.2.3), i.e. the resultant force (2.2.2).

2.4.2

The vector quantity $\mathbf{F}\mathrm{d}t$ is called an element of *impulse of force* $\mathbf{F}$ during the infinitely short time $\mathrm{d}t$ of its action. The impulse of force $\mathbf{F}$ acting in the finite time interval from $t = t_1$ to $t = t_2$ is equal to the definite integral $\int_{t_1}^{t_2} \mathbf{F}\mathrm{d}t$, where $\mathbf{F}$, in the general case, depends upon the time t.

According to Newtons second law, the change in the momentum of a particle is equal to the impulse of the force acting on it:

$$\mathrm{d}\mathbf{p} = \mathbf{F}\mathrm{d}t = \Delta\mathbf{p} = \mathbf{p}_2 - \mathbf{p}_1 = \int_{t_1}^{t_2} \mathbf{F}\mathrm{d}t$$

where $\mathbf{p}_2 = \mathbf{p}(t_2)$ and $\mathbf{p}_1 = \mathbf{p}(t_1)$ are the values of the momentum of a particle at the end $t = t_2$ and beginning $t = t_1$ of Ihe time interval being considered.

2.4.3

Since in Newtonian mechanics the mass m of a particle is independent of its state of motion, $\mathrm{d}m/\mathrm{d}t = 0$. Hence,

the mathematical expression of Newtons second law can also be presented in the form

$$\mathbf{a} = \frac{\mathbf{F}}{m}$$

where $\mathbf{a} = \mathrm{d}\mathbf{v}/\mathrm{d}t = \mathrm{d}^2\mathbf{r}/\mathrm{d}t^2$ is the acceleration of the particle and $\mathbf{r}$ is its radius vector. The corresponding statement of *Newton's second law reads*: the acceleration of a particle coincides in direction with the force acting on it and is equal to the ratio of this force to the mass of the particle. The tangential and normal accelerations of a particle (1.4.4, 1.4.5 and 1.4.6) are determined by the corresponding components of force $\mathbf{F}$:

$$\mathbf{a}_\tau = \frac{\mathbf{F}_\tau}{m}, \; a_\tau = \frac{\mathrm{d}v}{\mathrm{d}t} = \frac{F_\tau}{m}$$

and

$$\mathbf{a}_n = \frac{\mathbf{F}_n}{m}, \; a_n = \frac{v^2}{R} = \frac{F_n}{m}$$

where v is Ihe magnitude of the particles velocity vector, and R is the radius of curvature of its path. The force F_n, imparting normal acceleration to a particle, is directed toward the centre of curvature (1.2.4) of the particles path and is therefore called the *centripetal force*.

2.4.4

If a particle is subject to the simultaneous action of sev eral forces, $\mathbf{F_1}, \mathbf{F_2}, \mathbf{F_3}, \ldots \mathbf{F_n}$, its acceleration is

$$\mathbf{a} = \frac{1}{m}\sum_{l=1}^{n}\mathbf{F}_l = \sum_{l=1}^{n}\mathbf{a}_l$$

where $\mathbf{a}_l = \mathbf{F}_l/m$. Consequently, each of the forces acting simultaneously on a particle imparts to it the acceleration it would have if there were no other forces (*principle of superposition, or independence, of forces*).

The equation

$$m\frac{\mathrm{d}^2\mathbf{r}}{\mathrm{d}t^2} = \mathbf{F} = \sum_{l=1}^{n} \mathbf{F}_l$$

is called the *differential equation of motion of a particle*.

In projections on the axes of a rectangular Cartesian coordinate system, this equation is of the form

$$m\frac{\mathrm{d}^2x}{\mathrm{d}t^2} = F_x,\ m\frac{\mathrm{d}^2y}{\mathrm{d}t^2} = F_y,\ m\frac{\mathrm{d}^2z}{\mathrm{d}t^2} = F_z$$

where x, y and z are the coordinates of the moving particle.

2.5 Newton's Third Law. Motion of the Centre of Mass

2.5.1

The mechanical action exerted by bodies on one another is of the nature of their *interaction*. This is what *Newton's third law* deals with: two particles exert forces on each other which are equal in magnitude and opposite in direction along a line connecting these particles.

If $\mathbf{F}_{ik}$ is a force exerted on the ith particle by the kth one, and $\mathbf{F}_{ki}$ is, the force exerted on the kth particle by the ith one, then, according to Newtons third law,

$$\mathbf{F}_{ki} = -\mathbf{F}_{ik}$$

Forces $\mathbf{F}_{ik}$ and $\mathbf{F}_{ki}$ are applied to different particles and can be mutually counterbalanced only when particles i and k belong to the same perfectly rigid body.

2.5.2

Newtons third law is an essential supplement to the first and second laws. It permits us to go over from the dynamics of a separate particle to that of an arbitrary mechanical system (system of particles). It follows from Newtons third law that in any mechanical system the geometric sum of all the internal forces (2.2.4) equals zero:

$$\sum_{i=1}^{n} \sum_{k=1}^{n} \mathbf{F}_{ik} = 0$$

where n is the number of particles in the system, and $\mathbf{F}_{ii} = 0$. The vector $\mathbf{F}^{\text{ext}}$, equal to the vector sum of all the external forces (2.2.4) acting on the system, is called the *principal vector of external forces*:

$$\mathbf{F}^{\text{ext}} = \sum_{i=1}^{n} \mathbf{F}_{i}^{\text{ext}}$$

where $\mathbf{F}_{i}^{\text{ext}}$ is the resultant external force applied to the ith particle.

2.5.3

It follows from Newtons first and second laws that the first derivative with respect to the time t of the momentum $\mathbf{p}$

of a mechanical system (2.3.4) is equal to the principal vector of all external forces applied to the system. Thus

$$\frac{\mathrm{d}\mathbf{p}}{\mathrm{d}t} = \mathbf{F}^{\mathrm{ext}}$$

This equation expresses the *law of the change in the momentum of a system*.

Since $\mathbf{p} = m\mathbf{v}_c$, where m is the mass of a system and $\mathbf{v}_c$ is the velocity of its centre of inertia, or mass, the *law of motion of the centre of mass* of a mechanical system is of the form

$$\frac{\mathrm{d}}{\mathrm{d}t}(m\mathbf{v}_c) = \mathbf{F}^{\mathrm{ext}} \text{ or } m\mathbf{a}_c = \mathbf{F}^{\mathrm{ext}}$$

where $\mathbf{a}_c = \mathrm{d}\mathbf{v}_c/\mathrm{d}t$ is the acceleration of the centre of mass. Thus, the centre of mass (centre of inertia) of a mechanical system travels like a particle whose mass is equal to the mass of the whole system and which is subject to a force equal to the principal vector of the external forces applied to the system. If the system being considered is a rigid body that travels with translational motion (1.5.1), the velocities $\mathbf{v}_i$of all the points of the body and $\mathbf{v}_c$ of its centre of mass are the same and are equal to velocity $\mathbf{v}$ of the body. Correspondingly, the acceleration of the body $\mathbf{a} = \mathbf{a}_c$ and the *basic equation in the dynamics of translational motion of a rigid body* is of the form $m\mathbf{a} = \mathbf{F}^{\mathrm{ext}}$.

2.6 Motion of a Body of Variable Mass

2.6.1

In Newtonian mechanics the mass of a body can be changed only if particles of matter are detached from or added to it. An example of such a body is a rocket. In its flight the mass of the rocket is gradually reduced because the gaseous products of combustion in the rocket engine are ejected through the nozzles.

The equation of translational motion of a body of variable mass (Meshchersky equation) is

$$m\frac{\mathrm{d}\mathbf{v}}{\mathrm{d}t} = \mathbf{F}^{\mathrm{ext}} + (\mathbf{v}_1 - \mathbf{v})\frac{\mathrm{d}m}{\mathrm{d}t}$$

where m and $\mathbf{v}$ are the mass and velocity of the body at the instant of time being considered, $\mathbf{F}^{\mathrm{ext}}$ is the principal vector of the external forces (2.5.2) acting on the body, and $\mathbf{v}_1$ is the velocity of the detracted particles *after separation* from the rocket (if $\mathrm{d}m/\mathrm{d}t < 0$) or the added particles *before being joined* (if $\mathrm{d}m/\mathrm{d}t > 0$).

2.6.2

The second member on the right-hand side of the Me shchersky equation represents the additional force acting on a body of variable mass. It is called the *reactive force*:

$$\mathbf{F}_{\mathrm{r}} = (\mathbf{v}_1 - \mathbf{v})\frac{\mathrm{d}m}{\mathrm{d}t} = \mathbf{u}\frac{\mathrm{d}m}{\mathrm{d}t}$$

where $\mathbf{u} = \mathbf{v}_1 - \mathbf{v}$ is the relative velocity of the particles being separated from or joined to the body, i.e. their velocity with respect to a reference frame in translational motion together with the body.

The reactive force characterizes the mechanical action exerted on the body by the particles separated from or joined to it (for instance, the effect of the ejected exhaust gases on the rocket).

2.6.3

The equation of motion of a rocket not subject to the action of external forces is

$$m\frac{\mathrm{d}\mathbf{v}}{\mathrm{d}t} = \mathbf{u}\frac{\mathrm{d}m}{\mathrm{d}t}$$

If the initial velocity of the rocket is zero the rocket flies in a straight line in the direction opposite to that of the relative velocity $\mathbf{u}$ of the exhaust gases ejected from the engine nozzle. Here

$$m\frac{\mathrm{d}v}{\mathrm{d}t} = -u\frac{\mathrm{d}m}{\mathrm{d}t}$$

and at $\mathbf{u} = \text{const}$ the relation between the velocity of the rocket and its mass is expressed by *Tsiolkovsky's formula*

$$v = u\ln\frac{m_0}{m}$$

where m_0 is the initial, or launching, mass of the rocket.

2.6.4

The maximum velocity that a rocket can reach in the absence of external forces is called its *characteristic velocity*. This velocity is acquired at the moment the rocket engine

stops because it has used up all the fuel and oxidizer that were on board,

$$v_{\max} = u \ln \frac{m_0}{m_0 - m_{\mathrm{f}}}$$

where m_{f} is the initial mass of the fuel and oxidizer. The effects of the earths gravity and air resistance lead to an appreciable reduction in the maximum velocity actually acquired by the rocket, during the operation of its engine, as compared to the characteristic velocity.

2.6.5

The *characteristic velocity of a multistage* (combination) *rocket* is

$$v_{\max} = \sum_{i=1}^{n} u_i \ln \frac{m_{0i}}{m_{0i} - m_{\mathrm{f}i}}$$

where n is the total number of stages of the rocket, $m_{\mathrm{f}i}$ is the mass of the fuel and oxidizer intended for the operation of the ith stage engine, u_i is the exhaust gas velocity (nozzle velocity) of the ith stage engine, and m_{0i} is the launching mass of the multistage rocket, including all the stages from the ith to the nth. The velocity increase of a multistage rocket, compared to that of a single-stage one having the same launching mass and the same fuel and oxidizer capacity, is due to the reduction in the mass of the rocket as the first, second and subsequent stages are consecutively jettisoned when their fuel has been exhausted.

2.7 Law of Conservation of Momentum

2.7.1

The *law of conservation of momentum* is: the momentum $\mathbf{p}$ of a closed, or isolated, system does not change in the course of time, i.e.

$$\frac{\mathrm{d}\mathbf{p}}{\mathrm{d}t} \equiv 0 \text{ and } \mathbf{p} = \text{const}$$

In contrast to Newtons laws, the law, or principle, of conservation of momentum is valid not only within the framework of classical mechanics. It belongs to the most fundamental of physical laws because it is concerned with a definite property of the symmetry of space: its homogeneity. The *homogeneity of space* is manifested in the fact that the physical properties of a closed system and the laws of its motion are independent of the choice of position of the origin of the inertial reference frame, i.e. these properties and laws are unchanged by a parallel translation of the closed system as a whole in space. According to modern concepts, fields can also have momentum, not only particles and bodies. Light, for example, exerts a pressure on the surface of a body that reflects or absorbs it because the electromagnetic field of the light wave has momentum.

2.7.2

In application to systems described by classical (Newtonian) mechanics, the principle of conservation of momentum can be regarded as a consequence of Newtons laws.

For a closed mechanical system the principal vector of external forces

$\mathbf{F}^{\text{ext}} \equiv 0$ and the principle of conservation of momentum follows from (2.5.3):

$$\mathbf{p} = \sum i = 1 n m_i \mathbf{v}_i = \text{const}$$

where m_i and $\mathbf{v}_i$ are the mass and velocity of the ith particle of the system, which consists of n particles.

Consequently, there is also no change in the projections of the momentum of a closed system onto the axes of Cartesian coordinates of an inertial reference frame:

$$p_x = \sum_{i=1}^{n} m_i v_{ix} = \text{const}$$

$$p_y = \sum_{i=1}^{n} m_i v_{iy} = \text{const}$$

$$p_z = \sum_{i=1}^{n} m_i v_{iz} = \text{const}$$

The momentum of the system is $\mathbf{p} = m\mathbf{v}_c$, where m is the mass of the system and $\mathbf{v}_c$ is the velocity of its centre of mass (2.3.4). It follows, therefore, from the principle of conservation of momentum that in any processes occurring within a closed system the velocity of its centre of mass does not change: $\mathbf{v}_c = \text{const}$.

2.7.3

If a system is not closed, hut the external forces acting on it are such that their principal vector is identically

zero ($\mathbf{F}^{\text{ext}} \equiv 0$), then, according to Newtons laws (2.5.3), the momentum of the system does not change with time: $\mathbf{p} = \text{const}$.

As a rule, $\mathbf{F}^{\text{ext}} \not\equiv 0$ and $\mathbf{p} \neq \text{const}$. But if the projection of the principal vector of external forces onto any fixed axis is identically zero, the projection onto the same axis of the momentum vector of the system does not change with time. Thus, $p_x = \text{const}$ under the condition that $F_x^{\text{ext}} \equiv 0$. If, for instance, no other external forces, except gravity, are acting on a system, the horizontal component of the momentum of the system, perpendicular to the direction of the gravitational force, remains constant.

2.7.4

In some processes (e.g. collisions or in firing shells, etc.), the momenta of the parts of the system undergo great changes in relatively short time intervals. This is due to internal forces of interaction, of short duration, but of quite considerable magnitude, developed within the system. In comparison with these forces, all external forces acting continuously on the system (for instance, gravity) are small. In such processes, the action of the system of external forces can usually be ignored, i.e. it can be assumed that the momentum of the system as a whole is not changed in the process being considered.

2.8 Galilean Transformations. Mechanical Principle of Relativity

2.8.1

A *Galilean transformation* is a transformation of coordinates and time that is applied in Newtonian mechanics in going over from one inertial frame of reference $K(x, y, z, t)$ to another $K'(x, y', z', t')$ which travels with translational motion with respect to K at the constant velocity $\mathbf{V}$. The Galilean transformation is based on axioms concerning the absolute nature of time intervals and of lengths. The first axiom contends that the passage of time (time interval between any two events) is the same in all inertial frames of reference. According to the second axiom, the dimensions of a body are independent of its velocity of motion with respect to the frame of reference. If the like axes of Cartesian coordinates of inertial reference frames K and K' are drawn parallel to one another pairwise and if at the initial instant of time ($t = t' = 0$) the origins O and O' of coordinates coincide with each other (Figure 2.2), the Galilean transformations are of the form:

$$x' = x - V_x t,\ y' = y - V_y t,\ z' = z - V_z t \text{ and } t' = t \text{ or}$$
$$\mathbf{r}' = \mathbf{r} - \mathbf{V}t \text{ and } t' = t,$$

where x, y, z and x', y', z' are the coordinates of point M in the frames of reference K (at the instant of time t) and K' (at the instant of time $t' = t$), $\mathbf{r}$ and $\mathbf{r}'$ are the radius vectors of point M in the same frames of reference, and V_x, V_y and V_z are the projections of the velocity $\mathbf{V}$ of reference frame K' onto the coordinate axes of reference frame K.

The coordinate axes are usually arranged so that frame of reference K' travels along the positive direction of

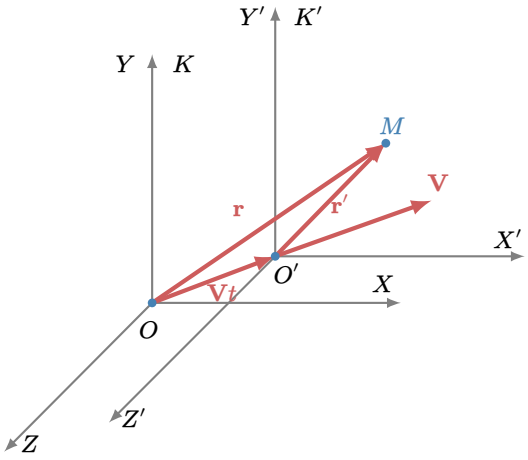


Figure 2.2.: A general Galilean transformation between two frames of reference K and K' moving with a constant velocity $\mathbf{V}$.

axis OX (Figure 2.3). Under this condition the Galilean transformations are of their simplest form:

$$x = x - Vt,\ y' = y,\ z = z \text{ and } t' = t$$

2.8.2

A consequence of the Galilean transformations is the following law for transforming the velocity of arbitrary point M (Figure **??**) in going over from one inertial frame of reference K (the velocity of the point is $\mathbf{v} = \mathrm{d}\mathbf{r}/\mathrm{d}t$)

to another K' (in which the velocity of the same point is $\mathbf{v}' = \mathrm{d}\mathbf{r}'/\mathrm{d}t$):

$$\mathbf{v}' = \mathbf{v} - \mathbf{V}$$

The projections of the velocity on like coordinate axes are transformed accordingly:

$$v'_{x'} = v_x - V_x,\ v'_{y'} = v_y - V_y \text{ and } v'_{z'} = v_z - V_z$$

In particular, when reference frame K' travels along the positive direction of axis OX (Figure 2.3)

$$v'_{x'} = v_x - V,\ v'_{y'} = v_y \text{ and } v'_{z'} = v_z$$

The accelerations of point M in frames of reference $K'(\mathbf{a} = \mathrm{d}\mathbf{v}/\mathrm{d}t)$ and $K'(\mathbf{a}' = \mathrm{d}\mathbf{v}'/\mathrm{d}t)$ are the same: $\mathbf{a}' = \mathbf{a}$.

Hence, the acceleration of a particle is independent of the choice of the inertial frame of reference or, in other words, it is invariant with respect to Galilean transformations.

2.8.3

The forces of interaction between particles depend only upon their relative position and their velocity with respect to one another. The relative position of any two particles, 2 and 1, is represented by a vector equal to the difference between the radius vectors of the two particles, i.e. to the vector $\mathbf{r}_{21} = \mathbf{r}_2 - \mathbf{r}_1$ in reference frame K and to the vector $\mathbf{r}'_{21} = \mathbf{r}'_2 - \mathbf{r}'_1($ in reference frame K'. It follows from the Galilean transformations that $\mathbf{r}_{21} = \mathbf{r}'_{21} - \mathbf{r}_{21}$.

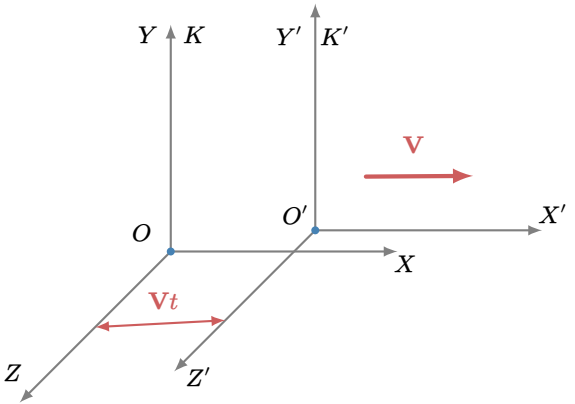


Figure 2.3.: Galilean transformation between two frames of reference K and K' when K' travels along direction of axis OX.

Therefore, the distance between particles 1 and 2 is the same in reference frames K and K':

$$\mathbf{r}'_{21} = \mathbf{r}_{21} = \text{ or}$$
$$(x'_2 - x'_1)^2 + (y'_2 - y'_1)^2 + (z'_2 - z'_1)^2$$
$$= (x_2 - x_1)^2 + (y_2 - y_1)^2 + (z_2 - z_1)^2$$

The velocity of particle 2 with respect to particle 1 is equal to the difference of the velocities of these two particles: $\mathbf{v}_2 - \mathbf{v}_1$(in reference frame K) and $\mathbf{v}'_2 - \mathbf{v}'_1$ (in reference frame K'). It follows from the Galilean transformations

that $\mathbf{v}_2' - \mathbf{v}_1' = \mathbf{v}_2 - \mathbf{v}_1$.

Thus, the relative position and the velocity of relative motion of any two particles are independent of the choice of inertial reference frame; they are invariant under a Galilean transformation. Accordingly, the forces acting on a particle are also invariant under a Galilean transformation: $\mathbf{F}' = \mathbf{F}$.

2.8.4

Equations expressing Newtons laws (2.4.3) and (2.5.1) are invariant with respect to Galilean transformations, i.e. their form is unchanged in transforming the coordinates and time from one inertial frame of reference (K) to another (K'):

$$m\mathbf{a} = \mathbf{F} \text{ and } \mathbf{F}_{ki} = -\mathbf{F}_{ik}$$

(in reference frame K)

$$m'\mathbf{a}' = \mathbf{F}' \text{ and } \mathbf{F}'_{ki} = -\mathbf{F}'_{ik}$$

(in reference frame K')

where $m' = m$ is the mass of the particle being considered and is the same in all frames of reference.

Thus, the *mechanical principle of relativity (Galileo's principle of relativity)* is valid in classical mechanics. It contends that the laws of mechanics are the same in all

inertial frames of reference. This implies that under the same conditions all mechanical processes proceed in the same way in different frames of reference. Consequently, it is impossible to establish, by means of any mechanical experiments conducted within a closed system of bodies, whether the system is at rest or is travelling at uniform velocity in a straight line (with respect to any inertial frame of reference whatsoever).

The mechanical principle of relativity points to the fact that all inertial frames of reference are equally valid in mechanics. It is impossible to single out any special, or "main", inertial frame of reference with respect to which the motion of bodies could be regarded as "absolute motion".

2.8.5

The principle of relativity was generalized to include all physical phenomena by Albert Einstein in his special theory of relativity (5.1.2). It was found that coordinates and time in various inertial frames of reference are related by the Lorentz transformations (5.3.2) rather than the Galilean transformations. But at low velocities of relative motion of the frames of reference (in comparison to the velocity of light in free space), the Lorentz transformations become the Galilean transformations.

3 Work And Mechanical Energy

3.1 Energy, Work and Power

3.1.1

Energy is a scalar physical quantity, which is a common measure of the various forms of motion of matter dealt with in physics. The energy of a system quantitatively characterizes this system with respect to the conversions of motion that are possible within it. These conversions take place due to the interaction between parts of the system, both with one another and with external bodies (the environment). The concept of various forms of energy has been introduced in physics to analyze the qualitatively different forms of motion and the interactions corresponding to them. These include: mechanical (3.4.1), internal (9.1.2), electromagnetic (31.2.1), nuclear (**??**) and various other forms of energy.

3.1.2

The mechanical motion of a body is changed by forces exerted on the body by other bodies. Used in mechanics for a quantitative description of such a process of energy exchange between interacting bodies is the concept of the work done by the forces applied to the body being considered. An *element of work* done by force $\mathbf{F}$ in the infinitely small displacement $d\mathbf{r}$ is the scalar quantity

$$\delta W = \mathbf{F}\,\mathrm{d}\mathbf{r} = \mathbf{F}\mathbf{v}\,\mathrm{d}t$$

where $\mathbf{r}$ and $\mathbf{v} = \mathrm{d}\mathbf{r}/\mathrm{d}t$ are the radius vector and velocity of the point of the body at which the force is applied, and $\mathrm{d}t$ is the infinitely short time interval during which force $\mathbf{F}$ performs the work δW (the meaning of the notation δW is given in (3.1.8)). In rectangular Cartesian coordinates

$$\begin{aligned}\delta W &= F_x\mathrm{d}x + F_y\mathrm{d}y + F_z\mathrm{d}z \\ &= (F_x v_x + F_y v_y + F_z v_z)\mathrm{d}t\end{aligned}$$

where x, y and z are the coordinates of the point of application of the force, and F_x, F_y, F_z and v_x, v_y, v_z are the projections of vectors $\mathbf{F}$ and $\mathbf{v}$ on the coordinate axes.

3.1.3

The expression for an element of work can also be presented in the form

$$\delta W = F\,\mathrm{d}s\cos\alpha = F_\tau\mathrm{d}s$$

where $\mathrm{d}s = |\mathrm{d}\mathbf{r}|$ is an element of the length of the path of the point of force application during the infinitely short time interval $\mathrm{d}t$, α is the angle between vectors $\mathbf{F}$ and $\mathrm{d}\mathbf{r}$, and $F_\tau = F\cos\alpha$ is the projection of the force in the direction of the displacement $\mathrm{d}\mathbf{r}$. A force normal to the path of its point of application performs no work.

Force $\mathbf{F}$ is called the *motive force* if $F_\tau > 0$, so that $\delta W > 0$. If $F_\tau < 0$ (so that $\delta W < 0$), force $\mathbf{F}$ is called the *retarding force* (*force of resistance*).

3.1.4

If a mechanical system is subject to the simultaneous action of forces $\mathbf{F}_1, \mathbf{F}_2 \ldots \mathbf{F}_n$, the work δW done by them during the infinitely short time $\mathrm{d}t$ is equal to the algebraic sum of the work done during the same time $\mathrm{d}t$ by each of the forces separately. Thus

$$\delta W = \sum_{i=1}^{n} \delta W_i = \sum_{i=1}^{n} \mathbf{F}_i \mathrm{d}\mathbf{r}_i = \sum_{i=1}^{n} \mathbf{F}_i \mathbf{v}_i \mathrm{d}t$$

where $\mathbf{r}_i$ and $\mathbf{v}_i$ are the radius vector and velocity of the point of application of force $\mathbf{F}_i$.

For example, for a particle $\mathbf{r}_i = \mathbf{r}$ is the radius vector of the particle and $\mathbf{v}_i = \mathbf{v}$ is its velocity. Accordingly, $\delta W = \mathbf{F}\mathrm{d}\mathbf{r} = \mathbf{F}\mathbf{v}\mathrm{d}t$, where $\mathbf{F} = \sum_{i=1}^{n} \mathbf{F}_i$ is the resultant force (2.2.2). It follows from Newtons second law (2.4.1) that for a particle

$$\delta W = \mathbf{v}\mathrm{d}\mathbf{p},$$

where $\mathbf{p} = m\mathbf{v}$ is the momentum of the particle, and m is its mass.

In the translational motion of a perfectly rigid body $\mathrm{d}\mathbf{r}_i == \mathrm{d}\mathbf{r}_C$ and $\mathbf{v}_i = \mathbf{v}_C$, where $\mathbf{r}_C$ and $\mathbf{v}_C$ are the radius vector and velocity of the centre of mass (2.3.3) of the body.

The work done by internal forces in any motion of a perfectly rigid body equals zero. Hence, in the translational motion of such a body $\delta W = \mathbf{F}^{\text{ext}}\mathrm{d}\mathbf{r}_C = \mathbf{F}^{\text{ext}}\mathbf{v}_C\mathrm{d}t$, where $\mathbf{F}^{\text{ext}}$ is the principal vector of external forces (2.5.2). It follows from the law of motion of the centre of mass (2.5.3) that

$$\delta W = \mathbf{v}_C\mathrm{d}\mathbf{p},$$

where $\mathbf{p} = m\mathbf{v}_C$ is the momentum of a rigid body of mass m travelling at the velocity $\mathbf{v} = \mathbf{v}_C$.

3.1.5

The work W done by force $\mathbf{F}$ along a finite portion of the path L of its point of application is equal to the algebraic sum of the work done over all the infinitely small portions of this path, i.e. it is expressed by the line integral

$$W = \int_{(L)} \mathbf{F}\mathrm{d}\mathbf{r} = \int_0^s F_\tau \mathrm{d}s$$

where s is the length of arc measured off along the path from the beginning of the portion of the path being considered, and F_τ the projection of the force onto the direction of displacement $\mathrm{d}\mathbf{r}$ of the point of force application.

To calculate this integral it is necessary to know the dependence of F_τ on s along the given path L. If this dependence is represented graphically (Figure 3.2), the




Figure 3.1.: Graphical representation of the resultant work.

required work W is proportional to the hatched area in Figure 3.2.

3.1.6

Potential-field (conservative) forces are ones whose work depends only on the initial and final positions of their points of application; it depends neither on the shape of the path of these points nor on their laws of motion along this path.

For example, the forces of interaction between the parts (i.e. particles) of a system are said to be potential (conservative) forces if they depend only upon the configuration of the system, i.e. on the relative position of all its particles. The work done by these forces in moving the system from one arbitrary position to another is independent of the kind of displacement, but is completely determined by the initial and final configurations of the system. Examples are the forces of electrostatic and gravitational interaction.

A *steady (stationary)* field (2.2.1) is said to be *potential*,




Figure 3.2.: Graphical representation of the resultant work.

or conservative, if force F, which it exerts on a particle located in the field, is a potential, or conservative force. This implies that force F depends only upon the position of the particle in the field, and that the amounts of work done by force F in displacing the particle from one arbitrary position (1) to another (2) (Figure **??**) along any two paths, for instance, $1a2$ (work W_{1a2}) and $1b2$ (work W_{1b2}), are the same:

$$W_{1a2} = W_{1b2} = \int_1^2 \mathbf{F} \frac{\mathrm{d}}{\mathrm{d}\mathbf{r}}$$

Accordingly, the work done by a conservative force in displacing its point of application along any closed path L (for example, $1a2b1$) is equal to zero:

$$\oint_{(L)} \mathbf{F}\,\mathrm{d}\mathbf{r} \equiv 0$$

In the general case, the external bodies that set up the field being considered can be in motion with respect to an inertial frame of reference, so that their field is not

stationary, i.e. force $\mathbf{F}$ depends explicitly on time:

$$\frac{\partial \mathbf{F}}{\partial t} \not\equiv 0$$

A *nonstationary field* is a *conservative* one if the work done by force $\mathbf{F}$ upon instantaneous displacement of its point of application along any closed path L equals zero:

$$\oint\limits_{(L)} \mathbf{F}\, d\mathbf{r} \equiv 0$$

Here $\mathbf{F}$ depends, not only on the coordinates of the point of application, but on the time as well. To calculate this integral, how ever, time is assumed to be a fixed parameter.

3.1.7

Among the nonconservative forces are dissipative and gyroscopic forces. *Dissipative forces* are ones whose total work done in displacing a closed system in any way is always negative. Such, for instance, are the forces of sliding friction and the forces retarding the motion of bodies in liquids and gases. In contrast to conservative forces, dissipative forces depend, not only on the relative positions of the interacting bodies, but on their relative velocities as well.

Gyroscopic forces are ones that depend upon the velocity of the particle on which they act. They are directed perpendicular to this velocity. An example is the Lorentz force (24.1.1) exerted by a magnetic field on a charged

particle travelling in this field. The work done by gyroscopic forces is always equal to zero, regardless of how the particle is displaced.

A mechanical system (system of particles) is said to be *conservative* if all the internal forces in it are conservative ones and all the external forces are both conservative and stationary. Systems that do not satisfy these conditions are said to be *non-conservative*.

3.1.8

An element of work done by force $\mathbf{F}$, exerted on a particle by a stationary conservative field, can be represented in the form of an exact differential of a scalar function $\Phi(x, y, z)$ of the coordinates. This is called the force function of the field:

$$\mathbf{F}\,\mathrm{d}r = \mathrm{d}\Phi \quad \text{or}$$

$$F_x\,\mathrm{d}x + F_y\,\mathrm{d}y + F_z\,\mathrm{d}z = \frac{\partial\Phi}{\partial x}\,\mathrm{d}x + \frac{\partial\Phi}{\partial y}\,\mathrm{d}y + \frac{\partial\Phi}{\partial z}\,\mathrm{d}z$$

Hence

$$F_x = \frac{\partial\Phi}{\partial x}, \quad F_x = \frac{\partial\Phi}{\partial x}, \quad F_x = \frac{\partial\Phi}{\partial x} \quad \text{and}$$
$$\mathbf{F} = \boldsymbol{\nabla}\Phi$$

These last relations are also valid for a non-stationary conservative field, whose force function depends, not only on the coordinates, but on time as well: $\Phi = \Phi(x, y, z, t)$. But here

$$\mathbf{F}\,\mathrm{d}\mathbf{r} = \mathrm{d}\Phi - \frac{\partial\Phi}{\partial t}\,\mathrm{d}t$$

An element of work done by a nonconservative force cannot be represented in the form of an exact differential of any function whatsoever of the coordinates. This is precisely why an element of work done by an arbitrary force is denoted by δW.

3.1.9

The concept of power is used in mechanics to characterize the amount of work done in unit time. *Power (instantaneous power)* is the scalar physical quantity P. It is equal to the ratio of the element of work δW to the infinitely short time interval $\mathrm{d}t$ during which it is performed:

$$P = \frac{\delta W}{\mathrm{d}t}$$

If $\mathbf{F}$ is the force doing the work δW, the power is the scalar product of force $\mathbf{F}$ by the velocity v of its point of application:

$$P = \mathbf{F}\mathbf{v} = F_\tau v$$

In the general case, power may vary with time.

The *average power* in the time interval from t to $t + \Delta t$ is the physical quantity $\langle P \rangle$, which is equal to the ratio of the work W done during this time interval to the length of this interval Δt:

$$\langle P \rangle = \frac{W}{\Delta t}$$

3.2 Kinetic Energy

3.2.1

The *kinetic energy* of a body is the energy of its mechanical motion. A change in the kinetic energy E_k of a particle due to the action of force F is equal to the work done by this force:

$$\mathrm{d}E_k = \delta W = \mathbf{v}\,\mathrm{d}\mathbf{p}$$

where $\mathbf{p} = m\mathbf{v}$ is the momentum of the particle, and m and $\mathbf{v}$ are its mass and velocity. In Newtonian mechanics $m = \text{const}$ and the expression for the kinetic energy of a particle is of the form

$$E_k = \frac{m\mathbf{v}^2}{2} = \frac{mv^2}{2}$$

Kinetic energy in relativistic mechanics is discussed in (5.7.1).

3.2.2

The kinetic energy of a mechanical system is equal to the sum of the kinetic energies of all the parts of the system. For a system consisting of n particles, for instance,

$$E_k = \sum_{i=1}^{n} \frac{m_i\mathbf{v}_i^2}{2} = \sum_{i=1}^{n} \frac{m_i v_i^2}{2}$$

where m_i and $\mathbf{v}_i$ are the mass and velocity of the i-th particle in the system.

The kinetic energy of a body is

$$E_k = \frac{1}{2}\int_{(V)} \rho\mathbf{v}^2\mathrm{d}V = \frac{1}{2}\int_{(V)} \rho v^2\mathrm{d}V$$

where $\mathbf{v}$ is the velocity of points of the infinitely small element of volume $\mathrm{d}V$ of the body, whose density is ρ and mass is $\mathrm{d}m = \rho \mathrm{d}V$. Integrating is carried out throughout the whole volume V of the body. If a perfectly rigid body of mass m travels with translational motion at the velocity $\mathbf{v}$, its kinetic energy is $E_k = mv^2/2$. The kinetic energy of rotating bodies is discussed in (4.3.3) and (4.3.5).

3.2.3

The change in the kinetic energy of a mechanical system is equal to the algebraic sum of the amounts of work done by all the external and internal forces acting on the system (2.2.4). Thus

$$\mathrm{d}E_k = \delta W^{\mathrm{ext}} + \delta W^{\mathrm{int}}$$

For example, for a system consisting of n particles

$$\mathrm{d}E_k = \sum_{i=1}^{n} \mathbf{F}_i^{\mathrm{ext}} \mathrm{d}\mathbf{r}_i = \sum_{i=1}^{n} \sum_{k=1}^{n} \mathbf{F}_{ik} \mathrm{d}\mathbf{r}_i$$

where $\mathbf{r}_i$ is the radius vector of the i-th particle, $\mathbf{F}_i^{\mathrm{ext}}$ is the resultant of the external forces acting on this particle, and $\mathbf{F}_{ii} = 0$.

If the system is not deformed, then the work done by the internal forces

$$\delta W^{\mathrm{int}} = 0, \text{ and } \mathrm{d}E_k = \delta W^{\mathrm{ext}}$$

For example, the change in the kinetic energy of a perfectly rigid body in translational motion is

$$\mathrm{d}E_k = \mathbf{F}^{\mathrm{ext}} \mathrm{d}\mathbf{r}$$

where $\mathbf{F}^{\text{ext}}$ is the principal vector of external forces (2.5.2), and d$\mathbf{r}$ is the vector of an element of displacement of the body.

3.2.4

The kinetic energy of a mechanical system depends upon the choice of the frame of reference. If in the inertial reference frame K the kinetic energy of the system equals E_k and in the reference frame K', travelling with translational motion at the velocity $\mathbf{V}$ with respect to K, it is equal to E'_k, then

$$E_k = E'_k + \frac{mV^2}{2} + \mathbf{p}'\mathbf{V}$$

where m is the mass of the system, $\mathbf{p}' = m\mathbf{v}'c$ is the momentum of the system in its motion with respect to reference frame K', and $\mathbf{v}'_C$ is the velocity of the systems centre of mass with respect to K'. This equation is valid both for the case when $\mathbf{V} = \text{const}$, i.e. when K' is an inertial frame of reference, as well as for $\mathrm{d}\mathbf{V}/\mathrm{d}t \neq 0$.

In particular, if the frame of reference K' travels with translational motion with respect to reference frame K at the velocity $\mathbf{v}_C$ of the centre of mass of the system, i.e. $\mathbf{V} = \mathbf{v}_C$, then $\mathbf{v}'_C = 0$ and

$$E_k = \frac{mv_C^2}{2} + E'_k$$

This equation is an expression of *Koenig's theorem*: the kinetic energy of a mechanical system is equal to the sum of the kinetic energy that a particle would have if its mass

was that of the whole system and if it travelled at the velocity of the systems centre of mass, plus the kinetic energy of the same system in its motion with respect to a translational reference frame (i.e. one travelling with translational motion) having its origin at the centre of mass.

It follows from Koenigs theorem that the kinetic energy of a perfectly rigid body is equal to the kinetic energy of translation al motion of this body at the velocity of its centre of mass plus the kinetic energy of rotation of the body about its centre of mass.

3.3 Potential Energy

3.3.1

Potential energy is the part of the energy of a mechanical system that depends only on its configuration, i.e. on the relative arrangement of all the particles of the system and their positions in the external potential (conservative) field (3.1.6). The decrease in the potential energy when the system is moved from arbitrary position **1** to another arbitrary position **2** is measured by the work W_{12} done in this displacement by the conservative forces (internal and external) acting on the system. Thus

$$E_p(1) - E_p(2) = W_{12}$$

where $E_p(1)$ and $E_p(2)$ are the values of the potential energy of the system in its initial and final positions. Accordingly, the work done by conservative forces upon

an infinitely small change in the configuration of the system is $\delta W = -\mathrm{d}E_p$.

Note. It is assumed here that the external conservative forces are *stationary (steady)*, i.e. they can change with time only as the consequence of a change of the position of the system being considered with respect to the frame of reference. Otherwise

$$\mathrm{d}E_p = -\delta W + \frac{\partial E_p}{\partial t}\mathrm{d}t$$

In the simplest case, when the system is a particle located in a conservative field, the relation between force $\mathbf{F}$, acting on the particle, and the potential energy E_p of this particle in the held is of the form

$$F_x = -\frac{\partial E_p}{\partial x},\ F_y = -\frac{\partial E_p}{\partial y},\ F_z = -\frac{\partial E_p}{\partial z}$$

and $F = -\operatorname{grad} E_p$.

The potential energy E_p of a particle is related to the force function (3.1.8) of the corresponding conservative field by the equation

$$\mathrm{d}E_p = -\mathrm{d}\Phi \text{ or } E_p(x, y, z, t) = -\Phi(x, y, z, t) + C$$

where C is the integration constant.

3.3.2

The equations in (3.3.1) enable the dependence of the potential energy of a system on its configuration to be determined only to an arbitrary constant term that has no effect on the *change* in energy. To obtain a unique

dependence of the potential energy of the system on its configuration, a so-called *zero configuration* is chosen, in which the potential energy of the system is conditionally assumed to equal zero. Thus, the potential energy of a system in an arbitrary state is equal to the work done by all the conservative forces acting on the system in transforming it from the state being considered to the state corresponding to the zero configuration.

3.3.3

Example 1. *Potential energy of a particle in a uniform (homogeneous) force field.* Assume that force $\mathbf{F}$, exerted on the particle by the field, is directed along axis OZ, i.e. $\mathbf{F} = F_z\mathbf{k}$, where $\mathbf{k}$ is the unit vector of axis OZ, and the projection F_z of force $\mathbf{F}$ onto axis OZ is independent of the coordinates of the particle. Then

$$\mathrm{d}E_p = -\mathbf{F}d\mathbf{r} = -F_z\mathrm{d}z \text{ and } E_p(z) = -F_z + E_p(0)$$

where $E_p(0)$ is the value of the potential energy of the particle at the level $z = 0$.

In particular, the potential energy of a particle of mass m located in a uniform gravity field at the earths surface (axis OZ is directed vertically upward, $F_z = -mg$, where g is the free fall acceleration) is equal to

$$E_p(z) = mgz + E_p(0).$$

3.3.4

Example 2. *Potential energy of a particle in a central force field.* In a conservative field of central forces the

particle is subject to the action of forces $\mathbf{F}$ which are directed everywhere along straight lines passing through a fixed point, called the *centre of force*, and depend only on the distance r to this point:

$$\mathbf{F} = F_r(r)\frac{\mathbf{r}}{r}$$

where $\mathbf{r}$ is the radius vector from the centre of force to the point being considered in the field, and $F_r(r)$ is the projection of force $\mathbf{F}$ onto the direction of vector $\mathbf{r}$; it depends only on the distance r. If the particle is attracted to the centre of force, $F_r(r) = -|F| < 0$, but if it is repelled from the centre of force, then $F_r(r) = |F| > 0$. An element of work done by force $\mathbf{F}$ is $\delta W = \mathbf{F}\mathrm{d}\mathbf{r} = F_r(r)\mathrm{d}r$. The potential energy of the particle is

$$E_p(r) = \int_r^\infty F_r(r)\mathrm{d}r + E_p(\infty)$$

Usually the energy of a particle, located at an infinite distance from the centre of force, is taken as the reference point for potential energy, i.e. it is assumed that $E_p(\infty) = 0$. Thus

$$E_p(r) = \int_r^\infty F_r(r)\mathrm{d}r$$

Examples of a central force field, in which the force is inversely proportional to the square of the distance to the centre of force ($F_r(r) \propto r^{-2}$), are the gravitational fields of a particle or a homogeneous sphere, the electrostatic field of a point charge, as well as that of a hollow sphere and a solid sphere uniformly charged along the surface and throughout the volume, respectively.




Figure 3.3.: Potential energy of a system of two particles with central forces.

3.3.5

Example 3. *Potential energy of a system of two particles between which central forces* act, i.e. forces depending upon the distance between the particles and directed along the straight line joining the particles. Shown in Figure 3.3 are mutually repulsive forces $\mathbf{F}_{12}$ and $\mathbf{F}_{21} = -\mathbf{F}_{12}$:

$$\mathbf{F}_{21} = F_\rho(\rho)\frac{\boldsymbol{\rho}}{\rho}$$

where $\boldsymbol{\rho} = \mathbf{r}_2 - \mathbf{r}_1$ is the radius vector from particle 1 to particle 2, and $F_\rho(\rho)$ is the projection of force $\mathbf{F}_{21}$ on the direction of vector $\boldsymbol{\rho}$ and depends only on the distance ρ between the particles. An infinitely small change in the potential energy of the system

$$\mathrm{d}E_p = -(\mathbf{F}_{12}\mathrm{d}\mathbf{r}_1 + \mathbf{F}_{21}\mathrm{d}\mathbf{r}_2) = -\mathbf{F}_{21}\mathrm{d}\boldsymbol{\rho} = -F_\rho(\rho)\mathrm{d}\rho$$

If we assume that $E_p \to 0$ as $\rho \to \infty$, then

$$E_p(\rho) = \int_{\rho}^{\infty} F_\rho(\rho)\mathrm{d}\rho$$

This energy is often called the *mutual potential energy of two particles.*




Figure 3.4.: Potential energy of an elastic body in axial tension or compression.

3.3.6

Example 4. *Potential energy of an elastic body (for instance, a spring) in axial tension or compression.* When an elastic body is deformed, conservative internal forces (elastic forces) are developed in the body that oppose deformation. According to Hookes law, the force $\mathbf{F}_{\mathrm{el}}$

exerted by the deformed body A (Figure 3.4) on body B, causing the deformation, is proportional to the amount of deformation (stretch or compression):

$$\mathbf{F}_{\text{el}} = -kx\mathbf{i}.$$

Here x_i is the displacement vector of body B that characterizes the deformation of body A (in the undeformed state $x = 0$; in compression $x > 0$ and intension $x < 0$),and $k > 0$ is a factor characterizing the elastic properties of body A.

The potential energy of an elastically deformed body (in the absence of deformation, i.e. at $x = 0$, this energy is assumed equal to zero)

$$E_p = \frac{kx^2}{2}.$$

3.4 Law of Conservation of Mechanical Energy

3.4.1

The *mechanical energy*, or *total mechanical energy*, is the energy of mechanical motion and interaction. The mechanical energy E of a system of particles is equal to the sum of their kinetic energy E_k and the potential energy E_p of interaction of these particles with one another and with external bodies:

$$E = E_k + E_p$$

An elementary increment of the mechanical energy of a system during the infinitely short time $\mathrm{d}t$ is equal to

$$\mathrm{d}E = \delta W_{\mathrm{nonc}} + \frac{\partial E_p}{\partial t}\mathrm{d}t$$

where δW_{nonc} is the algebraic sum of the elements of work done in the time interval $\mathrm{d}t$ by all the internal and external *nonconservative* forces. The term $(\partial E_p/\partial t)\mathrm{d}t$ represents the change during the time interval $\mathrm{d}t$ in the potential energy of the system and, consequently, its total mechanical energy due to nonstationary external conservative forces (3.3.1).

3.4.2

If the system is *conservative* (3.1.7), $\delta W_{\mathrm{nonc}} \equiv 0$ and $\partial E_p/\partial t = 0$, because, in this case, there are no nonconservative forces and the external conservative forces are stationary. Consequently, the mechanical energy of such a system $E = \mathrm{const}$, i.e. the following law, called the *law of conservation of mechanical energy*, is valid: in the motion of a conservative system, its mechanical energy remains unchanged.

In particular, this law holds for closed conservative systems: the mechanical energy of a closed system does not change with time if all the internal forces acting in this system are conservative ones.

The law of conservation of mechanical energy is associated with the *uniformity of time*. This property of time is manifested in the fact that the laws of motion of a closed system (or a system located in a stationary

external field) are independent of the choice of the zero time reference. For example, in the free fall of a body in a stationary conservative gravity field at the earths surface, the velocity of the body and the length of path travelled depend only on the length of time in free fall and initial velocity of the body, but not on the specific instant of time the body began to fall.

3.4.3

The mechanical energy of a closed nonconservative system is changed owing to the work done by all the nonconservative internal forces:

$$\mathrm{d}E = \delta W_{\mathrm{nonc}}$$

Gyroscopic forces (3.1.7) do no work and make no contribution to δW_{nonc}, i.e. the existence of such forces in a system does not lead to changes in its mechanical energy.

The action of dissipative forces (3.1.7), for instance, the force of friction, leads to a gradual reduction in the mechanical energy of a closed system. This process is called the *dissipation of energy*. Consequently, a system whose mechanical energy continually decreases with time is called a *dissipative system*. In the dissipation of energy, the mechanical energy of the system is converted into other forms of energy (for example, into the energy of chaotic motion of molecules). The conversion of mechanical energy is accomplished in full agreement with a universal law of nature: the law of conservation of energy (9.2.7).

According to this law, energy can be converted from one form to another and redistributed within the system, but its total amount in a closed system must remain constant. It follows from the law of conservation and conversion of energy that the changes in energy of an open system, occurring in interaction of the system with the external medium (external bodies and fields), must be numerically equal and opposite in sign to the changes in the energy of the external medium. In other words, the change in the energy of a system upon its interaction with the external medium should be equal to the energy the system receives or yields up in the process being considered.

3.4.4

Forces of resistance and friction act in all real mechanical systems. Hence, these systems are nonconservative. In certain cases, however, they can be assumed approximately conservative, and the law of conservation of mechanical energy can be applied to them. Such an approach is feasible if, in the process being considered, the work W_{nonc} done by all the nonconservative forces acting on the system is negligibly small in comparison to the mechanical energy E of the system, i.e. $|W_{\text{nonc}}/E| \ll 1$, so that $|\Delta E/E| \ll 1$, where $\Delta E = W_{\text{nonc}}$ is the change in the mechanical energy of the system.

3.4.5

The state of *mechanical equilibrium of a system* is one that can be disturbed only as a result of external force

action applied to the system. In this equilibrium state all the particles of the system are at rest so that the kinetic energy of the system equals zero. The state of mechanical equilibrium is said to be *stable* if a small external action applied to the system leads to only a small change in its state. In this case, forces are developed in the system that tend to restore the equilibrium state. A state of mechanical equilibrium is said to be *unstable* if it can be disturbed by even an infinitely small external action on the system, which does not return again to the equilibrium state. In this case, forces are developed in the system that tend to further disturb the equilibrium state.

The law of conservation of mechanical energy enables the conditions of equilibrium of conservative systems to be formulated:

in states of stable equilibrium the potential energy curve of the system has minima, whereas in states of unstable equilibrium, it has maxima.

3.4.6

On the basis of the law of conservation of mechanical energy, the region of possible configurations of a conservative system (3.3.1) can be found. The kinetic energy of the system $E_k \gg 0$. Hence, at a given value E of the mechanical energy of the system, the latter can only be in states that conform to the condition: $E_p \ll E$. Figure 3.5 illustrates the simplest case in which a particle has one-dimensional motion along axis OX in an external stationary conservative field. The potential energy of the particle is a function of only a single coordinate x,

i.e. $E_p = E_p(x)$. The curve of this relation, shown in Figure 3.5, is called a *potential energy curve.*

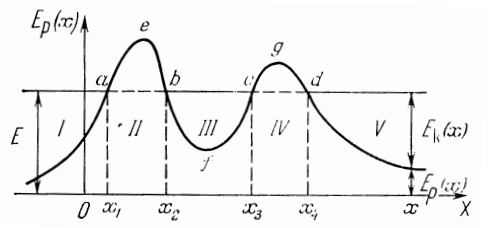


Figure 3.5.: Potential energy curve for the motion of a particle in an external stationary conservative field.

For a fixed value of the mechanical energy E of the particle, as shown in Figure 3.5, the particle can remain, in its travel, in one of the following three regions:

$$x \leqslant x_1 \text{ (region I)},$$
$$x_2 \leqslant x \leqslant x_3 \text{ (region III), and}$$
$$x \geqslant x_4 \text{ (region V)}$$

These regions are separated from one another by the regions II and IV, which are the so-called *potential barriers* *aeb* and *cgd*, within whose limits the particle cannot exist. At the boundaries of the potential barriers (at points a, b, c and d), the particle reverses its direction of motion; in region I the particle can travel without limit to the left of boundary a of the barrier, and in region V, without limit to the right of boundary d of the barrier. In region

III, the particle oscillates between points b and c; it is in a so-called *potential well* bfc.

3.5 Perfectly Elastic and Inelastic Collisions

3.5.1

An impact in which a considerable change in the velocities of the colliding bodies occurs in an extremely short time interval is called a *collision*. Examples of collisions are a ham mer striking a billet being forged that lies on the anvil, and a hammer striking the head of a nail being driven.

The *line of impact* is the common normal to the surfaces of the colliding bodies at their point of contact. If the centres of mass (2.3.3) of the colliding bodies lie on the line of impact at the instant of contact, the collision is said to be *central*. An example is the collision of two billiard balls. The collision, or impact, is said to be *head-on*, or *straight-line*, if the velocities of the centres of mass of the colliding bodies are parallel, before the collision, to the line of impact. Otherwise, it is called an *oblique impact*, or *glancing collision*.

3.5.2

In a collision the bodies are deformed and instantaneous, but quite substantial, forces are developed. They are called *impact forces*. For a system of colliding bodies these

forces are internal ones[1], i.e. they do not change the total momentum of the system. External forces, constantly exerted on the system (for instance, the gravity forces of the bodies) are usually very small compared to the impact forces. Therefore, even though the impulses of impact forces (2.4.2) in the duration τ of the collision are commensurable with the momenta (2.3.4) of the colliding bodies, the resultant impulse of all the constantly acting external forces during the same time interval τ is small compared to the momenta of the bodies. Accordingly, the work done on the system by the external forces during the time inter val t is small compared to the mechanical energy of the system. Hence, a system of bodies can be assumed, in the collision pro cess, to be an approximately closed system (2.2.4). This means that in calculating the results of the collision, use can be made of the laws of the conservation of momentum (2.7.1), of angular momentum (4.4.1) and of energy (9.2.7). If the bodies deform in the collision like perfectly elastic ones, the impact forces are conservative and the law of conservation of mechanical energy (3.4.2) is valid in the system.

3.5.3

The collision of two bodies is said to be *perfectly inelastic* if, after impact, they travel together as a single body. Sufficiently close to a perfectly inelastic collision are, for example, the impact of the pile-driving hammer with the

[1] It is assumed that the colliding bodies are either free (2.2.3) or the constraints imposed on them are such that no impact constraint reactions are developed.

end of the pile being driven, and the firing of a bullet into a wagon filled with sand, when the bullet remains embedded in the sand. Various processes occur in the colliding bodies in an inelastic collision (plastic deformation of the bodies, friction, etc.). As a result, the kinetic energy of the system is partly transformed into its internal energy (9.1.2).

If.two bodies of masses m_1 and m_2, travelling with translational motion at the velocities $\mathbf{v}_1$ and $\mathbf{v}_2$, undergo a *perfectly inelastic head-on central collision*, they continue their translational motion together at the velocity

$$\mathbf{u} = \frac{m_1\mathbf{v}_1 + m_2\mathbf{v}_2}{m_1 + m_2}$$

Note. In the case of a perfectly inelastic collision that is neither head-on nor central, the preceding equation can be used to find the velocity of the centre of the mass of the bodies joined together in the collision. As the result of such a collision, how ever, the system may begin to rotate about its centre of mass in accordance with the law of conservation of angular momentum (4.4.1).

3.5.4

The change in the kinetic energy of a system of two colliding bodies in a perfectly inelastic head-on central collision is

$$\begin{aligned}\Delta E_k &= \frac{m_1 + m_2}{2}\mathbf{u}^2 - \frac{m_1}{2}\mathbf{v}_1^2 - \frac{m_2}{2}\mathbf{v}_2^2 \\ &= -\frac{m_1 m_2}{2(m_1 + m_2)}(\mathbf{v}_1^2 - \mathbf{v}_2^2) < 0\end{aligned}$$

In particular, if the second, body is at rest before the collision (for instance, a pile being driven by a pile driver, or a forging lying on the anvil), the relative reduction in the kinetic energy of the system in a perfectly inelastic head-on central collision is

$$-\frac{\Delta E_k}{E_{k_1}} = \frac{m_2}{m_1 + m_2}$$

In engineering, a perfectly inelastic head-on central collision (impact) is made use of to change the shape of bodies (smith and die forging, rivetting, etc.) or to move a body in a medium with high resistance to motion (driving nails, piles, etc.). It proves expedient in the first case to have the ratio $-\Delta E_k/E_{k_1}$ as near as possible to unity, i.e. it is necessary that $m_2 \gg m_1$ (the mass of the forged item and the anvil should be many times greater than that of the hammer). In the second case, on the contrary, it is necessary that the loss in kinetic energy in the collision (impact) be as low as possible, i.e. that $m_1 \gg m_2$ (the mass of the hammer should be many times greater than that of the nail being driven).

3.5.5

A collision is said to be *perfectly elastic* if it does not lead to any change in the mechanical energy of the system, i.e. if the bodies are perfectly elastic.

Example 1. A perfectly elastic head-on central collision of two bodies (for instance, balls) of masses m_1 and m_2, which travel before the collision with translational motion at the velocities $\mathbf{v}_1$ and $\mathbf{v}_2$ along axis OX, passing through their centres of mass (Figure 3.6 (a)). The

velocities of the bodies after the collision, $\mathbf{u}_1$ and $\mathbf{u}_2$ (Figure 3.6 (b)), can be found from the laws of conservation of momentum and mechanical energy:

$$m_1\mathbf{u}_1 + m_2\mathbf{u}_2 = m_1\mathbf{v}_1 + m_2\mathbf{v}_2,$$
$$m_1\mathbf{u}_1^2 + m_2\mathbf{u}_2^2 = m_1\mathbf{v}_1^2 + m_2\mathbf{v}_2^2$$

Velocities $\mathbf{u}_1$ and $\mathbf{u}_2$ are directed along axis OX and

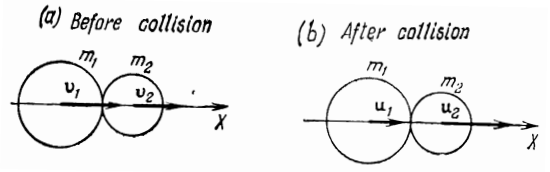


Figure 3.6.: A perfectly elastic head-on central collision of two bodies.

their projections on this axis are

$$u_{1x} = \frac{(m_1 - m_2)v_{1x} + 2m_2v_{2x}}{m_1 + m_2}$$

and

$$u_{2x} = \frac{2m_1v_{1x} + (m_2 - m_1)v_{2x}}{m_1 + m_2}$$

In particular, if the masses of the bodies are the same, the bodies exchange velocities in a collision: $u_{1x} = v_{2x}$ and $u_{2x} = v_{1x}$.

If the mass of the second body is many times greater than that of the first body, then $u_{1x} \approx 2v_{2x} - v_{1x}$ and $u_{2x} \approx v_{2x}$.

3.5.6

Example 2. *Perfectly elastic oblique central collision.* If the bodies are smooth the impulse of friction forces in the collision can be neglected. In this case the tangential components of the velocities of the bodies are not changed, i.e. components perpendicular to the line of impact: $u_1\tau = v_1\tau$ and $u_{2\tau} = v_{2\tau}$. The normal components, directed along the line of impact, change in the same way as in a head-on collision:

$$u_{1n} = \frac{(m_1 - m_2)v_{1n} + 2m_2v_{2n}}{m_1 + m_2}$$

and

$$u_{2n} = \frac{2m_1v_{1n} + (m_2 - m_1)v_{2n}}{m_1 + m_2}$$

In particular, in the perfectly elastic oblique collision of a smooth ball with a fixed flat wall($m_2 \gg m_1$ and $u_2 = v_2 = 0$): $u_{1\tau} = v_{2\tau}$ and $u_{1n} = -v_{1n}$, i.e. the ball rebounds from the wall according to the law of mirror reflection: the angle of reflection is equal to the angle of incidence. The magnitude of the velocity is conserved: $u_1 = v_1$. The vector $\Delta\mathbf{p}_1$ of the change in momentum of the ball in the collision is directed perpendicular to the wall:

$$\Delta\mathbf{p}_1 = m_1(\mathbf{u}_1 - \mathbf{v}_1) = -2m_1\mathbf{v}_{1n}$$

The impulse of impact force acting on the wall is equal to $2m_1\mathbf{v}_{1n}$.

4 Dynamics of Rotary Motion

4.1 Moment of Force and Angular Momentum

4.1.1

The moment of force, or force moment is a concept introduced in mechanics to characterize the external mechanical action exerted on a body that changes its rotary motion. Distinction is made between the moment of force about a fixed point and about a fixed axis.

The *moment of the force* $\mathbf{F}$ *about a fixed point* O (the *pole*) is the vector quantity $\mathbf{M}$, equal to the vector product of the radius vector $\mathbf{r}$, from point O to point A of force application (Figure 4.1), by the force vector $\mathbf{F}$:

$$\mathbf{M} = [\mathbf{r}\,\mathbf{F}]$$

The magnitude of the moment of force is $M = Fr\sin\alpha = Fl$, where α is the angle between vectors $\mathbf{r}$ and F, and $l = r\sin\alpha$ is the length of the perpendicular OB (Figure 4.1) dropped from point O to the line of action of the force.

The quantity l is called the *arm of the force* with respect to point O. If the point of application of force $\mathbf{F}$ is displaced along its line of action, the moment $\mathbf{M}$ of this force about the same fixed point O is not changed. If the line of action of the force passes through point O, the moment of the force about point O equals zero.

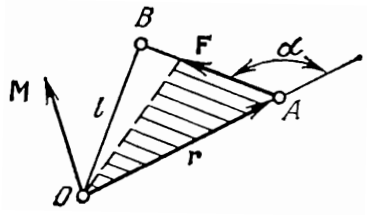


Figure 4.1.: The moment of force $\mathbf{M}$.

4.1.2

The *principal*, or *resultant, moment* of a system of forces *about fixed point* O (*pole*) is the vector $\mathbf{M}$, equal to the geometric sum of the moments about point O of all n forces of the system:

$$\mathbf{M} = \sum_{i=1}^{n} [\mathbf{r}_i \mathbf{F}_i]$$

where $\mathbf{r}_i$ is the radius vector from point O to the point of application of force $\mathbf{F}_i$.

It follows from Newtons third law (Section 2.5.1) that the moments of the internal forces of interaction between

the particles of a system about pole O are compensated for (cancelled out) pair wise: $[\mathbf{r}_i\mathbf{F}_{ik}] = -[\mathbf{r}_k\mathbf{F}_{ki}]$. Consequently, in calculating the resultant moment of forces, only the *external* forces exerted on the mechanical system being considered need be taken into account.

4.1.3

The *moment of force* $\mathbf{F}$ *about a fixed axis* a is the scalar quantity M_a, equal to the projection on this axis of vector $\mathbf{M}$, which is the moment of force $\mathbf{F}$ about arbitrary point O of axis a.

The value of moment M_a is independent of the choice of the position of point O along axis a.

Note. Sometimes the moment of a force about fixed axis a is understood to mean the vector quantity $\mathbf{M}_a = M_a\mathbf{i}_a$, where $\mathbf{i}_a$ is the unit vector of axis a. The vector $\mathbf{M}_a$ is the component of vector $\mathbf{M}$ of the moment of force about pole O, this component being directed along axis a.

If the line of action of the force intersects or is parallel to axis a, the moment of force about this axis is equal to zero.

Let A be the point of application of force $\mathbf{F}$, and O_1 be the foot of the perpendicular dropped from point A to the axis OZ being considered (Figure 4.2). It proves convenient to resolve force $\mathbf{F}$ into three mutually perpendicular components: axial component F_z, parallel to axis OZ; radial component $\mathbf{F}_n$, directed along vector $\boldsymbol{\rho} = \vec{O_1A}$, and tangential component $\mathbf{F}_\tau$ directed perpendicular to the axis a and perpendicular to vector $\boldsymbol{\rho}$.




Figure 4.2.: Resolving the components of the moment of force $\mathbf{M}$.

The moment of force $\mathbf{F}$ about axis OZ is

$$M_z = [\boldsymbol{\rho}\mathbf{F}_\tau]_z \text{ and } \mathbf{M}_z = [\boldsymbol{\rho}\mathbf{F}_\tau]$$

Since vectors $\boldsymbol{\rho}$ and $\mathbf{F}_\tau$ are perpendicular to each other

$$|\mathbf{M}_z| = |M_z| = \rho|\mathbf{F}_\tau|$$

The *principal*, or *resultant, moment* of a system of forces *about a fixed axis a* is equal to the algebraic sum of the moments of all the forces of the system about this axis.

4.1.4

The *angular momentum*, or *moment of momentum, of a particle about fixed point O* (*pole*) is the vector $\mathbf{L}$. It is equal to the vector product of radius vector $\mathbf{r}$, from

point O to the location of the particle, by vector $\mathbf{p}$ of its momentum:

$$\mathbf{L} = [\mathbf{r}\,\mathbf{p}] = [\mathbf{r}m\mathbf{v}],$$

where m and $\mathbf{v}$ are the mass and velocity of the particle.

The *angular momentum of a system about fixed point* O is denoted by vector $\mathbf{L}$ and equals the vector sum of the angular momenta of all the particles of the system about the same point O:

$$\mathbf{L} = \sum_{i=1}^{n} [\mathbf{r}_i\,\mathbf{p}_i] = \sum_{i=1}^{n} [\mathbf{r}_i m_i \mathbf{v}_i],$$

where m_i, $\mathbf{r}_i$ and $\mathbf{v}_i$ are the mass, radius vector and velocity of the i-th particle, and n is the total number of particles.

The *angular momentum of a system about fixed axis* a is the scalar quantity L_a, equal to the projection on axis a of vector $\mathbf{L}$, the angular momentum of the system about some point O lying on this axis:

$$L_a = \sum_{i=1}^{n} [\mathbf{r}_i m_i \mathbf{v}_i]_a$$

The numerical value L_a of the angular momentum is independent of the choice of the position of point O along axis a.

Note. Sometimes the angular momentum of a system about a fixed axis a is understood to mean the vector quantity $\mathbf{L}_a = L_a \mathbf{i}_a$ where $\mathbf{i}_a$ is the unit vector of axis a.

4.1.5

The *angular momentum of a body rotating about a fixed point O* at the angular velocity is equal to:

$$\mathbf{L} = \int_{(m)} [\mathbf{r}\mathbf{v}]\mathrm{d}m = \int_{(m)} [\mathbf{r}[\boldsymbol{\omega}\mathbf{r}]]\mathrm{d}m$$

where $\mathbf{r}$ is the radius vector from point O to an infinitely small (dement of the body of mass $\mathrm{d}m$, and $\mathbf{v} = [\boldsymbol{\omega}\mathbf{r}]$ is the velocity of the element of the body. Since $[\mathbf{r}[\boldsymbol{\omega}\mathbf{r}]] = r^2\boldsymbol{\omega} - (\boldsymbol{\omega}\mathbf{r})\mathbf{r}$, vectors $\mathbf{L}$ and $\boldsymbol{\omega}$ do not coincide in direction in the general case:

$$\mathbf{L} = \boldsymbol{\omega}\int_{(m)} r^2\mathrm{d}m - \int_{(m)} (\boldsymbol{\omega}\mathbf{r})\mathbf{r}\mathrm{d}m$$

The angular momentum of a body hinged at point O and its angular velocity coincide in direction if the body rotates about one of its principal axes of inertia (4.2.4) passing through point O

$$\mathbf{L} = \mathbf{I}\boldsymbol{\omega}$$

where $\mathbf{I}$ is the moment of inertia (4.2.1) of the body about this principal axis.

4.1.6

The resultant moments $\mathbf{M}$ and $\mathbf{M}^*$ of a system of forces about two different fixed points O and O^* are related by the equation

$$\mathbf{M} = \mathbf{M}^* + \left[\mathbf{r}^*\mathbf{F}\right]$$

where $\mathbf{r}^*$ is the radius vector from origin O to point O^*, and $\mathbf{F}$ is the principal vector of the system of forces being considered. If $\mathbf{F} = 0$ the resultant moment of the system of forces is the same about any fixed point: $\mathbf{M}^* = \mathbf{M}$. This, precisely, is the property possessed by a *force couple*, or simply *couple*, i.e. a system of two forces, equal in magnitude and directed along two parallel straight lines in opposite directions. The shortest (perpendicular) distance d between the lines of action of the forces is called the *arm of the couple*. The moment, or torque, of a force couple is directed perpendicular to the plane of the forces, and its magnitude is equal to $M = Fd$, where F is the magnitude of each of the forces of the couple.

The resultant moment $\mathbf{M}_C$ of all the forces acting on a mechanical system about the centre of mass (2.3.3) of this system is related to the resultant moment $\mathbf{M}$ of the same system of forces about fixed point O by the equation

$$\mathbf{M} = \mathbf{M}_C + [\mathbf{r}_C \mathbf{F}]$$

where $\mathbf{r}_C$ is a radius vector from origin O to point C, and $\mathbf{F}$ is the principal vector of the system of forces.

4.1.7

The value of the angular momentum of a mechanical system about its centre of mass C is the same for the absolute motion of the particles at the velocities (i.e. with respect to a fixed inertial frame of reference) and for the relative motion at the velocities $\mathbf{v}_i' = \mathbf{v}_i - \mathbf{v}_C$ (i.e. with respect to a frame of reference in translational motion

with the origin of coordinates at point C):

$$\sum_{i=1}^{n} [\mathbf{r}_i m_i \mathbf{v}_i] = \sum_{i=1}^{n} [\mathbf{r}'_i m_i \mathbf{v}'_i] = \mathbf{L}_C$$

where $\mathbf{r}'_i = -\mathbf{r}_C$ is the radius vector of the i-th particle in a frame of reference travelling together with the centre of mass.

The relation between the values of the angular momentum $\mathbf{L}$ of a mechanical system about fixed point O and $\mathbf{L}_C$ about the systems centre of mass is of the form

$$\mathbf{L} = \mathbf{L}_C + [\mathbf{r}_C \mathbf{p}]$$

where $\mathbf{p} = \sum_{i=1}^{n} m_i \mathbf{v}_i$ is the momentum of the system in its absolute motion.

4.2 Moment of Inertia

4.2.1

The *moment of inertia of a mechanical system* about fixed axis a is the physical quantity denoted by I_a and equal to the sum of the products of the masses of all n particles of the system by the squares of their normal distances from the axis:

$$I_a = \sum_{i=1}^{n} m_i \rho_i^2$$

where m_i and ρ_i are the mass of the i-th particle and its normal distance from the axis.

The moment of inertia of a body about fixed axis a is

$$I_a = \int_{(m)} \rho^2 \mathrm{d}m = \int_{(V)} \rho^2 D \mathrm{d}V$$

where $\mathrm{d}m = D\mathrm{d}V$ is the mass of an infinitely small element of volume $\mathrm{d}V$ of the body, D is the density and ρ is the normal distance from the element $\mathrm{d}V$ to axis a.

If the body is homogeneous, i.e. its density is the same through out, then

$$I_a = D \int_{(V)} \rho^2 \mathrm{d}V$$

The moment of inertia I_a is a measure of inertness of a body in its rotary motion about fixed axis a (4.3.4), in the same way that its mass is a measure of inertness of the body in its translational motion.

4.2.2

The moment of inertia of a given body about some axis depends, not only on the mass, shape and size of the body, but also on the position of the body with respect to this axis. Ac cording to *Steiner's theorem of parallel axes*, the moment of inertia I of a body about an arbitrary axis is equal to the sum of its moment of inertia I_C about a parallel axis through the centre of mass (or of inertia) of the body plus the product of the mass m of the body by the square of the normal distance d between the two axes:

$$I = I_C + md^2$$

4.2.3

The moments of inertia of certain homogeneous regularly shaped bodies about certain axes are listed in Table 4.1.

Body	**Position of axis a**	**Moment of inertia I_a**
Hollow thin-walled circular cylinder of radius R and mass m	Axis of the cylinder	mR^2
Solid circular cylinder (or disk) of radius R and mass m	Axis of the cylinder	$mR^2/2$
Solid sphere of radius R and mass m	Axis through the centre of the sphere	$2mR^2/5$
Hollow thin-walled sphere of radius R and mass m	Axis through the centre of the sphere	$2mR^2/3$
Thin straight rod of length l and mass m	Axis perpendicular to the rod and through its centre along its length	$ml^2/12$
The same rod	Axis perpendicular to the rod and through one end of it	$ml^2/3$

Table 4.1.: The moments of inertia of certain homogeneous regularly shaped bodies about certain axes.

4.2.4

The *products of inertia of a body* about the axes of a rectangular Cartesian coordinate system are the quantities:

$$I_{xy} = \int_{(m)} xy\mathrm{d}m = \int_{(V)} xy\, D\mathrm{d}V$$
$$I_{xz} = \int_{(m)} xz\mathrm{d}m = \int_{(V)} xz\, D\mathrm{d}V$$
$$I_{yz} = \int_{(m)} yz\mathrm{d}m = \int_{(V)} yz\, D\mathrm{d}V$$

where x, y and z are the coordinates of an infinitely small element of the body of volume $\mathrm{d}V$, density D and mass m.

Axis OX is called the *principal axis of inertia of the body* if the products of inertia I_{xy} and I_{xz} are simultaneously equal to zero. Three principal axes of inertia can be passed through each point of the body. The axes are mutually perpendicular.

The moments of inertia of a body about the three principal axes of inertia, passed through an arbitrary point O of the body, are called the *principal moments of inertia of the body.*

The principal axes of inertia, passing through the centre of mass of the body, are called the *principal central axes of inertia of the body*, and the moments of inertia about these axes are called the *principal central moments of inertia of the body.* An axis of symmetry of a homogeneous body is always one of its principal central axes of inertia.

4.3 The Fundamental Law in the Dynamics of Rotary Motion

4.3.1

It follows from Newtons laws that the first derivative with respect to time t of the angular momentum $\mathbf{L}$ of a mechanical system about any fixed point 0 is equal to the resultant moment M^{ext} of all the external forces, applied to the system, about the same point O:

$$\frac{\mathrm{d}\mathbf{L}}{\mathrm{d}t} = M^{\text{ext}}$$

This equation expresses the *law of the variation of angular momentum of the system.* It is valid, in particular, for a rigid body, hinged at point O and rotating about it. In this case, the equation expresses the *fundamental law of dynamics of a rigid body rotating about a fixed point.*

In terms of the projections on the axes of a fixed rectangular Cartesian coordinate system with its origin at point O, the law for the variation of the angular momentum is written in the form:

$$\frac{\mathrm{d}L_x}{\mathrm{d}t} = M_x^{\text{ext}}, \quad \frac{\mathrm{d}L_y}{\mathrm{d}t} = M_y^{\text{ext}}, \quad \frac{\mathrm{d}L_z}{\mathrm{d}t} = M_z^{\text{ext}}$$

Here L_x, L_y, L_z, M^{ext_x}, M_x^{ext}, M_y^{ext} M_z^{ext} are the angular momenta of the system and the resultant moments of the external forces about the corresponding coordinate axes.

4.3.2

Example. The *regular precession of a gyroscope* due to its gravitational force. A *gyroscope (symmetrical gyroscope)* is a rigid body spinning (rotating rapidly) about its axis of symmetry that can change its position in space. A gyroscope has three degrees of freedom (1.5.6) if it is mounted at fixed point O, which lies on its axis and is called the *centre of suspension of the gyroscope*. If the




Figure 4.3.: Analysing the rotary motion of a heavy gyroscope or a top.

centre of suspension coincides with the centre of gravity C (7.3.2) of the gyroscope, the gyroscope is said to be *balanced*: the force of gravity does not affect its state of rotation. Otherwise, it is said to be a *heavy gyroscope*, or top (Figure 4.3). Owing to the action of the moment of

gravitational force about point O

$$M^{\text{ext}} = [\mathbf{r}_C m\mathbf{g}]$$

a heavy gyroscope rotates about this point so that its axis OZ' rotates uniformly about vertical axis OZ describing a conical surface (shown by dashed lines in Figure 4.3). Such motion of the gyroscope is called *regular precession*. If the angular velocity of precession $\Omega \ll \omega$ (where ω is the spin angular velocity or, simply, spin velocity of the gyroscope about its axis of symmetry OZ'), it can be assumed with some approximation that the angular momentum $\mathbf{L}$ of the gyroscope about point O is directed along axis OZ' of the gyroscope and equals

$$\mathbf{L} = I\boldsymbol{\omega}$$

where I is the moment of inertia of the gyroscope about axis OZ'. Hence

$$\frac{\mathrm{d}\mathbf{L}}{\mathrm{d}t} = [\mathbf{r}_C m\mathbf{g}] = \left[\frac{\mathbf{r}_C}{I\omega_{z'}}\mathbf{L}m\mathbf{g}\right] = [\boldsymbol{\Omega}\mathbf{L}]$$

where $\boldsymbol{\Omega} = -m\mathbf{r}_C g/I\omega_{z'}$, is the angular velocity of precession, and $\omega_{z'} = \omega$ in the case shown in Figure 4.3. The greater the spin angular velocity of the gyroscope the slower its precession.

4.3.3

The kinetic energy of a rigid body rotating about a fixed point at the angular velocity $\boldsymbol{\omega}$ is

$$E_k = \frac{I\boldsymbol{\omega}^2}{2}$$

where I is the moment of inertia of the body about the instantaneous axis of rotation (1.5.6).

An element of work done in the infinitely short time interval $\mathrm{d}t$ by force $\mathbf{F}$ acting on the body is

$$\delta W = \mathbf{M}\boldsymbol{\omega}\mathrm{d}t = \mathbf{M}\mathrm{d}\boldsymbol{\varphi} = M_\omega \mathrm{d}\varphi$$

where $\mathbf{M} = [\mathbf{r}\mathbf{F}]$ is the moment of force $\mathbf{F}$ about point O ($\mathbf{r}$ is the radius vector from point O to the point of application of force $\mathbf{F}$), $\mathrm{d}\varphi = \omega \mathrm{d}t$ and $\mathrm{d}\boldsymbol{\varphi} = \boldsymbol{\omega}\mathrm{d}t$ are the angle of rotation and the vector of an element of rotation of the body in the time interval $\mathrm{d}t$, and M_ω is the moment of force $\mathbf{F}$ about an instantaneous axis of rotation ($\mathbf{M}_\omega$ equal to the projection of vector $\mathbf{M}$ on the direction of vector ω).

The change in the kinetic energy of a rotating rigid body during the time interval $\mathrm{d}t$ is equal to the work done by the external forces:

$$\mathrm{d}E_k = M_\omega^{\mathrm{ext}} \mathrm{d}\varphi$$

where is the resultant moment (4.1.3) of external forces about an instantaneous axis of rotation of the body.

4.3.4

If a rigid body rotates about fixed axis OZ at the angular velocity ω, its angular momentum about this axis is

$$L_z = I_z \omega_z \text{ and } \mathbf{L}_z = I_z \boldsymbol{\omega}$$

Here I_z is the moment of inertia of the body about axis OZ and does not change with time ($I_z = \text{const}$), and

$|\omega_z| = \omega > 0$ ($\omega_z = \omega$ if vector $\boldsymbol{\omega}$ and the unit vector of axis OZ coincide in direction, otherwise $\omega_z = -\omega$).

The *fundamental law in the dynamics of a rigid body rotating about fixed axis OZ is*

$$I_z = \frac{\mathrm{d}\boldsymbol{\omega}}{\mathrm{d}t} = \mathbf{M}_z^{\text{ext}} \text{ or } \boldsymbol{\varepsilon} = \frac{1}{I_z}\mathbf{M}_z^{\text{ext}}$$

where $\boldsymbol{\varepsilon} = \mathrm{d}\boldsymbol{\omega}/\mathrm{d}t$ is the angular acceleration of the body.

It is evident from the preceding equation that the moment of inertia of a rigid body about some fixed axis is a measure of inertness of the body in its rotation about the given axis: the greater the moment of inertia of the body, the less the angular acceleration it acquires under the action of the same moment of external forces.

4.3.5

The kinetic energy of a rigid body rotating about fixed axis OZ at the angular velocity ω is

$$E_k = \frac{1}{2} I_z \omega^2$$

An element of work done during the infinitely short time $\mathrm{d}t$ by force $\mathbf{F}$ applied to the body is

$$\delta W = \mathbf{M}_z \boldsymbol{\omega} \mathrm{d}t = M_z \mathrm{d}\varphi$$

where M_z is the moment of force $\mathbf{F}$ about the axis OZ of rotation (the unit vector of axis OZ coincides in direction with vector $\boldsymbol{\omega}$).

The change in the kinetic energy of a rigid body during the time interval $\mathrm{d}t$ is equal to the work done by the external forces during this interval:

$$\mathrm{d}E_k = M_z^{\mathrm{ext}}\mathrm{d}\varphi$$

where M_z^{ext} is the resultant moment of external forces about the axis of rotation of the body.

4.3.6

The motion of a free rigid body satisfies the following two differential equations:

$$\frac{\mathrm{d}}{\mathrm{d}t}(m\mathbf{v}_C) = \mathbf{F}^{\mathrm{ext}} \text{ and } \frac{\mathrm{d}\mathbf{L}_C}{\mathrm{d}t} = \mathbf{M}_C^{\mathrm{ext}}$$

Here m is the mass of the body, $\mathbf{v}_C$ is the velocity of its centre of mass C, $\mathbf{F}^{\mathrm{ext}}$ is the principal vector of external forces applied to the body (2.5.2), $\mathbf{M}_C^{\mathrm{ext}}$ is the resultant moment of external forces about point C (4.1.6), and $\mathbf{L}_C$ is the angular momentum about the same point C (4.1.7).

The first equation describes translational motion of the free body at the velocity of its centre of mass (2.5.3). The second equation follows from the law of the variation of angular momentum (4.3.1) and describes the rotation of a rigid body about its centre of mass (1.5.9).

4.3.7

The kinetic energy of a free rigid body can be deter mined on the basis of Koenigs theorem (3.2.4):

$$E_k = \frac{mv_C^2}{2} + \frac{I_C\omega^2}{2}$$

where I_C is the moment of inertia of the body about an instantaneous axis of rotation passing through its centre of mass C, and ω is the angular velocity of the body. In the general case, the instantaneous axis is displaced in the body and the moment of inertia I_C varies with time. The value of I_C is constant if the body is in plane motion (1.5.9).

Example. The kinetic energy of a homogeneous circular cylinder rolling down an inclined plane without slipping. The cylinder has plane motion because all of its points travel in vertical planes that are parallel to one another. The cylinder travels with translational motion at the velocity $\mathbf{v}_C$ directed along the inclined plane, and rotates about its axis ($I_C = mR^2/2$, where m and R are the mass and radius of the cylinder) at the angular velocity ω. From the condition that the cylinder rolls without slipping it follows that the instantaneous velocities of the points of contact between the cylinder and inclined plane equal zero, i.e. $\omega = v_C/R$. Hence, the kinetic energy of the rolling cylinder is

$$E_k = \frac{mv_C^2}{2} + \frac{I_C\omega^2}{2} = \frac{3}{4}mv_C^2.$$

4.4 Law of Conservation of Angular Momentum

4.4.1

The *law of the conservation of angular momentum* can be formulated as follows: the angular momentum of a closed

system (2.2.4) about any fixed point remains constant with time, i.e.

$$\frac{\mathrm{d}\mathbf{L}}{\mathrm{d}t} \equiv 0 \text{ and } \mathbf{L} = \text{const}$$

Accordingly, the angular momentum of a closed system about its centre of mass (4.1.7) remains constant with time:

$$\frac{\mathrm{d}\mathbf{L_C}}{\mathrm{d}t} \equiv 0 \text{ and } \mathbf{L_C} = \text{const}$$

Like the laws of conservation of momentum and energy, the law of conservation of angular momentum is of significance far beyond the scope of classical mechanics. It belongs to the most Fundamental of physical laws because it is associated with a definite symmetry property of space: its isotropy. The *isotropy of space* is manifested in the fact that the physical properties and laws of motion of a closed system are independent of the direction chosen for the coordinate axes in an inertial frame of reference. This means that these properties and laws do not change when the closed system is turned as a whole through any angle in space.

According to modern concepts, not only particles and bodies can have an angular momentum, hut fields as well. Elementary particles and systems built from them (for instance, atomic nuclei) can have an angular momentum that is not related to their motion in space and is called their spin (Table **??**).

4.4.2

With respect to systems that can be described by classical (Newtonian) mechanics, the law of conservation of angular momentum can be regarded as a consequence of Newtons laws. For a closed mechanical system, the resultant moment of external forces about any fixed point (as well as about the centre of mass of the system) is identically zero: $\mathbf{M}^{\text{ext}} \equiv 0$ (consequently, $\mathbf{M}_C^{\text{ext}} \equiv 0$, see (4.1.6), where $\mathbf{F} = \mathbf{F}^{\text{ext}} \equiv 0$) and the law of conservation of angular momentum follows from (4.3.1):

$$\mathbf{L} = \sum_{i=1}^{n} [\mathbf{r}_i m_i \mathbf{v}_i] = \text{const}$$

where $m_i, \mathbf{r}_i$ and $\mathbf{v}_i$ are the mass, radius vector and velocity of the i-th particle of the system, which consists of n such particles.

Accordingly (see (4.1.7) and (2.5.3)),

$$\mathbf{L}_C = \sum_{i=1}^{n} [\mathbf{r}'_i m_i \mathbf{v}'_i] = \sum_{i=1}^{n} [\mathbf{r}_i m_i \mathbf{v}_i] = \text{const}$$

where $\mathbf{r}'_i = \mathbf{r}_i - \mathbf{r}_C$, and $\mathbf{v}'_i = \mathbf{v}_i - \mathbf{v}_C$ and $\mathbf{r}_C$, $\mathbf{v}_C$ are the radius vector and velocity of the systems centre of mass.

4.4.3

If a system is not closed, but the external forces acting on it are such that their resultant moment about fixed point O is identically zero ($\mathbf{M}^{\text{ext}} \equiv 0$), then, according to Newtons laws (4.3.1), the angular momentum of the

system about the same point O remains constant with time: $\mathbf{L} = \text{const}$. This condition is practically complied with, for example, by a balanced gyroscope (4.3.2) with three degrees of freedom, if the moment of the friction force in its suspension is sufficiently small.

If the stand of the gyroscope, holding its centre of suspension at rest, is turned in any way, the axis of the gyroscope retains its orientation with respect to a fixed inertial frame of reference.[1]

Usually $\mathbf{M}^{\text{ext}} \not\equiv 0$ and $\mathbf{L} \neq \text{const}$. But if the resultant moment of external forces about any fixed axis passing through point O is identically zero, the angular momentum of the system about this axis remains constant with time. For instance, if $M_z^{\text{ext}} \equiv 0$, then $L_z = \text{const}$.

If the system rotates about fixed axis OZ and the resultant moment of external forces about this axis $M_z^{\text{ext}} \equiv 0$, the angular momentum of the system about the axis of rotation remains constant with time:

$$I_z \omega = \text{const}$$

where ω and I_z are the angular velocity and moment of inertia of the system.

If the action of internal forces, as well as external forces that comply with the condition $M_z^{\text{ext}} \equiv 0$, leads to deformation of the system, changing its moment of inertia I_z, the angular velocity ω correspondingly increases or decreases.

[1] It is assumed that vector $\mathbf{L}$ is directed along the axis of the gyroscope. Otherwise, a free gyroscope has a precessional motion: its axis describes a circular conical surface whose vertex is at the centre of suspension and whose axis is directed along the vector $\mathbf{L} = \text{const}$.

4.4.4

Free axes of a body are ones about which a free rigid body (2.2.3) can rotate at constant angular velocity $\boldsymbol{\omega}$ in the absence of all external action. Such rotation of a body is said to be *free*, or *inertial rotation*. The free axes of a body coincide with its principal central axes of inertia (4.2.4). In the general case, the values I_1, I_2 and I_3 of the principal central moments of inertia (4.2.4) differ. The free rotation of such a body (for ex ample, a homogeneous rectangular parallelepiped with edges of different length) is accomplished practically only about two free axes, corresponding to the extreme values of the principal central moments of inertia – the maximum and minimum values. The rotation of the body about its third principal central axis, corresponding to the intermediate value of the moment of inertia of the body, proves to be unstable: even very small external action is capable of leading to substantial deviation of the instantaneous axis of rotation from its initial direction in the body.

If the values of two principal central moments of inertia of a body are equal: $I_1 = I_2 \neq I_3$, stable free rotation of such a body (for instance, a homogeneous circular cylinder) is possible only about the free axis corresponding to the third, differing value I_3 of the moment of inertia. For a homogeneous circular cylinder such a free axis is its axis of symmetry. But if a long thin cylinder is rotated by means of a string secured to one end, stable rotation of the cylinder can be accomplished about the free axis corresponding to the maximum value of its moment of inertia. This free axis is perpendicular to the axis of

symmetry of the cylinder.

5 Fundamentals of the Special Theory of Relativity

5.1 Postulates of the Special Theory of Relativity

5.1.1

The *special theory of relativity* (sometimes called the *restricted relativity theory*) is the modern physical theory of space and time. The special relativity theory and quantum mechanics (38.1.1) serve as the theoretical basis for all modern physics and engineering (for example, nuclear physics and nuclear technology). The special relativity theory is often called *relativistic theory*, and specific phenomena described by this theory are called *relativistic effects*. Relativistic effects are manifested, as a rule, at velocities of bodies close to that of light in free space ($c = 3 \times 10^8$ m/s) and called *relativistic velocities*. Relativistic mechanics refers to the mechanics of motion at relativistic velocities and is based on the special theory

of relativity.

As in classical Newtonian mechanics it is assumed in special relativity theory that time is uniform (3.4.2) and that space is homogeneous (2.7.1) and isotropic (4.4.1).

5.1.2

The special theory of relativity is based on two main principles accepted as the initial postulates.

The *first postulate* is a generalization of Galileos mechanical principle of relativity (2.8.4) to cover any physical processes.

This postulate, called the *principle of relativity*, or *Einstein's relativity principle*, states: all physical phenomena proceed in the same way, under the same conditions, in all inertial frames of reference (2.1.2). In other words, the principle of relativity contends that physical laws are independent (invariant) with respect to the chosen inertial frame of reference; equations expressing these laws have the same form in all inertial frames of reference.

Consequently, it is impossible to ascertain, by means of any physical experiments whatsoever, conducted in a closed system of bodies (2.2.4), whether the system is at rest or is travelling at uniform velocity in a straight line with respect to some inertial frame of reference. All inertial frames of reference are equally justified in physics. It is impossible, on the basis of physical experiments, to select from the host of inertial reference frames any "preferred" or "absolute" frame of reference possessing any qualitative distinctions from other inertial reference frames.

5.1.3

The *second postulate* expresses the *principle of the invariance of the velocity of light*: the velocity of light in free space is independent of the motion of the source of light. It is the same in all directions and in all inertial frames of reference, being one of the most basic physical constants. Experiments show that c, the velocity of light in free space, is the limiting velocity in nature. The velocity of any particles and bodies, as well as the velocity of propagation of any interactions or signals, cannot exceed c.

These specific laws governing the process of light propagation in free space enable this real physical process to be made use of in establishing a procedure for the *chronometry of a frame of reference*, i.e. for the synchronization of clocks located at various points in space and travelling together with the frame of reference being considered (5.2.3).

5.1.4

The postulates of the special theory of relativity contradict the concepts of the properties of space and time that are accepted in classical mechanics and on which the Galilean transformations are based (2.8.1). In particular, this refers to the contention, considered to be "self-evident" in Newtonian mechanics, that the passage of time is identical in all inertial frames of reference. From this it follows that the time interval between any two events is of an absolute nature. For instance, if two events occur simultaneously

according to the clock in one inertial frame of reference, then, according to classical concepts, they also occur simultaneously according to the clock of any other inertial frame.

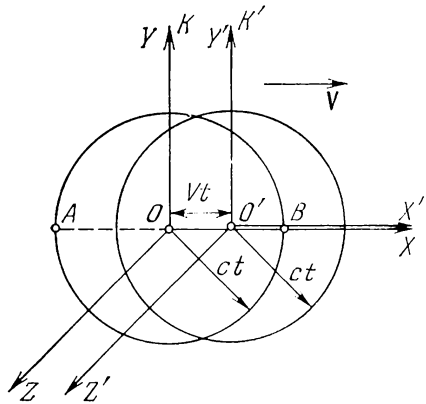


Figure 5.1.: Consequences of constancy of speed of light as a postulate in theory of realtivity.

The above-mentioned contradiction can be illustrated by the following example (Figure 5.1). We have two inertial frames of reference: fixed frame K and frame K' which travels along the OX axis at constant velocity V. Assume that a flash of light is produced at point O at the instant of the zero time reference in both frames K and K' ($t = t' = 0$), when their origins O and O' of coordinates coincide. By the instant of time $t > 0$, light, propagating in free space at the velocity c, reaches points

at the surface of a hollow sphere in the frame K. This sphere has its centre at point O and its radius equals ct.

It can be assumed that in frame K' the light flash occurred at the instant of time $t' = O$ at point O'. Hence, according to the postulates of the special theory of relativity, by the instant of time $t' = t$, light in frame K' reaches points at the surface of a hollow sphere of the same radius ct as in the frame K but with its centre at point O'. At this instant, however, point O' is not at point O, but at a distance of Vt from this point. Hence, any attempt to combine the postulates of the special theory of relativity with classical conceptions of absolute time that elapses identically in all frames of reference leads to an absurdity: the light flash must *simultaneously* reach points in space that belong to two different hollow spheres.

5.2 Simultaneity of Events. Synchronization of Clocks

5.2.1

The concept of the simultaneity of two or several events is extensively employed in making various physical measurements. For example, to determine the length l of a rod, arranged along the axis OX of reference frame K and travelling with respect to this frame, it is necessary to note the values of the coordinates $x_2(t)$and $x_1(t)$ of the ends of the rod *simultaneously*, i.e. at the same instant of time t. Then

$$l = | x_2(t) - x_1(t) |$$

The instant of time at which some event occurs (for instance, the launching or touchdown times of a spaceship) is determined by noting a clocks reading that is *simultaneous* with the event being considered. This can be simply done by means of a clock located at the place where the event occurs. Hence, there should be many clocks located at various points in space in each frame of reference. Obviously, these clocks should be in agreement with one another, i.e. run *synchronously*: their readings should be identical at each instant of time t.

5.2.2

The synchronism of clocks located adjacently, i.e. at the same place in space, can be checked by the coincidence of their readings at each arbitrary instant of time. The synchronism of clocks that are separated in space at the points A and B, distant from each other, could be checked in a similar manner if we had at our disposal standard time signals that could propagate *instantaneously* from A to B. Experiments indicate, however, that this method is unfeasible because the velocity of any signal cannot exceed the velocity of light in free space.

We can, however, proceed in the following manner. We can convey the clock from B to A, check whether it is synchronous with the clock located at A, and then convey the clock carefully back to B. Then we can check whether the clock brought back to B runs at the same rate as the clock left at A by transmitting time signals from A to B after definite equal time intervals according to the clock at A. But it cannot be established by this procedure

whether a shift in the zero time reference has occurred in the clock reading while it was being conveyed back to B, i.e. whether the clock brought back to B is now fast or slow with respect to the clock at A by a constant amount Δt.

5.2.3

The problem of the synchronism of clocks separated in space at points A and B can be solved only by an unambiguous agreement (or definition) about when these clocks are to be regarded as synchronous. Einstein made use of a real physical process – the propagation of light in free space – as the basis for such a definition. He proceeded from the facts that the velocity of light in free space is the maximum possible velocity at which signals can be transmitted in nature and that it is identical in all directions and in all inertial frames of reference.

Assume that according to the clock at point A the light signal is transmitted from this point at the instant of time t_1 and, after being reflected at point B, returns to A at the instant of time t_3. Then, by definition, the clock at B is in synchronism with that at A if they run at the same rate and if, at the instant the light signal reaches B, the clock located there indicates the time $t_2 = (t_1 + t_3)/2$.

5.2.4

According to the special theory of relativity, the passage of time may differ in different inertial frames of reference. Consequently, the time interval between any two definite

events is relative: it can change in going over from one inertial reference frame to another. In particular, the simultaneity of two events occurring at different points separated in space is also relative. Events occurring simultaneously in one inertial frame of reference are not at all simultaneous in other inertial frames that are travelling with respect to the first frame. In some frames of reference one of these events occurs before the other event; in other frames it occurs after the other event.

Thus, in the example illustrated in Figure 5.1 (5.1.4), the arrival of the light flash at points A and B are events that occur simultaneously in the fixed frame of reference A. In the travelling frame of reference K' these events are not simultaneous. The light flash reaches A, receding from the light source O', later than it reaches B, approaching the source O'.

Events connected by a cause-and-effect relationship, i.e. by causality, cannot occur simultaneously in any frame of reference whatsoever, because any effect is due to some process initiated by the cause. At the same time, no process (physical, chemical, biological, etc.) can proceed instantaneously. Therefore, relativity does not contradict causality in any way. In any inertial frame of reference an event that is an effect always occurs later than the event causing this effect.

5.3 Lorentz's Transformations

5.3.1

It follows from the postulates of the special theory of relativity, as well as from the homogeneity (2.7.1) and isotropy (4.4.1) of space and the uniformity of time (3.4.2), that the relations between the coordinates and times of the same event in two inertial frames of reference are expressed by the *Lorentz transformations*, rather than the Galilean transformations (2.8.1) used in classical (Newtonian) mechanics. According to the principle of relativity and the above-mentioned properties of the symmetry of space and time, the Lorentz transformations should he linear.

5.3.2

The Lorentz transformations are in their simplest form if the like axes of the Cartesian coordinates of the fixed (K) and moving (K') inertial frames of reference are pairwise parallel to each other and if frame K' travels with respect to frame K at the constant velocity V along axis OX (Figure 2.3, see (2.8.1)). If, in addition, the zero time reference in both frames ($t = 0$ and $t' = 0$) is taken as the instant when the origins O and O' of coordinates of the two systems coincide, then the Lorentz transformations are of the form

$$
\begin{aligned}
x' &= \frac{x - Vt}{\sqrt{1 - \frac{V^2}{c^2}}}, & x &= \frac{x' + Vt}{\sqrt{1 - \frac{V^2}{c^2}}} \\
y &= y', & y' &= y \\
z &= z', & z' &= z \\
t &= \frac{t - Vx/c^2}{\sqrt{1 - \frac{V^2}{c^2}}}, & t' &= \frac{t + Vx'/c^2}{\sqrt{1 - \frac{V^2}{c^2}}}
\end{aligned}
$$

where c is the velocity of light in free space.

5.3.3

The Lorentz transformations show that not only the spatial coordinates of an event being considered are changed in going over from one inertial frame of reference to another, hut the corresponding instants of time as well. But a definite interrelation exists between the spatial coordinates x', y' and z' of an event and the time instant t' it occurs in an arbitrary inertial frame of reference K'. Hence, the quantity $\left[(x')^2 + (y')^2 + (z')^2 - c^2(t')^2\right]$ is independent of the velocity V of frame K', i.e. it is identical in all inertial frames of reference:

$$(x')^2 + (y')^2 + (z')^2 - c^2(t')^2 = (x)^2 + (y)^2 + (z)^2 - c^2(t)^2$$

The coordinate x' and time t' cannot be imaginary. It follows, therefore, from the Lorentz transformations that the velocity of relative motion of any two inertial frames of reference cannot exceed the velocity of light in free space ($V \leqslant c$).

5.3.4

According to Einsteins principle of relativity (5.1.2), physical laws must comply with the condition of *relativistic invariance (Lorentz invariance)*. This requirement implies that equations expressing physical laws retain their form in going over from one inertial frame of reference to another in accordance with the Lorentz transformations.

The Lorentz transformations reduce to the Galilean transformations (2.8.1) at $V \ll c$ or, more precisely, in the limit as $V/c \to 0$, i.e. as $c \to \infty$. In other words, the Galilean transformations and classical (Newtonian) mechanics based on them are founded on the assumption of instantaneous propagation of interaction. Such an approximate approach is permissible only in considering the laws of mechanical motion of bodies at velocities a great many times less than the velocity of light in free space.

5.4 Relativity of Lengths and Time Intervals. Time Interval Between Two Events

5.4.1

It follows from the Lorentz transformations (5.3.2) that the linear dimension of a body travelling with respect to an inertial frame of reference is reduced in the direction of motion. This change in the longitudinal size of a body in motionis called the *Lorentz-FitzGerald contraction.* Assume l_0 to he the length of a rod at rest in reference frame

K'. If the rod is located along axis $O'X'$ (Figure 5.2),




Figure 5.2.: Length contraction in relative motion.

then $l_0 = x'_2 - x'_1$, where x'_2 and x'_1 are the coordinates of the ends of the rod. The length l of the same rod in reference frame K, with respect to which it travels along axis OX at the velocity V, is equal to the difference in the coordinates of the ends of the rod, measured at the same instant of time t:

$$\begin{aligned} l &= x_2(t) - x_1(t) \\ &= (x'_2 - x'_1)\sqrt{1 - \frac{V^2}{c^2}} \\ &= l_0\sqrt{1 - \frac{V^2}{c^2}} \end{aligned}$$

Transverse dimensions of a body are independent of its velocity and are identical in all inertial frames of reference:

$$y_2 - y_1 = y'_2 - y'_1, \text{ and } z_2 - z_1 = z'_2 - z'_1$$

Thus, the linear dimensions of a body are relative. They are maximal in the inertial frame of reference with respect

to which the body is at rest. These are said to be the bodys *proper dimensions.*

5.4.2

The Lorentz-FitzGerald contraction is a kinematic effect of the special theory of relativity. It is not due to the effect of any kind of longitudinal forces compressing the body along its direction of motion. This contraction becomes appreciable only at velocities approaching that of light in free space. It follows from the contraction formula that bodies cannot travel at velocities $V \geqslant c$ because at $V = c$ the longitudinal dimension of the body (in the direction of motion) becomes zero, and at $V > c$ it would have to become imaginary.

5.4.3

It is evident from the Lorentz transformations that in the theory of relativity we can specify a definite "instant of time" only with respect to a single definite inertial frame of reference. Thus, for instance, a single "instant of time" in reference frame K (a single definite value of time t in this frame) corresponds to many values of time t in frame K', depending upon the values of coordinate x:

$$t' = \frac{t - Vx/c^2}{\sqrt{1 - \dfrac{V^2}{c^2}}}$$

Likewise, a single "instant of time" in frame K', i.e. a single definite value of time t', corresponds to many val-

ues of time t in frame K, depending upon the values of coordinate x':

$$t = \frac{t' + Vx'/c^2}{\sqrt{1 - \frac{V^2}{c^2}}}.$$

5.4.4

Another important consequence of the Lorentz transformations is the relativity of the time interval between any two events (for example, the beginning and end of some process), i.e. the dependence of this time interval on the choice of the inertial frame of reference. Assume that two events, **1** and **2**, occur in the moving inertial frame of reference K' at the same point A, fixed in frame K' (i.e. $x'_2 = x'_1$), at the instants of time t'_1 and t'_2. Thus, the time interval between the events is $\tau_0 = t'_2 - t'_1$.

With respect to fixed inertial frame of reference K, point A travels with the same velocity V as does frame K'. Hence in frame K events **1** and **2** occur at different points in space, having the coordinates x_1 and x_2, and $x_2 - x_1 = V\tau$, where $\tau = t_2 - t_1$ is the time interval between events **1** and **2** according to the clock in frame K. It follows from the Lorentz transformations that

$$\tau = t_2 - t_1 = \frac{t'_2 - t'_1}{\sqrt{1 - \frac{V^2}{c^2}}} = \frac{\tau_0}{\sqrt{1 - \frac{V^2}{c^2}}}$$

Thus, the time interval between two events is minimal in the inertial frame of reference with respect to which both events occur at the same point. The time measured by a clock travel ling together with some object is said to be the *proper time* of the object.

5.4.5

The consequence of the Lorentz transformations that is dealt with in the preceding subsection is evidence of the existence of the relativistic effect of the slowing of time, called *time dilation*, in a moving inertial frame of reference as compared to a fixed one. A clock travelling at the velocity V with respect to a given inertial frame runs slower by a factor of $\sqrt{1 - V^2/c^2}$ than a fixed clock. Correspondingly, in agreement with the relativity principle, all physical processes in a moving frame of reference proceed at a slower rate than in a fixed frame.

The time dilation effect becomes appreciable only at extremely high velocities V, close to that of light in free space. This effect has been demonstrated, for example, by experiments conducted with muons (**??**). The muon is an unstable elementary particle. The mean proper lifetime of muons (according to a clock in the inertial frame of reference with respect to which they are at rest) $\tau_0 = 2.2 \times 10^{-6}$ s. Muons are created in the upper layers of title atmosphere by the action of primary cosmic rays, and they travel with respect to the earth at velocities V close to c. If there was no relativistic effect of time dilation, a muon would be capable of travelling an average distance, with respect to an observer on the earth, of

$\tau_0 c = 660\,\mathrm{m}$ through the atmosphere. In other words, muons could not reach the earths surface. Actually, they are registered by instruments installed at the surface of the earth, because the mean lifetime of a travelling muon, according to the clock of the observer on the earth, $\tau = \tau_0/\sqrt{1 - V^2/c^2} \gg \tau_0$, and the path travelled by a muon during this time, $\tau V \gg 660\,\mathrm{m}$.

5.4.6

The relativistic effect of time dilation in a spaceship travelling with respect to the earth makes it feasible to under take space flights of almost unlimited length and journeys "into the future". According to the relativity principle, all processes in a spaceship, including the aging process of the astronauts, proceed in agreement with the same laws as on the earth. But in the spaceship time must be measured by a clock travelling together with it at the velocity V with respect to the earth.

If V is close to c the clock in the ship runs considerably slower than earth clocks (at the space-launch complex), by a factor of $1/\sqrt{1 - V^2/c^2}$. For example, at $\beta = V/c = 0.99999$ the rates of the spaceship and earth clocks differ by a factor of 224. Consequently, in a time interval of $\tau_0 = 10\,\mathrm{years}$ in such a spaceship, one can make a space flight taking $\tau = 2240\,\mathrm{years}$ according to earth clocks, aging only 10 years during the flight. In this flight the spaceship can travel a tremendous distance from the earth: $l = V\tau = \beta c\tau = 2239.98\,\mathrm{light\ years}$[1]. The closer V is to

[1] A light year is the distance travelled by light in free space in one year: $1\ \mathrm{light\ year} = 9.4605 \times 10^{15}\,\mathrm{m}$.

c, the greater the distance l travelled by the spaceship with respect to the earth in the same interval τ_0 of proper time in the spaceship, i.e. the longer the space flight that the astronauts can make during their lifetime.

If an astronaut completes a space flight at a velocity V close to c by returning to the earth, he will find that people remaining on the earth (including his twin brother) has aged more than he has during the flight. If V differs from c by a sufficiently small amount, when $(1 - V^2/c^2)^{-1/2} \gg 1$, the astronaut can, during the flight, outlive all his contemporaries and find him self, upon his return, among future generations.

5.4.7

It would seem, on the face of it, that, on the basis of the relativity principle, we should arrive at a conclusion exactly the opposite of that given in the preceding subsection. The clock on the earth, travelling at the velocity $-\mathbf{V}$ with respect to the spaceship, should run slower than the clock in the ship. Therefore, the time required for the flight should be longer for the astronaut, and not for the people left on the earth. Hence, the twin that made the flight should age more than his brother.

We have thus found that the difference between the readings of the clocks at the space-launch complex and in the ship is positive according to (5.4.6), while, on the other hand, it is negative. This absurd result is called the *clock*, or *twin, paradox*. Actually, no clock paradox exists. It arose due to improper application of the relativity principle. This principle contends that not all frames of

reference are equally justified, but only all *inertial* frames of reference. But the frame of reference of the spaceship, in contrast to that of the earth, is not an inertial one all throughout the flight. During launching, turning around and in braking orbit when approaching the earth, the spaceship travels with acceleration (or deceleration).

Consequently, the problem concerning the running of the clock at the launching complex which is always at rest with respect to a single inertial frame, and that of the clock in the spaceship, is, in principle, not a symmetrical one. Hence, the earth and ship frames of reference are not equally justified in the given problem. The reasoning in (5.4.6) is the correct one because it is based on the use of an inertial (the earth) frame of reference. Accordingly, the reasoning given in (5.4.7), leading to the clock paradox, is incorrect. In the second case, the general theory of relativity should be applied, rather than the special theory. When this is done, it is found that, from the point of view of the astronaut as well, his clock runs slower than the clock at the launching complex.

5.4.8

The *interval*, or *space-time interval*, between two events, measured in the inertial frame of reference K' is the quantity

$$s'_{12} = \sqrt{c^2(t'_{12})^2 - (l'_{12})^2}$$

where $t'_{12} = t'_2 - t'_1$ is the time interval between the two events being considered (according to the clock in frame K'), and $l'_{12} = \sqrt{(x'_2 - x'_1)^2 + (y'_2 - y'_1)^2 + (z'_2 - z'_1)^2}$ is

the distance between the points at which events **1** and **2** occur, also measured in frame of reference K'.

It follows from the Lorentz transformations that the interval between two given events, **1** and **2**, is invariant with respect to the choice of the inertial frame of reference, i.e. it does not change in transferring from moving inertial frame K' to fixed frame K:

$$s'_{12} = s_{12} = \text{inv}, \text{ where } s_{12} = \sqrt{c^2 t_{12}^2 - l_{12}^2}$$

If $s_{12}^2 > 0$, i.e. if s_{12} is a real number, the interval s_{12} is said to be *timelike*.

The interval s_{12} is said to be *spacelike* if $s_{12}^2 < 0$, i.e. s_{12} is an imaginary number.

5.4.9

It follows from the invariance of the interval with respect to the choice of the inertial frame K' that in all frames K' the values of t'_{12} and l'_{12} for the given two events, 1 and 2, satisfy the equation of a hyperbola:

$$c^2 (t'_{12})^2 - (l'_{12})^2 = s_{12}^2$$

If $s_{12}^2 > 0$ the relation between t'_{12} and l'_{12} in various inertial frames of reference K' travelling with respect to fixed frame K at any possible velocities $(0 \geqslant V < c)$, can be represented graphically as the two branches I and II of a hyperbola (Figure 5.3). Consequently, the sign of the time interval between events **1** and **2**, related by a timelike interval, is absolute. It is independent of the choice of the frame of reference: in all frames K' the second event




Figure 5.3.: The invariance of interval between two inertial frames.

always occurs either after the first, i.e. $t'_{12} > 0$ (branch I) or always before the first, i.e. $t'_{12} < 0$ (branch II). The distance l'_{12} is relative; an inertial frame K' can be chosen in which $l'_{12} = 0$, i.e. events **1** and **2** occur at the same place (points A and B on the branches I and II of the hyperbola).

Two events related by causality should always correspond to a timelike interval or, in any case, one equal to zero ($s_{12} = 0$). This is due to the fact that the signal by means of which event **1** (the cause) leads to event **2** (the effect) cannot be propagated in space at a velocity exceeding that of light in free space:

$$l'_{12} \leqslant c(t'_2 - t'_1)$$

5.4.10

In the case of events related by a spacelike interval ($s_{12}^2 < 0$), the sign of t'_{12} is relative: $t'_{12} > 0$ (upper part of hyper bola III in Figure 5.3) in certain inertial frames K' whereas in others $t'_{12} < 0$ (lower part of hyperbola III). Point C corresponds to the frame K' in which $t'_{12} = 0$, i.e. events **1** and **2** occur simultaneously.

5.5 Transformation of Velocities and Accelerations in Relativistic Kinematics

5.5.1

The velocities $\mathbf{v}$ and $\mathbf{v}'$ of a particle in two inertial frames of reference K and K' are

$$\mathbf{v} = \frac{\mathrm{d}\mathbf{r}}{\mathrm{d}t} = v_x\mathbf{i} + \mathbf{v}_y\mathbf{j} + \mathbf{v}_z\mathbf{k}, \text{ and}$$
$$\mathbf{v}' = \frac{\mathrm{d}\mathbf{r}'}{\mathrm{d}t'} = v'_{x'}\mathbf{i}' + \mathbf{v}'_{y'}\mathbf{j}' + \mathbf{v}'_{z'}\mathbf{k}'$$

where $\mathbf{r} = x\mathbf{i} + y\mathbf{j} + z\mathbf{k}$ and $\mathbf{r}' = x'\mathbf{i}' + y'\mathbf{j}' + z'\mathbf{k}'$ are the radius vectors of the particle in frames K and K'. The projections of velocities $\mathbf{v}$ and $\mathbf{v}'$ on the axes of Cartesian coordinates of frames K and K' are:

$$v_x = \frac{\mathrm{d}x}{\mathrm{d}t}, \qquad v_y = \frac{\mathrm{d}y}{\mathrm{d}t}, \qquad v_z = \frac{\mathrm{d}z}{\mathrm{d}t}$$
$$v'_{x'} = \frac{\mathrm{d}x'}{\mathrm{d}t'}, \qquad v'_{y'} = \frac{\mathrm{d}y'}{\mathrm{d}t'}, \qquad v'_{z'} = \frac{\mathrm{d}z'}{\mathrm{d}t'}$$

If the like axes of the Cartesian coordinates of frames K' and K are pairwise parallel, and frame K' travels with

respect to frame K at the constant velocity V along axis OX (Figure 2.3, see (2.8.1)) and, in addition, if at the zero time references in frames K and K' ($t = 0$ and $t' = 0$), the origins O and O' of coordinates of these frames coincide, the Lorentz transformations in the form given in (5.3.2) are valid. It follows from these transformations that the relations between the projections of the velocities of the particle on the axes of the Cartesian coordinates of frames K and K' are of the form:

$$v_x = \frac{\mathrm{d}x}{\mathrm{d}t}, \qquad v_y = \frac{\mathrm{d}y}{\mathrm{d}t}, \qquad v_z = \frac{\mathrm{d}z}{\mathrm{d}t}$$
$$v'_{x'} = \frac{\mathrm{d}x'}{\mathrm{d}t'}, \qquad v'_{y'} = \frac{\mathrm{d}y'}{\mathrm{d}t'}, \qquad v'_{z'} = \frac{\mathrm{d}z'}{\mathrm{d}t'}$$

These equations express the *law of the composition of velocities in relativistic kinematics*. In the limit as $c \to \infty$ these equations lead to the ordinary law for the composition of velocities in classical mechanics (2.8.2):

$$v'_{x'} = v_x - V, \quad v'_{y'} = v_y, \quad v'_{z'} = v_z, \text{ and}$$
$$\mathbf{v}' = \mathbf{v} - \mathbf{V}$$

5.5.2

The relations between the squares of the magnitudes of vectors $\mathbf{v}$ and $\mathbf{v}'$ are

$$v^2 = c^2 \left[1 - \frac{\left[1 - (v'/c)^2\right]\left(1 - (V/c)^2\right)}{\left(1 + V v'_{x'}/c^2\right)^2} \right]$$
$$(v')^2 = c^2 \left[1 - \frac{\left[1 - (v/c)^2\right]\left(1 - (V/c)^2\right)}{\left(1 - V v_x/c^2\right)^2} \right]$$

In particular, if $v' = c$, then $v = c$ and vice versa. Hence, if the velocity of a particle with respect to some inertial frame of reference is equal to the velocity of light in free space, then it must have the same magnitude with respect to any other inertial frame regardless of the velocity of relative motion of these two frames. In other words, the sum of two velocities, of which one is equal to c, is always equal to c. This law, detected in the motion of such elementary particles as photons (37.1.4) and the neutrino (Table **??**), demonstrates the limiting nature of the velocity of light in free space (5.1.3).

5.5.3

It is evident from the equations in the preceding subsection that a particle, travelling with respect to some inertial frame of reference at a velocity less than c, has a velocity with respect to any other inertial frame that is also less than c (for instance, if $v < c$, then $v' < c$, and vice versa). From this it follows, among other things, that no matter how close to c the velocities of two particles are, their relative velocity is always less than c. Assume, for example, that two particles are travelling toward each other along the axis OX of frame K at the respective velocities: $\mathbf{v}_1 = 0.8c\,\mathbf{i}$ and $\mathbf{v}_2 = -0.8c\,\mathbf{i}$. The velocity $\mathbf{u}_{21}$ of the second particle with respect to the first is not equal, as is assumed in classical mechanics, to the vector difference $\mathbf{v}_2 - \mathbf{v}_1 = -1.6c\,\mathbf{i}$ if only because the magnitude of this velocity exceeds c. The required velocity is equal to the velocity of the second particle with respect to inertial frame K', travelling together with the first

particle ($\mathbf{V} = 0.8c\,\mathbf{i}$), i.e. $\mathbf{u}_{21} = \mathbf{v}'_2$. It follows from the equation in (5.5.1) that

$$\begin{aligned} v'_{2x'} &= \frac{v_{2x} - V}{1 - V v_{2x}/c^2} \\ &= -\frac{1.6c}{1 + 0.64} = 0.976c, \\ v'_{2y'} = v'_{2z'} &= 0 \end{aligned}$$

i.e. $\mathbf{u}_{21} = -0.976c\,\mathbf{i}'$ and $|\,\mathbf{u}_{21}| < c$.

5.5.4

The projections of the acceleration of a particle on the axes of the Cartesian coordinates of two inertial frames of reference K and K' (5.5.1) are related by the following

equations:

$$
\begin{aligned}
a'_{x'} &= \frac{\mathrm{d}v'_{x'}}{\mathrm{d}t'} = a_x \left(\frac{\sqrt{1-(V/c)^2}}{1-\dfrac{Vv_x}{c^2}} \right)^3, \\
a'_{y'} &= \frac{\mathrm{d}v'_{y'}}{\mathrm{d}t'} = \left[\left(1-\frac{Vv_x}{c^2} \right) a_y + \frac{Vv_y}{c^2} a_x \right] \frac{1-(V/c)^2}{\left(1-\dfrac{Vv_x}{c^2} \right)^3}, \\
a'_{z'} &= \frac{\mathrm{d}v'_{z'}}{\mathrm{d}t'} = \left[\left(1-\frac{Vv_x}{c^2} \right) a_z + \frac{Vv_z}{c^2} a_x \right] \frac{1-(V/c)^2}{\left(1-\dfrac{Vv_x}{c^2} \right)^3}, \\
a_x &= \frac{\mathrm{d}v_x}{\mathrm{d}t} = a'_{x'} \left(\frac{\sqrt{1-(V/c)^2}}{1+\dfrac{Vv'_{x'}}{c^2}} \right)^3, \\
a_y &= \frac{\mathrm{d}v_y}{\mathrm{d}t} = \left[\left(1+\frac{Vv'_{x'}}{c^2} \right) a'_{y'} + \frac{Vv'_{y'}}{c^2} a'_{x'} \right] \frac{1-(V/c)^2}{\left(1+\dfrac{Vv'_{x'}}{c^2} \right)^3}, \\
a_z &= \frac{\mathrm{d}v_z}{\mathrm{d}t} = \left[\left(1-\frac{Vv'_{x'}}{c^2} \right) a'_{z'} + \frac{Vv'_{z'}}{c^2} a'_{x'} \right] \frac{1-(V/c)^2}{\left(1+\dfrac{Vv'_{x'}}{c^2} \right)^3},
\end{aligned}
$$

5.6 Basic Law of Relativistic Dynamics

5.6.1

In contrast to classical mechanics, the mass of a particle is not constant in relativistic mechanics. It depends upon the velocity $\mathbf{v}$ of the particle. Its value m differs in two inertial frames of reference moving with respect to each other. The *dependence of mass on velocity* is expressed by the equation:

$$m = \frac{m_0}{\sqrt{1 - v^2/c^2}}$$

where m_0 is the *rest mass* of the particle, i.e. its mass measured in the inertial frame of reference with respect to which the particle is at rest, and c is the velocity of light in free space. The mass m is frequently called the *relativistic mass*.

The effect of the velocity of a particle on its mass becomes appreciable only at values of v close to c. For example, $m/m_0 = 1.005$ at $v/c = 0.1$ and $m/m_0 = 2.29$ at $v/c = 0.9$. It is evident from the law for the dependence of m on v that particles with a rest mass $m_0 \neq 0$ cannot travel at velocities greater than or equal to c (i.e. $v < c$). At the same time, particles whose rest mass equals zero [photons (37.1.4) and the neutrino (Table **??**)] cannot have a velocity other than c.

5.6.2

The momentum $\mathbf{p} = m\mathbf{v}$ of a particle is a nonlinear function of its velocity:

$$p = \frac{m_0\mathbf{v}}{\sqrt{1 - v^2/c^2}}$$

Vector $\mathbf{p}$ is sometimes called the *relativistic momentum* of the particle (to distinguish it from the value $m_0\mathbf{v}$ of its momentum in classical mechanics). It is obvious that at $v \ll c$, the momentum $\mathbf{p} = m\mathbf{v} \approx m_0\mathbf{v}$.

By virtue of the homogeneity of space (2.7.1), the *law of conservation of relativistic momentum* is valid in relativistic mechanics: the momentum of a closed system (2.2.4) does not change in the course of time.

Following from this law is the *law of conservation of relativistic mass*: in any processes that take place in a closed system, its total relativistic mass remains unchanged.

5.6.3

The *basic law of relativistic dynamics* is: the rate of change in the momentum of a particle is equal to the force $\mathbf{F}$ acting on it, i.e.

$$\frac{\mathrm{d}\mathbf{p}}{\mathrm{d}t} = \mathbf{F}, \text{ or } \frac{\mathrm{d}}{\mathrm{d}t}\left(\frac{m_0\mathbf{v}}{\sqrt{1 - v^2/c^2}}\right) = \mathbf{F}$$

Note. If the particle is subject to the simultaneous action of several forces, $\mathbf{F}$ is understood to be the resultant force (2.2.2).

5.6.4

An element of work done by force $\mathbf{F}$ in the infinitely small displacement $\mathrm{d}\mathbf{r}$ of its point of application is

$$\delta W = (\mathbf{F}\,\mathrm{d}\mathbf{r}) = (\mathbf{F}\mathbf{v})\,\mathrm{d}t$$

Combining the basic law of relativistic dynamics (5.6.3) and the dependence of mass on the velocity (5.6.1) we obtain

$$\mathbf{F} = m\frac{\mathrm{d}\mathbf{v}}{\mathrm{d}t} + \mathbf{v}\frac{\mathrm{d}m}{\mathrm{d}t} \text{ and } \frac{\mathrm{d}m}{\mathrm{d}t} = \frac{mv}{c^2 - v^2}\frac{\mathrm{d}v}{\mathrm{d}t}$$

Hence

$$\begin{aligned}\delta W &= (\mathbf{F}\mathbf{v})\,\mathrm{d}t = m(\mathbf{v}\,\mathrm{d}\mathbf{v}) + v^2\,\mathrm{d}m \\ &= mv\,\mathrm{d}v + v^2\,\mathrm{d}m = c^2\,\mathrm{d}m\end{aligned}$$

5.6.5

The acceleration imparted to a particle by the force $\mathbf{F}$ is

$$\mathbf{a} = \frac{\mathrm{d}\mathbf{v}}{\mathrm{d}t} = \frac{\mathbf{F}}{m} - \frac{\mathbf{v}}{m}\frac{\mathrm{d}m}{\mathrm{d}t} = \frac{1}{m}\left[\mathbf{F} - \frac{\mathbf{v}}{c^2}(\mathbf{F}\mathbf{v})\right]$$

Hence, in contrast to classical mechanics, the acceleration of a particle in relativistic mechanics does not, in general, coincide in direction with the force imparting the acceleration. Vector $\mathbf{a}$ is collinear with force $\mathbf{F}$ in only two cases:

(a) when force $\mathbf{F}$ is perpendicular to the velocity $\mathbf{v}$ of the particle (transverse force) so that $(\mathbf{F}\mathbf{v}) = 0$ and

$$\mathbf{a} = \frac{\mathbf{F}}{m} = \frac{\mathbf{F}}{m_0}\sqrt{1 - \frac{v^2}{c^2}}$$

(b) when force $\mathbf{F}$ is parallel to the velocity vector $\mathbf{v}$ of the particle (longitudinal force) so that $\mathbf{v}(\mathbf{F}\mathbf{v}) = v^2\mathbf{F}$ and

$$\mathbf{a} = \frac{\mathbf{F}}{m}\left(1 - \frac{v^2}{c^2}\right) = \frac{\mathbf{F}}{m_0}\left(1 - \frac{v^2}{c^2}\right)^{3/2}$$

A longitudinal force imparts to a particle an acceleration less by a factor of $1 - v^2/c^2$ than that imparted by a transverse force of the same magnitude. This is due to the fact that a transverse force changes the velocity of a particle only in direction (the magnitude v of the velocity and the relativistic mass are not changed), whereas a longitudinal force changes the magnitude of the velocity of a particle as well as its mass.

5.7 Mass-Energy Relation

5.7.1

The increment of the kinetic energy E_k of a particle is equal to the work done by the force $\mathbf{F}$ acting on the particle (5.6.4):

$$\mathrm{d}E_k = \delta W = c^2 \mathrm{d}m$$

where $\mathrm{d}m$ is the corresponding increment of relativistic mass of the particle. It follows that

$$E_k = (m - m_0)c^2 = m_0 c^2 \left[\frac{1}{\sqrt{1 - v^2/c^2}} - 1 \right]$$

where m_0 is the rest mass of the particle. Expanding $(1 - v^2/c^2)^{-1/2}$ into a Maclaurin series we obtain

$$E_k = m_0 c^2 \left[\frac{1}{2} \left(\frac{v}{c} \right)^2 + \frac{3}{8} \left(\frac{v}{c} \right)^4 + \dots \right]$$

At $v \ll c$ this equation reduces to the ordinary expression for the kinetic energy in classical mechanics:

$$E_k = \frac{m_0 v^2}{2} = \frac{m v^2}{2}$$

5.7.2

It follows from the first equation in the preceding subsection that an increase in the kinetic energy of a body should be accompanied by a corresponding increase in its relativistic mass m:

$$\mathrm{d}m = \frac{1}{c^2}\mathrm{d}E_k$$

Changes in other kinds of energy of a body are also associated with an increase in its relativistic mass. If, for example, in heating a body at rest its internal energy (9.1.2) is increased by the amount $\mathrm{d}U$, the mass m of the body, equal to its rest mass m_0, is increased by

$$\mathrm{d}m = \mathrm{d}m_0 = \frac{1}{c^2}\mathrm{d}U$$

In the general case, a change in the total energy E of the body by the amount $\mathrm{d}E$ is accompanied by a change in its relativistic mass by the amount

$$\mathrm{d}m = \frac{1}{c^2}\mathrm{d}E$$

Accordingly, the following universal relation exists between E and m:

$$E = mc^2 = \frac{m_0 c^2}{\sqrt{1 - \dfrac{v^2}{c^2}}}$$

this is known as the *mass-energy relation*: the total energy of a body (or system) is equal to the product of the

relativistic mass of the body (or system) by the square of the velocity of light in free space.

By virtue of the uniformity of time (3.4.2),the *law of the conservation of energy* is valid in relativistic mechanics as it is in classical mechanics: the total energy of a closed system (2.2.4) does not change in the course of time.

It follows from the mass-energy relation that the laws of the conservation of relativistic mass (5.6.2) and of the total energy are not independent laws.

5.7.3

The total energy of a particle or a system of particles (for instance, of an atomic nucleus, atom, molecule or body) at rest is equal to

$$E_0 = m_0 c^2$$

where m_0 is the rest mass; E_0 is called the *rest energy* of the particle or system. The values of m_0 and E_0 are independent of the choice of the inertial frame of reference. These quantities are constant characteristics of structureless (elementary) particles, similar, for example, to their electric charge and spin (Table **??**). The rest mass and rest energy of a system of particles depend upon the composition of the system and its internal state. For example, the rest mass of an excited nucleus (or atom) is greater than the rest mass of the same nucleus (or atom) in the ground state.

5.7.4

The total energy E of a particle and its momentum $\mathbf{p}$ are related by the equations:

$$\mathbf{p} = \frac{E}{c^2}\mathbf{v} \text{ or } \frac{E^2}{c^2} - p^2 = m_0^2 c^2 \text{ or } E = \sqrt{p^2 c^2 + m_0^2 c^4}$$

The values of the total energy, relativistic mass and momentum of a given particle, in contrast to its rest mass m_0, are relative, i.e. they are different in two inertial frames of reference K (E, m and $\mathbf{p}$) and K' (E', m' and $\mathbf{p}'$). But the difference between the square of the total energy of a particle divided by c^2 and the square of the momentum of the particle, like the interval between two events (5.4.8), does not depend upon the choice of the inertial frame of reference:

$$\frac{(E')^2}{c^2} - (p')^2 = \frac{E^2}{c^2} - p^2 = m_0^2 c^2$$

5.7.5

In going over from one inertial frame K to another K' that is travelling with respect to the first at the velocity $\mathbf{V}$ = const along the OX axis (Figure 2.3, see (2.8.1)), the projections of the momentum of the particle on the coordinate axes and its total energy are transformed as

follows:

$$
\begin{aligned}
p'_{x'} &= \frac{p_x - \dfrac{VE}{c^2}}{\sqrt{1 - V^2/c^2}}, & p_x &= \frac{p'_{x'} - \dfrac{VE'}{c^2}}{\sqrt{1 - V^2/c^2}} \\
p'_{y'} &= p_y, & p_y &= p'_{y'} \\
p'_{z'} &= p_z, & p_z &= p'_{z'} \\
E' &= \frac{E - Vp_x}{\sqrt{1 - V^2/c^2}}, & E &= \frac{E' + Vp'_{x'}}{\sqrt{1 - V^2/c^2}}
\end{aligned}
$$

5.7.6

It does not at all follow from the laws of conservation of relativistic mass (5.6.2) and of total energy (5.7.2) that the rest mass and rest energy of a closed system cannot change. For instance, the sum of the rest masses of free protons and neutrons is always greater than the rest mass of the atomic nucleus they form.

A quantity introduced to characterize systems held together with a margin of safety (for example, atomic nuclei, atoms and molecules) is the concept of the binding energy. The *binding energy of a system* is measured as the least amount of work that must be done to separate the system into its component parts (for instance, an atom into its nucleus and electrons). The binding energy of a system is

$$E_b = \sum_{i=1}^{n} m_{0i}c^2 - M_0c^2$$

where m_0 is the rest mass of a system of n particles, and m_{0i} is the rest mass of the i-th. particle in the free state. The quantity

$$\Delta m = \sum_{i=1}^{n} m_{0i} - M_0 = \frac{E_b}{c^2}$$

is sometimes called the *mass defect of the system.*

6 Gravitation

6.1 Law of Universal

6.1.1

Isaac Newton's law of universal gravitation states that the force of mutual attraction between any two particles is directly proportional to the product of their masses and inversely proportional to the square of the distance between them. Such forces are called *gravitational forces*. If m_1 and m_2 are the masses of the particles being considered and $\mathbf{r}_1$ and $\mathbf{r}_2$ are the radius vectors of these particles, then, according to the law of universal gravitation, the force $\mathbf{F}_{12}$ attracting the first particle toward the second particle, and the force $\mathbf{F}_{21}$ attracting the second particle toward the first particle are equal in magnitude and opposite in direction; they are equal to:

$$\mathbf{F}_{12} = -G\frac{m_1 m_2}{r_{12}^3}\mathbf{r}_{12} \text{ and } \mathbf{F}_{21} = -G\frac{m_1 m_2}{r_{21}^3}\mathbf{r}_{21}$$

Here $\mathbf{r}_{12} = \mathbf{r}_1 - \mathbf{r}_2$ and $\mathbf{r}_{21} = \mathbf{r}_2 - \mathbf{r}_1$ are radius vectors from the second particle to the first and from the first to

the second, respectively, and $r_{12} = r_{21} = |\mathbf{r}_{12}| = |\mathbf{r}_{21}|$ is the distance between the particles. The proportionality




Figure 6.1.: The gravitational interaction between two bodies of arbitrary size and shape.

factor G is called the *constant of universal gravitation*, or the *gravitational constant*. In value the gravitational constant is equal to the force of mutual attraction of two particles of unit mass with a distance of unit length between them. It has been found from experiments that

$$G = (6.6720 \pm 0.0041) \times 10^{-11}\,\mathrm{N\,m^2/kg^2}$$

6.1.2

The gravitational interaction of two bodies of arbitrary size and shape (Figure 6.1) is described by the equation

$$\mathbf{F}_{12} = -G \int_{(V_1} \rho_1 \mathrm{d}V_1 \int_{(V_2} \frac{\rho_2}{r_{12}^3} \mathbf{r}_{12} \mathrm{d}V_2$$

where $\mathbf{r}_{12}$ is the radius vector from the infinitely small element $\mathrm{d}V_2$ of volume of the second body to the infinitely small element $\mathrm{d}V_2$ of volume of the first body, ρ_1 and ρ_2 are the densities of the two elements, and integration is carried out throughout the whole volume of both bodies.

The calculations of force $\mathbf{F}_{12}$ are substantially simplified in two cases:

(a) when there is a spherically symmetrical distribution of the masses in the two bodies, i.e. both bodies are of spherical shape and the density of each body depends only upon the distance to its centre (in particular, the bodies can be homogeneous);

(b) when one of the bodies is of negligibly small size with respect to the other body in which the distribution of its mass is spherically symmetrical.

In these cases

$$\mathbf{F}_{12} = -G\frac{m_1 m_2}{r_{12}^3}\mathbf{r}_{12}$$

where m_1 and m_2 are the masses of the bodies, and $\mathbf{r}_{12}$ is the radius vector connecting the centres of mass (2.3.3) of the second and first bodies.

6.1.3

As a first approximation, it can be assumed that the earth is of spherical shape and the distribution of its mass is spherical ly symmetrical. Hence the gravitational force $\mathbf{F}$, exerted by the earth on a body of mass m, is directed toward the centre of the earth and its magnitude is

$$F = G\frac{mM_\oplus}{r^2}$$

where $M_\oplus$ is the mass of the earth and r is the distance from the body to the earths centre (the size of any body

on earth is negligibly small compared to the radius of the earth).

6.1.4

In application to such microscopic objects as elementary particles, gravitational interaction is practically of no importance whatsoever. It is found to be extremely weak in comparison to all other kinds of interaction: strong, electromagnetic and weak interaction ((**??**) through (**??**)). For example, the electric force of mutual repulsion of two electrons exceeds their gravitational force by over 10^{42} times! Even for ordinary macroscopic objects on the earth the forces of gravitational inter action are extremely small. Two homogeneous spheres, for instance, with a mass of 1000 kg each and a distance of one metre between their centres are attracted to each other with a force of only 7×10^{-5} N.

But, at the same time, gravitational forces are the determining factors in the motion of objects that are investigated in astronomy and astronautics (spaceships, planets and their satellites, planetary systems, stars, etc.). This is due, primarily, to the huge size of astronomical bodies and, in the second place, to the small electromagnetic forces of interaction of such bodies, which, as a whole, are practically electroneutral.

6.2 Gravitational Field

6.2.1

Gravitational interaction between bodies is due to the *gravitational field* set up by the bodies. A distinctive feature of a gravitational field is that a particle placed in this field is subject to a force proportional to the mass of the particle.

The force characteristic of a gravitational field is its *intensity*, the vector quantity $\mathbf{g}_f$, which is equal to the ratio of the force $\mathbf{F}$, exerted on the particle by the field in which it is placed, to the mass m of the particle:

$$\mathbf{g}_f = \frac{\mathbf{F}}{m}$$

The intensity of a gravitational field is independent of the mass m of the particle. It is a function of the coordinates (x, y, z) of points of the field being considered. In the case of an unsteady field the intensity also depends upon the time t.

A gravitational field is steady, or stationary (2.2.1), if the body that sets it up is fixed in the frame of reference chosen to describe the field. The intensity of a steady gravitational field depends only upon the coordinates: $\mathbf{g}_f = \mathbf{g}_f(x, y, z)$.

It follows from Newtons second law (2.4.3) that the forces of ;i gravitational field impart an acceleration $\mathbf{a}$ to a free particle in the field. This acceleration equals the intensity of the field:

$$\mathbf{a} = \frac{\mathbf{F}}{m} = \mathbf{g}_f$$

6.2.2

It follows from the law of universal gravitation (6.1.1) that the intensity of the gravitational field of a fixed particle of mass M, located at the origin of coordinates, equals

$$\mathbf{g}_f = -G\frac{M}{r^3}\mathbf{r}$$

where $\mathbf{r}$ is the radius vector of the point being considered in the field.

A gravitational field is a conservative, or potential, one (3.1.6) because the force acting on a particle of mass m brought into the field is a central force (3.3.4):

$$\mathbf{F} = m\mathbf{g}_f = -G\frac{mM}{r^2}\frac{\mathbf{r}}{r}$$

Correspondingly, the potential energy of a particle in such a field is equal to (3.3.4):[1]

$$E_p = \int_r^\infty F_r \mathrm{d}r = -GmM\int_r^\infty \frac{\mathrm{d}r}{r^2} = -G\frac{mM}{r}$$

It is equally correct to regard the quantity E_p as the potential energy of a particle of mass M in a gravitational field set up by a particle of mass m or, finally, as the *mutual potential energy of two particles* due to their gravitational interaction.

[1] Here and throughout (Section 6.2) and (Section 6.3) an infinitely distant point is chosen as the reference point for the potential energy, i.e. it is assumed that $E_p(\infty) = 0$.

6.2.3

A gravitational field complies with the *principle of super position of fields*: in superposing several (n) gravitational fields their intensities at each point in space are added vectorially, i.e. the intensity of the resultant field is

$$\mathbf{g}_f = \sum_{i=1}^{n} \mathbf{g}_{fi}$$

where $\mathbf{g}_{fi}$ is the intensity of only the i-th field at the point being considered in space.

The intensity of the gravitational field of an arbitrary system consisting of n fixed particles is

$$\mathbf{g}_f = -G \sum_{i=1}^{n} \frac{m_i}{\rho_i^3} \boldsymbol{\rho}_i$$

where $\boldsymbol{\rho}_i = \mathbf{r} - \mathbf{r}_i$ is the radius vector from the i-th particle, whose radius vector is equal to $\mathbf{r}_i$, to the point in the field specified by radius vector $\mathbf{r}$. Consequently, the potential energy of a particle of mass m in this gravitational field is

$$E_p = -Gm \sum_{i=1}^{n} \frac{m_i}{\rho_i}$$

In particular, if the gravitational field is set up by a body whose mass M is distributed in a spherically symmetrical manner (6.1.2), then outside this body

$$\mathbf{g}_f = -G \frac{M}{r^3} \mathbf{r} \quad \text{and} \quad E_p = -\frac{GmM}{r}$$

where $\mathbf{r}$ is a radius vector from the centre of the body to the point being considered in the field. These equations are valid, for example, for the gravitational field of the earth.

6.2.4

By virtue of the conservative nature (potentiality) of the gravitational field (3.1.6), its energy characteristic, the potential, ran be introduced. The *potential of a gravitational field* is the scalar φ, equal to the ratio of the potential energy $E_p$of a particle, placed at the point being considered in the field to the mass m of the particle:

$$\varphi = \frac{E_p}{m}$$

The potential φ is independent of the mass m of the particle; it is a function of the coordinates of points of the gravitational, held. For example, the potential of a gravitational field set up by a fixed particle of mass M is

$$\varphi = -\frac{GM}{r}$$

where r is the distance from the source of the field to the point being considered.

The potential of a gravitational field set up by an arbitrary system of n fixed particles is

$$\varphi = -\sum_{i=1}^{n} G\frac{m_i}{\rho_i}$$

where ρ_i is the distance from a particle of mass m_i to the point being considered in the field. Thus, in superposing

gravitational fields, their potentials are added together algebraically, i.e. the potential φ at any point of a resultant field is equal to the algebraic sum of the potentials at the same point for all the superposed fields taken separately;

$$\varphi = -\sum_{i=1}^{n} \varphi_i$$

Note. In applying this equation it is necessary that the same reference point be chosen for the potentials φ_i of all the fields being superposed: $\varphi_i(\infty) = 0$ (see the footnote to (6.2.2)).

6.2.5

An element of work done by the forces of a gravitational field in an infinitely small displacement $\mathrm{d}r$ of a particle of mass m in this field is:

$$\mathrm{d}W = (\mathbf{F}\,\mathrm{d}\mathbf{r}) = m(\mathbf{g}_f\,\mathrm{d}\mathbf{r})$$

But, on the other hand, the work $\mathrm{d}W$ is equal to the decrease in the potential energy of the particle in the gravitational field:

$$\mathrm{d}W = -\mathrm{d}E_p = -m\mathrm{d}\varphi$$

Consequently, the potential and intensity of a gravitational field are related by the equation:

$$\mathrm{d}\varphi = -(\mathbf{g}_f\,\mathrm{d}\mathbf{r}) = -(g_{fx}\mathrm{d}x + g_{fy}\mathrm{d}y + g_{fz}\mathrm{d}z)$$

where g_{fx}, g_{fy} and g_{fz} are the projections of vector $\mathbf{g}_f$ on the axes of rectangular Cartesian coordinates. Since

$$\mathrm{d}\varphi = \frac{\partial \varphi}{\partial x}\mathrm{d}x + \frac{\partial \varphi}{\partial y}\mathrm{d}y + \frac{\partial \varphi}{\partial z}\mathrm{d}z$$

then

$$\frac{\partial \varphi}{\partial x} = -g_{fx}, \quad \frac{\partial \varphi}{\partial y} = -g_{fy}, \quad \frac{\partial \varphi}{\partial z} = -g_{fz},$$

Hence

$$\mathbf{g}_f = -\left(\frac{\partial \varphi}{\partial x}\mathbf{i} + \frac{\partial \varphi}{\partial y}\mathbf{j} + \frac{\partial \varphi}{\partial z}\mathbf{k}+\right) = -\operatorname{grad}\varphi = -\boldsymbol{\nabla}\varphi$$

i.e. the intensity of a gravitational field is numerically equal and opposite in direction to the gradient of the potential of the field.

The relation between (p and gf can also be written in the form

$$\mathrm{d}\varphi = -\mathbf{g}_f \mathrm{d}l \cos\alpha = -g_{fl}\mathrm{d}l \quad \text{or} \quad g_{fl} = -\frac{\mathrm{d}\varphi}{\mathrm{d}l}$$

where α is the angle between vectors $\mathbf{g}_f$ and $\mathrm{d}\mathbf{r}$, $\mathrm{d}l = |\,\mathrm{d}\mathbf{r}\,|$, and g_{fl} is the projection of vector $\mathbf{g}_f$ onto the direction of vector $\mathrm{d}\mathbf{r}$. Thus, the projection of the intensity vector of a gravitational field onto some direction is numerically equal and opposite in sign to the change in the field potential per unit length in the same direction.

6.2.6

The non-relativistic theory of gravitation discussed above end based on Newtons law of universal gravitation is only approximate. It describes with sufficient accuracy only comparatively weak gravitational fields, having a potential $|\varphi| \ll c^2$, where $c^2 = 9 \times 10^{16}\,\mathrm{m^2/s^2}$ is the square of the velocity of light in free space. It is, in particular, applicable to the gravitational lieIds of the earth and sun because the absolute values of the potentials of these fields at the surfaces of the earth and sun are equal to 6.3×10^7 and $1.9 \times 10^{11}\,\mathrm{m^2/s^2}$.

6.2.7

The *modern* (relativistic) *theory of gravitation*, which is m unified theory of space, time and gravitation, was formulated by Albert Einstein. He called it the *general theory of relativity.* The existence of a close relationship between space and time had already been indicated in his special theory of relativity. This relationship is evident in the Lorentz transformations (5.3.2) and the invariance of the interval between two events (5.4.8). It was found necessary, in describing physical processes, l.o employ a four-dimensional space-time continuum, in which the position of a point is specified by three space coordinates mid the time coordinate ct.

According to the relativistic theory of gravitation, the geometrical properties (metric) of the space-time continuum depend upon the distribution of gravitating masses and their motion in space. Bodies setting up a gravi-

tational field "distort" real three-dimensional space and differently change the passage of time at various points in this space. This means that the bodies cause a deviation of the metric of space-time from that of the "flat" space-time described by Euclidean geometry and dealt with in the special theory of relativity. Therefore, the motion of a body in a gravitational field can be regarded as inertial motion, but in a "distorted" (non-Euclidean) space-time continuum. Accordingly, a particle, subject to the action of a gravitational field, travels neither in a straight line nor at uniform velocity in a real three-dimensional space.

It was shown in the relativistic theory of gravitation that the principle of superposition (6.2.3) does not hold for arbitrary gravitational fields. This principle, as well as the whole non-relativistic theory of gravitation, is sufficiently accurate only in weak fields ($|\varphi| \ll c^2$) and for motion in these fields at low velocities $v \ll c$.

6.3 Kepler's Laws. Space Velocities

6.3.1

The motion of the planets of the solar system along their orbits around the sun complies with the three laws of Kepler. These laws can be derived from Newtons law of universal gravitation, dealing, as a first approximation, with the sun and planets as particles. In the central force field of gravitation of the sun, a planet of mass m is subject to the action of the gravitational force

$$\mathbf{F} = -G\frac{mM_\odot}{r^3}\mathbf{r}$$

where $M_\odot$ is the mass of the sun and $\mathbf{r}$ is the radius vector of the planet from the centre of forces O, which is taken as the origin of coordinates.

The moment of force $\mathbf{F}$ about the centre of forces is $\mathbf{M} = [\mathbf{r}\,\mathbf{F}] \equiv 0$. Hence, the angular momentum $\mathbf{L}$ of the planet about the same point O does not change with time (4.3.1):

$$\mathbf{L} = [\mathbf{r}\, m\, \mathbf{v}] = \text{const}$$

Consequently, the planet travels along a plane path, (orbit), whose plane is perpendicular to vector $\mathbf{L}$. According to (1.3.6), $\mathbf{L} = [\mathbf{r}\, m\, \mathbf{v}_\varphi]$, where $\mathbf{v}_\varphi$ the transverse velocity of the planet. Therefore, the orbital motion of the planet satisfies the condition

$$r^2 \frac{\mathrm{d}\varphi}{\mathrm{d}t} = \frac{L}{m} = \text{const}$$

where r and φ are the polar coordinates of the planet.

A second condition is imposed by the law of conservation of mechanical energy: $E_k + E_p = E = \text{const}$. According to (1.3.6) and (6.2.2):

$$E_k = \frac{mv^2}{2} = \frac{m}{2}\left[\left(\frac{\mathrm{d}r}{\mathrm{d}t}\right)^2 + \left(r\frac{\mathrm{d}\varphi}{\mathrm{d}t}\right)^2\right]$$

$$= \frac{m}{2}\left[\left(\frac{\mathrm{d}r}{\mathrm{d}t}\right)^2 + \left(\frac{L}{mr}\right)^2\right]$$

and

$$E_p = -G\frac{mM_\odot}{r}$$

so that the second condition is of the form

$$\left(\frac{\mathrm{d}r}{\mathrm{d}t}\right)^2 + \left(\frac{L}{mr}\right)^2 - \frac{2GM_\odot}{r} = \frac{2E}{m}$$

6.3.2

The equation of the path of the planet (in the polar coordinates r and φ) is

$$r = \frac{p}{1 + e\cos\varphi}$$

where $p = L^2/Gm^2M_\odot$ and $e = \sqrt{(2EL^2/G^2m^3M_\odot^2) + 1}$. The total mechanical energy of the planet $E < 0$, so that $e < 1$ and the path (orbit) of the planet is an ellipse.

Kepler's first law states that all the planets of the solar system travel along elliptic orbits of which the sun occupies one focus. It follows from the first condition (6.3.1) that the areal velocity (1.3.6) of the planet is constant:

$$\sigma = \frac{1}{2}r^2\frac{\mathrm{d}\varphi}{\mathrm{d}t} = \frac{L}{2m} = \text{const}$$

Kepler's second law states that the radius vector of a planet sweeps out equal areas in equal lengths of time.

6.3.3

According to Kepler's second law, the orbital period, or period of revolution, T of a planet about the sun is equal to the ratio of the area A of the orbit to the areal velocity σ:

$$T = \frac{A}{\sigma} = \frac{\pi ab}{\sigma} = \text{const}$$

where $a = p/(1-e^2)$ and $b = a\sqrt{1-e^2}$ are the major and minor semi-axes of the elliptic orbit. Thus

$$T^2 = \frac{\pi^2 p}{L^2/4m^2}a^3 = \frac{4\pi^2}{GM_\odot}a^3 = \text{const}$$

This equation is an expression of *Kepler's third law*: the squares of the periods of revolution of the planets about the sun are proportional to the cubes of the major semi-axes of the elliptic orbits of these planets.

6.3.4

The *orbital velocity* is the minimum velocity that it is necessary to impart to a body to convert it into an artificial satellite of the earth. It is also called the *circular orbital velocity* because it is equal to the velocity of an artificial satellite in circular orbit about the earth in the absence of air friction of the atmosphere. The orbital velocity is

$$v_1 = \sqrt{\frac{GM_\oplus}{r}}$$

where $GM_\oplus$ is the mass of the earth, and r is the radius of the circular orbit. At the earths surface $v_1 = 7.9\,\mathrm{km/s}$.

6.3.5

The *escape velocity* is the minimum velocity that it is necessary to impart to a body to enable it, without any additional forces, to overcome the earths gravitational attraction and become an artificial satellite of the sun. It is also called the *parabolic velocity* because it launches the body on a parabolic orbit in the earths gravitational field (in the absence of air friction of the atmosphere). The escape velocity

$$v_2 = \sqrt{\frac{2GM_\oplus}{r}}$$

where r is the radius from the launching site of the body to the centre of the earth. At the earths surface $v_2 = 11.2\,\mathrm{km/s}$.

6.3.6

The *solar escape velocity* is the minimum velocity that it is necessary to impart to a spacecraft, launched at the earths surface, to overcome the suns gravitational attraction and leave the solar system. This velocity is $v_1 = 16.7\,\mathrm{km/s}$.

7 Motion in non-inertial Frames of Reference

7.1 Kinematics of Relative Motion

7.1.1

It is assumed in classical (Newtonian) mechanics that distances and time intervals remain unchanged in going over from one frame of reference to any other frame that is in motion in even the most arbitrary manner with respect to the first frame. For example, assume that K is an inertial frame with origin at point O^* and S is a *non-inertial* frame with its origin at point O (Figure 7.1).

In the general case, the motion of frame S with respect to frame K can be regarded as the sum of two motions: translational motion of point O at the velocity $\mathbf{v}_0$ and rotation about this point at the angular velocity $\boldsymbol{\Omega}$. Radius vectors $\mathbf{r}^*$ and $\mathbf{r}$ of arbitrary particle M, measured in




Figure 7.1.: Inertial and non-inertial frames of reference.

frames K and S, are related by the equation

$$\mathbf{r}^* = \mathbf{r}_0^* + \mathbf{r}$$

where $\mathbf{r}_0^*$ is the radius vector of point O measured in frame of reference K.

7.1.2

The motion of particle M with respect to any inertial frame of reference K, conditionally assumed to be fixed, is called the *absolute motion* of particle M. The motion of the same particle with respect to the non-inertial frame of reference S is said to be *relative motion.*

The *relative velocity* $\mathbf{v}_r$ of particle M, i.e. its velocity with respect to frame S, equals

$$\mathbf{v}_r = \frac{\mathrm{d}x}{\mathrm{d}t}\mathbf{i} + \frac{\mathrm{d}y}{\mathrm{d}t}\mathbf{j} + \frac{\mathrm{d}z}{\mathrm{d}t}\mathbf{k}$$

where x, y and z are the Cartesian coordinates of particle M, and $\mathbf{i}$, $\mathbf{k}$ and $\mathbf{k}$ are the unit vectors of the coordinate axes in frame S.

The *absolute velocity* of particle M, i.e. its velocity $\mathbf{v}$ in the frame of reference K, equals

$$\mathbf{v} = \frac{\mathrm{d}\mathbf{r}^*}{\mathrm{d}t} = \mathbf{v}_0 + x\frac{\mathrm{d}\mathbf{i}}{\mathrm{d}t} + y\frac{\mathrm{d}\mathbf{j}}{\mathrm{d}t} + z\frac{\mathrm{d}\mathbf{k}}{\mathrm{d}t} + \mathbf{v}_r$$

where $\mathbf{v}_0 = \mathrm{d}\mathbf{r}_0^*/\mathrm{d}t$ is the absolute velocity of point O. Since the unit vectors of moving frame S can change in frame of reference K only due to the rotation of frame S about point O at the angular velocity $\mathbf{\Omega}$,

$$\frac{\mathrm{d}\mathbf{i}}{\mathrm{d}t} = [\mathbf{\Omega}\mathbf{i}], \quad \frac{\mathrm{d}\mathbf{j}}{\mathrm{d}t} = [\mathbf{\Omega}\mathbf{j}], \quad \frac{\mathrm{d}\mathbf{k}}{\mathrm{d}t} = [\mathbf{\Omega}\mathbf{k}]$$

and

$$\mathbf{v} = \mathbf{v}_t + \mathbf{v}_r$$

where $\mathbf{v}_t = \mathbf{v}_0 + [\mathbf{\Omega}\mathbf{k}]$ is the *velocity of transportation* of particle M. It is also called the *bulk*, or *drift*, *velocity* and is equal to the absolute velocity of the point of moving frame of reference S (i.e. rigidly fixed in this frame) in which particle M is located at the given instant of time.

7.1.3

The *relative acceleration* $\mathbf{a}_r$ of particle M (its acceleration with respect to frame S) equals

$$\mathbf{a}_r = \frac{\mathrm{d}^2x}{\mathrm{d}t^2}\mathbf{i} + \frac{\mathrm{d}^2y}{\mathrm{d}t^2}\mathbf{j} + \frac{\mathrm{d}^2z}{\mathrm{d}t^2}\mathbf{k}$$

The *absolute acceleration* of particle M, i.e. its acceleration with respect to frame K, equals

$$\mathbf{a} = \frac{\mathrm{d}\mathbf{v}}{\mathrm{d}t} = \mathbf{a}_t + \mathbf{a}_C + \mathbf{a}_r$$

Here

$$\mathbf{a}_t = \frac{\mathrm{d}\mathbf{v}_0}{\mathrm{d}t} + \left[\frac{\mathrm{d}\boldsymbol{\Omega}}{\mathrm{d}t}\mathbf{r}\right] + [\boldsymbol{\Omega}[\boldsymbol{\Omega}\mathbf{r}]]$$

is the *acceleration of transportation* of particle M. It is equal to the absolute acceleration of the point in moving frame S in which particle M is located at the given instant of time, and

$$\mathbf{a}_C = 2[\boldsymbol{\Omega}\mathbf{v}_r]$$

is the *Coriolis acceleration* of particle M. The Coriolis acceleration has its maximum value if the relative velocity $\mathbf{v}_r$ of the particle is perpendicular to the vector $\boldsymbol{\Omega}$ of angular velocity of the moving frame of reference. It is equal to zero if the angle between vectors $\mathbf{v}_r$ and $\boldsymbol{\Omega}$ equals zero or π, or if even one of these vectors equals zero.

7.2 Inertial Forces

7.2.1

Newtons laws of motion are not valid in non-inertial frames of reference. In particular, a particle can change the slate of its motion with respect to non-inertial frame S without any action being exerted on the particle by other bodies. A ball, for instance, suspended by a string from the ceiling of a railway coach of a train travelling at uniform velocity in a straight line, deviates backward when the motion of the train is accelerated and frontward when the motion is decelerated, i.e. it begins to move with respect to a non-inertial frame of reference attached to the coach. But no horizontal forces act on the ball when it deviates.

7.2.2

The fundamental law of dynamics for a particle in non-inertial frames of reference can be derived from Newtons second law and the relation between the absolute and relative accelerations of a particle. It follows from (7.1.3) that the product of the mass m of a particle by its relative acceleration equals

$$m\mathbf{a}_r = m\mathbf{a} - m\mathbf{a}_t - m\mathbf{a}_C$$

According to Newtons second law, formulated to apply to the absolute motion of a particle, i.e. its motion with respect to inertial frame K,

$$m\mathbf{a} = \mathbf{F}$$

where $\mathbf{F}$ is the vector sum of all forces acting on the particle. Hence, the *fundamental equation of dynamics of a particle's relative motion* is of the form:

$$m\mathbf{a}_r = \mathbf{F} - m\mathbf{a}_t - m\mathbf{a}_C$$

This equation can be reduced to a form similar to the fundamental law of dynamics for the absolute motion of a particle:

$$m\mathbf{a}_r = \mathbf{F} + \mathbf{I}_t + \mathbf{I}_C$$

The vector quantities $\mathbf{I}_t = -m\mathbf{a}_t$ and $\mathbf{I}_C = -m\mathbf{a}_C$ have the dimensionality of force and are called the *inertial force of transportation* and the *Coriolis inertial force*, respectively.

7.2.3

It follows from (7.1.3) that in the general case the inertial force of transportation is the sum of three terms:

$$\mathbf{I}_t = -m\frac{\mathrm{d}\mathbf{v}_0}{\mathrm{d}t} - m\left[\frac{\mathrm{d}\boldsymbol{\Omega}}{\mathrm{d}t}\mathbf{r}\right] - m[\boldsymbol{\Omega}[\boldsymbol{\Omega}\mathbf{r}]]$$

The last term on the right-hand side of this equation

$$\mathbf{I}_{cf} = -m[\boldsymbol{\Omega}[\boldsymbol{\Omega}\mathbf{r}]]$$

is called the *centrifugal force of inertia*, or simply the *centrifugal force*, because this vector is perpendicular to the instantaneous axis of rotation (to vector $\boldsymbol{\Omega}$) of the non-inertial frame S and its direction is away from this axis. Numerically the centrifugal force equals

$$I_{cf} = -m\Omega^2\rho$$

where ρ is the distance from a particle of mass m to the instantaneous axis of rotation of the frame of reference.

The inertial force of transportation coincides with the centrifugal force when the non-inertial frame of reference travels with translational motion at constant velocity ($\mathbf{v}_0 = \text{const}$) and rotates at constant angular velocity ($\boldsymbol{\Omega} = \text{const}$).

7.2.4

The Coriolis inertial force is

$$I_C = 2m[\mathbf{v}_r\boldsymbol{\Omega}]$$

This force acts on the particle only when the non-inertial frame of reference rotates and the particle moves with respect to this frame. Thus, for example, particles of water in rivers of the Northern Hemisphere that flow meridionally are subject to the action of a Coriolis inertial force. This force is perpendicular to the velocity of flow of the river and leads to under mining the right bank in the direction of flow.

The Coriolis inertial force does no work in the relative motion of a particle because the force is perpendicular to the velocity of relative motion of the particle. Hence, the Coriolis inertial force is an example of the gyroscopic forces (3.1.7).

7.2.5

The action of inertial forces on a particle in a non-inertial frame of reference are real and can be measured in this frame by, for example, a spring dynamometer. But, in contrast to ordinary forces of interaction between bodies, it is impossible lo indicate for inertial forces the action of what specific bodies on the particle being considered they express. This feature of inertial forces is due to the fact that the very occurrence of the vector quantities $\mathbf{I}_t$ and $\mathbf{I}_C$ in the fundamental equation of the dynamics of relative motion results only from the non-inertial nature of the frame of reference used to describe the relative motion of the particle. The addition of the inertial forces $\mathbf{I}_t$ and $\mathbf{I}_C$ to the force $\mathbf{F}$, which characterizes the action on the particle of all the other bodies, enables the fundamental equation of the dynamics of relative motion to

be written in a form that resembles the expression for Newtons second law in an inertial frame of reference.

There can be no closed systems of bodies in non-inertial frames of reference because the inertial forces are always external forces for any of the bodies in the system. Therefore, the laws of conservation of momentum (2.7.1), of angular momentum (4.4.1) and of energy (3.4.2) are not valid in non-inertial frames of reference.

7.3 Relative Motion in a Frame of Reference Fixed to the Earth. Gravity Force and Weight of a Body

7.3.1

A frame of reference fixed in the earth is non-inertial lor two reasons: firstly, due to the diurnal, or daily, rotation of the earth at constant angular velocity $\boldsymbol{\Omega}$ (where $\Omega = 2\pi$ rad per 24 hours $= 7.3 \times 10^{-5}$ rad/s) and, in the second place, due to the effects of the gravitational field of the sun, moon, planets and other astronomical bodies on the earth. This gravitational field is practically uniform within the limits of the earth and imparts the same acceleration of translational motion to the terrestrial frame of reference and all bodies moving with respect to this frame. This acceleration is $\mathbf{a}_0 = \mathrm{d}\mathbf{v}_0/\mathrm{d}t = \mathbf{g}_f$, where $\mathbf{g}_f$ is the intensity of the field (6.2.1).

It follows from the equations in (7.2.2) and (7.2.3) that the equation of relative motion of a particle of mass m in

a frame of reference fixed to the earth is of the form

$$m\mathbf{a}_r = \mathbf{F} + \mathbf{F}_{gr} + \mathbf{I}_{cf} + \mathbf{I}_C$$

where $\mathbf{I}_{cf}$ and $\mathbf{I}_C$ are the centrifugal and Coriolis inertial forces. $\mathbf{F}_{gr}$ is the gravitation al attraction of the earth for the particle (6.1.3), and $\mathbf{F}$ is the sum of all the other forces acting on the particle, with the exception of the gravitational forces.




Figure 7.2.: The Coriolis force in a non-inertial frame of reference.

7.3.2

The *gravity force of a body* is the force P, applied to the body and equal to the vector sum of the force $\mathbf{F}_{gr}$ of gravitational attraction of the earth for the body (6.1.3) and the centrifugal inertial force $\mathbf{I}_{cf}$ due to the diurnal rotation of the earth (Figure 7.2):

$$\mathbf{P} = \mathbf{F}_{gr} + \mathbf{I}_{cf}$$

i.e.

$$\mathbf{P} = -G\frac{mM_\oplus}{r^3}\mathbf{r} - m[\mathbf{\Omega}[\mathbf{\Omega}\mathbf{r}]]$$

Here m and $M_\oplus$ are the masses of the body and the earth, $\mathbf{r}$ is the radius vector drawn from the centre of the earth to the place where the body is located, $\mathbf{\Omega}$ is the angular velocity of diurnal rotation of the earth, and G is the gravitational constant (6.1.1).

The gravity force causes an unsupported or unfastened body to fall to the earth. It equals the force with which the body presses against a horizontal support (or pulls on a vertical suspension) due to the gravitation attraction of the earth. It can be measured in the terrestrial frame of reference by means of a spring dynamometer. The point of application of the gravity force acting on a body, i.e. the point of application of the resultant of all the gravity forces acting on all the particles of the body is called the *centre of gravity of the body*. It coincides with its centre of mass (2.3.3).

7.3.3

The gravity force of a body is independent of its velocity of relative motion. It is proportional to the mass m of the body and can be presented in the form

$$\mathbf{P} = m\mathbf{g},$$

where $\mathbf{g}$ is the *acceleration due to gravity*, or *free fall acceleration* (see (7.3.5)). At a given place on earth, vector $\mathbf{g}$ is the same for all bodies and changes for other places.

The gravity force of a body coincides with the gravitational attraction of the earth for the body only at the earths North and South poles because there the centrifugal inertial force $\mathbf{I}_{cf} = 0$. The greatest difference between the gravity force and the gravitational attraction is observed at the equator, where the force $\mathbf{I}_{cf}$ reaches its maximum value and is opposite in direction to $\mathbf{F}_{gr}$. Even at the equator, however, the gravity force and the force of gravitational attraction differ by only 0.35 per cent. At all points of the earths surface, except the equator and the poles, forces $\mathbf{P}$ and $\mathbf{F}_{gr}$ fail to coincide in direction as well (Figure 7.2), but the maximum angle between them does not exceed 6 minutes of arc. The gravity force decreases with the altitude. Near the earths surface this decrease is approximately 0.034 per cent per kilometre above the surface.

7.3.4

The acceleration $\mathbf{g}$ near the earths surface varies from $9.78\,\mathrm{m/s^2}$ at the equator to $9.83\,\mathrm{m/s^2}$ at the North and South poles. This is due, in the first place, to the dependence of the centrifugal inertial force on the geographical latitude of the location and, in the second, to the nonspherical shape of the earth, which is slightly flattened at the poles of its axis of rotation, having the shape of an ellipsoid of rotation, or spheroid (the polar and equatorial radii of the earth are $R_p = 6357\,\mathrm{km}$ and $R_e = 6378\,\mathrm{km}$). The *standard value of free fall acceleration*, accepted in establishing a system of units and for barometric computation, is $9.806\,65\,\mathrm{m/s^2}$.

7.3.5

The *free fall of a body* is its motion due to the action of the gravitational held alone.

The free fall acceleration of a body falling to the earth, mea sured in a non-inertial frame of reference rotating together with the earth, can he found by the motion equation (7.3.1) by putting $\mathbf{F} = 0$, $\mathbf{F}_{gr} + \mathbf{I}_{cf} = m\mathbf{g}$ and $I_C = 2m[\mathbf{v}_r\boldsymbol{\Omega}]$. Then

$$\mathbf{a}_r = \mathbf{g} + 2[\mathbf{v}_r\boldsymbol{\Omega}]$$

If $\mathbf{v}_r = 0$, $\mathbf{a}_r = \mathbf{g}$.

Consequently, vector $\mathbf{g}$ is equal to the free fall acceleration of the body, measured with respect to the terrestrial frame of reference at the instant when the relative velocity of the body equals zero. For this reason, vector $\mathbf{g}$ is called the *free fall acceleration.*

If the relative velocity of a freely falling body $\mathbf{v}_r = 0$, its acceleration with respect to the earth is not $\mathbf{g} : \mathbf{g} = \mathbf{a}_r + 2[\mathbf{v}_r\boldsymbol{\Omega}]$. At velocities $v_r < 680\,\mathrm{m/s}$, however, the values of $\mathbf{g}$ and $\mathbf{a}_r$ differ by less than one per cent. It can therefore be assumed in many cases that with respect to an observer on the earth free fall of a body is caused only by the gravity force acting on and imparting the acceleration g to the body. In a similar manner the action of the Coriolis inertial force on a freely falling body can be treated as a comparatively small perturbation. Thus, for instance, a freely falling body is deviated by the Coriolis force to the east of the direction assumed by a plumb line, i.e. from the direction of the vector $\mathbf{P} = m\mathbf{g}$. This deviation for a body falling freely without any initial velocity

from the height h is equal, at the latitude φ, to

$$s = \frac{2}{3}\Omega h\sqrt{\frac{2h}{g}}\cos\varphi$$

If, for example, $h = 160\,\text{m}$ and $\varphi = 45^\circ$, $s = 1.55\,\text{cm}$.

7.3.6

The *weight of a body* is the force $\mathbf{Q}$ with which it acts, due to the earths gravity, on a support or suspension that prevents it from falling freely. It is assumed that the body and its support (or suspension) are fixed with respect to the frame of reference in which the weight is determined. The force $-\mathbf{Q}$ is exerted by the support or suspension on the body. It follows from the fundamental equation of dynamics of relative motion (7.2.2), where $\mathbf{a}_r = \mathbf{a}_C = 0$ and $\mathbf{F} = \mathbf{F}_{gr} - \mathbf{Q}$, that

$$\mathbf{Q} = \mathbf{F}_{gr} + \mathbf{I}_t$$

where $\mathbf{F}_{gr}$ is the force of gravitational attraction of the earth for the body, and $\mathbf{I}_t$ is the inertial force of transportation due to the non-inertial nature of the frame of reference.

Example 1. The weight of a body in a frame of reference fixed to the earth is equal to the gravity force of the body (7.3.2):

$$\mathbf{Q} = \mathbf{F}_{gr} + \mathbf{I}_{cf} = \mathbf{P}$$

Example 2. The weight of a body in a frame of reference attached to a lift (elevator) which travels with

translational motion with respect to the earth with the acceleration $\mathbf{a}_0$:

$$\mathbf{Q} = \mathbf{P} - m\mathbf{a}_0$$

If the lift falls freely, $\mathbf{a}_0 = \mathbf{g}$, the free fall acceleration, and the weight of the body in the lift is $\mathbf{Q} = 0$, i.e. the body is in the state of weightlessness.

7.3.7

Weightlessness, or zero gravity, is the state of a mechanical system in which the external gravitational field acting on the system does not cause any pressure of the parts against one another or their deformation. Such a state occurs in a mechanical system complying with the following three conditions:

(a) no other external forces, except those of the gravitational field, act on the system;

(b) the size of the system is such that within its limits the external gravitational field can be regarded as being uniform; and

(c) the system is in translational motion.

The state of weightlessness is characteristic, for instance, of bodies in a spaceship because, during the main part of its path in a gravitational field, it is in free flight, i.e. coasting with the engines turned off.

7.4 Principle of Equivalence

7.4.1

The inertial forces acting on bodies in a non-inertial frame of reference are proportional to the masses of the bodies and, other conditions being equal, impart the same relative accelerations (7.1.3) to them. In other words, all bodies free of external action travel in an "inertial force field", i.e. with respect to a non-inertial frame of reference, in absolutely the same way, provided that the initial conditions of their motion are also the same. A similar behaviour is observed for bodies travelling with respect to an inertial frame of reference and

subject to the action of the forces of a gravitational field. At each point in the field these forces, like the inertial forces, are proportional to the masses of the bodies and impart the same free fall acceleration to them. This acceleration is equal to the field intensity (6.2.1) at the point being considered. In a non-inertial frame of reference, for example, fixed to a lift (elevator) travelling with uniform acceleration vertically upward at the acceleration of transportation $\mathbf{a}_0 = \text{const}$, all free bodies fall in the absence of a gravitational field with the same relative acceleration $\mathbf{a}_r = -\mathbf{a}_0$. Free bodies behave in exactly the same way in the same lift when it travels at uniform velocity in a uniform gravitational field of the intensity $\mathbf{g}_f = -\mathbf{a}_0$. Thus, on the basis of experiments conducted on the free fall of bodies within a tightly closed lift, it is impossible to establish whether the lift is travelling at uniform velocity in a gravitational field of the intensity $\mathbf{g}_f = \mathbf{a}_r$ (in particular, the lift may also be at rest in this held) or whether it is travelling with constant accel-

eration of transportation $\mathbf{a}_t = -\mathbf{a}_r$ in the absence of a gravitational field.

7.4.2

The *local equivalence principle* states that the gravitational field in a limited region of space is equivalent to an "inertial force held" in a properly chosen non-inertial frame of reference. The region of space should be small enough so that the gravitational held in it can be assumed to be uniform.

The equivalence principle is not to be understood as a statement of the identity of inertial forces and Newtons gravitational forces that act between bodies. As a matter of fact, the intensity of a true gravitational held, set up by bodies, decreases as the bodies recede farther and farther away, and approaches zero at infinity. Gravitational fields "equivalent" to inertial forces do not comply with this condition. For example, the intensity of a gravitational held, "equivalent" to the centrifugal inertial forces in a rotating frame of reference increases without limit at points farther and farther away from the axis of rotation. The intensity of a held "equivalent" to the inertial forces of transportation in a frame of reference having translational motion is the same at all points of the held.

7.4.3

A true gravitational held, in contrast to one "equivalent" to inertial forces, exists in both non-inertial and inertial frames of reference. No possible choice of a non-inertial

frame of reference can completely eliminate a true gravitational held, i.e. compensate for it throughout space by means of a "field of inertial forces". This follows in any case, even if only from the different behaviour of "fields of inertial forces" and true gravitational fields at infinity. A true gravitational field can be eliminated only locally, i.e. for a small region of space within whose limits the field can he assumed uniform, and for a short time interval during which the field can be assumed constant. The non-inertial frame of reference corresponding to this operation should travel with an acceleration of transportation equal to the free fall acceleration of bodies in the region of the true gravitational field being considered. Thus, in a space ship in free flight in a gravitational field, the gravitational forces of attraction are compensated for by the inertial forces of transportation and do not lead to the relative motion of bodies in the ship.

Part II.

Fundamentals of Molecular Physics and Thermodynamics

8 Ideal Gases

8.1 Subject Matter of Molecular Physics. Thermal Motion

8.1.1

The branch of physics called *molecular physics* deals with the dependence of the structure and physical properties of bodies on the nature of the motion of and the interaction be tween the particles making up these bodies.

Molecular physics is based on the *molecular-kinetic theory* of the structure of matter. According to this theory all bodies consist of submicroscopic particles – atoms, molecules or ions – in continuous chaotic motion, which is called *thermal motion*. Experimental confirmations of the molecular-kinetic theory are: the Brownian movement (11.7.1), the transport phenomenon in various aggregate states of matter and other phenomena.

8.1.2

The molecular-kinetic theory of the structure of matter is used to advantage in various branches of physics. A great variety of physical phenomena that proceed due to the interaction and motion of particles of matter are dealt with in this theory from a unified point of view. This theory, for example, enables the mechanism of elasticity in solids (**??**) to be understood, reveals the cause of internal friction in gases (10.8.4) and liquids, explains the difference between real gases (12.1.2) and ideal gases (8.4.1), and elucidates the mechanism of electrical conduction in conductors of electric current of various kinds, and the electrical and magnetic properties of matter.

8.1.3

The thermal motion of particles of matter in various states of aggregation is not the same. It depends upon the forces of attraction or repulsion between the atoms, molecules and ions.

There are practically no attractive forces between the atoms and molecules in sufficiently dilute gases. This is due to the fact that the particles of such gases are located at distances from one another exceeding the range of molecular action (12.2.3). The particles of such gases travel at uniform velocity and in a straight line until they collide with one another or with the walls of the container. These collisions are of a random nature. Each molecule in the volume of the gas may collide with any of the nearby particles, changing the direction of its motion in

any arbitrary manner. The collision of a molecule (or atom) of the gas with a wall may occur at any angle θ where $-\pi/2 \leqslant \theta \leqslant \pi/2$. As a result, the thermal motion of molecules of gas is a purely random one and, on the average, the same number of molecules are travelling at any instant of time in any arbitrary direction within the gas.

8.1.4

Solid crystalline bodies are characterized by considerable forces of interaction between their particles (atoms, molecules and ions). The joint action of the forces of attraction and repulsion between the particles (12.1.3) leads to the vibration of the particles of solids about their equilibrium positions, which are called the *sites*, or *points, of the crystal lattice* (**??**). Intermolecular interaction and violations of periodicity in crystals (40.1.1) make these vibrations anharmonic (28.1.3).

8.1.5

The thermal motion of molecules of a liquid is of a kind intermediate between the two preceding types of motion (8.1.3) and (8.1.4). For a definite length of time the molecules of a liquid vibrate about a.certain equilibrium position and are in a temporarily settled state. At the end of this time the equilibrium position of the molecules is displaced and a new settled arrange ment is formed. Simultaneously, a slow displacement of the molecules and their vibrations occur within small volumes of the liquid

(see also (13.2.3)).

8.2 Statistical and Thermodynamic Methods of Investigation

8.2.1

There is a huge number of atoms (or molecules) in any body. For instance, in $1\,\mathrm{cm}^3$ of a gas whose properties are close to those of an ideal gas there are 2.7×10^{19} molecules at standard conditions. In the condensed states, liquid and solid, the amount is of the order of 10^{22} particles per cm^3. If we assume that each atom (or molecule) obeys Newtons second law (2.4.1) it is obviously quite impossible, not only to solve the differential equations of motion of the separate particles, but even to write these equations. Therefore, the behaviour of a separate molecule (or atom) of a body, for example, its path and the sequence of changes in its state, cannot be investigated by the methods used in classical mechanics.

8.2.2

The macroscopic properties of systems consisting of a very great number of particles are studied by the *statistical method*. It is based on the application of probability theory to definite models of the structure of the systems being investigated. The branch of theoretical physics in which the physical properties of systems are studied by the statistical method is called *statistical physics (statistical mechanics)*. Special laws, known as statistical laws are

manifested in the joint behaviour of large numbers of particles. Certain *average values of the physical quantities* can be found for a system consisting of a great many particles. These values characterize the set of particles as a whole. In gases, for instance, there are average values of the velocity of thermal motion of the molecules (10.3.6) and of their energy (10.2.4). In a solid there is an average energy per degree of freedom of the vibrational motion of its particles (**??**), etc. All properties of a system of particles are due, not only to the individual properties of the particles themselves, but to the features of their joint motion and average values of their dynamic characteristics (average velocities, average energies, etc.).

In addition to statistical laws, there are also dynamical laws, describing the motion of separate particles. The relationship between dynamical and statistical laws is manifested in the fact that the laws of motion of individual particles have an effect of the description of a system of particles, which is being investigated by the statistical method.

8.2.3

Another procedure for studying physical phenomena is the *thermodynamic method*, which is not concerned with either the internal structure of the substances making up the bodies (or systems) being investigated or with the nature of the motion of the separate particles. The thermodynamic method is based on the study of the various conversions of energy that occur in a system. The conditions of these conversions and the relations between

the various kinds of energy enable the physical properties of systems to be studied in a great variety of processes in which the systems participate. The branch of physics in which research in the physical properties of systems is conducted by means of the thermodynamic method is called *thermodynamics (phenomenological thermodynamics)*. Thermodynamics is based on two experimentally established principles, or laws, of thermodynamics (9.3.1) and (11.3.2), as well as the Nernst. heat theorem, or third law of thermodynamics (11.8.2).

8.3 Thermodynamic Variables. Equations of State. Thermodynamic Processes

8.3.1

Thermodynamics deals with *thermodynamic systems*. There are macroscopic items (bodies and fields) that can interchange energy with one another as well as with the external medium, i.e. bodies and fields that are external with respect to the given system.

8.3.2

The physical quantities introduced to describe the state of a thermodynamic system are called *thermodynamic variables*, or *parameters (state variables)*, of the system. Usually the pressure, specific volume and temperature are taken as the thermo dynamic variables.

The *pressure* p is a physical quantity equal to the force acting on unit area of a bodys surface in the direction

normal to the surface:

$$p = \frac{\mathrm{d}F_n}{\mathrm{d}A}$$

where $\mathrm{d}F_n$ is the numerical value of the normal force acting on an infinitely small part of the surface of the body, the area of this part being $\mathrm{d}A$.

The *specific volume* v is the reciprocal of the density ρ of a body: $v = 1/\rho$. The specific volume of a homogeneous body is equal to the volume of unit mass of the body.

8.3.3

The concept of temperature is of significance for equilibrium states of a thermodynamic system (8.3.4). An *equilibrium state (state of thermodynamic equilibrium)* is a state of a system which does not change with time (*steady state*), the steady nature of the state not being due to processes occurring in the external medium. An equilibrium state is set up in a system subject to constant external conditions and is maintained in the system for an arbitrary length of time. The temperature is the same in all parts of a thermodynamic system that is in a state of thermodynamic equilibrium. If two bodies with different temperatures come into contact, internal energy (9.1.2) is transferred from the body at the higher temperature to that at the lower temperature. The process ceases when the temperatures of the two bodies become equal.

8.3.4

The temperature of an equilibrium system is a measure of the intensity of thermal motion of its molecules (or atoms or ions). In an equilibrium system of particles that obeys the laws of classical statistical mechanics (8.2.2), the average kinetic energy of the thermal motion of the particles is proportional to the absolute temperature (10.2.5).

Temperature can only be measured indirectly, making use of the fact that many physical properties of bodies, lending themselves to direct measurement, depend on the temperature. A change in the temperature of a body leads to changes in its length and volume, density, electric resistance, elastic properties, etc. A change in any of these properties can be used to measure temperature. For this purpose, it is necessary for a certain body, said to be *temperature-indicating*, that the functional dependence of the given property on the temperature be known. Temperature scales based on temperature-indicating bodies are said to be *empirical*.

In the *international centigrade (Celsius)* scale, temperature is measured in $^\circ$C and is denoted by t (degree centigrade or degree Celsius). It is assumed that at a standard pressure of $1.013\,25 \times 10^5$ Pa (**??**) the melting point of ice and the boiling point of water are equal to $0\,^\circ$C and $100\,^\circ$C.

In the thermodynamic (absolute) temperature scale, the temperature is measured in kelvins (K) and is denoted by T.

The relation between the absolute temperature and the

temperature measured by the Celsius scale is:

$$T = 273.15 + t$$

The temperature $T = 0\,\mathrm{K}$ (or $t = -273.15\,^{\circ}\mathrm{C}$) is called absolute zero temperature (the impossibility of reaching absolute zero is discussed in (11.8.4)).

8.3.5

The state variables of a system are classified as being either external or internal. *External state variables* are physical quantities depending upon the position in space and various properties of bodies that are external with respect to the given system. For a gas, for instance, the volume V of the vessel in which the gas is contained is an external variable because the volume depends upon the position of external bodies: the walls of the vessel. For a dielectric in an electric field, the intensity of the field, set up by certain external sources, is an external variable. If a liquid is held in an open vessel, the atmospheric pressure, for example, is an external variable.

The *internal variables of a system* are physical quantities that depend both on the position of bodies external with respect to the system, and on the coordinates and velocities of the particles that make up the system. Internal variables of a gas, for instance, are its pressure and energy because they depend upon the coordinates and velocities of the moving molecules and on the density of the gas.

8.3.6

The state variables of a system that is in equilibrium (8.3.3) are not independent. The internal variables of such a system depend only on its external variables and on the temperature. The equilibrium state of a simple system[1] of given chemical composition and mass M is determined by specifying two variables: the volume V and the temperature T. The equation of state (thermal equation of state) of a simple system is the functional dependence of the equilibrium pressure p in the system on the volume and temperature

$$p = f(V, T)$$

The equation of state is obtained experimentally in thermodynamics. In statistical physics (8.2.2), it is derived theoretically. This constitutes the interrelation between the statistical (8.2.2) and thermodynamical (8.2.3) methods of investigation.

8.3.7

If any of the external variables of the system is changed, the state of a thermodynamic system is changed. This is called a *thermodynamic process*. A thermodynamic process is said lo be equilibrium (an *equilibrium, quasi-static process*) if the system passes at an infinitely slow

[1] An example of a simple system is a gas in the absence of external fields. Mixtures of chemically homogeneous gases of constant composition, chemically pure liquids, etc. arc also simple systems.

rate through a continuous succession of infinitely close thermodynamic equilibrium states (8.3.3). All processes that do not comply with these conditions are said to be *non-equilibrium* ones. Real processes are non-equilibrium ones because they proceed at a finite rate. But the slower they proceed, the closer they are to equilibrium processes

Isoprocesses are thermodynamic processes that proceed in a system of constant mass with a constant value of one of the state variables.

An *isothermal process* proceeds at constant temperature ($T = \text{const}$).

An *isochoric (isovolumic) process* proceeds at constant volume ($V = \text{const}$).

An *isobaric process* proceeds at constant pressure ($p = \text{const}$).

An *adiabatic process* is a thermodynamic process that occurs in a system without heat exchange (9.2.4) with external bodies (see also (9.5.10)).

8.3.8

State functions are physical quantities characterizing the state of a system. Variation in the state functions during thermodynamic processes is independent of the kind of process that occurs. State functions are uniquely determined by the values of the variables of the initial and final states of the system. The simplest state functions of a system are its internal energy U (9.1.2) and its entropy S (11.4.2).

8.4 Equation of State of an Ideal Gas

8.4.1

An *ideal*, or *perfect, gas* is one whose molecules do not interact with one another at a distance and are of vanishingly small size. In real gases (12.1.2) the molecules are subject to the forces of intermolecular interaction (12.1.3).

In collisions with one another and in striking the walls of the vessel the molecules of an ideal gas behave as perfectly elastic spheres (1.1.4) of diameter d (*elective diameter of the molecule*), which depends upon the chemical nature of the gas. The existence of an effective diameter d (where $d \approx 10^{11}$ m) signifies that forces of mutual repulsion (12.1.3) act between the molecules. Intermolecular forces of attraction (12.1.3) decrease drastically with an increase in the distance r between molecules and are practically negligible at $R_m > 10^9$ m. In real gases at low densities the average distance $\langle r \rangle$) between molecules exceeds R_m and, to a good approximation, they can be regarded as ideal. Hydrogen, helium, oxygen and nitrogen are assumed to be ideal gases at densities corresponding to standard conditions.

8.4.2

For a given mass of an ideal gas, the ratio of the product of the numerical values of pressure and volume to the absolute temperature is a constant value (*Clapeyron equation*):

$$\frac{pV}{T} = C = \text{const}$$

The numerical value of the *gas constant* C depends upon the choice of the units of measurement of p, V and T.

If v is the specific volume of the gas (8.3.2) and M is its mass, then $V = Mv$ and the Clapeyron equation assumes the form

$$pv = \frac{C}{M}T = BT$$

where $B = C/M$ is the *specific gas constant* referred to unit mass.

8.4.3

From the definition of the mole (**??**), it is evident that moles of different gases contain the same number of molecules. This is called *Avogadro's number* N_A (**??**).

The *molar mass* μ of a gas or any body is the physical quantity equal to the ratio of the mass of the gas (or any body) to the number of moles N it contains: $\mu = M/N$.

The molar mass is proportional to the relative mass of the molecules of a gas: $\mu = 10^{-3} m/m_0$, where m is the mass of the molecules of the given gas and m_0 is the atomic mass unit based on the carbon scale (**??**). The coefficient 10^{-3} is required because molar mass is measured in kg/mol in the SI (International System of Units).

The *molar volume* V_μ is the physical quantity equal to the ratio of the volume V of a gas to the number of moles N it contains: $V_\mu = V/N$. The mass of a mole is numerically equal to μ and therefore $V_\mu = \mu v$, where v is the specific volume (8.3.2).

8.4.4

The equation of state for a mole of ideal gas is

$$\frac{pV_\mu}{T} = \mu B = R \quad \text{or} \quad pV_\mu = RT$$

Here R is the *universal gas constant*, being the gas constant per mole of gas. The universal nature of R follows from *Avagadro's law*, which states that moles of all ideal gases occupy the same volume at the same pressure and the same temperature. Under standard conditions ($T = 273.15\,\mathrm{K} and \mathrm{p} = 1.0132 \times 10^5\,\mathrm{Pa} = 1\,\mathrm{atm} = 760\,\mathrm{mm\,Hg}$) a mole of any gas has a volume of $V_\mu = 22.415 \times 10^{-3}\,\mathrm{m}^3$. From this we can calculate the numerical values of R for various systems of units (**??**).

If a volume V of gas has the mass M kg, i.e. if it contains M/μ moles, then $V = M/\mu \times V_\mu$ and the equation of state of the gas assumes the form called the *Mendeleev-Clapeyron equation*:

$$pV = \frac{M}{\mu} RT$$

8.4.5

Boltzmann's constant k is a physical quantity equal to the ratio of the universal gas constant R to Avogadros number N_A, i.e. $k = R/N_a$. The values of k in various systems of units are listed in **??**.

The equation of state of an ideal gas, expressed by means of Boltzmanns constant, is of the form

$$p = \frac{kN_A}{V_\mu} = kn_0T$$

where $n_0 = N_A/V_\mu$ is the number of gas molecules in unit volume (molecule concentration).

At constant temperature, the pressure of a gas is proportional to the concentration of its molecules (or to the density of the gas).

9 First law of Thermodynamics

9.1 Total and Internal Energy of a System

9.1.1

An arbitrary thermodynamic system (8.3.1), in any thermodynamic state (8.3.3), has a *total energy* E , which is the sum of:

(a) the kinetic energy E_k^{Mech} of mechanical motion of the system as a whole (or of its macroscopic parts);

(b) the potential energy E_p^{Ext} (3.3.1) of the system in all external force fields (for instance, electromagnetic or gravitational fields); and

(c) the internal energy U:

$$E = E_k^{\text{Mech}} + E_p^{\text{Ext}} + U$$

9.1.2

The *internal energy* of a body or of a thermodynamic system (8.3.1) is the energy depending only upon the thermodynamic state of the body (or system). For a fixed (stationary) system, not located in any external force fields, the internal energy coincides with the total energy. The internal energy also coincides with the rest energy of a body (or system) (5.7.3) and includes the energy of all the types of internal motion of a body (or system) and the energy of interaction of all the particles (atoms, molecules, ions, etc.) making up the body (or system).

For example, the internal energy of a gas consisting of poly atomic molecules (ammonia, carbon dioxide, etc.) consists of:

(a) kinetic energy of thermal translational and rotary motion of the molecules;

(b) kinetic and potential energy of vibration of the atoms and molecules;

(c) potential energy due to intermolecular interactions;

(d) energy of the electron shells of the atoms and ions;

(e) kinetic energy and potential energy of interaction of the nucleons (**??**) in the nuclei of the atoms.

Terms (d) and (e) do not ordinarily change in processes that proceed at not very high temperatures so that ionization and excitation play no essential role. Under these conditions, terms (d) and (e) are not taken into account

in the internal energy balance. Term (c) is also neglected for an ideal gas (8.4.1).

9.1.3

The internal energy is a single-valued function of the thermodynamic state of a system. The value of the internal energy in any state is independent of the process by means of which the system reached this state. The change in internal energy in the transition of a system from state **1** to state **2** equals $\Delta U = U_2 U_1$ and is independent of the kind of transition **1** $\rightarrow$ **2** that occurs. If the system accomplishes a cycle (11.1.1) the total change in its internal energy is equal to zero:

$$\oint \mathrm{d}U = 0$$

As is well known, such a relation mathematically signifies that an element of change in the internal energy $\mathrm{d}U$ is a complete (exact) differential. This property is also possessed by the entropy (11.4.2) and other state functions (8.3.8) (cf. (9.2.5)).

9.1.4

In a system that is in a state of thermodynamic equilibrium the internal energy depends only upon the temperature and the external variables (8.3.5). In particular, for a simple system (8.3.6) of constant mass M, the internal energy is a function of the temperature T and volume

V of the system (*calorific equation of state* of a simple system):

$$U = \varphi(V, T).$$

Example 1. The internal energy of an ideal gas (8.4.1) depends only on its absolute temperature and is proportional to the mass M of the gas:

$$U = \oint_0^T C_V \mathrm{d}T + U_0 = M \left(\oint_0^T c_V \mathrm{d}T + u_0 \right)$$

where C_V and $c_V = C_V/M$ are the heat capacity (9.5.1) and specific heat (9.5.2) of the gas at constant volume (in an isochoric process) (8.3.7), $u_0 = U_0/M$ is the internal energy of unit mass of the gas at $T = 0\,\mathrm{K}$. For monatomic gases at ordinary temperatures C_V is independent of T, and $U = C_V T + U_0$.

Example 2. The internal energy of a van der Waals gas (12.2.1) is:

$$U = \oint_0^T C_V \mathrm{d}T - \frac{M^2}{\mu^2} \frac{a}{V} + U_0$$

where M is the mass of the gas, μ is its molar mass (8.4.3), and a is the van der Waals coefficient (12.2.3).

9.1.5

In thermodynamics, the internal energy is determined to an accuracy of the constant term U_0, whose value depends upon the choice of the reference point for the quantity

U, i.e. from a state with zero internal energy. The quantity U_0 plays practically no role in thermodynamical calculations in which the changes ΔU of internal energy, independent of U_0, are determined (see also (8.1.2)).

9.2 Heat and Work

9.2.1

An energy exchange between a thermodynamic system and external bodies takes place in two ways: either by doing work or by means of heat exchange.[1] The amount of energy transferred to the system by external bodies in force inter action between the system and the bodies is called *work* done on the system. The amount of energy transferred to the system by external bodies by heat transfer is called the *quantity of heat* imparted to the system.[2]

9.2.2

If the thermodynamic system is fixed (stationary), a neces sary condition to do work is displacement of the external bodies interacting with it, i.e. it is necessary to change the external state variables of the system (8.3.5). In the absence of external force fields, energy exchange between

[1] A discussion of the third way of energy exchange – mass transfer – is beyond the scope of the present handbook.

[2] Sometimes the term "heat" is employed in place of the term "quantity of heat" if this leads to no confusion. It should be indicated, however, that heat, generally speaking, is to be under stood as a form of energy transfer (9.2.4)).

the lixed system and the external medium may take place by doing work when the volume and shape of the system are changed. According to the law of conservation of energy, the work W' done on the system by external forces is numerically equal and opposite in sign to the work W that the system does on the external medium, i.e. against the external forces:

$$W' = -W$$

9.2.3

Expansion work is the work done by the system in over coming the external pressure. An element of expansion work $\delta W = p_{\text{ext}} \mathrm{d}V$, where p_{ext} is the uniformly distributed external pressure, and dV is an element of change of the systems volume. If the expansion process is an equilibrium (quasistatic) one (8.3.7), $p_{\text{ext}} = p$, where p is the pressure in the system. Then $\delta W = p\mathrm{d}V$.

The significance of the different ways used in denoting the elements of change δW and $\mathrm{d}U$ is explained in (9.4.3) and (9.1.3). The work done in equilibrium expansion of system from volume V_1 to volume V_2 is

$$W = \int_{V_1}^{V_2} p\mathrm{d}V$$

Example. The work done by a gas in a vessel with a weightless movable piston (Figure 9.1). The pressure of the gas $p > 0$ and, therefore, in its expansion ($\mathrm{d}V > 0$) the gas performs positive work ($\delta W > 0$). In compressing the gas ($\mathrm{d}V < 0$ and $\delta W < 0$) the positive work is done




Figure 9.1.: The work done by a gas in a vessel with a weightless movable piston.

on the p_{ext} gas by the forces of external pressure. Here the gas does negative work. The graphical representation of work is discussed in (9.4.2).

9.2.4

Heat exchange takes place between bodies (or parts of bodies) heated to different temperatures. There are three types of heat exchange: convection, conduction and radiation (radiative heat exchange).

Convective heat exchange is the transfer of energy in the form of heat between the unequally heated parts of gases or liquids or between gases, liquids and solids. Convective heat exchange in liquids takes place by motion of parts of the liquid with respect to one another or with respect to solids. For instance, in a radiator of a hot-water heating system, energy of the hot water flowing through the radiator is transferred by convection to the less heated

walls of the radiator.

The phenomenon of *heat conduction* consists in the transfer of energy in the form of heat from one part of a non-uniformly heated body to another part. Thus, for example, energy is transferred through the walls of a heating radiator from the more heated inner surfaces to the less heated outer surfaces.

Radiative heat exchange takes place without direct contact of the bodies exchanging energy and consists in the emission and absorption of the energy of an electromagnetic field by the bodies. An immense amount of energy is delivered from the sun to the earths surface by radiative heat exchange.

9.2.5

Work and heat are the energy characteristics of processes for changing the state of thermodynamic systems and are meaningful only when such processes occur. Depending upon the kind of process the system undergoes in its transition from state **1** to state **2**, it is necessary to perform different amounts of work and to deliver different quantities of heat to the system.

A comparison with (8.1.3) (on the change in the internal energy in processes) indicates that work and heat are not forms of energy and it is incorrect to speak of a "stockpile of work" or a "reserve of heat" in a body. For the same reasons, an element of the quantity of heat δQ and an element of work δW are not complete differentials (cf. (9.1.3)).

9.2.6

The performance of work on a system can change any type of its energy. For example, when a gas is rapidly com pressed in a vessel by means of a moving piston (9.2.3), the work done by external forces on the gas increases the internal energy of the gas. In the inelastic collision of two bodies (3.5.3), a part of the work is expended to change the kinetic energy of the bodies (3.2.2) and a part to change their internal energy.

If energy is delivered to a system in the form of heat, it is used only to increase the internal energy of the system. This is due to the fact that in any kind of heat exchange (9.2.4), energy is transferred directly between chaotically moving particles of the bodies. This changes their internal energy. In the process of heat conduction, for instance, in a nonuniformly heated rigid body the particles of the body located in its more heated parts transmit some of their energy to particles located in its less heated parts. The result is an equalization of the internal energies of the various parts of the body, an equalization of their temperatures and the discontinuation of the heat conduction process.

It follows from the aforesaid that there is a qualitative difference and lack of equivalence between work and heat as a form of energy transmission. Frequently, these two forms of transmitting energy exist simultaneously. For example, in heating a gas in a vessel with a moving piston, the volume of the gas is increased and work is done against the external pressure simultaneously.

9.2.7

A thermodynamical system is said to be *closed* (or *isolated*) if there is no exchange of energy in any form between it and the external medium. Such systems comply with the *law of conservation of energy*: the total energy of the system remains unchanged regardless of the processes that occur within it.

9.2.8

A thermodynamical system is said to be *adiabatically isolated* (i.e. *thermally isolated*) if no heat exchange takes place between it and the external medium. Such a system can per form work on external bodies. Moreover, external forces can do work on the system. An example of such a system is a cylinder with a moving piston, filled with gas and surrounded all over by a dense layer of heatproof felt. The absence of heat exchange with the external medium does not exclude the possibility of the gas doing expansion work (9.2.3), or the external pressure doing compression work on the gas.The properties of a system approximate those of an adiabatically isolated one if the change in its state is so rapid that there is no time, during the process, for heat exchange with the external medium. (For example, rapid expansion of a compressed gas released from a gas cylinder when the outlet valve is opened for a short time.)

9.3 First Law of Thermodynamics

9.3.1

The *first law of thermodynamics* states that the change in the internal energy ΔU_{1-2} of a system that occurs in the process 1 2 of transition of the system from state **1** to state **2** is equal to the sum of the work W'_{1-2} done by external forces on the system and the quantity of heat Q_{1-2} transmitted to the system:

$$\Delta U_{1-2} = W'_{1-2} + Q_{1-2}$$

where $W'_{1-2} = -W_{1-2}$ and W_{1-2} is the work done by the system to overcome external forces in the process **1** $\rightarrow$ **2**. Hence

$$Q_{1-2} = \Delta U_{1-2} + W_{1-2}$$

The quantity of heat transferred to a system is expended in changing the internal energy of the system and in the work done by the system to overcome the external forces.

For an element of the quantity of heat δQ an element of work δW and an infinitely small change δU of the internal energy, the first law of thermodynamics assumes the form

$$\delta Q = \mathrm{d}U + \delta W.$$

9.3.2

If $\delta Q > 0$, then heat is being transferred to the system; if $Q < 0$, then heat is being removed from the system. In the finite process **1** $\rightarrow$ **2**, elements of the quantity of heat can have both signs, and the total quantity of heat Q_{1-2} in the process **1** $\rightarrow$ **2** is equal to the algebraic sum of the

quantities of heat transferred during all the parts of this process:

$$\delta Q_{1-2} = \int_1^2 \delta Q$$

It is customary to consider $\delta W > 0$ when the system performs work on external bodies, and $\delta W < 0$ when work is performed by external bodies on the system. The work W_{1-2} done by the system in the finite process **1** → **2** is equal to the algebraic sum of the amounts of work δW performed by the system during all the parts of this process:

$$W_{1-2} = \int_1^2 \delta W$$

9.3.3

If the system for instance, the working medium (11.1.1) in a periodic-action engine completes a cycle **1** → **1** (11.1.1), then $\Delta U_{1-1} = 0$ and $W_{1-1} = Q_{1-1}$. It is impossible to build an operating engine that could perform more work than the energy transferred to the system from outside. Such an engine is called a *perpetual motion machine of the first kind.* The impossibility of constructing a perpetual motion engine of the first bind is also a statement of the first law of thermodynamics.

9.4 Graphical Representation of Thermodynamic Processes and Work

9.4.1

The equation of state (8.3.6) of a thermodynamic system enables the value of any state variable, for example p, to be determined from any values of two other variables, such as V and T. Therefore, thermodynamic processes can be graphically represented in various two-dimensional coordinate systems. In addition to the most extensively used pV diagrams, pT and VT diagrams are also used.




Figure 9.2.: Graphical representation of an equilibrium process.

In Figure 9.2, the thermodynamic process in the pV diagram is represented by the curve C_1C_2, and the points $C_1(p_1, V_1)$ and $C_2(p_2, V_2)$indicate the initial and final states of the thermodynamic system.

Only equilibrium processes (8.3.7) can be represented graphically. State variables for the whole body (or system) cannot be specified for non-equilibrium processes (8.3.7) because they differ at different parts of the body (or

system). Hence such graphical representation of non-equilibrium processes is impossible.

9.4.2

An element of work δW done by a system (9.2.3) in an equilibrium process (8.3.7) can be measured by the area of the trapezoid having one curvilinear side, hatched in Figure 9.2. The work W_{1-2} done by the system in the process C_1C_2 is equal to

$$W_{1-2} = \int_{V_1}^{V_2} p\mathrm{d}V$$

and is measured by the area that is bounded by the curve representing process C_1C_2,the axis of abscissas and the ordinates p_1 and p_2 of points C_1 and C_2. The amount of work W_{1-2} done depends on how the system passes from state C_1 to state C_2, i.e. upon the kind of process C_1C_2 the system undergoes in changing its state. In the pV diagram of Figure 9.3 the amounts of work done by the system in the processes $C_1L_1C_2$, $C_1L_2C_2$ and $C_1L_3C_2$, and equal to WL_1, WL_2 and WL_3, respectively, are measured by three areas that differ in size: $WL_1 > WL_2 > WL_3$.

After the system has completed the cycle (11.1.1) $C_1L_1C_2L_3C_1$ the total amount of work $W_{C_1-C_1}$ is not equal to zero. The positive expansion work in process $C_1L_1C_2$ exceeds the negative work done in the compression process $C_2L_3C_1$. The resultant positive work is measured by the hatched area in Figure 9.3.




Figure 9.3.: Finding work done via graphical representation.

9.4.3

The work W and the quantity of heat Q are not state functions (8.3.8). In various processes **1** → **2**, in which the state of a system is changed, various quantities of heat are transferred to the system, and various amounts of work are done. Elements of the changes in the physical quantities δQ and δW are not complete differentials (9.1.3).

9.5 Heat Capacity of Matter. Applying the First Law of Thermodynamics to Isoprocesses in an Ideal Gas

9.5.1

The *heat capacity* C of a body is a physical quantity, numerically equal to the ratio of the quantity of heat δQ transferred to the body to the change $\mathrm{d}T$ in the temperature of the body in the thermodynamic process being

considered:

$$C = \frac{\delta Q}{\mathrm{d}T}$$

The value of C depends upon the mass of the body, its chemical composition, thermodynamic state and the process in which the heat δQ is transferred to it.

9.5.2

The *specific heat* c is the heat capacity per unit mass of a substance. For a homogeneous body $c = C/M$, where M is the mass of the body.

The *molar heat capacity* C_μ is the heat capacity of a single mole (**??**) of the substance: $C_\mu = \mu\, c$, where μ is the molar mass (8.4.3) of the substance.

9.5.3

The element of the quantity of heat δQ that must be transferred to a body to change its temperature from T to $T + \Delta T$ is

$$\delta Q = C\mathrm{d}T$$

For a homogeneous body $\delta Q - Mc\,\mathrm{d}T = (M/\mu)C_\mu \mathrm{d}T$, where M is the mass of the body, μ is its molar mass and M/μ is the number of moles in the body.

9.5.4

For equilibrium (8.3.7) iso processes in gases (8.3.7), the first law of thermodynamics (9.3.1) is of the form

$$\frac{M}{\mu} C_\mu \mathrm{d}T = \mathrm{d}U + p\mathrm{d}V$$




Figure 9.4.: Finding work done via graphical representation.

In the isochoric process (8.3.7) of heating or cooling a gas (straight lines 1-2 and 1-3 in Figure 9.4), no element of work $\delta W = p\mathrm{d}V$ is done (because $\mathrm{d}V = 0$). The whole quantity of heat transferred to the gas is expended in changing its internal energy: $\delta Q = \mathrm{d}U$. If C_{V_μ} is the molar heat capacity at constant volume,

$$\frac{M}{\mu} C_{V_\mu} \mathrm{d}T = \mathrm{d}U + p\mathrm{d}V \qquad (\star)$$

Within a definite temperature range it can be assumed that $C_{V_\mu} \approx \text{const}$ (for greater detail see (10.7.4)) and that the change in the internal energy of the gas ΔU_{1-2}, as its temperature is changed from T_1 to T_2, is equal to $\Delta U_{1-2} = U_2 - U_1 = (M/\mu) C_{V_\mu} (T_2 - T_1)$ and is due to the quantity of heat Q_{1-2} transferred to the gas in the isochoric process:

$$Q_{1-2} = \frac{M}{\mu} C_{V_\mu} (T_2 - T_1) \qquad (\star\star)$$

At $T_2 > T_1$, $Q_{1-2} > 0$ and a definite quantity of heat is transferred to gas; at $T_2 < T_1$, $Q_{1-2} < 0$ and a definite quantity of heat is conducted away from the gas.

9.5.5

For an ideal gas, equations ($\star$) and ($\star\star$) express the change in its internal energy in *any process* for changing the state of the gas in the temperature range $(T_2 - T_1)$. The internal energy of an ideal gas depends only on its chemical composition, mass and temperature.

In real gases (12.1.2) the internal energy includes the potential energy of interaction between the molecules (9.1.2), which depends upon the distance between them. This part of the internal energy of a real gas is changed with changes in its volume. Therefore, equations ($\star$) and ($\star\star$) express the change in the internal energy of a real gas only when it is heated or cooled in an isochoric (constant-volume) process.

9.5.6

In an arbitrary equilibrium process (8.3.7) that takes place in an ideal gas, the first law of thermodynamics assumes the form

$$\frac{M}{\mu} C_\mu \mathrm{d}T = \frac{M}{\mu} C_{V_\mu} \mathrm{d}T + p\mathrm{d}V$$

where C_μ is the molar heat capacity of an ideal gas in the given process. The isobaric process (8.3.7) of heating (straight line 1-2 in Figure 9.5) or cooling (straight line

1-3 in Figure 9.5) a gas can be carried out, for instance, in a vessel (cylinder) closed by a movable piston subject to a constant external pressure. An clement of work 6IF done by an ideal gas in an isobaric process is

$$\delta W = p\mathrm{d}V = \frac{M}{\mu} R\mathrm{d}T$$

in which use is made of the expression $\mathrm{d}V = (M/\mu)(R/p)\mathrm{d}T$ from the Mendeleev-Clapeyron equation (8.4.4) at $p =$ const. The universal gas constant R (8.4.4) is numerically




Figure 9.5.: Finding work done via graphical representation.

equal to the work done by one mole of an ideal gas when it is heated isobarically by one degree:

$$R = \frac{\delta W}{(M/\mu)\mathrm{d}T}$$

The work W_{1-2} done by the gas in isobaric expansion 1-2 is

$$W_{1-2} = \int_{V_1}^{V_2} p\mathrm{d}V = p(V_2 - V_1)$$

It is represented by the hatched area in Figure 9.5. For an ideal gas the work W_{1-2} is also equal to

$$W_{1-2} = \frac{M}{\mu} R(T_2 - T_1).$$

9.5.7

The element of the quantity of heat δQ transferred to the gas in the isobaric process is

$$\delta Q = \frac{M}{\mu} C_{p\mu} \mathrm{d}T$$

where $C_{p\mu}$ is the molar heat capacity at constant pressure. If the quantity $C_{p\mu}$ can be assumed constant in the temperature range $(T_2 - T_1)$ then the quantity of heat Q_{1-2} transferred to (or conducted away from) the gas is

$$Q_{1-2} = \frac{M}{\mu} C_{p\mu} (T_2 - T_1).$$

9.5.8

The molar heat capacities $C_{p\mu}$ and $C_{V\mu}$ of a gas are related by the *Mayer equation*

$$C_{p\mu} - C_{V\mu} = R$$

For specific heats c_p and c_V, the Mayer relation is of the form

$$c_p - c_V = \frac{R}{\mu}$$

where μ is the molar mass (8.4.3) of the gas.

For the heat capacities C_p and C_V

$$C_p - C_V = \frac{M}{\mu} R$$

where M is the mass of the gas and M/μ is the number of moles it contains.

The Mayer relation indicates that in heating a gas isobarically by one degree a greater quantity of heat must be transferred to the gas than in isochoric heating by the same amount. This difference between the quantities of heat should be equal to the work done by the gas in its isobaric expansion.

9.5.9

The isothermal process (8.3.7) of expanding (or compressing) a gas takes place in heat exchange (9.2.4) between the gas and the external medium at a constant temperature difference. For this to be feasible, the heat capacity (9.5.1) of the external medium should be sufficiently great and the process of expansion (or compression) should proceed extremely slowly. First-order phase transitions (12.3.3), such as boiling and condensation, are isothermal processes if they proceed at constant external pressure.

In an isothermal process in an ideal gas the internal energy of the gas remains unchanged (9.5.5) and the whole quantity of heat Q_{1-2} transferred to the gas is expended in the work W_{1-2} done by the gas to overcome the external forces:

$$Q_{1-2} = W_{1-2} = \int_{V_1}^{V_2} p \mathrm{d}V = \frac{M}{\mu} RT \int_{V_1}^{V_2} \frac{\mathrm{d}V}{V} = \frac{M}{\mu} RT \ln \frac{V_2}{V_1}$$

Here $\frac{M}{\mu}$ is the number of moles contained in mass M of the gas, T is the constant temperature of the gas, and V_1 and V_2 are the initial and final volumes of the gas. If the gas isothermally expands ($V_2 > V_1$), heat is being transferred to it $Q_{1-2} > 0$)and it is doing positive work ($W_{1-2} > 0$) represented by the hatched area in Figure 9.6. In isothermal compression of the gas (process




Figure 9.6.: Finding work done via graphical representation.

1-3 in Figure 9.6), the work done by the gas is negative ($W_{1-3} < 0$) . Positive work ($W'_{1-3} = -W_{1-3} > 0$) is being done by the external forces to compress the gas. In compression, a certain quantity of heat is conducted away from the gas ($Q_{1-3} < 0$). The heat capacity of a substance in an isothermal process equals infinity ($\mathrm{d}T = 0$ and $\delta Q \neq 0$).

9.5.10

An adiabatic process (8.3.7) proceeds under the condition that $\delta Q = 0$. It is essential that the condition $Q = 0$ does

not define this process, because it does not specify the absence of heat exchange with the external medium. It only indicates that the algebraic sum of the quantities of heat transferred to and conducted away from the gas in various parts of the process equals zero. In an adiabatic process, work is done by an ideal gas at the expense of its internal energy:

$$\delta W = -\mathrm{d}U = -\frac{M}{\mu} C_{V\mu} \mathrm{d}T$$

where $C_{V\mu}$ is the molar heat capacity of the gas at constant volume, M/μ is the number of moles contained in mass M of the gas, and $\mathrm{d}T$ is an element of change in the temperature of the gas. If the gas adiabatically expands ($\delta W = p\mathrm{d}V > 0$), it is cooled ($\mathrm{d}T < 0$). In adiabatic compression the gas is heated: $\delta W = p\mathrm{d}V < 0$ and $\mathrm{d}T > 0$.

9.5.11

The *adiabatic*, or *Poisson, equation*: $pV^{\varkappa} = \text{const}$, is valid for an equilibrium adiabatic process (8.3.7).

Making use of the Mendeleev-Clapeyron equation (8.4.4), the relation between p and T, and also between V and T, in an adiabatic process can be found from the adiabatic equation:

$$pT^{\frac{\varkappa}{\varkappa-1}} = \text{const} \quad \text{and} \quad VT^{\frac{1}{\varkappa-1}} = \text{const}$$

In these equations the dimensionless quantity $\varkappa = C_{p\mu}/C_{V\mu} = c_p/c_V > 1$ is the *adiabatic exponent*. The full curve

in Figure 9.7, called an *adiabat* or *adiabatic curve*, represents an adiabatic process in a pV diagram. The dashed curve on this diagram, called an *isotherm*, represents an isothermic process at the temperature corresponding to the initial state **1** of the gas. In an adiabatic process the pressure varies with the volume more rapidly than in an isothermic process (the curve is steep er). In adiabatic expansion the temperature of the gas and its pressure decrease faster than in the corresponding isothermal expansion. In adiabatic compression of the gas its pressure increases at a higher rate than in the corresponding isothermal compression. The reason is that the increased pressure is due both to the decrease in the volume of the gas and to the increase in its temperature.

9.5.12

The work W_{1-2} done by the gas in the adiabatic process **1** → **2** is measured by the hatched area in Figure 9.7. The amount of work W_{1-2} done in an adiabatic process is expressed by

In these equations M/μ is the number of moles contained in mass M of the gas, $C_{V\mu}$ is the molar heat capacity at constant volume, $\varkappa$ is the adiabatic exponent, and p, V and T are the state variables of the gas in the states **1** and **2** as indicated.

9.5.13

Table 9.1 lists summarized information on the isoprocesses in gases.




Figure 9.7.: Finding work done via graphical representation.

Thermodynamic Process	**Isochoric**	**Isobaric**	**Isothermal**	**Adiabatic**
Basic Condition	$V = \text{const}$	$p = \text{const}$	$T = \text{const}$	$\delta Q = 0$
Relationship between state variables	$\frac{p}{T} = \text{const}$	$\frac{V}{T} = \text{const}$	$pV = \text{const}$	$pV^{\varkappa} = \text{const}$ $pT^{\varkappa/(\varkappa-1)} = \text{const}$ $VT^{1/(\varkappa-1)} = \text{const}$
Work done in the process	$\delta W = 0$ $W = 0$	$\delta W = p\mathrm{d}V$ $W = p(V_2 - V_1)$	$\delta W = p\mathrm{d}V$ $W = \frac{M}{\mu} RT \ln \frac{V_2}{V_1}$	$\delta W = p\mathrm{d}V = -\mathrm{d}U$ $W = -\Delta U = C_V(T_2 - T_1)$
Quantity of heat transferred in the process	$\delta Q = C_V \mathrm{d}T$ $Q = C_V(T_2 - T_1)$	$\delta Q = C_p \mathrm{d}T$ $Q = C_p(T_2 - T_1)$	$\delta Q = \delta W$ $Q = W$	$\delta Q = 0$ $Q = 0$
Change in internal energy	$\mathrm{d}U = \delta Q$ $U = Q$	$\mathrm{d}U = C_V \mathrm{d}T$ $U = C_V(T_2 - T_1)$	$\mathrm{d}U = 0$ $\Delta U = 0$	$\mathrm{d}U = -\delta W = C_V \mathrm{d}T$ $\Delta U = -W = C_V(T_2 - T_1)$
Heat capacity	$C_V = \frac{M}{\mu} \frac{R}{\varkappa - 1}$	$C_p = \frac{M}{\mu} \frac{\varkappa R}{\varkappa - 1}$	$C_T = \infty$	$C_{ad} = 0$

Table 9.1.: A table of isoprocesses.

10 Kinetic Theory of Gases

10.1 Certain Information on Classical Statistical Physics

10.1.1

The *kinetic theory of gases* deals with the structure and physical properties of gases and is based on the statistical method of investigation (8.2.2). Besides those mentioned in (8.2.1), the following propositions form the foundation for *classical statistical physics*.

10.1.2

A system of particles complies with the laws of conservation of energy (9.2.7), momentum (2.7.1) and of angular momentum (4.4.1). A system of charged particles complies with the law of conservation of electric charge (14.1.3).

10.1.3

All physical processes in a system of particles proceed *continuously* in space and time. A space-time description of any physical phenomena in classical mechanics and classical statistical physics assumes the possibility of continuous variation of all physical quantities that characterize the state of the system. For instance, the velocity and energy of any particle can vary continuously due to the action of various forces.

10.1.4

Each particle in a system is regarded as being "tagged]]. It can be distinguished from all other such particles (*distinguishability of identical particles in classical statistical physics*).

10.1.5

Any particle of a system can have arbitrary values for its coordinates and momenta (or velocities) independently of the values of these quantities for other particles of the system. If an infinitely small volume $\mathrm{d}x\,\mathrm{d}y\,\mathrm{d}z$ is chosen in the coordinate system XYZ, any particle can be located within this volume regardless of the presence in this volume of any arbitrary number of other particles. Likewise, any particle may be located within an arbitrary element of "volume" $\mathrm{d}p_x\,\mathrm{d}p_y\,\mathrm{d}p_z$ of momenta space (or $\mathrm{d}u_x\,\mathrm{d}u_y\,\mathrm{d}u_z$ of velocity space) regardless of the presence in these "volumes" of any arbitrary number of other particles. This implies that any particle can have momentum

components along the coordinate axes within the limits from p_x to $p_x + \mathrm{d}p_x$, from p_y to $p_y + \mathrm{d}p_y$ and from p_z to $p_z + \mathrm{d}p_z$ (and, respectively, velocity components of the particle along the coordinate axes within the limits from u_x to $u_x + \mathrm{d}u_x$, u_y to $u_y + \mathrm{d}u_y$, u_z to $u_z + \mathrm{d}u_z$). The minimum values of the volumes $\mathrm{d}x\,\mathrm{d}y\,\mathrm{d}z$ and $\mathrm{d}p_x\,\mathrm{d}p_y\,\mathrm{d}p_z$ are not restricted in any manner.

(10.1.2) and (10.1.3) apply not only to classical statistical physics, they are characteristic of all of classical physics. Sections (10.1.4) and (10.1.5) apply only to classical statistical physics; they do not hold for quantum statistics (**??**).

10.2 Basic Equation of the Kinetic Theory of Gases

10.2.1

The pressure of a gas (8.3.2) in a vessel is the result of the collisions of the gas molecules with the walls of the vessel. The pressure of a gas is the macroscopic effect of the thermal motion of molecules (8.1.1). As the molecules of the gas strike the walls of the vessel (8.4.1) they impart their momentum (2.3.4) to the walls. This change in momentum of the molecules exerts the pressure on the walls. For an ideal gas the collisions between the molecules within the vessel has no effect on the pressure exerted by the gas on the walls. Owing to the chaotic nature of thermal motion of the molecules (8.1.3) the pressure of the gas is the same on all the walls and, by definition (8.3.2), is the average force exerted normal to unit area

of the wall surface.

10.2.2

The *basic equation of the kinetic theory of gases* is

$$pV = \frac{2}{3}E_k$$

where p is the pressure of the gas, V is its volume and $E_k = \sum_{i=1}^{N} \frac{m_i u_i^2}{2}$ is total kinetic energy of translational motion of all the N molecules of gas in the vessel.

10.2.3

In a homogeneous gas $m_i = m$, i.e. the mass of each molecule is the same, hut their velocities u_i differ (10.3.1), and

$$E_k = \frac{m}{2}\sum_{i=1}^{N} u_i^2$$

It proves expedient to introduce the root-mean-square velocity v_{rms} of translational motion of gases:

$$v_{\text{rms}} = \sqrt{\frac{1}{N}\sum_{i=1}^{N} u_i^2}$$

where N is the total number of molecules in volume V of the gas. The root-mean-square velocity pertains to the whole population of molecules, but is meaningless in application to a single molecule or to a small number

of molecules. Making use of v_{rms} the expression for E_k assumes the form

$$E_k = \frac{1}{2} N m v_{\text{rms}}^2 \quad \text{and} \quad pV = \frac{1}{3} N m v_{\text{rms}}^2 = \frac{1}{3} M v_{\text{rms}}^2$$

where $M = Nm$ is the mass of the gas.

The basic equation for the pressure of a gas is

$$p = \frac{2}{3} E_{k_0} = \frac{1}{3} n_0 m v_{\text{rms}}^2 = \frac{1}{3} \rho v_{\text{rms}}^2$$

where $E_{k_0} = E_k / V$, $n_0 = N/V$ is the number of molecules in unit volume, and $\rho = n_0 m$ is the density of the gas.

10.2.4

From a comparison of the Mendeleev-Clapeyron equation (8.4.4) with the basic equation (10.2.3) $RT = \mu v_{\text{rms}}^2 / 3$ it follows that

$$v_{\text{rms}} = \sqrt{\frac{3RT}{\mu}} = \sqrt{\frac{3RT}{mN_A}} = \sqrt{\frac{3kT}{m}} = 1.73\sqrt{pv}$$

where k is Boltzmanns constant (8.4.5), m is the mass of a molecule, N_A is Avogadros number (**??**), p is the pressure of the gas, and v is its specific volume.

10.2.5

The *average kinetic energy of translational motion of the molecules in an ideal gas* is

$$v_{\text{rms}} = \sqrt{\frac{3RT}{\mu}} = \sqrt{\frac{3RT}{mN_A}} = \sqrt{\frac{3kT}{m}} = 1.73\sqrt{pv}$$

The average kinetic energy $\langle E_k^m \rangle$ is proportional to the absolute temperature and is independent of any other variables (Figure 10.1). The absolute, or thermodynamic,




Figure 10.1.: The relation of average kinetic energy and absolute temperature.

temperature is a measure of the average kinetic energy of translational motion of the molecules in an ideal gas. This consequence of the kinetic theory of gases is not valid in the region of ultra-low temperatures, close to absolute zero (8.3.4).

10.3 Maxwell's Molecular Velocity and Energy Distribution Law (Maxwell's Distribution Law)

10.3.1

The *law of the distribution of molecular velocities for an ideal gas*, theoretically established by Maxwell, determines

the number $\mathrm{d}n$ of molecules of a homogeneous monatomic ideal gas, out of the total number n_0 of its molecules in unit volume, that has a velocity, at a given temperature, lying within the range from u to $u + \mathrm{d}u$. This law is valid for gases in a state of thermodynamic equilibrium (8.3.3). The velocity distribution of the molecules of such a gas is a steady-state value. The Maxwellian distribution is based on pairwise collisions of the randomly moving gas molecules. This assumes uniform distribution of the molecules throughout the volume of the vessel, i.e. constant density of the gas.

10.3.2

In its most customary form, the law of the distribution of molecular speeds (magnitudes of the molecular velocities) is presented as

$$\mathrm{d}n = n_0 \left(\frac{m}{2\pi kT}\right)^{3/2} \exp\left(-\frac{mu^2}{2kT}\right) 4\pi u^2 \mathrm{d}u$$

Here u is the magnitude of the molecular velocity (speed of a molecule), m is the mass of a molecule, k is Boltzmanns constant, and T is the absolute (thermodynamic) temperature. Molecular velocity distribution curves for various temperatures $T_1 < T_2 < T_3$ are shown in Figure 10.2. As is evident from these curves, the most probable velocity u_p (10.3.4) increases with temperature and the fraction of molecules travelling at this velocity decreases.

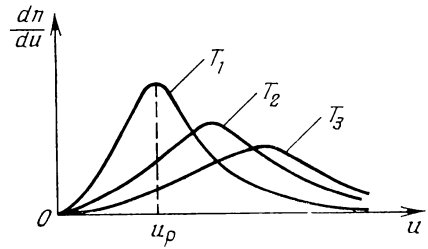


Figure 10.2.: Molecular velocity distribution for various temperatures.

10.3.3

Another form of the Maxwellian distribution is

$$\mathrm{d}n = n_0 \left(\frac{m}{2\pi kT}\right)^{3/2} \exp\left(-\frac{mu^2}{2kT}\right) \mathrm{d}u_x \mathrm{d}u_y \mathrm{d}u_z$$

where u_x, u_y and u_z are projections of the molecular velocity on the coordinate axes. Owing to the random nature of thermal motion of the molecules (8.1.1), distributions of the molecules according to the projections u_i of their velocities on the coordinate axes $(i = x, y, z)$ are mutually independent. Hence

$$\mathrm{d}n = n_0 f(u_x)\, f(u_y)\, f(u_z) \mathrm{d}u_x \mathrm{d}u_y \mathrm{d}u_z$$

where

$$f(u_i) = \left(\frac{m}{2\pi kT}\right)^{3/2} \exp\left(-\frac{mu_i^2}{2kT}\right) \quad (i = x,\, y,\, z)$$

is a distribution function of the projections of the molecular velocities.

The Maxwellian distribution is isotropic. This is evident from the fact that the function $f(u_x, u_y, u_z)$ depends only upon the speed (magnitude of the velocity), and because the function $f(u_i)$ is the same along all the axes.

10.3.4

The law of the distribution of molecular velocities (10.3.2) can be used to determine the *most probable velocity* u_p of the molecules, which corresponds to the maximum of the function

$$f(u) = \frac{\mathrm{d}n}{\mathrm{d}u} = 4\pi n_0 \left(\frac{m}{4\pi kT}\right)^{1/2} \exp\left(-\frac{mu^2}{2kT}\right)$$

The condition

$$\left[\frac{\mathrm{d}}{\mathrm{d}u}\left(\exp\left(-\frac{mu^2}{2kT}\right)u^2\right)\right]_{u=u_\mathrm{p}} = 0$$

yields

$$u_\mathrm{p} = \sqrt{\frac{2kT}{m}} = \sqrt{\frac{2RT}{\mu}} = v_\mathrm{rms}\sqrt{\frac{2}{3}}$$

10.3.5

A third form of the law of the distribution of molecular velocities is

$$\mathrm{d}n = \frac{4n_0}{\sqrt{\pi}} \exp\left(-\frac{u^2}{u_{\mathrm{p}^2}}\right)\left(\frac{u}{u_\mathrm{p}}\right)^2 \frac{\mathrm{d}u}{\mathrm{d}u_\mathrm{p}}$$

The fraction $\mathrm{d}n/n_0$ of the molecules of a gas having velocities lying within the range from u to $u + \mathrm{d}u$ is numerically equal to the hatched area $\mathrm{d}S$ under the curve in Figure 10.3, which represents the dependence of $(u_\mathrm{p}/n_0)\,(\mathrm{d}n/\mathrm{d}u)$ on u/u_p:

$$\mathrm{d}S = \left(\frac{u_\mathrm{p}}{n_0}\,\frac{\mathrm{d}n}{\mathrm{d}u}\right)\frac{\mathrm{d}u}{u_\mathrm{p}} = \frac{\mathrm{d}n}{n_0}$$

The area under the curve in Figure **??**, i.e. bounded by the curve and the axis of abscissas, is equal to unity. This area represents the fraction of the molecules having all possible velocity values from 0 to ∞.

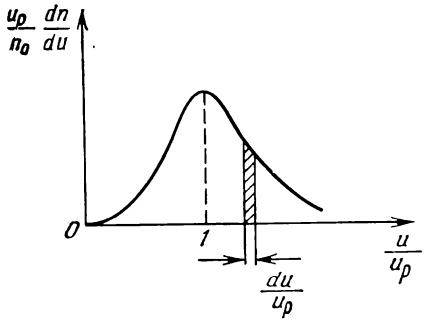


Figure 10.3.: A velocity distribution curve for molecules.

10.3.6

The arithmetic mean velocity $\langle u \rangle$ of translational motion of the molecules in an ideal gas, calculated by means of

the distribution law (10.3.2), is

$$\langle u \rangle = v_{\text{rms}} \sqrt{\frac{8}{3\pi}} = \sqrt{\frac{8RT}{\pi\mu}} = \sqrt{\frac{8kT}{\pi m}} = 1.60\sqrt{pv}$$

10.3.7

The energy distribution of the molecules in an ideal gas determines the fraction $\mathrm{d}n_{E^{\mathrm{m}}}/n_0$ of molecules, of their total number n_0, having kinetic energies $E_k^{\mathrm{m}} = mu^2/2$ lying within the range from E_k^{m} to $E_k^{\mathrm{m}} + \mathrm{d}E_k^{\mathrm{m}}$:

$$\mathrm{d}n_{E^{\mathrm{m}}} = \frac{2n_0}{\sqrt{\pi}} (kT)^{-3/2} \exp\left(-\frac{E_k^{\mathrm{m}}}{kT}\right) \sqrt{E_k^{\mathrm{m}}} \mathrm{d}E_k^{\mathrm{m}}$$

Here $\mathrm{d}n_{E^{\mathrm{m}}}/n_0 = f(E_k^{\mathrm{m}})\,\mathrm{d}E_k^{\mathrm{m}}$, where $f(E_k^{\mathrm{m}})$ is the distribution function for the molecular energies in an ideal gas.

Example. The average kinetic energy $\langle E_k^{\mathrm{m}} \rangle$ of a molecule in an ideal gas is

$$\begin{aligned}
\langle E_k^{\mathrm{m}} \rangle &= \int_0^{\infty} E_k^{\mathrm{m}}\, f(E_k^{\mathrm{m}})\, \mathrm{d}E_k^{\mathrm{m}} \\
&= \frac{2}{\sqrt{\pi}(kT)^{3/2}} \int_0^{\infty} E_k^{\mathrm{m}} \exp\left(-\frac{E_k^{\mathrm{m}}}{kT}\right) \sqrt{E_k^{\mathrm{m}}} \mathrm{d}E_k^{\mathrm{m}} \\
&= \frac{3}{2} kT
\end{aligned}$$

(cf. (10.2.4)).

10.3.8

The relative motion (7.1.2) of two particles with the masses m_1 and m_2 is equivalent to the motion of a single particle with the reduced mass $m_{\text{red}} = m_1 m_2/(m_1 + m_2)$. For a homogeneous gas $m_1 = m_2 = m$ and $m_{\text{red}} = m/2$. The distribution of molecules according to their relative velocities establishes the fraction $\mathrm{d}n_{u_{\text{rel}}}/n_0$ of molecules, of their total number n_0, having relative velocities u_{rel} lying within the range from u_{rel} to $u_{\text{rel}} + \mathrm{d}u_{\text{rel}}$:

$$\mathrm{d}n_{u_{\text{rel}}} = n_0 \left(\frac{m}{4\pi kT}\right)^{3/2} \exp\left(-\frac{m u_{\text{rel}}^2}{4kT}\right) 4\pi u_{\text{rel}}^2 \mathrm{d}u_{\text{rel}}$$

Here $\mathrm{d}n_{u_{\text{rel}}}/n_0 = f(u_{\text{rel}})\mathrm{d}u_{\text{rel}}$, where

$$f(u_{\text{rel}}) = 4\pi \left(\frac{m}{4\pi kT}\right)^{3/2} \exp\left(-\frac{m u_{\text{rel}}^2}{4kT}\right) u_{\text{rel}}^2$$

is the relative velocity distribution of the molecules in an ideal gas.

Example. The *average relative velocity* $\langle u_{\text{rel}} \rangle$ of the molecules is

$$\langle u_{\text{rel}} \rangle = \int_0^\infty u_{\text{rel}} f(u_{\text{rel}})\, \mathrm{d}u_{\text{rel}} = \sqrt{2}\sqrt{\frac{8kT}{\pi m}} = \sqrt{2}\langle u \rangle$$

where $\langle u \rangle$ is the arithmetic mean velocity of the molecules (10.3.6).

10.4 Particle Distribution in a Potential Force Field (Boltzmann Distribution)

10.4.1

Gases are ordinarily in the potential (conservative) gravitational fields of the earth (6.2.1). If there were no such gravitational field, the atmospheric air would be dispersed in the universe. If, on the other hand, there were no thermal motion, the molecules of atmospheric air would drop to the earth. Gravity and thermal motion lead to a steady state of gases, in which their concentration and pressure decrease with an increase of their altitude above the earths surface.

10.4.2

If a gas (or other system of particles) is located in an external potential (conservative) force field (3.1.6), the distribution of the particles throughout the volume is described by the *Boltzmann distribution law*. This law establishes the number of particles $\mathrm{d}n(x,\, y,\, z)$ that have coordinates within the ranges from x to $x + \mathrm{d}x$, from y to $y + \mathrm{d}y$, and from z to $z + \mathrm{d}z$. In other words, $\mathrm{d}n(x,\, y,\, z)$ is the number of molecules contained in the element of volume $\mathrm{d}V = \mathrm{d}x\mathrm{d}y\mathrm{d}z$. The Boltzmann distribution law is of the form

$$\mathrm{d}n\,(x,\, y,\, z) = \text{const}\ \exp\left(-\frac{E_{\mathrm{p}}^{\mathrm{m}}}{kT}\right)\,\mathrm{d}x\,\mathrm{d}y\,\mathrm{d}z$$

where $E_{\mathrm{p}}^{\mathrm{m}}(x,\, y,\, z)$ is the potential energy of a particle in the external force field, k is Boltzmanns constant, and T is the absolute temperature. The value of the constant in the preceding equation is determined from the normalization

condition:

$$\int \mathrm{d}n = n_0$$

where n_0 is the total number of particles in unit volume.

Example. For particles of mass m, located in the earths gravitational field, $E_{\mathrm{p}}^{\mathrm{m}} = mgh$ (3.3.3), where g is the acceleration due to gravity (7.3.3), and h is the altitude. At each altitude there is a Maxwellian molecular velocity distribution (10.3.1). The number of molecules contained in the volume $\mathrm{d}V$ is

$$\mathrm{d}n\,(x, y, z) = \text{const} \exp\left(-\frac{mgh}{kT}\right) \mathrm{d}V.$$

The gas density $\rho = m\mathrm{d}n/\mathrm{d}V$ decreases with an increase in the altitude according to the exponential law

$$\rho = \text{const} \exp\left(-\frac{mgh}{kT}\right)$$

The value of the constant can be determined from the condition $\rho = \rho_0 = \text{const}$ at $h = 0$. The density of the gas or its pressure varies according to the *barometric height formula*

$$\rho = \rho_0 \exp\left(-\frac{mgh}{kT}\right) \quad \text{and} \quad p = p_0 \exp\left(-\frac{mgh}{kT}\right)$$

10.4.3

The *Maxwell-Boltzmann law*, or *distribution*, describes the distribution of the coordinates and velocities of gas

mole cules subject to the action of an arbitrary potential (conserva tive) force field:

$$\mathrm{d}n = \text{const}\exp\left(-\frac{p_x^2+p_y^2+p_z^2}{2mkT}\right)\mathrm{d}p_x\mathrm{d}p_y\mathrm{d}p_z \times \exp\left(-\frac{E_\mathrm{p}^\mathrm{m}(x,y,z)}{kT}\right)\mathrm{d}x\mathrm{d}y\mathrm{d}z$$

where $\mathrm{d}n$ is the number of molecules contained in six-dimensional space within the element of volume $\mathrm{d}\Gamma = \mathrm{d}x\mathrm{d}y\mathrm{d}z\,\mathrm{d}p_x\mathrm{d}p_y\mathrm{d}p_z$, and $E_\mathrm{p}^\mathrm{m}(x,y,z)$ is the potential energy of a molecule in the external force field at a point with the coordinates x, y and z, and the projections p_x, p_y and p_z of the momenta on the axes. The Maxwell-Boltzmann law is the product of two distribution functions. One of them describes the distribution with respect to coordinates, and the other with respect to momenta (or velocities).

10.5 Mean Free Path of Molecules

10.5.1

Gas molecules have finite dimensions (8.4.1) and are continuously colliding with one another in thermal motion. Between two successive collisions, molecules travel at uniform velocity in a straight line over certain distances called their free paths λ. The mean free path $\langle\lambda\rangle$ is the average distance that a molecule travels without a collision. The mean free path is a characteristic of the whole totality of gas molecules at given values of p and T.

10.5.2

In unit time each molecule undergoes a mean number of collisions $\langle z \rangle$ (*average collision frequency*) equal to

$$\left\langle z^2 \right\rangle = \pi d^2 n_0 \left\langle u_{\mathrm{rel}} \right\rangle = \sqrt{2} \pi d^2 n_0 \langle u \rangle$$

Here d is the effective diameter of the molecule (8.4.1), n_0 is the number of molecules in unit volume of the gas, $\langle u_{\mathrm{rel}} \rangle$ is their average relative velocity (10.3.8), and $\langle u \rangle$ is their arithmetic mean velocity (10.3.6).

10.5.3

The average distance travelled by a molecule in unit time is numerically equal to $\langle u \rangle$. Therefore $\langle u \rangle = \langle \lambda \rangle \langle z \rangle$. The mean free path $\langle \lambda \rangle$ is

$$\langle \lambda \rangle = \frac{\langle u \rangle}{\langle z \rangle} = \frac{1}{\sqrt{2} d^2 n_0}$$

At constant temperature, n_0 is proportional to the pressure p of the gas (8.4.5). Hence, for a given gas the mean free path is inversely proportional to the pressure:

$$p_1 \langle \lambda_1 \rangle = p_2 \langle \lambda_2 \rangle = \mathrm{const}$$

in which the subscripts 1 and 2 refer to two states of the gas.

10.5.4

If molecules are ejected from some source of particles and a beam is formed by means of a diaphragm, the free path distribution law is valid for the molecules of the beam:

$$N = N_0 \exp\left(-\frac{x}{\langle\lambda\rangle}\right)$$

where N is the number of molecules in the beam that have travelled a distance x without collisions, and N_0 is the number of molecules in the beam at $x = 0$, i.e. at the output of the diaphragm.

10.6 Principle of the Equipartition of Energy. Internal Energy of an Ideal Gas

10.6.1

The *number of degrees of freedom* of a body is the minimum number of coordinates (number of independent coordinates) that it is necessary to specify in order to completely determine the position of the body in space.

A particle, for instance, travelling along one of the coordinate axes has a single degree of freedom. The same particle travelling in a plane has two degrees of freedom. The position of a particle travelling freely in space is determined by three degrees of freedom: the coordinates x, y and z. A rigid body (1.1.4) has six degrees of freedom: its position in space is determined by the three coordinates of its centre of mass (2.3.3), two




Figure 10.4.: Degrees of freedom for a particle.

angles, θ and φ, determining the direction of a certain axis, fixed in the body and passing through its centre of mass (Figure 10.4), and, in addition, angle ψ, determining the direction of a second axis, fixed in the body and perpendicular to the first axis. Changes in the three coordinates of the centre of mass at given constant angles θ, φ and ψ correspond to translational motion of the rigid body. The coordinates of the centre of mass are the three degrees of freedom of translational motion. Changes in the angle θ, φ or ψ at a constant position of the centre of mass lead to rotation of the rigid body. Hence, the correspond ing degrees of freedom are said to be rotary. Additional degrees of freedom of oscillatory, or vibratory, motion (10.6.5) are introduced to determine the position in space of an imperfectly rigid body, whose various parts can be displaced with respect to one another.

10.6.2

In many problems a *molecule of a monatomic gas* can be regarded as a particle (cf. (8.4.1)). This is based on the fact that practically all the mass of such an atom is concentrated in its nucleus (**??**), which is of extremely small size. The molecule of monatomic gas has three degrees of freedom of translational motion. Its average kinetic energy $\langle E_{\mathrm{k}}^{\mathrm{m}} \rangle$ is equal to the kinetic energy of molecules travelling at a velocity equal to the root-mean-square velocity v_{rms} (10.2.4):

$$\langle E_{\mathrm{k}}^{\mathrm{m}} \rangle = \frac{3}{2} kT$$

Owing to the random nature of thermal motion of the molecules, this energy is uniformly distributed between the three degrees of freedom. Hence, on an average each degree of freedom of translational motion of a monatomic molecule accounts for the same amount of kinetic energy $\langle E_{\mathrm{k}_0}^{\mathrm{m}} \rangle = \langle E_{\mathrm{k}}^{\mathrm{m}} \rangle / 3 = kT/2$, where k is Boltzmanns constant and T is the absolute temperature.

10.6.3

As a first approximation, a molecule of a diatomic gas consists of two atoms, A and B, rigidly held together by an incompressible, undeformable bond (Figure 10.5). In addition to the three degrees of freedom of translational motion, the centre of mass C (2.3.3) of such a molecule has two more degrees of freedom of rotary motion about axes $O_1 - O_1$ and $O_2 - O_2$. Rotation about the third axis $O' - O'$ makes no contribution to the molecules energy




Figure 10.5.: Degrees of freedom of A diatomic molecule.

because the moment of inertia (4.2.1) of the atoms with respect to this axis is negligibly small. Thus, a diatomic molecule has five degrees of freedom. Molecules consisting of three or more atoms have six degrees of freedom: three translational and three rotary degrees (Figure 10.6).




Figure 10.6.: Degrees of freedom of molecules with three or more atoms.

10.6.4

The principle of equipartition of energy states that on an average each degree of freedom of a molecule accounts for the same amount of kinetic energy, equal to $kT/2$. If a molecule has i degrees of freedom its average kinetic energy $\langle E_{\mathrm{k}}^{\mathrm{m}} \rangle = ikT/2$.

The principle of equipartition of energy leads to the conclusion that all degrees of freedom of the molecule are equally justified: each makes the same contribution to its average energy. This conclusion actually has only a limited field of application, and has been revised for quantum statistics (**??**).

10.6.5

In real molecules, which are not absolutely rigid, vibratory degrees of freedom make a contribution to the energy of the molecule in accordance with the principle of equipartition of energy (10.6.4). Each vibratory degree of freedom accounts, not only for kinetic energy $\langle E_{\mathrm{k}}^{\mathrm{m}} \rangle$ but for potential energy $\langle E_{\mathrm{p}}^{\mathrm{m}} \rangle$ as well. For harmonic vibrations (28.1.3), $\langle E_{\mathrm{k}_0}^{\mathrm{m}} \rangle = \langle E_{\mathrm{p}_0}^{\mathrm{m}} \rangle$. According to (10.6.4)

$$\langle E_{\mathrm{k}_0}^{\mathrm{m}} \rangle = \langle E_{\mathrm{p}_0}^{\mathrm{m}} \rangle = \frac{1}{2} kT$$

where $\langle E_{\mathrm{k}_0}^{\mathrm{m}} \rangle$ and $\langle E_{\mathrm{p}_0}^{\mathrm{m}} \rangle$ are the average kinetic and potential energies of a molecule per vibratory degree of freedom.

The average value $\langle E_0^{\mathrm{m}} \rangle$ of the total energy of a molecule

per vibratory degree of freedom is

$$\langle E_0^{\mathrm{m}} \rangle = \langle E_{\mathrm{k}_0}^{\mathrm{m}} \rangle + \langle E_{\mathrm{p}_0}^{\mathrm{m}} \rangle = 2 \langle E_{\mathrm{k}_0}^{\mathrm{m}} \rangle = kT$$

This equation is valid for harmonic vibrations of particles (atoms, molecules or ions) in the crystal lattice sites of solids (8.1.4).

10.6.6

The internal energy (9.1.2) of a polyatomic gas constitutes the kinetic energy of all kinds of motion of its particles. For one mole of such a gas

$$U = \langle E_{\mathrm{k}}^{\mathrm{m}} \rangle N_A = \frac{i}{2} k N_A T = i \frac{RT}{2}$$

where N_A is Avogadros number (**??**), i is the number of degrees of freedom of the molecule (10.6.4), and R is the universal gas constant (8.4.4).

10.7 Heat Capacity of Monatomic, Diatomic and Polyatomic Gases

10.7.1

The molecules of a monatomic gas have three degrees of freedom (10.6.2) and, according to(10.6.6), the internal energy of one mole of such a gas is $U = 3kN_AT/2$.

The molar heat capacity of such a gas at constant volume (9.5.4) is

$$\begin{aligned} C_{V\mu} &= \frac{\mathrm{d}U}{\mathrm{d}T} = \frac{3}{2}N_A k = \frac{3}{2}R \\ &= 1246.5\frac{\mathrm{J}}{\mathrm{mol\,K}} \\ &\approx 3\frac{\mathrm{cal}}{\mathrm{mol\,K}} \quad \text{because} \quad R \approx 2\frac{\mathrm{cal}}{\mathrm{mol\,K}} \end{aligned}$$

For a polyatomic gas whose molecules have i degrees of freedom

$$\begin{aligned} C_{V\mu} &= \frac{iR}{2} = 4.16i\frac{\mathrm{J}}{\mathrm{mol\,K}} \\ &\approx i\frac{\mathrm{cal}}{\mathrm{mol\,K}} \end{aligned}$$

10.7.2

The molar heat capacity $C_{p\mu}$ at constant pressure ((9.5.7) and (9.5.8)) of a gas whose molecules have i degrees of freedom is

$$\begin{aligned} C_{p\mu} &= \frac{(i+2)R}{2} = 4.16(i+2)\frac{\mathrm{J}}{\mathrm{mol\,K}} \\ &\approx (i+2)\frac{\mathrm{cal}}{\mathrm{mol\,K}} \end{aligned}$$

The principle of equipartition of energy (10.6.4) leads to the conclusion that the heat capacity of a gas depends upon the number of degrees of freedom of its molecules, but does not depend on the temperature. Experimental data disprove these conclusions of the classical theory of

heat capacity. Investigations indicate that the heat capacity of gases increases and decreases with temperature.

10.7.3

A theoretical explanation of experimental data on the dependence of heat capacity on temperature in a wide temperature range is given in the quantum theory of heat capacity. This theory takes into account the following results obtained in a quantum-mechanical description of the properties of diatomic and polyatomic molecules:

(a) Of the four parts that comprise the energy Em of the molecule[1] (**??**), i.e.

$$E^{\mathrm{m}} = E_t^{\mathrm{m}} + E_e^{\mathrm{m}} + E_v^{\mathrm{m}} + E_r^{\mathrm{m}}$$

only E_t^{m} the energy of translational motion of the molecules centre of mass (2.3.3), varies continuously (not by discrete amounts). The values of all other kinds of internal energy of molecules are quantized and thereby assume only a discrete series of values (**??**). This refers to the following kinds of energy: E_e^{m}, the energy of motion of the electrons of the molecule; E_v^{m}, the energy of vibrational motion of the nuclei in the molecule; and E_r^{m}, the energy of rotary motion of the molecule.

(b) As a first approximation, the kinds of internal motion of the molecule can be assumed independent of

[1] This ignores the nuclear energy of the molecule, which has no influence on the heat capacity of molecules.

one another. Thus, at small amplitudes of vibration of the nuclei, the changes in the moments of inertia (4.2.1) of the molecule due to vibration can be neglected, as can the effect of the vibrational motion in the molecule on its rotation.

(c) No changes in the energy of motion of the electrons occur when a substance is heated by one degree at ordinary temperatures. Adjacent energy levels of the electrons in the molecule are separated by energy of the order of several eV, correspond ing to temperatures of several tens of thousands of degrees (10.7.6). Therefore, the energy of motion of electrons in the molecule can be neglected in dealing with the heat capacities of monatomic and polyatomic gases up to the very highest temperatures.

10.7.4

As a first approximation, the vibrational motion of the nuclei in the molecule is described as the vibration of a harmonic oscillator (38.5.4), whose mass m is equal to the reduced mass of a system of vibrating atoms, $m = m_1 m_2/(m_1 + m_2)$, where m_1 and m_2 are the masses of the atoms. Then the energy of vibrational motion of the molecule equals

$$E_v^{\mathrm{m}} = h\nu_0 \left(n + \frac{1}{2}\right)$$

where n is the quantum number and assumes integral values: $n = 0, 1, 2, \ldots$, ν_0 is the natural frequency of

vibrations (38.5.5), and h is Plancks constant (Appendix II). The energy of a harmonic oscillator, equal to $h\nu_0/2$ at $n = 0$, is conserved at any arbitrarily low temperatures, and even at $T \to 0$ (38.5.6). The difference ΔE_v^{m} between the energies of two adjacent vibrational energy levels, $\Delta E_v^{\mathrm{m}} = h\nu_0$, is independent of the quantum number. Valid at room and lower temperatures is the condition: $\Delta E_v^{\mathrm{m}} \gg kT$. No changes are observed in the energy of vibrational motion of molecules at such temperatures. In calculating the heat capacity of gases under such conditions, vibrational degrees of freedom of the molecule can be neglected. In the general case, vibrational motions make contributions to the internal energy U_v (9.1.2) and the heat capacity $C_{V\mu}$ (9.5.2). For one mole

$$U_v = \frac{N_A h\nu}{2} \frac{\left(\exp\left(\frac{h\nu}{2kT}\right) + \exp\left(-\frac{h\nu}{2kT}\right)\right)}{\left(\exp\left(\frac{h\nu}{2kT}\right) - \exp\left(-\frac{h\nu}{2kT}\right)\right)}$$

$$C_{V\mu_v} = \frac{N_A k}{4} \left(\frac{h\nu}{kT}\right)^2 \left(\frac{\exp\left(\frac{h\nu}{2kT}\right) - \exp\left(-\frac{h\nu}{2kT}\right)}{2}\right)^{-2}$$

where T is the absolute temperature, k is Boltzmanns constant (8.4.5) and N_A is Avogadros number (Appendix II). At high temperatures ($T \gg h\nu/k$)

$$U_v \approx N_A kT = RT, \quad C_{V\mu v} \approx N_A k = R$$

These results coincide with those of classical theory which follow from the principle of the equipartition of energy (10.6.4). Under these conditions the energy of the oscillator can be assumed to vary continuously because

$\Delta E_v^m \ll kT$. At sufficiently low temperatures ($T \ll h\nu/k$)

$$U_v \approx \frac{N_A h\nu}{2} + N_A h\nu \exp\left(-\frac{h\nu}{kT}\right)$$

$$C_{V\mu_v} \approx N_A k \left(\frac{h\nu}{kT}\right)^2 \exp\left(-\frac{h\nu}{kT}\right)$$

As $T \to 0$, the energy $U_v \to N_A h\nu/2$. This quantity is called the *zero-point vibrational energy* of the system (38.5.6). As $T \to 0$, the heat capacity $C_{V\mu v} \to 0$ in accordance with the third law of thermodynamics (11.8.4). The dependence $C_{V\mu v} = f(T)$ for diatomic gases is shown in Figure 10.7.




Figure 10.7.: The dependence $C_{V\mu v} = f(T)$ for diatomic gases.

10.7.5

As a first approximation, the rotary motion of diatomic molecules can be dealt with as the motion of a rigid dumbbell which rotates about its centre of mass with the moment of inertia $I = m_1 m_2 r_0^2/(m_1 + m_2)$, where

$m = m_1 m_2/(m_1+m_2)$ is the reduced mass of the molecule (m_1 and m_2 are the masses of the two atoms), and r_0 is the distance between the atoms in the molecule. The energy of such a system is

$$E_{\mathrm{r}}^{\mathrm{m}} = \frac{h^2}{8\pi I} J(J+1)$$

where J is a quantum number that assumes the values $J = 0, 1, 2, \ldots$ difference $\Delta E_{\mathrm{r}}^{\mathrm{m}}$ between the energies of two adjacent rotational energy levels is

$$\Delta E_{\mathrm{r}}^{\mathrm{m}} = \frac{2h^2}{8\pi^2 I}(J+1)$$

The value of $\Delta E_{\mathrm{r}}^{\mathrm{m}}$ is less than $E_{\mathrm{v}}^{\mathrm{m}}$ by a factor of 800 to 1000.

At ordinary temperatures $\Delta E_{\mathrm{r}}^{\mathrm{m}} \ll kT$ for diatomic and certain polyatomic gases (water vapour, methane, etc.), and the quantization of the energy of rotary motion of the molecules can be ignored. Under these conditions, the principle of equipartition of energy (10.6.4) can be applied in calculating the contribution of rotary motion to the heat capacity.

The contribution of rotary motion of diatomic molecules to the internal energy and heat capacity per mole equals:

(a) At high temperatures ($T \gg h^2/8\pi^2 kI$)

$$U_r \approx N_A kT\left(1 - \frac{h^2}{24\pi^2 IkT}\right), \quad \text{and} \quad C_{V\mu r} \approx N_A k = R$$

The heat capacity $C_{V\mu r}$ at high temperatures has a value following from the principle of equipartition of energy (10.6.4).

(b) At low temperatures ($T \ll h^2/8\pi^2 kI$)

$$U_r \approx \frac{3h^2 N_A}{4\pi^2 I} \exp\left(-\frac{h^2}{4\pi^2 IkT}\right),$$

$$C_{V\mu r} \approx 3\left(\frac{h^2}{4\pi^2 I}\right)\frac{N_A}{kT^2}\exp\left(-\frac{h^2}{4\pi^2 IkT}\right)$$

as $T \to 0$, the heat capacity $C_{V\mu r} \to 0$ (10.7.4). The general shape of the curve representing the dependence $C_{V\mu r} = f(T)$ is the same as that in Figure 10.7.

As the gas cools, the reduction in the energy of its molecules leads to a reduction in the number of molecules transferring to higher rotational energy levels. At sufficiently low temperatures, the rotation of the molecules in a gas practically cannot be excited, and rotational degrees of freedom make no contribution to the heat capacity of the gas. The heat capacities of all gases at low temperatures become the same as for monatomic gases whose molecules have no rotational degrees of freedom.

10.7.6

At extremely high temperatures, of the order of tens of thousands of degrees, the heat capacity is increased. This is associated with the fact that the value of kT under such conditions becomes comparable, in order of magnitude, with ΔE_e^m, the change in the energy of the electrons in their transition from lower to higher energy levels. Moreover, at high temperatures the processes of dissociation and ionization of the gases make contributions to their heat capacities.

10.8 Transport Phenomena in Gases

10.8.1

Transport phenomena unite a group of processes pertain ing to non-uniformities in the density, temperature or velocity of ordered motion of various layers of a substance. The equalization of these non-uniformities leads to transport phenomena. Transport phenomena include diffusion, internal friction and heat conduction.

10.8.2

Transport phenomena in gases and liquids consist of ordered directional mass transport in these substances (diffusion), momentum transport (internal friction) and internal energy transport (heat conduction). In gases these phenomena violate the completely random motion of the molecules and Maxwells molecular velocity distribution (10.3.2). Deviations from the Maxwell law can be explained by the directional transport of the physical characteristics of the substance in such phenomena. In the simplest cases of one-dimensional transport phenomena, the physical quantities that govern them depend on only a single Cartesian coordinate.

10.8.3

Diffusion is the spontaneous interpenetration and mixing of the particles of two adjoining gases, liquids or solids. In chemically pure gases at constant temperature, diffusion occurs owing to differing densities in various parts

throughout the volume bf the gas. In a mixture of gases, diffusion is caused by the difference in the densities of the various gases at various parts of the volume of the gas mixture.

In a chemically homogeneous gas the phenomenon of diffusion consists in the transport of a mass of the gas from places with higher density to places with lower density. This phenomenon obeys *Fick's law*:

$$m_{\text{sec}} = -D \frac{\mathrm{d}\rho}{\mathrm{d}x}$$

Here m_{sec} is the *specific mass flow* and is numerically equal to the mass that passes by diffusion in unit time through a plane surface of unit area located perpendicular to the direction the substance is being transported, ρ is the density of the gas, and D is the *diffusion coefficient.* The derivative $\mathrm{d}p/\mathrm{d}x$ is numerically equal to the density gradient, i.e. the change in density per unit length. The diffusion coefficient is numerically equal to the specific mass flow at unit density gradient. The minus sign in Ficks law indicates that mass transport takes place in the direction of decreasing density. Another form of Ficks law is

$$j = -D \frac{\mathrm{d}n_0}{\mathrm{d}x}$$

where $j = m_{\text{sec}}/m$ is the density of the molecular flow in diffusion, i.e. the number of molecules diffusing in unit time through the surface indicated in the first form of Ficks law, n_0 is the molecular concentration, equal to the number of molecules per unit volume, and m is the mass of one molecule, so that $\rho = n_0 m$.

The expression obtained in the kinetic theory of gases for the diffusion coefficient is

$$D = \frac{1}{3} \langle u \rangle \langle \lambda \rangle$$

where $\langle u \rangle$ is the arithmetic mean velocity of thermal motion of the molecules (10.3.6), and $\langle \lambda \rangle$ is the mean free path (10.5.1).

10.8.4

Internal friction (*viscosity*) is the occurrence of friction forces between layers of a gas or liquid that flow parallel to one another at different speeds. A layer flowing faster exerts an accelerating force on a slower layer. On the other hand, a slow layer retards a faster flowing layer of fluid. The forces of internal friction (viscosity) are directed tangent to the contacting surfaces of the layers. The cause of viscosity (as internal friction in gases and liquids is more commonly called) is the superposition of ordered motion of layers of fluid at various velocities $\mathbf{v}$ and the thermal random motion of the molecules at velocities depending upon the temperature.

The random motion of the molecules transfers them from layer B flowing at the velocity $\mathbf{v}_2$ into layer A flowing at the velocity $\mathbf{v}_1$(Figure 10.8). This leads to transport of momenta $m\mathbf{v}$ of ordered motion of the molecules. When $\mathbf{v}_1 > \mathbf{v}_2$, the molecules that entered layer A from layer B have their velocities of ordered motion accelerated by collisions with the molecules from the new layer. This slows down the velocities of ordered motion of the molecules in

layer A. On the other hand, molecules passing from faster layer A to slower layer B have higher momenta $m\mathbf{v}_1$ so that the inter-molecular collisions in layer B accelerate the motion of its molecules.




Figure 10.8.: The random motion of the molecules transfers them between layer of a fluid.

The phenomenon of viscosity is described by the *Newtonian friction law*:

$$\tau = -\eta \frac{\mathrm{d}v}{\mathrm{d}n}$$

where τ is the *friction stress*, i.e. the physical quantity equal numerically to the force of internal friction acting per unit area of the surface of the layer, $\mathrm{d}v/\mathrm{d}n$ is the velocity gradient, i.e. the variation in the velocity of layer motion per unit length in the direction of the inner normal $\mathbf{n}$ to the layer surface. The internal frictional force is opposite in direction to the derivative of the gas velocity vector $\mathbf{v}$ with respect to $\mathbf{n}$. The quantity η is called the *coefficient of dynamic viscosity* (or just the *viscosity*). It is numerically equal to the friction stress at a velocity gradient equal to unity.

The *coefficient of kinematic viscosity* is the quantity $\nu = \eta/\rho$, where ρ is the density of the substance. The coefficient of dynamic viscosity is calculated by the equation

$$\eta = \frac{1}{3} \langle u \rangle \langle \lambda \rangle \rho$$

where $\langle u \rangle$ is the arithmetic mean velocity of thermal motion of the molecules (10.3.6), and $\langle \lambda \rangle$ is their mean free path (10.5.1). The coefficient of dynamic viscosity is independent of the pressure (or density) of the gas since $\langle \lambda \rangle \propto 1/\rho$. This can be explained by the fact that in an isothermal increase in the density of a gas, for example, by two times, the number of carriers of momenta is doubled, but each molecule (or atom) travels only one half the distance without a collision and carries only one half as much momentum. Hence, all in all, momenta transport remains unchanged.

10.8.5

The third transport phenomenon, *heat conduction*, occurs under the condition that a difference in temperature exists in a body in a certain direction. For instance, the two opposing walls of a vessel holding a gas can have different temperatures that are maintained by external sources. Then the gas molecules at various locations throughout the volume have different average kinetic energies (10.2.4). Under such conditions, the random thermal motion of the molecules leads to directional energy transport (or transfer) in the form of heat (9.2.6). Molecules passing from the heated parts of the volume of gas to the colder

parts yield some of their average kinetic energy to the surrounding molecules in the process of molecular collisions. Slow molecules, on the contrary, increase their average kinetic energy, in passing from the less heated to the more heated parts of the gas, owing to collisions with molecules having higher velocities.

In one-dimensional heat conduction, when the temperature of the gas depends only on a single coordinate $T = T(x)$, energy transfer in the form of heat proceeds along the OX axis according to the *Fourier law* of heat conduction (Fourier heat equation):

$$q_{\text{sec}} = -K\frac{\mathrm{d}T}{\mathrm{d}x}$$

where q_{sec} is the *specific rate of heat flow*, a physical quantity numerically equal to the energy transmitted in the form of heat in unit time through a plane surface of unit area located perpendicular to the direction of energy transport. The quantity K is called the *thermal conductivity*. It is numerically equal to the specific rate of heat flow at the temperature gradient $\mathrm{d}T/\mathrm{d}x$ (the change in temperature over unit length) equal to unity. The minus sign in the Fourier law indicates that in heat conduction energy is transported in the direction of decreasing temperatures.

According to the kinetic theory of gases, the thermal conductivity is equal to

$$K = \frac{1}{3}\langle u\rangle\,\langle\lambda\rangle\,c_V\rho$$

where c_V is the specific heat at constant volume (9.5.4). The other quantities are defined in (10.8.4). It follows

from the last equation that the thermal conductivity is independent of the gas density. The reasons are similar to those given in (10.8.4) to explain why η is independent of the density.

10.8.6

The laws of transport phenomena, given in the subsections (10.8.3), (10.8.4) and (10.8.5), can be written in another form:

$$\mathrm{d}M = D\,\frac{\mathrm{d}\rho}{\mathrm{d}x}\,\mathrm{d}S\,\mathrm{d}t$$

$$\mathrm{d}F = \eta\,\frac{\mathrm{d}v}{\mathrm{d}x}\,\mathrm{d}S\,\mathrm{d}t$$

$$\mathrm{d}Q = K\,\frac{\mathrm{d}T}{\mathrm{d}x}\mathrm{d}S\mathrm{d}t$$

Here $\mathrm{d}M$ is the mass transported in diffusion during the time $\mathrm{d}t$ through the element of area $\mathrm{d}S$, located perpendicular to the direction of diffusion; $\mathrm{d}Q$ is the amount of energy transported in the form of heat during the time $\mathrm{d}t$ through the same element of area $\mathrm{d}S$, located perpendicular to the OX axis; and $\mathrm{d}F$ is the force of internal friction (viscous force) exerted on an element of surface of the layer having the area $\mathrm{d}S$. The other quantities are defined in the subsections mentioned above.

10.8.7

Simple relations exist between the transport coefficients:

$$\eta = \rho\,D, \quad \frac{K}{\eta c_V} = 1$$

Phenomenon	Transported physical quantity	Transport equation	Formula for the transport coefficient
Diffusion	Mass	$\mathrm{d}M = D\,\frac{\mathrm{d}\rho}{\mathrm{d}x}\,\mathrm{d}S\,\mathrm{d}t$	$D = \frac{1}{3}\langle u\rangle\langle\lambda\rangle$
Internal friction (viscosity)	Momentum	$\mathrm{d}F = \eta\,\frac{\mathrm{d}v}{\mathrm{d}x}\,\mathrm{d}S\,\mathrm{d}t$	$\eta = \frac{1}{3}\langle u\rangle\langle\lambda\rangle\,\rho$
Heat conduction	Energy in the form of heat	$\mathrm{d}Q = K\,\frac{\mathrm{d}T}{\mathrm{d}x}\mathrm{d}S\,\mathrm{d}t$	$K = \frac{1}{3}\langle u\rangle\langle\lambda\rangle\,c_V\,\rho$

Table 10.1.: Information on transport phenomena.

If any one of the transport coefficients is known the others can be found by these formulas (for known values of ρ and c_V). When the coefficients are known, such vital characteristics of a gas can be determined as the mean free path (10.5.1) of its molecules and the effective diameter of the molecules (8.4.1). Information on transport phenomena is listed in Table 10.1.

10.9 Properties of Rarified Gases

10.9.1

A gas in said to be *rarified* (a *dilute gas*) if its density is so low that the mean free path $\langle\lambda\rangle$ of the molecules is com parable to the linear dimensions d of the vessel confining the gas. Such a state of a gas is also called a *vacuum*. The degrees of vacuum of gases are classified as ultrahigh ($\langle\lambda\rangle \gg d$), high ($\langle\lambda\rangle > d$), medium ($\langle\lambda\rangle \leqslant d$) and low ($\langle\lambda\rangle \gg d$). The properties of rarified gases differ

Characteristic	Vacuum			
	Low	Medium	High	Ultrahigh
Pressure	760 to 1	1 to 10^{-3}	10^{-3} to 10^{-7}	10^{-8} and less
Number of molecules in unit volume (per m^3)	10^{25} to 10^{22}	10^{22} to 10^{19}	10^{19} to 10^{13}	10^{13} and less
Dependence of coefficients K and η on the pressure	None	Pressure dependence is determined by the parameter $\langle\lambda\rangle/d$	Directly proportional to pressure	Heat conduction and viscosity are practically absent

Table 10.2.: Properties of gas in different vacuums.

from those of non-rarified gases only for the first three of these degrees of vacuum. This is evident from Table 10.2 which lists certain characteristics for the various degrees.

10.9.2

In the stale of a high vacuum ((10.9.1)) a reduction in the density of a rarified gas leads to a corresponding decrease in the number of particles without changing X). This, consequently, reduces the number of carriers of momentum or internal energy in viscosity and heat conduction. The transport coefficients in these phenomena are directly proportional to the gas density (cf. (10.8.4) and (10.8.5)). Internal friction is essentially absent in highly rarified gases. Instead, only external friction exists between the

moving gas and the walls of the vessel. This is due to the fact that the molecules change their momentum only in interacting with the walls. Under these conditions, as a first approximation, the friction stress is proportional to the density of the gas and velocity of its motion (cf. Sect. (10.8.4)). The specific rate of heat flow in highly rarified gases is proportional to the temperature difference and to the gas density (cf. Sect. (10.8.5)).

10.9.3

A steady state of a rarified gas, contained in two vessels connected by a narrow tube, is possible under the condition of equality of the counterflow of particles passing between the vessels: $n_1 \langle u_1 \rangle = n_2 \langle u_2 \rangle$, where n_1 and n_2 are the numbers of molecules per cm^3 in the two vessels, and $\langle u_1 \rangle$ and $\langle u_2 \rangle$ are their arithmetic mean velocities (10.3.6).

If T_1 and T_2 are the gas temperatures in the two vessels, the preceding condition for a steady state can be rewritten in the form of an equation that expresses the *Knudsen effect*:

$$\frac{p_1}{p_2} = \sqrt{\frac{T_1}{T_2}}$$

where p_1 and p_2 are the pressures of the rarified gas in the two vessels.

11 Second Law Of Thermodynamics

11.1 Cycles. The Carnot Cycle

11.1.1

A *cycle* is a succession of thermodynamic processes (8.3.7) as a result of which the system returns to its initial state. In pV, pT and other thermodynamic diagrams, equilibrium cycles (8.3.7) are represented in the form of closed curves, because two identical states, the beginning and end of the cycle, correspond to the same point of the diagram. A thermodynamic system that accomplishes a cycle and exchanges energy with other bodies is called the *working medium*, or *substance*. This medium is usually a gas.

11.1.2

The arbitrary equilibrium cycle $C_1aC_2bC_1$ Figure 11.1, using an ideal gas, can be divided into the process of

expansion of the gas from state C_1, to state C_2 (curve C_1aC_2) and the process of compressing the gas from state C_2 to state C_1 (curve C_2bC_1). In expansion the gas does positive work W_1 measured by the area under the curve C_1aC_2 (the area of the figure $V_1C_1C_2V_2$ see Sect. (9.4.2). The gas is compressed by external forces that do positive work $W_2' = -W_2$ measured by the area under the curve C_1bC_2 (the area of the figure $V_1C_1bC_2V_2$). Since $W_1 > W_2'$ (Figure 11.1), the gas does the *positive* work $W = W_1 + W_2 = W_1W_2'$ in the cycle. This work is measured by the hatched area, bounded by the curve $C_1aC_2bC_1$ of the process.

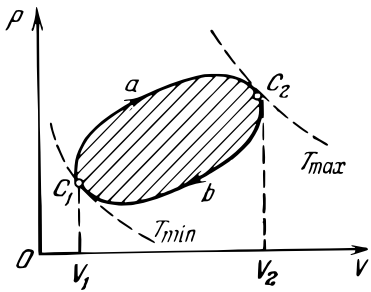


Figure 11.1.: An arbitrary equilibrium of a cycle.

11.1.3

A *direct cycle* is one in which the system does positive work $W = \oint p\,\mathrm{d}V > 0$.In a pV diagram a direct cycle is represented by a closed curve along which the working

medium passes in the clockwise direction Figure 11.1. An example of a direct cycle is that accomplished by the working medium in a heat engine. In such an engine the working medium (11.1.1) receives energy in the form of heat (9.2.1) from external sources and gives a part of it up in the form of work (9.2.1) (see Sect. (11.1.5)).

11.1.4

A *reverse cycle* is one in which the system does negative work $W = \oint p\,\mathrm{d}V < 0$. In a pV diagram a reverse cycle is represented by a closed curve along which the working medium passes in the counterclockwise direction. An example of a re verse cycle is that accomplished by the working medium in a refrigerator. In such a device the working medium receives energy in the form of work and transmits energy in the form of heat from a cold body to a hotter one (see Sect. (11.1.5)).

11.1.5

Since the total change in the internal energy of a gas in a cycle is equal to zero (9.1.3), the first law of thermo dynamics (9.3.1) for such a process is of the form

$$Q = \Delta U + W = W$$

where Q is the total quantity of heat delivered to the gas in the cycle, and W is the work done by the gas in this cycle.

In a direct cycle (11.1.3) $Q > 0$ and $A > 0$,and the gas does work owing to the heat delivered to it. In a reverse

cycle (11.1.4) the work done *on the gas* is $W' = -W$ (where $W > 0$) and a quantity of heat equivalent to this work is removed from the gas.




Figure 11.2.: The Carnot cycle.

11.1.6

The *Carnot cycle* is the one shown in Figure 11.2. The *direct Carnot cycle* consists of four consecutive processes: isothermal expansion $1 - 1'$ at the temperature T_1 (where $T_1' = T_2$) adiabatic expansion $1' - 2$, isothermal compression $2 - 2'$ at the temperature T_2 (where $T_2' = T_2$), and adiabatic compression $2' - 1$.

11.1.7

In practice a direct Carnot cycle could be carried out by means of a gas enclosed in a vessel with a movable piston. In the process $1 - 1'$ the gas is in thermal contact with

a *heat source (heater)* at the constant temperature T_1[1]. From the heater the gas receives a certain quantity of heat Q_1 (where $Q_1 > 0$). It is assumed that this does not change the temperature of the heater. This is possible, strictly speaking, only if the heater has an infinite heat capacity. In the process $1' - 2$ the gas is thermally isolated and its expansion is adiabatic[2] (9.5.10). In the process $2 - 2'$ the gas is brought into thermal contact with a *cooler (heat sink)* having the constant temperature T_2 (where $T_2 < T_1$). Here the gas is isothermically compressed and gives off the quantity of heat Q_2 to the cooler (assuming that Q is the quantity of heat received by the gas from the cooler). The heat capacity of the cooler is assumed to be infinitely high. In the state $2'$ the gas is again thermally insulated and contracts adiabatically to its initial state 1.

11.1.8

The work done by the gas in an equilibrium (8.3.7) direct Carnot cycle is

$$W = Q = Q_1 + Q_2 = Q_1 - |Q_2|$$

It is evident from the equation that $W < Q_1$ i, i.e. the work done by the working medium (11.1.1) in the Carnot cycle is less than the energy received from the heater by the amount of energy given up to the cooler in the form of heat. This is valid for an arbitrary process: the work W done in the cycle is always less than the sum Q_{del} of all

[1] For instance, a large tank filled with water.

[2] For instance, the cylinder with the gas is covered with a thick layer of felt.

the quantities of heat delivered to the working medium from heaters.

The operation of heat engines is based on the direct Carnot cycle.

11.1.9

The *thermal efficiency* η is the ratio of the work W done by the working medium in a direct cycle to the sum Q_{del} of all quantities of heat delivered in this cycle to the working medium by heaters:

$$\eta = \frac{W}{Q_{\text{del}}}$$

The quantity η characterizes the economy of operation of a heat engine.

11.1.10

The thermal efficiency of a direct equilibrium Carnot cycle carried out with an ideal gas is

$$\eta_c = \frac{Q_1 + Q_2}{Q_1} = \frac{T_1 - T_2}{T_1} = 1 - \frac{T_2}{T_1}$$

The value of η_c depends only on the ratio of the temperatures of the cooler (T_2) and the heater (T_1).

11.1.11

The *reverse Carnot cycle* is shown in Figure 11.3. In isothermal compression, carried out in the process $1' - 1$,




Figure 11.3.: The reverse Carnot cycle.

the quantity of heat Q_1 is removed from the gas at the temperature T_1, which remains constant. In the process of isothermal expansion $2'-2$ at the temperature $T_2 < T_1$,the quantity of heat Q_2 is delivered to the gas. In the reverse Carnot cycle $Q_1 < 0$, $Q_2 > 0$ and the work W done by the gas in one cycle is negative: $W = (Q_1 + Q_2) < 0$. This conclusion is valid for any reverse cycle. If the working medium carries out a reverse cycle, energy can be transferred in the form of heat (9.2.1) from a cold body to a hotter one at the expense of the corresponding work done by external forces. This principle is used in all refrigerating devices. The less the work $W' = W$ done by external forces to extract the quantity of heat Q_2 from a cold body, the higher the economical efficiency (coefficient of performance) of a refrigerator:

$$Q_2 = W_1 - Q_1 = W - \frac{W}{\eta} = -\frac{1-\eta}{\eta}W$$

where η is the thermal efficiency of the direct cycle between the same temperatures T_1 and T_2 (11.1.3) and

(11.1.4).

11.2 Reversible and Irreversible Processes

11.2.1

A thermodynamic process is said to be reversible (*reversible process*) if the thermodynamic system (8.3.1), in carrying out the process first in the direct and then in the exactly re versed order, returns, together with all the external bodies with which it interacts, to its initial state. In other words, in a reversible process the thermodynamic system returns to its initial state without leaving any changes in the surrounding medium. A necessary and sufficient condition for the reversibility of a thermodynamic process is the equilibrium (8.3.3) of all the consecutive states in the process. Here all corresponding states of the thermodynamic system in the direct and reverse processes are absolutely identical.

Example 1. The mechanical motion of a body in a vacuum in the complete absence of friction is a reversible process. Assume, for instance, that a body under these conditions is thrown with a certain initial velocity into a gravitational field (6.2.1) at a definite angle to the horizon. After describing a parabolic path the body drops to the earth at a certain place. Now, if the body is thrown from this place at the same angle and the same initial velocity, but in the opposite direction, it describes the same path in the opposite direction and drops to the earth at the initial point. Any intermediate states of the moving body in the forward and reverse motions are entirely identical.

The *reversibility of mechanical motions* indicates their symmetry with respect to the interchanging of the future by the past, i.e. with respect to the reversal of the sign of the time. The reversibility of mechanical motions follows from the differential equations of motion (2.4.4). When the sign of the time is changed, this changes the sign of the velocity as well, but the acceleration, in the motion equations, retains its sign.

Example 2. Another reversible process is the undamped vibrations of a body suspended in a vacuum on a perfectly elastic spring (28.2.3). The body-spring system is a conservative one (3.1.7). Its mechanical vibrations do not change the energy of thermal random motion of its particles. Only changes in the configuration and velocity of the system lead to a change of its state. But these changes are completely repeated after each period T (28.1.2) of vibration. Hence, the conditions for the reversibility (11.2.1) of the process are complied with.

11.2.2

Any process that does not comply with the conditions for reversibility is said to be irreversible (*irreversible process*).

Example 1. The direct process of braking a moving body by means of friction forces is an irreversible process. If these forces are the only ones acting on the body, its velocity is reduced and it finally stops. The energy of mechanical motion of the body as a whole is reduced and is expended in increasing the energy of random motion of particles of the body and the surrounding medium. The internal energy (9.1.2) of the body and the medium is

increased; they are heated by the action of the friction forces. The direct process dealt with here proceeds spontaneously; it is carried out without any processes taking place in surrounding bodies. For the reverse process to occur, return ing the system to its initial state, it would be necessary for the braked and stopped body to start moving again by cooling it and the surrounding medium. As is evident from experiments, the thermal random motion of particles of a body cannot spontaneously lead to the initiation of ordered motion of all the particles of the body as a whole. To accomplish such motion it is necessary to provide for an *additional compensating process* in which the body and surrounding medium are cooled to the initial temperature. In this process, the quantity of heat Q is given up to the cooler and the work $A' = Q$ is performed on the body.

Thus, the consecutive performance of such direct and reverse processes returns the body-medium system to its initial state, but the states of external bodies are changed. Hence, all processes accompanied by friction are irreversible ones.

Example 2. The direct process of heat exchange (9.2.4) between two bodies having different temperatures is a spontaneous one. The reverse process, heating one body by cooling another that initially has the same temperature as the first body, cannot proceed spontaneously. To accomplish this process, a refrigerating device (11.1.11) is required. The process of heat exchange at a finite temperature difference is an irreversible one.

11.3 Second Law of Thermodynamics

11.3.1

The reference in the preceding section to experiments that prove the irreversibility of the processes of heat exchange and motion with friction (11.2.2) was no chance one. The first law of thermodynamics (9.3.1) cannot describe thermodynamic processes comprehensively. An essential limitation of the first law is that it cannot be used to predict in which direction a thermodynamic process will proceed. Any process that does not violate the law of conservation of energy is feasible from the point of view of the first law of thermodynamics. Among others, (he spontaneous transfer of energy in the form of heat from a cooler body to a hotter body is also possible. Also feasible is a process whose only result would be the obtaining of a certain quantity of heat from a body and the conversion of this heat into an equivalent amount of work. A periodic-action device, based on the first law of thermodynamics, which performs work by cooling a single source of heat (for instance, the internal energy of large bodies of water), is called a *perpetual motion machine of the second kind.*

11.3.2

The *second law of thermodynamics* is the experimentally established statement of the impossibility of building a perpetual motion machine of the second kind (11.3.1). The two most common statements of the second law, equivalent to each other, are:

(a) no process is possible whose sole result is the conversion of all the heat received from a certain body into an equivalent amount of work;
(b) no process is possible whose sole result is the transfer of energy in the form of heat from a cold body to a hotter one.

11.3.3

It follows from the second law of thermodynamics that work and heat are not equivalent forms of transferring energy. The conversion of orderly motion of a body as a whole into the random motion of its particles is an irreversible process, proceeding without compensating processes (11.2.2). The conversion of random motion of the particles of a body into ordered motion of the body as a whole requires the provision of some simultaneous compensating process.[3]

Example 1. In the isothermal expansion of an ideal gas work is done that is fully equivalent to the quantity of heat delivered (o the gas (9.5.9). The heat received by the gas is completely converted into an equivalent amount of work. But the gas does not return to its initial state. It expands and its specific volume is increased. The conversion of heat into work[3] is not the sole result of the isothermal expansion of an ideal gas.

Example 2. In a heat engine based on the direct Carnot cycle (11.1.8), work is done owing to the heat delivered from the heater. But a part of the quantity of

[3] Such a process is sometimes, not quite correctly, called the "conversion of heat into work".

heat obtained is given up to the cooler (11.1.7). Hence, the work done in a cycle is not equivalent to the whole quantity of heat delivered to the working medium. Example 3. In refrigerating devices operating on the reverse Carnot cycle (11.1.11), a certain quantity of heat is transferred from a cold body to a hotter one. But external forces do work to accomplish this and, consequently, a compensating process is being carried out.

11.3.4

The *Carnot theorem* states that the thermal efficiency (11.1.9) of the reversible Carnot cycle does not depend upon the composition of the working medium and is always ex pressed by the formula (11.1.10):

$$\eta_C = \frac{Q_1 + Q_2}{Q_1} = \frac{T_1 - T_2}{T_1}$$

The thermal efficiency $\eta_{C\,\mathrm{ir}}$ of the irreversible Carnot cycle is always less than the thermal efficiency $\eta_{C\,\mathrm{rev}}$ of the reversible Carnot cycle, carried out at the same temperatures T_1 and T_2: $\eta_{C\,\mathrm{ir}} < \eta_{C\,\mathrm{rev}}$.

The thermal efficiency of any reversible cycle cannot be higher than that η_C, of a reversible Carnot cycle being accomplished by means of a heater and cooler having the temperatures T_1 and T_2:

$$\eta_{\mathrm{rev}} \leqslant \eta_C = \frac{T_1 - T_2}{T_1}$$

11.3.5

The Carnot theorem (11.3.4) is used to establish the *thermodynamic temperature scale*. It follows from the first equation in the preceding subsection that $T_2/T_1 = -Q_2/Q_1$ or, since $Q_2 < 0$,

$$\frac{T_2}{T_1} = \frac{|Q_2|}{Q_1}$$

In order to compare the temperatures T_1 and T_2 of two bodies it is necessary to carry out a reversible Carnot cycle in which these bodies are the heater and cooler. Then, according to the ratio of the numerical values of the quantities of heat delivered to and received from the bodies, the ratio of their temperatures is determined. The result of such a comparison of temperatures does not depend upon the chemical composition of the working medium (11.3.4). Therefore, the thermodynamic temperature scale is independent of the properties of the temperature-indicating substance (8.3.4) and, in this respect, has great generality. However, since all real thermodynamic processes are irreversible, the comparison of temperatures by the above-mentioned procedure is unfeasible; it has only a theoretical significance.

11.4 Entropy and Free Energy

11.4.1

The ratio of the quantity of heat Q, received by a body in an isothermal process, to the temperature T of the body

giving up the heat is called the *reduced quantity of heat* $Q*$, i.e. $Q* = Q/T$. In heating a body ($Q > 0$), $Q*$ is positive; in cooling ($Q < 0$), $Q*$ is negative.

The reduced quantity of heat delivered to a body in an infinitely small portion of an arbitrary process, is equal to $\delta Q/T$ where T is the temperature of the corresponding heater.[4] The reduced quantity of heat ($Q*_{1-2}$for the arbitrary portion $1 \to 2$ of the process C_1C_2 is

$$Q*_{1-2} = \int_{C_1}^{C_2} \frac{\delta Q}{T}$$

11.4.2

The reduced quantity of heat $Q*_{\text{rev}}$ delivered to a body in any reversible cycle equals zero:

$$Q*_{\text{rev}} = \oint_{\text{rev}} \frac{\delta Q}{T} = 0$$

Here T is the temperature at which an element of the quantity of heat δQ is delivered to the body. It follows from the equation in the preceding subsection that the function $\delta Q/T$ is a complete differential of a certain function S [in contrast to δQ, which is not a complete differential (9.4.3)]:

$$\mathrm{d}S = \left(\frac{\delta Q}{T}\right)_{\text{rev}}$$

The single-valued state function (9.1.3) S, whose complete differential is determined by the preceding equation, is

[4] In the case of a reversible process, T coincides with the temperature of the body that is carrying out the process.

called the *entropy* of a body. It is evident from this equation that $\mathrm{d}S$ and δQ have the same sign. Consequently, from the way in which the entropy varies it is possible to determine in which direction heat exchange (9.2.4) takes place. In heating a body ($\delta Q > 0$) its entropy increases ($\mathrm{d}S > 0$). If a body is cooled ($\delta Q < 0$), its entropy decreases ($\mathrm{d}S < 0$).

Example. The complete differential of the entropy of an ideal gas is expressed by the equation

$$\mathrm{d}S = \left(\frac{\delta Q}{T}\right)_{\text{rev}} = \frac{M}{\mu} C_{V\mu} \frac{\mathrm{d}T}{T} + \frac{M}{\mu} R \frac{\mathrm{d}V}{V}$$

where M is the mass of the gas, μ, is its molar mass (8.4.3), $C_{V\mu}$ is its molar heat capacity at constant volume (9.5.4), R is the universal gas constant (8.4.4), T is its temperature, and V is its volume. This result is obtained on the basis of the first law of thermodynamics (9.3.1) for δQ, with the Mendeleev-Clapeyron equation (8.4.4) taken into account.

The change $\Delta S_{1\to 2}$ in the entropy of an ideal gas going over from state 1 to state 2 does not depend upon the kind of pro cess $1 \to 2$ used in this transition:

$$\Delta S_{1\to 2} = S_2 - S_1 = \frac{M}{\mu}\left(C_{V\mu} \ln \frac{T_2}{T_1} + R \ln \frac{V_2}{V_1}\right)$$

11.4.3

Certain of the most important properties of the entropy of closed systems (2.2.4) are:

(a) The entropy of a closed system in a reversible Carnot cycle (11.1.6) does not change:

$$\Delta S_{\text{rev}} = 0 \quad \text{and} \quad S = \text{const}.$$

(b) The entropy of a closed system increases in an irreversible Carnot cycle:

$$\Delta S_{\text{ir}} > 0$$

(c) In any processes that occur in a closed system its entropy never decreases:

$$\Delta S_{\text{rev}} \geqslant 0$$

In an element of change in the state of a closed system, the entropy does not decrease: $\Delta S_{\text{rev}} \geqslant 0$.

The equality sign pertains to reversible processes and the greater-than sign to irreversible ones. Item (c) is one of the statements of the second law of thermodynamics.

11.4.4

The following relation is valid for an arbitrary process occurring in a thermodynamic system (8.3.1):

$$\delta Q \leqslant T \mathrm{d}S$$

where T is the temperature of the body that transfers the energy δQ to the thermodynamic system in the process of an infinitely small change in the state of the system. Making use of an equation of the first law of thermodynamics (9.3.1) for δQ, the preceding inequality can be rewritten in the form

$$T \mathrm{d}\, S \geqslant \mathrm{d}U + \delta W$$

combining the first and second laws.

11.4.5

For a reversible process

$$\delta W = -(\mathrm{d}U - T\mathrm{d}\,S)$$

or

$$\delta W = -\,\mathrm{d}(U - TS) - S\,\mathrm{d}T = -\mathrm{d}F - S\,\mathrm{d}T$$

where $F = U - TS$ is called the *free energy*. The free, or available, energy is the difference of two state functions (8.3.8) and is therefore also a state function of the thermodynamic system.

If the system carries out a reversible isothermal process, $\mathrm{d}T = 0$ and $\delta W_{\text{isot}} = -\mathrm{d}F$. When the system passes from state 1 to state 2 in a reversible isothermal process,

$$W_{\text{isot}} = F_1 - F_2$$

The decrease in free energy is the measure of the work done by a system (or body) in a reversible isothermal process.

11.4.6

It follows from the equation $U = F + TS$ that the internal energy of a body (or system) is equal to the sum of the free energy F and the *bound energy* TS. The bound, or unavailable, energy is the part of the internal energy of a body (or system) that cannot be transferred in the form of work in an isothermal process. In this sense, this part

of the internal energy is "depreciated". The more the entropy of the body (or system), the more the bound energy. Therefore, the entropy of a body (or system) serves as a measure of the "depreciation" of its energy.

11.5 Statistical Interpretation of the Second Law of Thermodynamics

11.5.1

The statement of the second law of thermodynamics on the impossibility of a decrease in the entropy in an isolated system (11.4.3) can be interpreted statistically, on the basis of the molecular-kinetic theory of the structure of matter, by means of Boltzmanns relation:

$$S = k \ln P + \text{const.}$$

where S is the entropy of the system, k is Boltzmanns constant (8.4.5), and P is the thermodynamic probability of the state.

11.5.2

The *thermodynamic probability* P of a state of a body (or system) is equal to the number of all possible kinds of coordinate and velocity distributions of its particles corresponding to the given thermodynamic state (8.3.3). By definition, P is a whole number not less than unity ($P \geqslant 1$).The Boltzmann relation (11.5.1) leads to the following statistical interpretation of the second law of thermodynamics: the thermodynamic prob ability of a

state of a closed system cannot decrease, regardless of the processes that occur in it. In any process that proceeds in a closed system and brings it from state 1 to state 2, the change ΔP in the thermodynamic probability is either positive or zero: $\Delta P = P_2 - P_1 \geqslant 0$.

In a reversible process $\Delta P = 0$, i.e. the thermodynamic probability P is constant. If the process is irreversible, $\Delta P > 0$ and P increases. This means that an irreversible process transfers the system from a less probable state to a more probable one and, in the limit, to an equilibrium state (8.3.3).

11.5.3

Being a statistical law, the second law of thermodynamics describes the laws of random motion of a great number of particles making up a closed system. In systems that consist of a relatively small number of particles, fluctuations (11.6.1) are observed. They are deviations from the second law of thermodynamics.

11.5.4

The second law of thermodynamics, established for closed systems on the earth, cannot be applied to the whole infinite universe. Such an application leads to the conclusion that the temperatures of all bodies in the universe equalize. This is incorrect from both the philosophical and physical points of view. According to this erroneous conclusion, all forms of motion, except random thermal motion, will cease and the universe will then reach a state

of so-called "heat death". Actually, owing to the infinity of the universe, fluctuations (11.6.1) are inevitable in certain of its parts. These violate thermal equilibrium. The duration and magnitude of the fluctuations can be extremely great. It has been proven that there can be no equilibrium state, corresponding to "heat death", for the infinite universe.

11.6 Fluctuations

11.6.1

Substantial deviations of certain physical quantities, characterizing a system, from their average values may occur in systems consisting of a comparatively small number of particles. Such deviations are called *fluctuations* of physical quantities. For instance, in highly rarified gases the density at various places in the volume of the gas may differ from the aver age density corresponding to the equilibrium state for definite p and T values. Chance deviations of the temperature T, pressure p and other physical quantities may occur in exactly the same way.

11.6.2

If M is the true value of a physical quantity, and $\langle M \rangle$ is its average value, then the quantity ΔM, where $\Delta M = M - \langle M \rangle$, and its average value $\langle \Delta M \rangle = \langle M - \langle M \rangle \rangle$ cannot be measures of the fluctuation of the quantity M. The quantity ΔM is not constant with time, and the

quantity

$$\langle \Delta M \rangle = \langle M \rangle \langle M \rangle = 0$$[5]

This last equation follows from the fact that the deviation of the quantity M from $\langle M \rangle$ occurs in both directions, towards values larger than the average and towards values smaller than the average, with equal frequency.

11.6.3

A measure of the fluctuations of the physical quantity M is the mean square of the difference ΔM. It is called the *mean square fluctuation*:

$$\left\langle \Delta(M^2) \right\rangle = \left\langle (M - \Delta M)^2 \right\rangle = \left\langle M^2 \right\rangle - (\langle M \rangle)^2$$[6]

The mean square fluctuation is essentially positive or zero: $(\left\langle (\Delta M)^2 \right\rangle \geqslant 0$.

The *absolute fluctuation* is the quantity $\sqrt{\left\langle (\Delta M)^2 \right\rangle}$, which also characterizes the deviation of M from $\langle M \rangle$. A small absolute fluctuation signifies that large deviations of M from $\langle M \rangle$ occur very rarely.

The *relative fluctuation* δ_M is the ratio of the absolute fluctuation to the average value $\langle M \rangle$ of a physical quantity:

$$\delta_M = \frac{\sqrt{\left\langle (\Delta M)^2 \right\rangle}}{\langle M \rangle}$$

[5] Used here is the statement that the mean value $\langle M \rangle$ of a constant quantity coincides with the quantity.

[6] This last equation, following from the rules of algebraic operations with average values, underlines the fact that the average value $\left\langle M^2 \right\rangle$ of the square of a quantity should not be confused with the square of the average value $(\langle M \rangle)^2$.

The relative fluctuations in the concentration of particles (or density) of a gas, and in its pressure and temperature, decrease with an increase in the number N of gas molecules contained in the vessel:

$$\delta_\rho = \frac{\sqrt{\langle (\Delta\rho)^2 \rangle}}{\langle \rho \rangle} \propto \frac{1}{\sqrt{N}}$$

$$\delta_p = \frac{\sqrt{\langle (\Delta p)^2 \rangle}}{\langle p \rangle} \propto \frac{1}{\sqrt{N}}$$

$$\delta_T = \frac{\sqrt{\langle (\Delta T)^2 \rangle}}{\langle T \rangle} \propto \frac{1}{\sqrt{N}}$$

When $N = N_A$ (Avogadros number, see Appendix II), δ_ρ, δ_p and δ_T have values of the order of 10^{-14}.

If a system consists of N independent particles, the relative fluctuation of an additive state function (9.1.3) of the system is inversely proportional to the square root of N:

$$\delta_M \propto \frac{1}{\sqrt{N}}$$

11.6.4

The following are examples of fluctuations of physical quantities.

Example 1. In measuring the temperature by means of a gas thermometer filled with an ideal gas (8.4.1), the thermometer readings are not constant owing to fluctuations of temperature. The variations in temperature measured by the thermometer cannot be less than the absolute fluctuation of the thermometer indication, equal

to $\sqrt{\langle\,(\Delta T)^2\,\rangle}$, i.e. $\Delta t \geqslant \sqrt{\langle\,(\Delta T)^2\,\rangle}$. The absolute fluctuation can be determined by the formula in (11.6.3):

$$\sqrt{\langle\,(\Delta T)^2\,\rangle} \propto \frac{\langle\,T\,\rangle}{\sqrt{N}}$$

Thus

$$\Delta t \geqslant \sqrt{\langle\,(\Delta T)^2\,\rangle} \propto \frac{\langle\,T\,\rangle}{\sqrt{N}}$$

If the gas thermometer contains 10^{-8} mole of gas, i.e. $N = 6.02 \times 10^{15}$, then the minimum changes in temperature Δt that can he detected by the instrument, are of the order of magnitude $\Delta t \approx 10^{-10}\,\langle\,T\,\rangle$. This value indicates the limit of sensitivity of the gas thermometer.

Real variations in temperature, commonly encountered in experiments, are incommensurably larger than Δt.

Example 2. Electrical fluctuations in circuits restrict the limits of sensitivity of radio receiving equipment. Among others, fluctuations in the number of electrons emitted by the incandescent cathode lead to fluctuations in the current supplied to the vacuum tube. This is called *shot*, or *Schottky, noise*. A measure of the shot noise is the mean square fluctuation of the current:

$$\left\langle\,(\Delta I)^2\,\right\rangle \approx \frac{eI_0}{t}$$

where e is the charge of the electron, and I_0 is the average current over the time t during which it is measured. Here $t \gg \tau$, where τ is the time of flight of the electron in the tube.

11.7 Brownian Movement

11.7.1

The *Brownian movement* is the continuous haphazard zigzag motion of small particles suspended in a gas or liquid and can be observed in a microscope. The Brownian movement is caused by fluctuations (11.6.1) in the pressure exerted by the molecules of gas or liquid on the surfaces of the minute suspend ed particles. As a result of pressure fluctuations the Brownian particles are subject on all sides to the action of unbalanced forces which cause their complex motions that are observed.

11.7.2

Under constant external conditions, no changes are observed in the motions of the Brownian particles and they continue indefinitely. This is testimony to the continuous nature of random thermal motion of the molecules to which the displacements of the Brownian particles are due. The velocity v and energy E of motion of these particles depend upon their size, but not on their chemical composition. The values of v and E increase with the temperature and with a reduction in the viscosity of the gas or liquid.

11.7.3

It has been experimentally established that Brownian particles can move upwards, rising in the fluid. This occurs when the molecules of the gas (or liquid) transmit

an uncompensated momentum directed upwards to the particle. This increases the potential energy of the particle at the expense of the kinetic energy of the molecules surrounding it, thereby leading to localized cooling of the gas or liquid. This means that the mechanical energy of the Brownian particle has increased by cooling a single source of heat, the liquid or gas, thereby contradicting the second law of thermodynamics (11.3.2). In this manner, Brownian movement is proof of the limited application of the second law of thermodynamics and of its statistical nature (11.5.1).

11.7.4

The motions of Brownian particles are completely chaotic. Therefore, the average displacement $\langle x \rangle$ of a particle along an arbitrary direction equals zero. Then mean square displacement $\langle x^2 \rangle$ is proportional to the time t of observation of the particle and is expressed by *Einstein's equation*:

$$\langle x^2 \rangle = 2\,Dt$$

where D is the diffusion coefficient of the Brownian particles. For spherical particles of radius r

$$D = \frac{RT}{6\pi\eta r N_A}$$

Here T is the absolute temperature, R is the universal gas constant (8.4.4), η is the coefficient of viscosity of the liquid or gas (10.8.4), and N_A is Avogadros number (Appendix II).

11.8 Third Law of Thermodynamics

11.8.1

As a single-valued state function of a system entropy is introduced by means of a differential relation (11.4.2). Hence, the entropy can be determined up to an arbitrary constant, which cannot be found from the first and second laws of thermo dynamics. It is consequently impossible to determine the absolute value of the entropy.

11.8.2

An experimental investigation of the properties of substances at ultra-low temperatures led to the establishment of the *third law of thermodynamics*. This law, also called the *Nernst heat theorem*, states that the change in entropy equals zero in any isothermal process conducted at absolute zero:

$$\Delta S_{T\to 0} = 0 \quad \text{and} \quad S = S_0 = \text{const}$$

regardless of the changes in any other state variables (for example, volume, pressure, and intensity of the external force field). The third law does not enable the absolute value of the entropy to be determined. But the fact that the entropy is constant as $T \to 0$ permits this constant value to be employed as the reference point for entropy values. This enables the change in entropy to be determined in processes being investigated.

11.8.3

Planck extended Nernsts heat theorem by stating that the entropy of a system equals zero at absolute zero temperature. If E_0, $E_1, \ldots, E_n$ is a sequence of energy levels (38.2.5) of a system, then at absolute zero temperature the system in equilibrium is in a quite definite lowest state with energy exactly equal to E_0. Here the thermodynamic probability P of the state (11.5.2) is equal to unity ($P = 1$) and, according to Boltzmanns relation (11.5.1),

$$S_0 = k \ln P = 0$$

11.8.4

The heat capacity $C_{V\mu}$ at constant volume (9.5.4) for all bodies vanishes at $T = 0\,\mathrm{K}$. As a matter of fact, if the temperature of a system is sufficiently low, so that the average kinetic energy kT of a particle (10.6.4) is substantially less than the difference ΔE between the lowest and first energy levels ($\Delta E > kT$), then the thermal excitation of the system is insufficient to transfer it from the state with the energy E_0 to one with the energy E_1 Therefore, at ultra-low temperatures the system should be in a state having the least energy E_0. The internal energy U_0 of the system (9.1.2) is equal to E_0, i.e. $U_0 = E_0$. Hence the heat capacity of the system at constant volume

$$C_{V\mu} = \left(\frac{\mathrm{d}U}{\mathrm{d}T}\right)_V = \left(\frac{\mathrm{d}E_0}{\mathrm{d}T}\right)_V = 0 \quad \text{as} \quad T \to 0$$

The coefficient of cubic expansion (**??**) also vanishes at absolute zero temperature.

It follows from the third law that a process in which a body could be cooled to absolute zero temperature is impossible (*principle of the unattainability of absolute zero temperature*, sometimes called the *Nernst principle*).

12 Real Gases And Vapours

12.1 Forces of Intermolecular Interaction

12.1.1

The properties of gases that are not highly rarified differ from those of ideal gases, which comply with the Mendeleev- Clapeyron equation (8.4.4). Experiments indicate that the specific heat capacities (9.5.2), coefficients of viscosity (10.8.4) and other quantities have different values for real gases than for ideal gases.

12.1.2

A *real gas* is one in which forces of molecular interaction exist between the molecules.

A *vapour* is a real gas in states close to that in which it condenses.

12.1.3

The forces of intermolecular interaction decrease rapidly with an increase in the distances between the molecules (*short-range forces*). At intermolecular distances exceeding 10^{-9} m, these forces can be neglected. Forces of interaction between molecules can be subdivided into *forces of attraction* and *forces of repulsion*. Both types act simultaneously. Otherwise it would be impossible to deter mine the volume of liquids or solids: their constituent particles would either fly apart in all directions or would stick together, forming the minimum possible volume.

12.1.4

The forces of mutual attraction and repulsion depend differently on the distance r between the molecules. At distances commensurable with the linear dimensions of atoms and small inorganic molecules (10^{-10} m),repulsive forces $\mathbf{F}_1$ predominate; at distances r of the order of 10^{-9} m forces of mutual attraction $\mathbf{F}_1$ prevail. If $\mathbf{r}$ is the radius vector to the point where molecule A is located from a point where molecule B is located and acts on molecule A with the forces $\mathbf{F}_1$ and $\mathbf{F}_2$, then

$$\mathbf{F}_1 = F_{1r}\frac{\mathbf{r}}{r} \quad \text{and} \quad \mathbf{F}_2 = F_{2r}\frac{\mathbf{r}}{r}$$

Projections F_{1r} and F_{2r} of forces $\mathbf{F}_1$ and $\mathbf{F}_3$ on the direction of $\mathbf{r}$ depend upon r in the following way

$$F_{1r} = \frac{b}{r^3} \quad \text{and} \quad F_{2r} = -\frac{a}{r^7}$$

where a and b are factors that depend on the structure of the molecules and the type of intermolecular interaction. The curves in Figure 12.1 show the dependence of F_{1r} and F_{2r} on r. Forces of repulsion are conventionally accepted as positive and at tractive forces as negative (Figure 12.1).

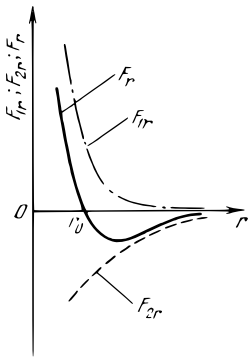


Figure 12.1.: Forces of attraction and repulsion for two molecules.

The resultant force is

$$\mathbf{F} = \mathbf{F}_1 + \mathbf{F}_2 = F_r \frac{\mathbf{r}}{r}$$

and $F_r = F_{1r} + F_{2r}$. The dependence of F_r on r is also shown in Figure 12.1.

12.1.5

At $r = r_0$, forces $\mathbf{F}_1$ and $\mathbf{F}_2$ counterbalance each other and $\mathbf{F} = 0$. At $r > r_0$ force $\mathbf{F}_2 > \mathbf{F}_1$ at $r < r_0$ force

$\mathbf{F}_2 < \mathbf{F}_1$. Thus r_0 is the equilibrium distance between the molecules and where they would be with respect to each other if there were no thermal motion.

12.1.6

The element of work δW done by the resultant force $\mathbf{F}$, when the distance between the molecules is increased by the amount $\mathrm{d}\mathbf{r}$, is equal to the decrease in the mutual potential energy E_p of the two molecules (3.3.1):

$$\delta W = (\mathbf{F},\, \mathrm{d}\mathbf{r}) = F_r\, \mathrm{d}r = \mathrm{d}E_p$$

Integrating with respect to r from r to ∞:

$$\int_{E_p}^{E_{p\infty}} \mathrm{d}E_p = -\int_r^\infty F_r\, \mathrm{d}r \quad \text{and} \quad E_p - E_{p\infty} = \int_r^\infty F_r\, \mathrm{d}r$$

At $r = \infty$ the molecules do not interact and $E_p - E_{p\infty} = 0$. Hence,

$$E_p = \int_r^\infty F_r\, \mathrm{d}r$$

This integral can be calculated graphically from the known dependence of F_r on r (Figure 12.1). It is proportional to the area bounded by the curve $F_r = F_r\,(r)$, the r axis and the value of r (where $r = \text{const}$) for which E_p is being calculated. At $r > r_0$, the energy $E_p < 0$ because $F_r < 0$; at $r = r_0$, the energy E_p reaches its minimum value: $E_p = E_{\min}$. This follows from the equation

$$\left(\frac{\mathrm{d}E_p}{\mathrm{d}r}\right)_{r=r_0} = F_r(r_0) = 0.$$

A system consisting of the interacting molecules, in a state of stable equilibrium ($r = r_0$),possesses minimum potential energy. At $r < r_0$, the energy E_p begins to increase, becomes positive and then rises drastically due to the rapid increase in the repulsive forces as r drops (Figure 12.2).

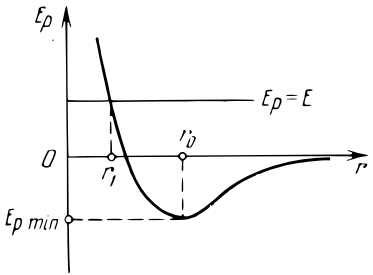


Figure 12.2.: Energy E_p and distance.

12.1.7

The value $E = E_{p\min}$, the minimum potential energy of interaction of molecules, is the criterion for various states of aggregation of matter.

If $|E|_{p\min} \ll kT$, the substance is in a gaseous state. When $|E|_{p\min} \gg kT$, it is in the solid state. The condition $|E|_{p\min} \approx kT$ corresponds to the liquid state. Here kT is twice the average energy per degree of freedom of thermal motion of the molecules (10.6.4).

12.1.8

Van der Waals forces are weak[1] forces of attraction that act between molecules at distances of the order of 10^{-9} m (12.1.4). They are the reason for the correction of the internal pressure in the Van der Waals equation of state for a real gas (12.2.4). Distinction is made between three types of Van der Waals forces of attraction.

(a) Orientational forces of attraction $\mathbf{F}_{or}$ are due to the fact that asymmetric polar molecules (18.1.4) have constant dipole moments p_e (18.1.4). The result of interaction of these dipole moments is the attraction force $\mathbf{F}_{or}$. This force is opposed by the thermal motion of the molecules. Calculations indicate that

$$\mathbf{F}_{or} \propto -\frac{p_e^4}{kT}\frac{1}{r^7}$$

where r is the distance between the molecules, k is Boltzmanns constant (8.4.5), and T is the absolute temperature.

(b) *Induction forces* of attraction are exerted when a neutral molecule of a real gas is in an electric field set up by another molecule, both molecules having high polarizability (18.1.3). If the molecules are sufficiently close together, the action of the electric field of the second molecule develops an induced dipole moment $\mathbf{p}_e = \epsilon_0 \beta \mathbf{E}$ (18.1.4) in the first molecule, where β is the polarizability of the molecule (18.1.3),

[1] Weak in the sense of their small magnitude compared to the forces of attraction that provide for the formation of stable molecules (12.1.9).

and $\mathbf{E}$ is the strength of the electric field set up by the second molecule. To constant factors

$$\mathbf{F}_{in} \propto -\beta p_e^2 \frac{1}{r^7}$$

(c) The vibration of electrons in one molecule (or atom) can excite vibration in another molecule (or atom). The vibrations of the electrons in the two molecules are in phase with each other, leading to attraction between the molecules (or atoms). The resulting resonance forces of attraction are called *dispersion forces*. They play the main role in the interaction of non polar molecules (18.1.3). The force of dispersion attraction is

$$\mathbf{F}_d \propto -\beta \frac{e^4 h \nu_0}{k^2} \frac{1}{r^7}$$

where e is the charge of the electron, h is Plancks constant, $\nu_0 = (1/2\pi)\sqrt{k/m}$ is the frequency of vibration of the atoms (28.1.2), k is the coefficient of the quasi-elastic force (**??**), and m is the mass of the atom.

Dispersion forces owe their name to the analogy between the origin of these forces and dispersion phenomena occurring when electromagnetic waves propagate through matter (**??**).

12.1.9

The attraction force $\mathbf{F}_r$ between two molecules, shown in Figure 12.1, is the resultant of all the kinds of attraction

enumerated in (12.1.8). The potential energy of Van der Waals attraction amounts to (0.4 to 4) $\times 10^3$ J/mol.

In addition to the electromagnetic interaction, a special kind of quantum interaction exists between molecules at distances $r < 10^{-10}$ m. This interaction leads either to the development of repulsive forces between the molecules (12.1.4), or to strong attraction of adjacent atoms (or groups of atoms) and the formation between them of ionic and covalent chemical bonds ((**??**) and (**??**)). The result of such bonds is the formation of stable molecules. The potential energy of chemical bonds exceeds the energy of Van der Waals attraction and ranges from (0.4 to 4) $\times 10^4$ J/mol.

12.1.10

Being internal forces (2.2.4), the forces of interaction in a system of two molecules cannot change the total energy E of the system, which is the sum of the kinetic energy E_k of the molecules and their mutual potential energy E_p. Hence

$$\mathrm{d}E = \mathrm{d}E_k + \mathrm{d}E_p = 0 \quad \text{or} \quad \mathrm{d}E_k = \mathrm{d}E_p = F_r \mathrm{d}r$$

Use is made here of the equation in (12.1.6). When the molecules are brought closer together ($\mathrm{d}r < 0$), to the distance r_0 (Figure 12.1), the potential energy E_p decreases and the kinetic energy E_k accordingly increases. This occurs at the expense of the positive work done by the resultant force of mutual attraction between the molecules (12.1.4) ($F_r < 0$ when $r > r_0$). As the molecules are brought still closer, they do work in overcoming the

resultant force of mutual repulsion ($F_r > 0$ when $r < r_0$). This reduces the kinetic energy of the molecules. At the instant they are closest together ($r = r_1$ in Figure 12.2) all of the kinetic energy of the molecules has been completely expended in doing work to overcome the repulsive forces: $E_k = 0$ and the total energy E is equal to the potential energy E_p, i.e. $E = E_p$ (Figure 12.2).

If all the state variables of real gases are maintained constant with the exception of the temperature, the distance r_1 decreases when the gas is heated. This decrease is very small, however, even at high temperatures. This is due to the extremely steep increase in the repulsive forces F_1 as r is decreased (Figure 12.1). Thus the distance r_1 is the effective diameter d of the molecule (8.4.1). The finite dimensions of molecules of real gases are explained by the action of repulsive forces between the molecules.

12.2 Van der Waals Equation of State

12.2.1

A *Van der Waals gas* is a model of a real gas in which the molecules are dealt with as perfectly rigid spheres of diameter d (12.1.10), with forces of mutual attraction acting between them. The finite size of the spheres signifies that the repulsive forces between the molecules of a real gas are also taken into account.

12.2.2

The molecules of a real gas, each having a volume of $\tilde{v} = \pi d^3/6$, do not move around as freely in a vessel as the "point" molecules of an ideal gas. Therefore, in the Mendeleev-Clapeyron equation (8.4.4) $pV = RT$, the total volume V of a vessel holding one mole of the gas should be replaced by the "free" volume

$$V'_\mu = V_\mu - b$$

where b is Van der Waalss correction for the intrinsic volume of the molecules. Correction b is equal to four times the volume of all the molecules contained in one mole of the gas:

$$b = 4N_A\tilde{v}$$

where N_A is Avogadros number (Appendix II), and $\tilde{v}$ is the volume of a single molecule.

12.2.3

The forces of mutual attraction between the molecules are taken into account for a Van der Waals gas by introducing a correction for the pressure in the Mendeleev-Clapeyron equation (8.4.4). Owing to the short-range nature of the attraction forces (12.1.3), each molecule interacts only with particles that are located at distances $r \leqslant R_m$, where R_m is the *range of molecular action*, with a magnitude of the order of 10^{-9} m. A sphere of radius R_m is called the *sphere of molecular action.*

The forces of attraction of a molecule within the bulk of the gas to other molecules are mutually counterbalanced

and have no effect on the motion of the given molecule. If the molecule is within a layer of gas that borders on a wall of the vessel, it is subject to an uncompensated force of attraction directed inward, into the bulk of the gas. Consequently, in its collision with a wall, such a molecule imparts less momentum to the wall (10.2.1), and the pressure p exerted by a real gas on the walls is reduced in comparison to the pressure p of an ideal gas having the same density at the same temperature,

$$p = p_{id} - p^* \quad \text{or}$$
$$p_{id} = p + p^*$$

where $p*$ is the Van der Waals correction due to the forces of mutual attraction and is called the *internal pressure*. The internal pressure p^* is inversely proportional to the square of the volume of the vessel occupied by one mole of the gas:

$$p^* = \frac{a}{V_\mu^2}$$

where a is the Van der Waals coefficient and depends upon the chemical nature of the gas.

12.2.4

The Van der Waals equation describes the state of a real gas and differs from the Mendeleev-Clapeyron equation (8.4.4) in that the corrections b and $p*$ have been introduced ((12.2.2) and (12.2.3)). For a single mole of gas it is of the form

$$\left(p + \frac{a}{V_\mu^2}\right)(V_\mu - b) = RT$$

12.2.5

The Van der Waals equation for an arbitrary mass of real gas, having the molar mass p (8.4.3), is

$$\left(p + \frac{M^2}{\mu^2}\,\frac{a}{V^2}\right)\left(V - \frac{M}{\mu}b\right) = \frac{M}{\mu}\,RT$$

This equation is valid for gases that are not too highly compressed. In highly rarefied gases $V_\mu \gg B$, $p^* \ll p$ and the Van der Waals equation does not differ from the Mendeleev-Clapeyron equation.

12.3 Isothermals of Real Gases. Phase Transitions

12.3.1

The curve representing the dependence of the molar volume of a gas on the pressure at constant temperature is called the *isothermal*, or *isotherm*, of a real gas. Isothermals of carbon dioxide gas are shown in Figure 12.3. At temperatures T below $T_C = 340\,\mathrm{K}$, all the isothermals have horizontal steps along which, in addition to the constant temperature, the pressure is also constant while the molar volume varies. The difference $V_D V_B$ of the molar volumes over the horizontal steps decreases as the temperature is raised Figure **??**. At $T = T_c$ this difference vanishes. The temperature $T = T_c$, corresponding to the condition $V_D V_B = 0$, is called the *critical temperature*. The isothermal of a real gas at $T = T_c$ is called the critical isothermal. On this isothermal points D and B merge

into point C, which is called the *critical point*. The state variables (8.3.2) of the gas at the critical point are the critical variables $V_{\mu c}$, p_c and T_c.

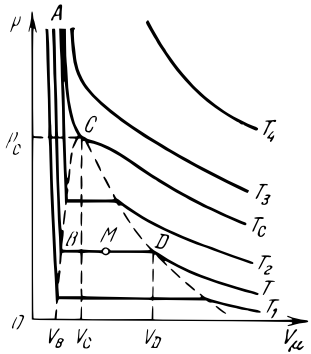


Figure 12.3.: Isothermals of carbon dioxide gas.

Critical point C is an inflection point on the critical isothermal. Consequently, the tangent to the isothermal at this point is parallel to the OV_μ axis.

12.3.2

Any subcritical isothermal ($T < T_c$) is a curve representing the continuous transition of the substance from the gaseous to the liquid state. It consists of three portions: TD, DB and BA, each of which represents different states of the substance. Over the portion TD the substance is in the gaseous state, portion DB corresponds to the transition of the substance from the gaseous to the liquid state.

Over the portion BA of the isothermal, the substance is a liquid. This portion is almost vertical owing to the low compressibility of liquids. Points D and B of the horizontal portion of the isothermal correspond to the beginning and end of condensation in isothermal compression of a real gas. On the contrary, in isothermal expansion of the liquid, points B and D are the beginning and end of the boiling process. Point B corresponds to the state of a *boiling liquid*, point D to *dry saturated vapour*. The mixture of the boiling liquid and dry saturated vapour that exists at any point M of portion BD is called wet vapour (Figure 12.3).

12.3.3

In thermodynamics a *phase* is a totality of all the parts of a system, having the same chemical composition and being in the same state. Wet vapour, for instance, is a two-phase system consisting of boiling liquid and dry saturated vapour.

Shown in Figure 12.4 are two boundary curves BC and DC which connect points B and D (Figure 12.3) at various temperatures. Curves BC and DC converge at critical point C. Boiling curve BC separates the single-phase liquid region I from the two- phase wet vapour region II. The curve BC is one representing the beginning of the *first-kind phase* transition of the substance from the liquid to the gaseous state. The boundary curve DC separates the two-phase region II from the single-phase region III in which the substance is in the gaseous state.

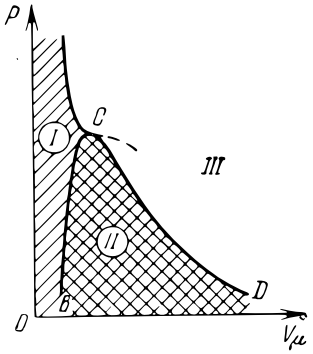


Figure 12.4.: Phases.

12.3.4

The two-phase region II cannot exist at pressures above the critical one p_c (12.3.1) at which the substance can be in either of two states, gaseous or liquid. No pressure can convert gas at a temperature above the critical T_c into the liquid state by isothermal compression. The critical temperatures of many gases are very low: $T_c \approx 5\,\mathrm{K}$ for helium and 33 K for hydrogen. This makes the liquefaction of such gases quite difficult.

12.3.5

Besides the difference in the molar volumes of boiling liquid and dry saturated vapour, the specific heat of vaporizalion (13.6.4) also vanishes when a substance is

in the critical state, as does the surface tension (13.4.5). The difference between the liquid and gaseous states of a substance completely disappears when it is in the critical state.

12.3.6

The Van der Waals equation (12.2.4) is a cubic equation with respect to the molar volume V, having factors that depend upon the pressure, temperature and the chemical nature of the gas. This equation has either one or three real roots, in accordance with the numerical values of p and T. Shown in Figure 12.5 are the isothermals of a real gas that complies with the Van der Waals equation. The isothermals correspond to the different temperatures $T_1 < T_2 < T_3 < T_c < T_5 < T_6$. All the subcritical isothermals have a hatched portion where each pressure corresponds to three different states, which are represented by the three points, B , E and G, of the isothermal.

The wave-shaped portion $BDEFG$ of the isothermal in Figure **??** more accurately represents the transition of the substance from (lie gaseous to the liquid state than the horizontal portions of experimentally plotted isothermals (dash straight lines BG). The portion BD of the isothermal corresponds to a *superheated liquid*, which can be obtained if the beginning of boiling is delayed at point B. The portion GF of the isothermal represents the state of *supersaturated vapour*, occurring upon slow isothermal compression in the absence of condensation centres. If such centres (dust specks or ions) are introduced into the supersaturated vapour, extremely rapid condensation

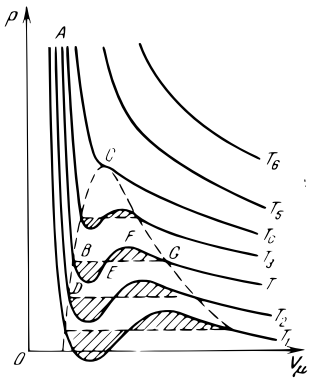


Figure 12.5.: Isothermals of a real gas that compling with the Van der Waals equation.

of the vapour takes place. Over the portion DEF, the molar volume increases (decreases) as the pressure is increased (decreased). Such states of matter are impossible. The horizontal steps BG cut the portions $BDEFG$ of the isothermals in such manner that the hatched areas $BDEB$ and $EFGE$ in Figure **??** are equal to each other (*Maxwell's equal area rule*).

12.3.7

The values of the critical variables p_c, $V_{\mu\,c}$ and T_c (12.3.1) can be expressed in terms of the coefficients a and b in the Van der Waals equation (12.2.4) and the universal

gas constant R (8.4.4):

$$p_c = \frac{1}{27}\frac{a}{b^2}, \quad V_{\mu c} = 3b, \quad \text{and} \quad T_c = \frac{8}{27}\frac{a}{bR}$$

12.4 Superfluidity Of Helium

12.4.1

Helium is a kind of substance which, after going over from the gaseous to the liquid state at standard atmospheric pressure and a temperature of 4.22 K, remains in the liquid state no matter how close to absolute zero (11.8.4) it is cooled.

12.4.2

At the temperature 2.19 K a second-order phase transition occurs: liquid helium I, existing at temperatures $T > 2.19\,\mathrm{K}$, undergoes the transition to liquid helium II, which exists at $T < 2.19\,\mathrm{K}$.

A *second-order phase transition* is a transformation of matter that is not associated with the evolution or absorption of heat as in a first-order transition. In second-order phase transitions the heat capacity, coefficient of thermal expansion and certain other characteristics of substances vary with discontinuous jumps. Some examples of second-order phase transitions are the transition of iron at the Curie point (26.5.2) from a ferro-magnetic substance into a paramagnetic one (26.3.5) and the transition of certain metals and alloys at extremely low temperatures to the superconductive state (**??**).

12.4.3

Superfluidity, a phenomenon observed *in liquid helium II*, is the practically complete absence of viscosity when such helium flows through narrow capillary tubes (13.5.5). The coefficient of viscosity (10.8.4) of helium II is less than 10^{-12} Pa s, while that of helium I close to the temperature 4.22 K is of the order of 10^{-6} Pa s.

12.4.4

According to the *two-fluid theory*, liquid helium II is a mixture of a superfluid component and a normal component. The superfluid component moves without friction and does not participate in the transfer of energy in the form of heat (9.2.1). The normal component moves with friction and does participate in energy transfer.

12.4.5

The theory of superfluidity is based on quantum mechanics (38.1.2). In the first place, quantum mechanics was required to explain why helium is the only nonfreezing liquid at ultra-low temperatures and standard pressure. The zero-point vibrations (38.5.6) of the light-weight atoms of helium are sufficiently intensive and do not allow the weak forces of attraction between the helium atoms to form a crystalline structure at ordinary pressures.

The present-day theory of superfluidity is based on a study of the energy spectrum of helium at ultra-low temperatures. Under these conditions the continuous

energy spectrum can be regarded as the totality of quasi-particles with the energies $h\nu_i$, where h is Plancks constant and ν_i is the phonon frequency (**??**) corresponding to these quasi-particles. The quasiparticles cannot be identified with the real atoms of helium. They represent the motion of the whole system of helium atoms, and the energy values of the quasi-particle describe the energy spectrum of the whole quantum system, i.e. the liquid helium as a whole.

At low temperatures the excited state of the helium constitutes sound waves that are quasi-particles in the normal part of helium II. Associated with the quasi-particles are the store of internal energy and the presence of friction in the liquid helium. But states are possible in helium II t hat correspond to its superfluid part, in which quasi-particles are not advantageous from the energy point of view and do not arise. As a result of the strong interaction between the particles of the superfluid part of helium II a bound body is formed in which no thermal excitations are generated: the superfluid part of helium II has no store of internal energy and is not subject to viscosity. At absolute zero temperature, there should actually not be any normal part in helium II; all of the helium should be superfluid. As the helium is heated, the number of phonons increases as does the share of the normal part of helium II. But until the temperature reaches 2.19 K, a superfluid part of helium II, with its characteristic properties, still remains. At the temperature 2.19 K, helium II is converted into helium I and all the special properties of helium II disappear.

13 Liquids

13.1 Certain Properties of Liquids

13.1.1

Liquids are bodies that have a definite volume, but assume the shape of the vessel that holds them. On the thermal motion in liquids, see (8.1.5). The nature of the thermal motion in liquids determines the similarity of their properties with those of both solids and gases. Like solids, liquids are almost incompressible. This property is associated with the strong intermolecular interaction of the particles in liquids. When liquids are compressed, the distances between the molecules are reduced and the repulsive forces that impede compression in crease drastically (12.1.4). Liquids have relatively high densities and, like solids, resist, not only compression, but tension as well (**??**). This is manifested in the fact that the Van der Waals isothermals enter the region of negative pressures (the isothermal at $T = T_1$ in Figure 12.5). The resemblance of the properties of liquids and real gases

at high temperatures and low densities is observed, for instance, in that the surface tension of liquids (13.4.5) and the specific heat of vaporization (13.6.4) are reduced as the temperature is raised. Besides, the densities of dry saturated vapour (12.3.2) and of boiling liquid (12.3.2) approach each other as the temperature is increased.

13.1.2

The similarity between liquids and solids is confirmed by X-ray diffraction analysis (33.4.1). At temperatures close to that of solidification, the arrangement of the particles in liquids is similar to the ordered arrangement of particles that is typical of solidified liquids. The mutual arrangement of neighbouring particles in liquids resembles the ordered arrangement of neighbouring particles in crystals. In liquids, however, this ordered arrangement is observed only within small volumes. At distances $r > (3\,\text{to}\,4)\,d$ from a certain selected "central" molecule, order is no longer evident (here d is the effective diameter of the molecule, see (8.4.1)). Such order in the arrangement of the particles is called *short-range order in liquids*.

13.1.3

X-ray patterns of liquids do not differ from those of polycrystalline bodies (33.4.5) consisting of extremely fine crystals (having linear dimensions of the order of 10^{-9} m) that are randomly oriented with respect to one another in so-called *cybotaxic regions*. Within the boundaries of these regions the particle distribution is ordered, but

the kind of order changes from one cybotaxic region to another. In the course of time, intensive thermal motion at temperatures that are not too low rapidly alters the arrangement and structure of the cybotaxic regions.

13.2 Frenkel's Hole Theory of the Liquid State

13.2.1

The most important parameter determining the structure and physical properties of liquids is the specific volume. In melting a crystalline body the specific volume increases only slightly, by approximately 10 per cent. Such an increase in the specific volume takes place in a solid subject to negative pres sure equal to the ultimate strength (**??**) of the solid. This enables a liquid to be dealt with as a body whose integrity has been violated at various places. In melting crystalline bodies, their particles acquire higher mobility. This is due to the vital property of *fluidity of liquids*, as well as the violation of long-range order in crystals and the emergence of short-range order in liquids (13.1.2). Moreover, owing to the high mobility of the particles, microscopic gaps or microvoids, which shall be called *holes*, appear in liquids. The thermal motion in liquids causes the holes to disappear at random at certain places and to appear simultaneously at others. This is equivalent to chaotic movement of the holes.

13.2.2

The hole theory of the structure of liquids is inapplicable to liquids subject to high external pressures of the order of thousands of atmospheres, at which the compressibility of liquids is comparable to that of solids. At high temperatures* close to the critical one[1], the structure and properties of a liquid are close to those of a gas for which the concept of holes is meaningless. Hence, the hole theory is inapplicable for liquids under these conditions.

13.2.3

It follows from the nature of thermal motion in liquids (8.1.5) that the molecules vibrate about a certain equilibrium position for the length of time τ, after which this equilibrium position is displaced with a jump over a distance of an order of magnitude equal to the average distance $\langle d \rangle$ between adjacent molecules:

$$\langle d \rangle \approx \sqrt[3]{\frac{1}{n_0}} = \sqrt[3]{\frac{\mu}{N_A \rho}}$$

where n_0 is the number of molecules in unit volume, N_A is Avogadros number (Appendix II), ρ is the density of the liquid, and μ is its molar mass. For water, for example, $\rho = 10^3\,\mathrm{kg/m^3}$, $\mu = 0.018\,\mathrm{kg/mol}$ and $\langle d \rangle \approx 3 \times 10^{-10}\,\mathrm{m}$.

[1] Substances with an exceptionally low critical temperature are not considered here.

13.2.4

The *relaxation time* is the average time $\langle \tau \rangle$ that a molecule of the liquid remains in a temporarily settled state close to a certain equilibrium position. As the temperature is raised $\langle \tau \rangle$ decreases rapidly (13.2.5). This explains the high mobility of molecules in a liquid at high temperatures and the low viscosity of liquids under these conditions.

13.2.5

The expenditure of a certain amount of *activation energy* E is required for a molecule to pass from one equilibrium position to another (13.2.4). Such a passage is regarded as overcoming a potential barrier of height E (38.7.1) because to accomplish the passage the potential energy of the molecule should increase by the amount E. Only after this can it pass over to a new equilibrium position. The whole process turns out to be possible because high energy is concentrated on some of the molecules as a result of collisions in thermal motion. It is transferred to them by other molecules. The dependence of the relaxation time (13.2.4) on E and the absolute temperature is of the form

$$\langle \tau \rangle = \tau_0 \exp\left(\frac{E}{kT}\right)$$

where k is Boltzmanns constant (8.4.5) and τ_0 is the average period of vibrations of the molecule about its equilibrium position.

13.2.6

When a liquid is subject to the action of an external force for the length of time $t \gg \langle \tau \rangle$ the particles of the liquid are displaced mainly in the direction of this force. This reveals the fluidity of the liquid. But if $t \ll \langle \tau \rangle$ a particle has no opportunity to change its equilibrium position during the time of force action. At this the liquid manifests elastic properties, resisting changes in both volume and shape.

During the time $\langle \tau \rangle$ a particle of liquid is displaced, on an average, over the distance $\langle d \rangle$, the average velocity $\langle v \rangle$ of dis placement of the molecules is determined by the equation

$$\langle v \rangle = \frac{\langle d \rangle}{\langle \tau \rangle} \quad \text{or} \quad \langle v \rangle = \frac{\langle d \rangle}{\langle \tau_0 \rangle} \exp\left(- \frac{E}{kT} \right)$$

The average velocity of motion of molecules in liquids is quite considerable, as a rule, but an order of magnitude less than the average velocities of molecules of the vapour of the same sub stance at the same temperatures.

13.3 Diffusion and Viscosity Phenomena in Liquids

13.3.1

If conditions required for transport phenomena (10.8.1) arise, diffusion, heat conduction and viscosity are observed in liquids. The difference between transport phenomena in liquids and similar phenomena in gases affects the transport coefficients and their dependence on the characteristics of properties of the liquids.

13.3.2

For a chemically homogeneous liquid the diffusion coefficient D (10.8.3) is calculated by the equation

$$D = \frac{1}{6} \frac{\langle d \rangle^2}{\tau_0} \exp\left(-\frac{E}{kT}\right)$$

The quantities are defined in Sects. (13.2.3), (13.2.4) and (13.2.5). The diffusion coefficient grows rapidly with temperature. This is due, for the most part, to the sharp drop in the relaxation time $\langle d \rangle$ (13.2.4). Besides, the quantity $\langle d \rangle$ (13.2.3) increases somewhat with the temperature T.

13.3.3

When the temperature approaches the critical value (12.3.1), the average velocity $\langle v \rangle$ of the particles of the liquid approaches the average velocity of molecules of a real gas and the values of the diffusion coefficient D for liquids become close to those for gases.

At temperatures much lower than the critical one, the diffusion coefficients for liquids are extremely small compared to those for the corresponding vapours or gases at ordinary pressures. For example, $D \approx 1.5 \times 10^{-9}\,\mathrm{m^2/s}$ for water at $T = 300\,\mathrm{K}$, while for the vapour of water (steam) in air at the same temperature and at standard atmospheric pressure $D \approx 2 \times 10^{-5}\,\mathrm{m^2/s}$.

13.3.4

At temperatures close to the critical one [2], the thermal motion in liquids acquires features that differ from those described in (8.3.5) and approach those of thermal motion in gases. Under these conditions the internal friction (viscosity) in liquids is of the same nature as in gases (10.8.4).

At temperatures close to the melting point, the viscosity of liquids cannot be accounted for in the same way as for gases. The mechanism by means of which viscosity arises is a complex one. The coefficient of dynamic viscosity η (10.8.4) for liquids may be related to the *mobility* u_0 *of the molecule*. This is defined as the velocity u gained by a molecule subject to an external force F equal to unity: $u_0 = u/F$. The relation between η and u_0 is an inversely proportional one: $\eta \propto 1/u_0$.

In its turn $u_0 \propto D/kT$, where D is the diffusion coefficient, T is the absolute temperature, and k is Boltzmanns constant (8.4.5). Consequently, $\eta \propto T/D$ or $\eta \propto T \exp(E/kT)$, where E is the activation energy (13.2.5). As the temperature is raised the viscosity of liquids drops rapidly, especially in the region of low temperatures. At high pressures the viscosity of liquids increases rapidly with pressure. This is due to the increase in the activation energy (13.2.5) and the corresponding increase in the relaxation lime (13.2.4).

[2] See the footnote on page 316.

13.4 Surface Tension of Liquids

13.4.1

A molecule of a liquid in the surface layer is subject to uncompensated, inwardly directed forces of attraction exerted by the rest of the liquid. As a result, the surface layer exerts a high *internal pressure* on the whole liquid. It is of the order of tens of thousands of atmospheres.

13.4.2

Particles of the surface layer of a liquid have a higher potential energy than those inside the liquid. The reason for this is that in order to emerge from inside the liquid to its surface the molecules must do work to overcome the inwardly directed forces of internal pressure (13.4.1). This work increases the potential energy of the molecules that reach the surface.

The work W that must be performed to increase the area of the surface layer of a liquid isothermally is equal to

$$W = \langle (F_S - F_V) \rangle \, N,$$

where $\langle (F_S - F_V) \rangle$ is the average difference between the free energy (11.4.5) per molecule at the surface F_S and within the bulk F_V of the liquid, and N is the number of molecules in the surface layer of the liquid.

13.4.3

The condition of minimum potential energy of a liquid, required to maintain its stable equilibrium, is complied with when the liquid has its minimum possible free surface area. The state of stable equilibrium of a liquid incompressible body corresponds to the minimum ratio of its surface area to its volume. Therefore, small drops of liquid suspended in air are of spherical shape. A liquid tends to reduce the area of its free surface. Consequently, the surface layer resembles a stretched elastic film in which tensile forces act (see also (**??**)).

13.4.4

The work done in the isothermal formation of unit surface area is called the *surface tension* σ of the given liquid at the boundary with another phase (12.3.3):

$$\sigma = \frac{W}{A} = \langle (F_S - F_V) \rangle \frac{N}{A} = \langle (F_S - F_V) \rangle n_1$$

where $n_1 = N/A$ is the number of molecules per unit area of the surface layer. The surface tension is also calculated by the equation

$$\sigma = \frac{\Delta F}{\Delta A}$$

where ΔF is the change in the free energy of the surface layer, and ΔA is the change in the surface area.

The surface tension σ depends upon the chemical composition of the liquid and its temperature. It decreases when the temperature is raised and vanishes at the critical

temperature (12.3.1). The surface tension can be reduced by adding *surface-active substances* to the liquid. This is due to the fact that such substances are adsorbed on the surface layer of the liquid and reduce the free energy of this layer (11.4.5).

13.4.5

13.4.5 There is an essential difference between the surface layer of a liquid and an elastic film (13.4.3). The surface tension of liquids does not depend upon the surface area and tends to reduce this area to zero. The tension of an elastic film is proportional to its deformation and equals zero at a definite finite area of the film's surface.

This peculiarity in the properties of liquid films is associated with the change in the number of molecules in the surface layer when these films are stretched (or compressed). But the average distances between the molecules and the forces of intermolecular interaction determined by these distances do not change. This is why the magnitude of the surface tension is independent of the area of the free, surface of the liquid.

13.4.6

If the surface of a liquid is bounded by a wetted perimeter (13.5.1), then the quantity a is equal to the force acting on unit length of the wetted perimeter, perpendicular to this perimeter. This force lies in a plane tangent to the free surface of the liquid.

13.5 Wetting and Capillary Phenomena

13.5.1

The free surface of a liquid, curved adjacent to the wall of the vessel holding the liquid, is called the *meniscus*. The line along which the meniscus contacts the wall is called the *wetted perimeter*. The meniscus is characterized by the *contact angle* θ between the wetted surface of the wall and the meniscus at their point of contact. When $\theta < \pi/2$ (Figure 13.1 (a)), the liquid is said to *wet* the wall(to be a *wetting* liquid); when $\theta > \pi/2$ (Figure 13.1 (b)) the liquid *does not wet* the wall and is a *nonwetting* liquid.

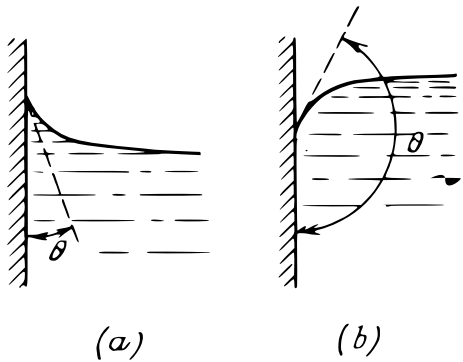


Figure 13.1.: Angle of contact and wetting in liquids.

Wetting (nonwetting) is said to be ideal when $\theta = 0\,(\theta = \pi)$. Here the meniscus is of spherical shape and

is concave or convex. The absence of both wetting and nonwetting corresponds to the condition $\theta = \pi/2$, in which case the liquid has a plane free surface.

13.5.2

The formation of a meniscus is due to the interaction of the molecules with one another and with the particles of the rigid body (wall). Molecule A of the surface layer, located close to the wall of the vessel and having a sphere of molecular action (12.2.3) of radius R_m (range of molecular action) (Figure 13.2), is subject to the resultant force of attraction exerted on it by all the other molecules of the liquid ($\mathbf{F}_1$) and by all the particles of the wall ($\mathbf{F}_2$). Force $\mathbf{F}_2$ is perpendicular to the wall. This follows from considerations of symmetry.

The direction of force $\mathbf{F}_1$ depends upon the shape of the meniscus and the position of molecule A with respect to the wall. For example, if the meniscus is flat (13.5.1) and molecule A is right at the wall, force $\mathbf{F}_1$ is directed at an angle of 45° to the wall (Figure 13.3). Molecule A can be in equilibrium only when the resultant force $\mathbf{F} = \mathbf{F}_1 + \mathbf{F}_2$ is perpendicular to the surface of the liquid.[3] Otherwise, molecule A would move along this surface.

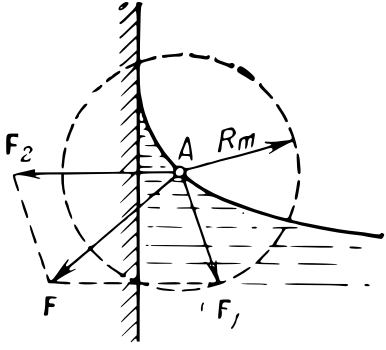


Figure 13.2.: Range of molecular attraction.

13.5.3

The shape of the meniscus is determined by the three possible directions of force $\mathbf{F}$:

[3] Here we ignore the gravity force acting on molecule A because it is negligibly small compared to forces $\mathbf{F}_1$ and $\mathbf{F}_2$.

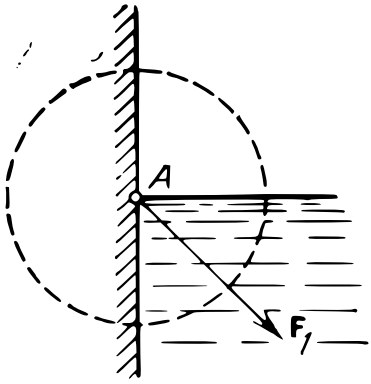


Figure 13.3.: Range of molecular attraction.

(a) force $\mathbf{F}$ is parallel to the surface of the wall, the liquid has a plane surface and $\theta = \pi/2$ (Figure 13.4 (a));

(b) force $\mathbf{F}$ is directed towards the wall; the forces of attraction exerted by the wall on molecule A exceed the forces of attraction exerted on the molecule by all the other molecules of the liquid. The liquid has a concave meniscus with $\theta < \pi/2$, i.e. the liquid wets the wall (Figure 13.4 (b));

(c) force $\mathbf{F}$ is directed towards the liquid; the forces of attraction exerted by the molecules of the liquid on molecule A prevail over those exerted on it by the particles of the wall. The meniscus is convex with $\theta > \pi/2$, i.e. the liquid does not wet the wall (Figure 13.4 (c)).

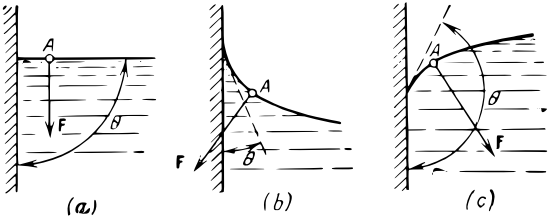


Figure 13.4.: The shape of meniscus.

13.5.4

The curved shape of the surface layer is the cause of the pressure Δp, additional to the external pressure, acting on the liquid. This additional pressure is due to the surface tension. This is similar to the way in which a stretched elastic envelope (like a rubber balloon) exerts pressure on the gas it contains.

The additional pressure exerted on a liquid with a surface layer of arbitrary shape is calculated by the equation

$$\Delta p = \sigma \left(\frac{1}{R_1} + \frac{1}{R_2} \right)$$

where σ is the surface tension (13.4.5), and R_1 and R_2 are the radii of curvature of any two mutually perpendicular normal sections[4] of the surface of the liquid at the point

[4] A normal section of the surface through point A is the curve obtained as the intersection of the surface and a plane passed through the normal to the surface at this point. Radii R_1 and R_2 are called the principal radii of curvature of the surface layer.

where molecule A is located. The radius of curvature R_1 (or R_2) is taken positive if its centre in the corresponding section is inside the liquid. Otherwise, the radius of curvature is taken to be negative. Thus, $\Delta p > 0$ when the meniscus is convex and $\Delta p < 0$ when it is concave. In the case of a plane surface $R_1 = R_2 = \infty$, and there is no additional pressure ($\Delta p = 0$). The preceding equation is called the Laplace theorem. For a spherical surface $R_1 = R_2 = R$ and $\Delta p = 2\sigma/R$. Such a surplus pressure exists, for instance, within a bubble of gas of radius R, located inside a liquid near the surface.

The surplus pressure inside a soap bubble of radius R is due to the action of both superficial layers of the thin spherical film of soap (inside and outside the bubble). Thus $\Delta p = 4\sigma/R$.

13.5.5

The level of a liquid in narrow cylindrical vessels (*capillary tubes*) of radius r differs from the level of the liquid in a larger vessel into which the capillary tube is placed vertically. The level in the capillary tube is higher (lower) than in the larger vessel by the amount h if the liquid wets (does not wet) the walls of the vessel. Here

$$h = \frac{2\sigma \cos\theta}{rg\rho}$$

where θ is the contact angle (13.5.1), ρ is the density of the liquid, and g is the acceleration due to gravity (7.3.3). This is called *Jurin's rule*.

If the liquid is in a narrow slit of constant width δ between two parallel plates, the meniscus is of cylindrical shape having the radius $\delta/2$ and the level in the slit is above (for a wetting liquid) or below (for a nonwetting liquid) the level in the vessel in which the plates are immersed by the amount

$$h = \frac{2\sigma \cos\theta}{\delta g \rho}$$

13.5.6

The pressure of saturated vapour (12.3.2) above the curved surface of a liquid depends upon the shape of the meniscus. If the meniscus is concave (convex), the pressure of the saturated vapour is less (greater) than that above a plane surface by the amount Δp_{ms}:

$$\Delta p_{\text{ms}} = \frac{\rho}{\rho_1 - \rho} \Delta p$$

where ρ is the density of the saturated vapour, ρ_1 is the density of the liquid, and Δp is the additional pressure due to the curvature of the surface (13.5.4).

13.6 Vaporization and Boiling of Liquids

13.6.1

Vaporization, or *evaporation*, is the process of vapour formation at the free surface of a liquid. It takes place at any temperature and increases as the temperature is raised. There are molecules in the surface layer of a liquid

that have high velocities and kinetic energies of thermal motion. The escape of such molecules from the surface into the space above the liquid is the explanation for evaporation with the consequent reduction of the store of internal energy and cooling of the liquid. A measure of the process of vaporization is the *rate of evaporation* u, which is the amount of liquid converted into vapour in unit time. The rate u depends upon the external pressure and the motion of the gaseous phase above the free surface of the liquid. Thus

$$u = \frac{cA}{p_0}(p_v - p)$$

where c is a constant, A is the area of the free surface of the liquid, p_v is the pressure of saturated vapour, p is the pressure of the vapour above the free surface of the liquid being vaporized, and p_0 is the external barometric pressure.

13.6.2

Boiling is the process of intense vaporization of a liquid, not only from its free surface, but throughout the whole volume of the liquid within the bubbles of vapour that are produced in boiling. The bubbles of vapour in a boiling liquid rapidly increase in size, rise to the surface and burst. This causes the turbulence in a boiling liquid. The pressure p within a bubble of vapour located within the liquid is the sum of the external pressure p_0, the hydrostatic pressure pi of the overlying layers of liquid, and the additional pressure Δp due to the surface tension

(13.5.4). Thus

$$p = p_0 + p_1 + \Delta p$$

and

$$p_1 = \rho g h, \quad \text{and} \quad \Delta p = \frac{2\sigma}{r}$$

where r is the radius of the vapour bubble, h is the distance from its centre to the surface of the liquid, and p and σ are the density and surface tension of the liquid.

The boiling of a liquid begins at the temperature at which the pressure p_v of the saturated vapour inside a bubble is at least as high as the pressure p (13.6.2):

$$p_v \geqslant p_0 + \rho g h + \frac{2\sigma}{r}$$

If this condition is not complied with, the bubble collapses and the vapour it contains is condensed.

13.6.3

With small radii r of the vapour bubbles, the pressure p_v should be quite high and it is necessary to heat the liquid to a high temperature before it starts boiling. If the liquid contains *centres of vaporization* (dust specks, bubbles of dissolved gases, etc.), boiling begins at a much lower temperature. This is due to the fact that the vapour bubbles that appear on the centres of vaporization are of such a size that the effect of the third member in the inequality of (13.6.2) can be neglected. More over, $\rho g h \ll p_0$ as a rule, so that the approximate condition for the beginning of boiling can be written in the form

$$p_v \approx p_0$$

The temperature of a liquid at which the pressure of its saturated vapour is equal to the external pressure is called the *boiling point* of the liquid.

13.6.4

When a liquid boils at constant pressure, its temperature remains constant. The quantity of heat transferred to a boiling liquid is completely expended in converting the molecules of the liquid into vapour. The heat r_b required to vaporize unit mass of a liquid heated to the boiling point is called the *heat of vaporization*. The value of r_b decreases as the boiling point is raised and vanishes at the critical temperature (12.3.1).

The change in the internal energy of a liquid (9.1.1) as a unit of its mass is converted into vapour at the boiling point is called the *internal heat of vaporization*.

13.6.5

The boiling of liquids and the condensation of vapour are examples of first-order phase transitions (cf. (12.4.2)). Typical of such phase transitions are the simultaneous constant values of pressure and temperature, but the changing ratio of the masses of the two phases (12.3.3). For a first-order phase transition to occur, the heat r_b (*specific latent heat of vaporization*) must be supplied to or taken away from the system. The heat r_b per unit mass is calculated by the *Clausius-Clapeyron equation*:

$$r_b = (v_2 - v_1)\, T \, \frac{\mathrm{d}p}{\mathrm{d}T}$$

where v_1 and v_2 are the specific volumes of the substance in the initial and final phases, T and p are the temperature and pressure of the phase transition.

13.6.6

It follows from the Clausius-Clapeyron equation for the boiling of liquids that

$$\frac{\mathrm{d}T}{\mathrm{d}p} = \frac{v_\mathrm{v} - v_1}{r_b}$$

where v_1 and v_v are the specific volumes of the liquid and vapour at the boiling point T. Since $v_\mathrm{v} > v_1$ and $r_b > 0$, $\mathrm{d}T/\mathrm{d}p > 0$, i.e. the boiling point increases with pressure. For instance, at the pressure $p = 1.25 \times 10^7\,\mathrm{Pa}$ water can be heated without boiling to a temperature at which lead can be melted in the water. The melting point of lead is $900\,\mathrm{K}$.

Part III.

Electrodynamics

14 Electric Charges. Coulomb's Law

14.1 Introduction

14.1.1

Electrostatics is the branch of the study of electricity that deals with the interaction and properties of a system of electric charges that are fixed with respect to the chosen inertial frame of reference (2.1.2).

There are two kinds of electric charges, *positive* and *negative*. Bodies having unlike charges attract one another; those having like charges repulse one another.

14.1.2

The electric charge of any system of bodies consists of a whole number of elementary charges, each equal to 1.6×10^{-19} C (where C is the abbreviation of coulomb, the unit of charge). The stable particle with the minimum

rest mass (5.6.1) and a negative elementary charge is the *electron*. The rest mass of the electron is 9.1×10^{-31} kg. The stable particle with the minimum rest mass and a positive elementary charge is the *positron* (**??**).[1] Its rest mass is the same as that of the electron. Besides, there is a stable particle with a positive elementary charge called the *proton*. The rest mass of the proton is 1.67×10^{-27} kg. Electrons and protons are found in the atoms of all the chemical elements.

[1] Here we do not consider the instability of the positron, common in our world, that is associated with the annihilation of an electron-positron pair (**??**).

14.1.3

The *law of conservation of electric charge* states: the algebraic sum of the electric charges of bodies or particles that constitute an electrically isolated system remains constant re gardless of any processes that occur in the system.

New electrically charged particles may be formed in the system being considered. These may be electrons formed by the ionization of atoms or molecules (22.4.1), ions formed by the phenomenon of electrolytic dissociation, etc. If the system is electrically isolated, however, then the algebraic sum of the charges of all the newly formed particles of the system always equals zero. The law of the conservation of electric charge is one of the fundamental conservation laws, like the laws of conservation of momentum (2.7.1) and of energy (3.4.2).

14.1.4

Upon contact of two electrically neutral bodies, charges go over from one body to the other as a result of friction. In each of such two bodies there is no longer an equal number of positive and negative charges and the bodies become oppositely charged.

When a body is electrized by induction, the charges in it are no longer uniformly distributed. The charges are redistributed so that one part of the body has an excess of positive charges and the other part, of negative charges. If these two parts of the body are separated in some way, they will be oppositely charged.

14.2 Coulomb's Law

14.2.1

Coulomb experimentally established that the force of interaction F_{12} between two small charged spheres, with charges equal to q_1 and q_2 (14.1.1), is proportional to the product $q_1\,q_2$ and inversely proportional to the square of the distance r between the spheres:

$$F_{12} = k_1 \frac{q_1\,q_2}{r^2}$$

where k_1 is the proportionality factor ($k_1 > 0$).

14.2.2

Central forces act on the charges along a straight line joining the centres of the charges. In the interaction of




Figure 14.1.: Repulsive and attractive force between charges.

like charges the product $q_1 q_2 > 0$ and $F_{12} > 0$. This corresponds to mutual repulsion. For unlike charges $q_1 q_2 < 0$ and $F_{12} < 0$, which corresponds to mutual attraction. The vector form of the Coulomb law is

$$\mathbf{F}_{12} = k_1 \frac{q_1\, q_2}{r^2} \frac{\mathbf{r}_{12}}{r}$$

where $\mathbf{F}_{12}$ is the force exerted on charge q_1 by charge q_2, $\mathbf{r}_{12}$ is the radius vector joining charge q_2 to q_1 and $r = |\mathbf{r}_{12}|$.

The force $\mathbf{F}_{12}$, exerted on charge q_2 by charge q_1, equals

$$\mathbf{F}_{12} = k_1 \frac{q_1\, q_2}{r^2} \frac{\mathbf{r}_{12}}{r}$$

where $\mathbf{r}_{21} = -\mathbf{r}_{12}$ is the radius vector joining charges q_1 and q_2 (Figure 14.1 (b)). Forces $\mathbf{F}_{12}$ and $\mathbf{F}_{21}$ are said to be *Coulomb forces.*

14.2.3

Coulombs law is valid for the interaction of *point electric charges* that are fixed in the given inertial frame of reference. Point charges are charged bodies whose linear dimensions d are very much smaller than the distance r between them ($d \ll r$).

Coulomb's law states: the force of electrostatic interaction be tween two point electric charges is proportional to the product of the magnitudes of the charges, inversely proportional to the square of the distance between them and acts along the straight line joining them.

In the form given in Sect. (14.2.2) Coulombs law is also valid for the interaction of charged spheres of radii

R_1 and R_2 if the charges q_1 and q_2 of the spheres are uniformly distributed over their surfaces or throughout their volumes. Radii R_1 and R_2 may be commensurable with the distance r between the centres of the spheres.

14.2.4

A Coulomb force (14.2.2) depends upon the properties of the medium in which the interacting charges are located. This dependence can be taken into consideration if we consider the factor k_1 in the formulas of Sects. (14.2.1) and (14.2.2) as the ratio of two factors:

$$k_1 = \frac{k}{\epsilon_r}$$

where k is a factor depending only on the choice of the system of units of measurement and ϵ_r is the dimensionless *relative permittivity*,or *dielectric constant*, of the medium and characterizes its electric properties. It is assumed here that the medium is boundless, homogeneous and isotropic, i.e. that its properties are the same throughout its volume and are independent of the direction. For a vacuum, ϵ_r is considered to equal unity.

14.2.5

For a medium with the relative dielectric constant ϵ_r, Coulombs law takes the form

$$F_{12} = k \frac{q_1 q_2}{\epsilon_r r^2}$$

For charges q_1 and q_2 located in vacuum ($\epsilon_r = 1$),

$$F_0 = k\,\frac{q_1\,q_2}{r^2}$$

From this follows the meaning of the relative dielectric con stant

$$\epsilon_r = \frac{F_0}{F}$$

14.2.6

The concept of ϵ_r, introduced in Sects. (14.2.4) and (14.2.5), has a meaning only under the conditions stipulated in Sect. (14.2.4). An ϵ_r-fold reduction of F is due to a phenomenon known as *electrostriction*, i.e. the deformation of a dielectric (18.1.1) from the effect of charged bodies. In their deformation, liquid and gaseous dielectrics are directly adjacent to the charged bodies and exert an additional mechanical action on them, reducing the Coulomb force (14.2.2). In solid dielectrics, charges q_1 and q_2 on the bodies may be located within certain cavities. This makes the calculation of forces $\mathbf{F}_{12}$ and $\mathbf{F}_{21}$ (14.2.2) considerably more difficult. These forces depend on the shapes of the cavities in which the charges q_1 and q_2 are located. In this case the interpretation of ϵ_r given in Sect. (14.2.5) cannot be correct.

14.2.7

In SI units (Appendix I) the factor k in the formulas of Sect. (14.2.5) are taken equal to

$$k = \frac{1}{4\pi\varepsilon_0}$$

and Coulombs law is written in the form

$$F = \frac{1}{4\pi\varepsilon_0}\,\frac{q_1\,q_2}{\epsilon_r\,r^2}$$

This form of Coulombs law and of all laws following from it is said to be *rationalized*.

The quantity ϵ_0 is called the *permittivity of free space* or, according to the SI units, the *electric constant*. It is equal to $8.85 \times 10^{-12}\,\mathrm{C^2\,m^2/N}$ (Appendix II).

The product $\epsilon_0\epsilon_r$ is sometimes called the *absolute dielectric constant*, or *absolute permittivity* of the medium.

In the cgse system of units (Appendix I), Coulombs law is written in the following irrational form:

$$F = \frac{q_1\,q_2}{\epsilon_r\,r^2}$$

15 Electric Field Strength And Displacement

15.1 Electric Field. Field Strength

15.1.1

A *force field* is a form of matter that is studied in physics along with its study of other forms of matter known commonly as substances. The most basic feature of force fields is that various kinds of interaction are accomplished by means of them. A gravitational field (6.2.1), for instance, accomplishes gravitational interaction between bodies of various masses located in the field. All force fields have vital properties that characterize their material nature. Primarily this concerns their energy. There are no impassible barriers between a field and material substances; one can be converted into the other (**??**).

A physical field cannot be defined as space in which certain forces act. Space, like time, is a form of the existence of matter. The fact that a field exists in space

by no means infers that the field can be identified with space, because the form of existence of matter cannot be confused with the matter itself.

15.1.2

Coulomb interaction (14.2.2) between fixed electrically charged particles or bodies is accomplished through the *electrostatic field* set up by the charges. An electrostatic field is a *steady-state electric field*, i.e. one that does not change in the course of time, and is set up by fixed electric charges. This is one of the forms of an *electromagnetic field* by means of which interaction is accomplished between electrically charged particles (or bodies) that travel, in the general case, in some arbitrary way with respect to the chosen frame of reference.

A typical property of an arbitrary electric field, distinguishing it from all other physical fields, is the action it exerts on both travelling and fixed electric charges (charged particles and bodies).

15.1.3

The quantitative force characteristic of the action exert ed by an electric field on charged particles and bodies is the vector $\mathbf{E}$ of the *electric field strength* (formerly called the electric intensity). The electric field strength at a given point is the ratio of the force $\mathbf{F}$, exerted by the field on a fixed point (14.2.3) *electric test charge* placed at the point of the field being considered, to the magnitude q_0

of the charge:

$$\mathbf{E} = \frac{\mathbf{F}}{q_0}$$

It is assumed that the test charge q_0 is so small that its presence does not lead to a redistribution in space of the charges that set up the field being investigated. In other words, the lest charge does not distort the field.

An electric field is said to be *uniform* (a *uniform electric field*) if the electric field, vector $\mathbf{E}$ has a constant magnitude and direction at any point of the field.

15.1.4

The strength of the electrostatic field of point charge q at a point located at the distance r from the charge is

$$\mathbf{E} = \frac{1}{4\pi\varepsilon_0}\frac{q}{\epsilon_r r^3}\mathbf{r} \qquad \text{(in SI units)}$$

$$\mathbf{E} = \frac{q}{\epsilon_r r^3}\mathbf{r} \qquad \text{(in cgse units)}$$

where $\mathbf{r}$ is the radius vector joining charge q and the point at which the field strength is to be calculated. Vectors $\mathbf{E}$ are directed at all points of the field radially away from charge q when $q > 0$, and directed radially toward the charge when $q < 0$.

The projection E_r of the field strength on the direction of radius vector $\mathbf{r}$ is

$$E_r = \frac{1}{4\pi\varepsilon_0}\frac{q}{\epsilon_r r^2} \qquad \text{(in SI units)}$$

$$E_r = \frac{q}{\epsilon_r r^2} \qquad \text{(in cgse units)}$$

These formulas are also used to calculate the strength of the field set up by a hollow sphere, having the charge q on its surface, at the distance r from the centre of the sphere whose radius equals R. Inside the hollow sphere $E_r = 0$.

15.1.5

The force $\mathbf{F}$ exerted by an electric field on an arbitrary charge q located at a given point in the field is

$$\mathbf{F} = q\,\mathbf{E}$$

where $\mathbf{E}$ is the field strength at the point where charge q is located and is distorting the field, i.e. making it different from the field set up before introducing charge q.

15.1.6

Electrostatic fields are represented graphically by employing *lines of force*.

Lines of force are imaginary curves drawn in such a way that their direction at any point (i.e. the direction of the tangent to the line at the point) coincides with that of the electric field vector. Lines of force are assumed to have the same direction as the corresponding electric field vectors. Lines of force do not intersect because at each point of the field vector $\mathbf{E}$ has only a single direction.

Lines of force are not identical with the paths of motion of light charged particles in an electrostatic field. Tangent at each point of the path of a particle is its velocity. Tangent to a line of force is the force acting on a

charged particle. This, consequently, corresponds to the acceleration of the particle.

15.2 Principle of Superposition of Electric Fields

15.2.1

The basic problem of electrostatics can be formulated as follows: find the magnitude and direction of the electric field vector $\mathbf{E}$ for each point of a field from the given space distribution and magnitudes of the electric charges that are the source of the field.

15.2.2

When the field is set up by a system of fixed charges $q_1, q_2, \dots q_n$ the resultant force $\mathbf{F}$ exerted on a test charge q_0 (15.1.3) at any point of the field being considered is equal to the vector sum of the forces exerted on charge q_0 by the fields set up by each of the charges q_i:

$$\mathbf{F} = \sum_{i=1}^{n} \mathbf{F}_i$$

According to Sect. (15.1.3), $\mathbf{F} = q_0\mathbf{E}$ and $\mathbf{F}_i = q_0\mathbf{E}_i$ where $\mathbf{E}$ is the strength of the resultant field, and $\mathbf{E}_i$ is the strength of the field set up by charge q_i. Following from the preceding formulas is the *principle of independent action of electric fields*, or the *principle of superposition*

of electric fields:

$$\mathbf{E} = \sum_{i=1}^{n} \mathbf{E}_i$$

The strength of an electric field of a system of charges is equal to the vector sum of the strengths of the fields set up by each charge separately. The strength of the resultant field is found by superposition of the strengths of the fields of the separate charges.

For charges distributed continuously in space (15.2.3), the principle of superposition of fields is of the form

$$\mathbf{E} = \int \mathrm{d}\mathbf{E}$$

where integration extends over all the continuously distributed sources of the fields, setting up electric fields with the strength

Example. A system of fixed point charges q_1, q_2, $\ldots q_n$ sets up an electrostatic field whose strength $\mathbf{E}$ equals

$$\mathbf{E} = \frac{1}{4\pi\varepsilon_0} \sum_{i=1}^{n} \frac{q_i}{\epsilon_r r_i^3} \mathbf{r}_i \qquad \text{(in SI units)}$$

$$\mathbf{E} = \sum_{i=1}^{n} \frac{q_i}{\epsilon_r r_i^3} \qquad \text{(in cgse units)}$$

where $\mathbf{r}_i$ is the radius vector from point charge q_i to the point being investigated in the field. Any charged body on which the charge Q is discretely distributed (15.2.3) can be divided into extremely small parts, each having a point charge. Therefore, the preceding formula is of general significance for calculating electrostatic fields in a homogeneous, isotropic medium that fills the whole field.

15.2.3

Electric charges, the sources of electrostatic fields, can be distributed in space either *discretely* (*discrete charge distribution*) at various points in space, or *continuously* (*continuous charge distribution*). In the latter case, the charges are distributed either along a certain line, on the surface of some body or within a certain volume. The concept of charge density is introduced for continuous charge distribution. When the electric charge is distributed continuously along a line we have *linear charge density* τ:

$$\tau = \frac{\mathrm{d}q}{\mathrm{d}l}$$

where $\mathrm{d}q$ is the charge of an infinitesimal clement of length $\mathrm{d}l$. When the electric charge is distributed continuously over a certain surface, we speak of the *surface charge density* σ:

$$\sigma = \frac{\mathrm{d}q}{\mathrm{d}S}$$

where $\mathrm{d}q$ is the charge on an infinitesimal element of area $\mathrm{d}S$. When the electric charge is distributed continuously throughout some volume, we speak of the volume charge density ρ:

$$\rho = \frac{\mathrm{d}q}{\mathrm{d}V}$$

where $\mathrm{d}q$ is the charge in an infinitesimal element of volume $\mathrm{d}V$.

Example. The electrostatic field of an electric dipole. An *electric dipole* is a system of two charges of equal magnitude, but of opposite sign. These charges, q and

$-q$ ($q > 0$) are separated by the distance l which is small in comparison with the distance to the points being considered in the field. The *arm of the dipole* is the vector $\mathbf{l}$, directed along the dipole axis from the negative toward the positive charge and equal to the distance between them (Figure 15.1). The product of the charge q of the dipole ($q > 0$) hy the arm $\mathbf{l}$ is called the *electric dipole moment* $\mathbf{p}_e$:

$$\mathbf{p}_e = q\,\mathbf{l}$$

The strength E of the field of an electric dipole at an arbitrary point is:

$$\mathbf{E} = \mathbf{E}_+ + \mathbf{E}_-$$

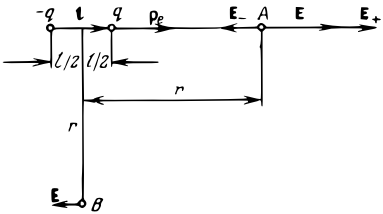


Figure 15.1.: Electric dipole moment.

where $\mathbf{E}_+$ and $\mathbf{E}_-$ are the strengths of the fields set up by the charges q and $-q$ (Figure 15.1). At point A, located on the dipole axis at the distance r from its middle (Figure 15.1) ($r \gg l$), the strength of the field of a dipole equals:

$$\mathbf{E} = \frac{1}{4\pi\varepsilon_0}\frac{2\mathbf{p}_e}{\epsilon_r r^3} \qquad \text{(in SI units)}$$

$$\mathbf{E} = \frac{2\mathbf{p}_e}{\epsilon_r r^3} \qquad \text{(in cgse units)}$$

At point B, located on a perpendicular erected at the middle of the dipole axis and at the distance r from the middle of the axis ($r \gg l$)

$$\mathbf{E} = -\frac{1}{4\pi\varepsilon_0}\frac{\mathbf{p}_e}{\epsilon_r r^3} \qquad \text{(in SI units)}$$

$$\mathbf{E} = -\frac{\mathbf{p}_e}{\epsilon_r r^3} \qquad \text{(in cgse units)}$$

At the arbitrary point O sufficiently distant from the dipole ($r \gg l$) (Figure 15.2), the magnitude of its field strength is:

$$\mathbf{E} = \frac{1}{4\pi\varepsilon_0}\frac{p_e}{\epsilon_r r^3}\sqrt{3\cos^2\theta + 1} \qquad \text{(in SI units)}$$

$$\mathbf{E} = -\frac{p_e}{\epsilon_r r^3}\sqrt{3\cos^2\theta + 1} \qquad \text{(in cgse units)}$$

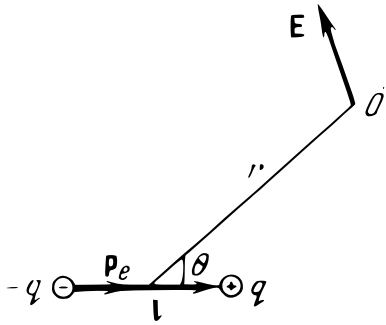


Figure 15.2.: Electric field strength due to a dipole at an arbitrary point O.

15.3 Electric Displacement. Ostrogradsky-Gauss Electric Flux Theorem

15.3.1

The electric field strength (15.1.3) depends upon the properties of the medium. In a homogeneous isotropic medium, the strength $\mathbf{E}$ is inversely proportional to ϵ_r ((??). Another characteristic of an electric field, along with its strength $\mathbf{E}$, is the vector $\mathbf{D}$ of *electric displacement*, or *electric induction* (other names are dielectric displacement, dielectric flux density, displacement, electric displacement density and electric flux density). For a field in an electrically isotropic medium, the relation between $\mathbf{D}$ and $\mathbf{E}$ is of the form

$$\mathbf{D} = \epsilon_0\epsilon_r\mathbf{E} \qquad \text{(in SI units)}$$

$$\mathbf{D} = \epsilon_r\mathbf{E} \qquad \text{(in cgse units)}$$

The general relation for $\mathbf{D}$, valid for anisotropic media is given in (18.3.4).

Example. For the field of point electric charge q (14.2.3)

$$\mathbf{D} = \frac{1}{4\pi}\frac{q}{r^3}\mathbf{r} \qquad \text{(in SI units)}$$
$$\mathbf{D} = \frac{q}{r^3}\mathbf{r} \qquad \text{(in cgse units)}$$

The projection of $\mathbf{D}$ on the direction of radius vector $\mathbf{r}$, from the point charge to the given point in the field, is

$$\mathbf{D} = \frac{1}{4\pi}\frac{q}{r^2} \qquad \text{(in SI units)}$$
$$\mathbf{D} = \frac{q}{r^2} \qquad \text{(in cgse units)}$$

15.3.2

An *element* $\mathrm{d}\Phi_e$ of *electric displacement flux* through an element of surface with the area $\mathrm{d}S$ is the scalar physical quantity defined by the equation

$$\mathrm{d}\Phi_e = \mathbf{D}\cdot\mathrm{d}\mathbf{S} = D\,\mathrm{d}S\cos\alpha = D_n\,\mathrm{d}S = D\,\mathrm{d}S_\perp$$

where $\mathbf{D}$ is the displacement vector (15.3.1), $\hat{\mathbf{n}}$ is a unit vector normal to area $\mathrm{d}S$, $\mathrm{d}\mathbf{S} = \mathrm{d}S\hat{\mathbf{n}}$ is the vector of the element of surface $\mathrm{d}S$, $D_n = D\cos\alpha$ is the projection of vector $\mathbf{D}$ on the direction of vector $\hat{\mathbf{n}}$, $\mathrm{d}S_\perp = \mathrm{d}S\cos\alpha$ is the area of the projection of the element of surface $\mathrm{d}S$ on a plane perpendicular to vector $\mathbf{D}$, and α is the angle between vectors $\mathbf{D}$ and $\hat{\mathbf{n}}$ (Figure 15.3)

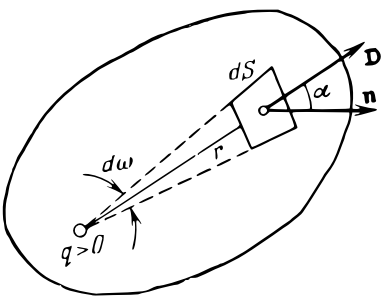


Figure 15.3.: Electric displacement flux.

When the electric field is set up by point charge q, the element of displacement flux $\mathrm{d}\Phi_e$ through the element of

surface $\mathrm{d}S$ of the closed surface S, within which the point charge is located, is

$$\mathrm{d}\Phi_e = \frac{q}{4\pi}\,\mathrm{d}\omega$$

where $\mathrm{d}\omega$ is the solid angle subtended at point charge q by the element $\mathrm{d}S$ of surface S (Figure 15.3).

The total *displacement flux* Φ_e through the surface S is the summation or integration of all the elements of flux:

$$\Phi_e = \int_S \mathbf{D}\,\mathrm{d}\mathbf{S} = \int_S D\;\mathrm{d}S\cos\alpha$$
$$= \int_S D_n\;\mathrm{d}S = \int_S D\;\mathrm{d}S_\perp$$

where α is the angle between vectors $\mathbf{D}$ and $\hat{\mathbf{n}}$. Here all the vectors and normals to the elements $\mathrm{d}S$ of surface are directed toward the same side of surface S. In the case of a closed surface S (Figure 15.3), all the vectors n of the normals must be either outward or inward ones.[2]

[2] Only outward normals arc used in the following.

15.3.3

The *Ostrogradsky-Gauss theorem* states that the displacement flux passing through an arbitrary closed surface is equal to or proportional to the algebraic sum of the electric charges $q_1, q_2, \ldots, q_k$ enclosed within the surface:

$$\oint_S \mathbf{D}\,\mathrm{d}\mathbf{S} = \oint_S D_n\;\mathrm{d}S = \sum_{i=1}^{k} q_i \qquad \text{(in SI units)}$$

$$\oint_S \mathbf{D}\,\mathrm{d}\mathbf{S} = \oint_S D_n\;\mathrm{d}S = 4\pi\sum_{i=1}^{k} q_i \qquad \text{(in cgse units)}$$

The displacement flux passing through an arbitrary closed surface that does not enclose any electric charges equals zero. The differential form of the Ostrogradsky-Gauss theorem is one of Maxwells equations for an electromagnetic field (**??**)

15.3.4

The Ostrogradsky-Gauss theorem for the electrostatic field in vacuum states that vector flux of electrostatic field strength in vacuum passing through an arbitrary closed surface is proportional to the algebraic sum of the electric charges enclosed within the surface:

$$\oint_S \mathbf{E}\,\mathrm{d}\mathbf{S} = \frac{1}{\epsilon_0}\sum_{i=1}^{k} q_i \qquad \text{(in SI units)}$$

$$\oint_S \mathbf{E}\,\mathrm{d}\mathbf{S} = 4\pi\sum_{i=1}^{k} q_i \qquad \text{(in cgse units)}$$

where ϵ_0 is the electric constant (14.2.7).

The Ostrogradsky-Gauss theorem for the field in a dielectric is discussed in (18.3.3).

15.3.5

Together with the principle of superposition of fields (15.2.2), the Ostrogradsky-Gauss theorem is applied to calculate electric field vectors $\mathbf{D}$. This is done by choosing a closed surface in such a way that in the expression for the displacement flux, the quantity $\mathbf{D}$ can be placed

outside the sign of the surface integral. This can be done for fields set up by the simplest symmetrically arranged charges (charged lines, plane, sphere, etc.).

16 Electric Field Potential

16.1 Work Done in Moving an Electric Charge in an Electrostatic Field

16.1.1

The work done in moving an electric charge q' in an electrostatic field of strength $\mathbf{E}$ (15.1.3) is independent of the shape of the path along which the charge is moved; it depends only upon the initial and final positions of the charge. In other words, electrostatic forces, like gravitational forces, are potential (conservative) forces (3.1.6). The work δW done by the force $\mathbf{F} = q'\mathbf{E}$ exerted on charge q' in moving it over the distance $\mathrm{d}\mathbf{l}$, is equal to:

$$\delta W = F\ \mathrm{d}l \cos\varphi = q' E \cos\alpha\, \mathrm{d}l$$

where α is the angle between the directions of vectors $\mathbf{E}$ and $\mathrm{d}\mathbf{l}$, and φ is the angle between the directions of the vectors $\mathbf{F}$ and $\mathrm{d}\mathbf{l}$. The work done in a finite movement of

charge q' from point a to point b is equal to

$$W = q' \int_a^b E \cos\alpha \, \mathrm{d}l = q' \int_a^b \mathbf{E} \, \mathrm{d}\mathbf{l}$$

where $\mathbf{E}\,\mathrm{d}\mathbf{l}$ is the scalar product of vectors $\mathbf{E}$ and $\mathrm{d}\mathbf{l}$.

16.1.2

If the electric field has been set up by charge q, then

$$E = \frac{q}{4\pi\epsilon_0\epsilon_r r^2}, \quad \mathrm{d}l \cos\alpha = \mathrm{d}r$$

and the work done in the movement of charge q' from point a to point b in this field is equal to

$$W = \frac{qq'}{4\pi\epsilon_0\epsilon_r} \int_{r_1}^{r_2} \frac{\mathrm{d}r}{r^2} = \frac{qq'}{4\pi\epsilon_0\epsilon_r} \left(\frac{1}{r_1} - \frac{1}{r_2} \right)$$

where r_1 and r_2 are the distances of points a and b from charge q (Figure 16.1). The work W done by the electric forces of repulsion of like charges q and q' is positive when the-charges move away from each other, and negative when they move toward each other. The work done by electric forces of attraction of unlike charges (q and q' is positive when they move toward each other and negative when they move away from each other.

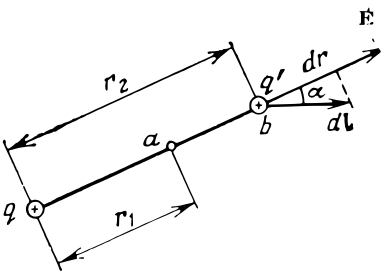


Figure 16.1.: The work done in the movement of charge q' from point a to point b in an electric field.

16.1.3

When an electric charge q' is moved in a field set up by a system of point charges $q_1, q_2, \ldots, q_n$, the charge q' is subject to the force

$$\mathbf{F} = \mathbf{F}_1 + \mathbf{F}_2 + \ldots + \mathbf{F}_n$$

and the work W done by the resultant force is equal to the algebraic sum of the work done by the component forces:

$$W = W_1 + W_2 + \ldots + W_n = \sum_{i=1}^{n} \frac{q_i q'}{4\pi\epsilon_0\epsilon_r} \left(\frac{1}{r_{i1}} - \frac{1}{r_{i2}} \right)$$

where r_{i2} and r_{i2} are the distances of charge q_i to the initial and final positions of charge q'. Each of the amounts of work W_i and the total work W depend upon the initial and final positions of the charge q', but are independent of the shape of its path.

16.1.4

Circulation of the field strength vector along the closed path or loop L is the line integral

$$\oint_L E \, \mathrm{d}l \cos\alpha = \oint_L \mathbf{E} \, \mathbf{dl}$$

This integral is numerically equal to the work done by electrostatic forces in moving a unit positive charge along a closed path. Since $r_{i1} = r_{i2}$ for a closed path, we have, according to Sect. (16.1.3), $\oint_L \mathbf{E} \, \mathbf{dl} = 0$, i.e. the above-mentioned work equals zero.

A force field of strength $\mathbf{E}$ that complies with such a condition is said to be a *conservative one*. An electrostatic field is conservative.

The differential form of the condition indicating the conservative nature of an electrostatic field is one of Maxwells equations for an electrostatic field (27.2.1).

16.2 Potential of an Electrostatic Field

16.2.1

The work δW (16.1.1) is equal to the decrease $\mathrm{d}E_p$ in potential energy (3.3.1) of the charge q' moving in an electrostatic field:

$$\delta W = -\mathrm{d}E_p,$$

and

$$W = \int_a^b q' E \mathrm{d}l \cos\alpha = -\Delta E_p = E_{1P} - E_{2P},$$

where E_{1P} and E_{1P} are the values of the potential energy of charge q' at points a and b, and α is the angle between the directions of vectors $\mathbf{E}$ and $\mathrm{d}l$ (Figure 16.1).

16.2.2

When point charge q' is moved by electrostatic forces in a field set up by charge q, the change $\mathrm{d}E_p$ in its potential energy in an infinitesimal displacement is

$$\mathrm{d}E_p = -\delta W = -\frac{qq'\,\mathrm{d}r}{4\pi\varepsilon\varepsilon_0 r^2}.$$

Upon a finite displacement of charge q' from point a to point b (Figure 16.1), the change ΔE_p in the potential

energy of the charge is

$$\begin{aligned}\Delta E_p &= E_{2p} - E_{1p} = \int_{r_1}^{r_2} \mathrm{d}E_p \\ &= \frac{qq'\,\mathrm{d}r}{4\pi\varepsilon\varepsilon_0 r_2} - \frac{qq'\,\mathrm{d}r}{4\pi\varepsilon\varepsilon_0 r_1} \qquad \text{(in SI units)}, \\ \Delta E_p &= qq'\left(\frac{1}{\varepsilon_r r_2 - \varepsilon_r r_1}\right) \qquad \text{(in CGSE units.)}\end{aligned}$$

16.2.3

When point charge q' is moved in a field set up by a system of point charges $(q_1, q_2, \ldots, q_n)$, the change in the potential energy of charge q' is

$$\Delta E_p = q' \sum_{i=1}^{n} \left(\frac{q_i}{4\pi\varepsilon\varepsilon_0 r_{i2}} - \frac{q_i}{4\pi\varepsilon\varepsilon_0 r_{i1}}\right) \quad \text{(in SI units)},$$

$$\Delta E_p = q' \sum_{i=1}^{n} \left(\frac{q_i}{\varepsilon_r r_{i2}} - \frac{q_i}{\varepsilon_r r_{i1}}\right) \quad \text{(in CGSE units.)}$$

where r_{i1} and r_{i2} are the distances between charges q_i and q' before and after the displacement of the latter.

16.2.4

To find the absolute value of the potential energy of an electric charge at a given point of an electrostatic field, it is necessary to choose a reference point (3.3.4) for the potential energy. Integrating the equation in (16.2.2), we obtain for the general case:

$$E_p = \frac{qq'}{4\pi\varepsilon_0\varepsilon_r r} + C,$$

where C is an arbitrary constant. If we assume that $E_p = 0$ as $r \to \infty$, then $C = 0$ and the potential energy of charge q', located in the field of charge q at the distance r from this charge, equals

$$E_p = \frac{qq'}{4\pi\varepsilon_0\varepsilon_r r} \qquad \text{(in SI units)},$$

$$E_p = \frac{qq'}{\varepsilon_r r} \qquad \text{(in CGSE units.)}$$

For like charges q and q' the potential energy of their inter action (repulsion) is positive and increases (decreases) as the charges move closer together (away from each other). In attraction of unlike charges $E_p < 0$ and increases to zero as one of the charges approaches infinity. The curves showing the dependence of the potential energy of two point charges on the distance between them are given in Figure **??**.

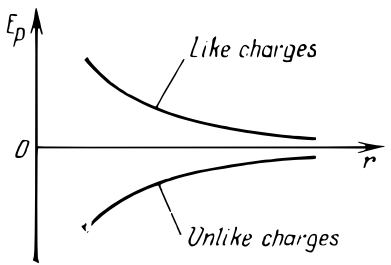


Figure 16.2.: The dependence of the potential energy of two point charges on the distance between them.

16.2.5

The potential energy E_p of charge q', located in a field set up by a system of point charges $(q_1, q_2, \ldots, q_n)$ is equal to the sum of the potential energies E_{ip} in the fields set up by each of the charges separately:

$$E_p = \sum_{i=1}^{n} E_{ip} = q' \sum_{i=1}^{n} \frac{q_i}{4\pi\varepsilon_0\varepsilon_r r_i} \qquad \text{(in SI units.)}$$

where r_i is the distance between charges q_i and q'.

16.2.6

The *potential of an electrostatic field* is an energy characteristic of the field, it is the ratio of the potential energy E_p of charge q' to the magnitude of the charge

$$V = \frac{E_p}{q'} = \sum_{i=1}^{n} \frac{q_i}{4\varepsilon_0\varepsilon_r \pi r_i} \quad \text{(in SI units)}.$$

This ratio is independent of the magnitude of the charge q' and is numerically equal to the potential energy of a unit test charge (15.1.3) placed at the point being considered in the field.

Examples.

(1) The potential of an electrostatic field set up by one point charge q in a homogeneous and isotropic dielectric is

$$V = \frac{q}{4\pi\varepsilon_0\varepsilon_r r} \qquad \text{(in SI units)},$$
$$V = \frac{q}{\varepsilon_r r} \qquad \text{(in cgse units)}.$$

(2) The potential of a field set up by a charged conductor (16.4.4) in a homogeneous and isotropic dielectric is

$$V = \frac{1}{4\pi\varepsilon_0\varepsilon_r} \oint_S \frac{\sigma \, \mathrm{d}S}{r} \qquad \text{(in SI units)},$$
$$V = \frac{1}{\varepsilon_r} \oint_S \frac{\sigma \, \mathrm{d}S}{r} \qquad \text{(in cgse units)}.$$

where σ is the surface charge density on the conductor (15.2.3) and $\mathrm{d}S$ is an element of surface of the conductor.

(3) The potential of an isolated conducting sphere of radius R, having the charge q, is

$$V = \frac{q}{4\pi\varepsilon_0\varepsilon_r R} \qquad \text{(in SI units)},$$

$$V = \frac{q}{\varepsilon_r R} \qquad \text{(in cgse units)}.$$

16.2.7

The work W done by electric forces in moving charge q' from point a to point b of an electrostatic field is

$$W = E_{1p} - E_{2p} = q'(V_1 - V_2) = q'\Delta V,$$

where E_{1p} and E_{2p} are the potential energies of charge q' at points a and b, V_1 and V_2 are the potentials of the field at the same points, and $\Delta V = V_1 - V_2$ is the *potential difference*. If point b is at infinity, $E_{2p} = 0$ and $V_2 = 0$. Then the work W_∞ required to move charge q' from point a to infinity is equal to

$$W_\infty = E_{1p} = q'V_1.$$

Owing to the arbitrary nature of point a subindex 1 can be discarded. Then

$$V = \frac{W_\infty}{q}.$$

Hence, the potential at a given point of an electrostatic field is numerically equal to the work done by electrostatic

forces in moving a unit positive charge from the point in the field to infinity. This work is also numerically equal to that done by external forces (acting against the forces of the electrostatic field) in moving a unit positive charge from infinity to the given point in the field.

16.2.8

In the study of electrostatic fields, all the problems require a knowledge of the potential difference between any points in a field rather than the absolute values of the potentials at these points. Therefore, the choice of a point of zero potential depends only on its convenience for solving the given problem. It frequently proves convenient to assume that the potential of the earth is equal to zero.

16.3 Relation Between the Potential and Strength of an Electrostatic Field

16.3.1

On the basis of the equations in sections (16.2.1) and (16.2.6), an element of work δW done in the infinitesimal displacement of charge q' in an electrostatic field is

$$\delta W = q' E \cos\alpha \mathrm{d}l = -\mathrm{d}E_p = -q'\,\mathrm{d}V, \quad \text{or}$$
$$E\cos\alpha\,\mathrm{d}l = -\mathrm{d}V; \quad \mathbf{E}\,\mathrm{d}\mathbf{l} = -\mathrm{d}V.$$

But $\mathrm{d}l\cos\alpha = \mathrm{d}l_0$ where $\mathrm{d}l_0$ is an element of length of the line of force (15.1.6) (Figure 16.3). Hence, $E = -\,\mathrm{d}V/\mathrm{d}l_0$. The derivative $\frac{\mathrm{d}V}{\mathrm{d}l_0}$ is the rate of change of the potential

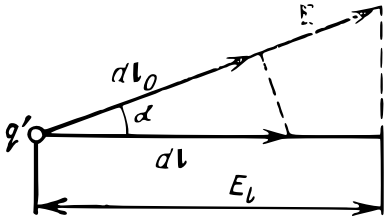


Figure 16.3.: The field E is numerically equal to the change in potential per unit length of a line of force.

along a line of force and is numerically equal to the change in potential per unit length of a line of force.

16.3.2

The projection E_l of vector $\mathbf{E}$ on the direction of motion $\mathrm{d}\mathbf{l}$ is equal to: $E_l = E\cos\alpha$. Therefore

$$E_l = -\frac{\mathrm{d}V}{\mathrm{d}t}.$$

It is obvious that $E_l \leqslant E$ and $|\,\mathrm{d}V/\mathrm{d}l\,| \leqslant |\,\mathrm{d}V/\mathrm{d}l_0\,|$. Hence, E_l and $\mathrm{d}V/\mathrm{d}l$ reach their maximum values when $\mathrm{d}\mathbf{l}$ is tangent to the line of force.

In the vicinity of a given point in an electrostatic field, the potential varies most rapidly in the direction of a line of force. The sense of vector $\mathbf{E}$ is toward the most rapid decrease in potential.

16.3.3

In a more general form the relation between the strength and potential of an electrostatic field is

$$\mathbf{E} = -\boldsymbol{\nabla} V,$$

where $\boldsymbol{\nabla} V$ is the potential gradient vector, directed toward the most rapid increase in the potential and numerically equal to its rate of change per unit length in this direction. If the potential V is regarded as a function of

the three Cartesian coordinates of the given point in the field, then

$$\nabla V = \frac{\partial V}{\partial x}\hat{\mathbf{i}} + \frac{\partial V}{\partial y}\hat{\mathbf{j}} + \frac{\partial V}{\partial z}\hat{\mathbf{k}}$$

where $\hat{\mathbf{i}}$, $\hat{\mathbf{j}}$ and $\hat{\mathbf{k}}$ are unit vectors along the OX, OY and OZ axes. The projections of the electrostatic field strength vector on the coordinate axes are related to the field potential by the equations:

$$E_x = -\frac{\partial V}{\partial x},\ E_y = -\frac{\partial V}{\partial y},\ E_z = -\frac{\partial V}{\partial z}.$$

16.3.4

When an electric charge is moved in a direction $\mathrm{d}\mathbf{l}$, perpendicular to a line of force, i.e. perpendicular to vector $\mathbf{E}$, $E_l = 0$ and $\mathrm{d}V/\mathrm{d}l = 0$ (16.3.1), i.e. $V = \text{const}$. The potential is the same at all points of a curve orthogonal to a line of force.

The geometrical locus of all points having the same potential is called an *equipotential surface*. It follows from the aforesaid that equipotential surfaces are everywhere orthogonal to lines of force.

The work done in moving an electric charge along one and the same equipotential surface equals zero.

An infinite number of equipotential surfaces can be constructed about any system of electric charges. They are usually constructed so that the potential difference is the same between any two adjacent equipotential surfaces.

16.3.5

There are two methods for the graphical representation of electrostatic fields: by means of lines of force and by means of equipotential surfaces. If the arrangement of the lines of force of an electrostatic field is known, equipotential surfaces can be constructed. Conversely, knowing the arrangement of the equipotential surfaces, the magnitude and direction of the field strength can be found for each point of the field, i.e. the lines of force can be constructed.

16.4 Conductors in an Electrostatic Field

16.4.1

Solid metal conductors contain current carriers. These are conduction electrons (free electrons) that can be moved by the external electric field through the volume of the conductor. Conduction electrons appear when a conducting metal goes over from a less condensed to a more condensed state, i.e. from the gaseous to the liquid or solid state. At this valence electrons (**??**) are collectivized; they are separated from "their" atoms and form a special *electron* gas.

16.4.2

The electrical properties of conductors under electrostatic conditions are determined by the behaviour of the conduction electrons in the external electrostatic field. In the

absence of an external electrostatic field, the electric fields of the conduction electrons and the positive ions of the metal (**??**), the atomic cores, mutually compensate each other. When a metal conductor is placed into an external electrostatic field, this field redistributes the conduction electrons in the conductor so that at any point within the conductor the conduction electrons and the positive ions compensate the external electrostatic field.

At any point inside a conductor located in an electrostatic field, the strength of the resultant steady-state electric field is equal to zero.

16.4.3

At the surface of the conductor the field strength vector $\mathbf{E}$ should be normal to the surface. If this were not so the tangential component $\mathbf{E}_\tau$ of vector $\mathbf{E}$ would cause the charges to move along the conductors surface, and this would contradict the fixed distribution of the charges. This leads to the following consequences:

(a) $\mathbf{E} = 0$ at all points inside the conductor; at all points on its surface $\mathbf{E} = \mathbf{E}_n$ (and $\mathbf{E}_\tau = 0$), where $\mathbf{E}_n$ is the normal component of the field strength vector;

(b) the whole volume of a conductor in an electrostatic field is equipotential, because, for any point within the conductor,

$$\frac{\mathrm{d}V}{\mathrm{d}l} = -E\cos\alpha = 0 \quad \text{and} \quad V = \text{const};$$

(c) the surface of the conductor is also equipotential (16.3.4), because for any line on the surface

$$\frac{\mathrm{d}V}{\mathrm{d}l} = -E_\tau = 0 \quad \text{and} \quad V = \text{const};$$

(d) in a charged conductor the uncompensated charges are located only on its surface. This follows from the Ostrogradsky-Gauss electric flux theorem (15.3.3), according to which the total charge q inside a conductor and enclosed within a certain volume bounded by the arbitrary closed surface S is equal to

$$q = \Phi_e = \oint\limits_S D \cos\alpha \, \mathrm{d}S = 0,$$

because $D = 0$ at all points on the surface.

16.4.4

When the electrostatic field is set up by a charged conductor the displacement and strength of this field close to the surface of the conductor are found by the equations

$$D_n = G \quad \text{and} \quad E_n = \frac{\sigma}{\varepsilon_0 \varepsilon_r} \text{ (in SI units)},$$

where $\mathbf{n}$ is the outward normal to the conductors surface, σ is the surface charge density (15.2.3), ε_r is the relative permittivity (dielectric constant) of the medium (14.2.4) and ε_0 is the electric constant in SI units (14.2.7).

17 Capacitance

17.1 Capacitance of an Isolated Conductor

17.1.1

Upon an increase in the amount of electricity transmitted to an isolated conductor, the charges are distributed over the conductors surface with varying surface density. The way in which the charges are distributed depends only on the shape of the conductor, but not on the amount of electricity that was previously on the conductor. Each new portion of charges is distributed over the surface of the conductor similar to the preceding portion. It follows that, at any point on the conductors surface, the surface charge density σ (15.2.3) increases in proportion to the charge q on the conductor: $\sigma = kq$, where $k = f(x, y, z)$ is a function of the coordinates of the point being considered on the surface.

The potential of the field set up by a charged conductor

(16.2.6) is

$$V = \frac{1}{4\pi\varepsilon_0\varepsilon_r}\oint\limits_S \frac{\sigma\,\mathrm{d}S}{r} = \frac{q}{4\pi\varepsilon_0\varepsilon_r} = \oint\limits_S \frac{k\,\mathrm{d}S}{r}.$$

For points on the surface S of the conductor this integral depends only on the size and shape of the conductors surface. Hence the potential V of the conductor is proportional to its charge q.

17.1.2

The ratio of the charge q of an isolated conductor to its potential V is called the *capacitance* of the given conductor:

$$C = \frac{q}{V} \qquad \text{or}$$

$$C = 4\pi\varepsilon_0\varepsilon_r \left(\oint\limits_S \frac{k\,\mathrm{d}S}{r}\right)^{-1} \qquad \text{(in SI units.)}$$

The capacitance of an isolated conductor is numerically equal to the charge that changes the potential of the conductor by one unit.

The capacitance of an isolated conductor depends upon its shape and dimensions. For geometrically similar conductors, their capacitances are proportional to their linear dimensions.

The capacitance of an isolated conductor depends upon the dielectric properties of the surrounding medium. The capacitance of a conductor in a homogeneous isotropic

medium is proportional to the relative permittivity (dielectric constant) (14.2.4) of the medium.

17.1.3

It follows from the equation for the potential of an isolated conducting sphere of radius R (16.2.6) that the *capacitance* of such a *sphere* is

$$C = 4\pi\varepsilon_0\varepsilon_r\, R \qquad \text{(in SI units.)}$$
$$C = \varepsilon_r\, R \qquad \text{(in cgse units.)}$$

17.2 Mutual Capacitance. Capacitors

17.2.1

When there are other conductors close to conductor A the capacitance of the latter is greater than for an identical, but isolated, conductor. This is due to the fact that when the charge q is transferred to conductor A,charges are induced on the conductors surrounding it under the influence of the field set up by conductor A. The portions of the surrounding conductors nearest to the inducing charge q become oppositely charged (Figure 17.1). These charges weaken the field set up by charge q lower the potential of conductor A and increase its capacitance.

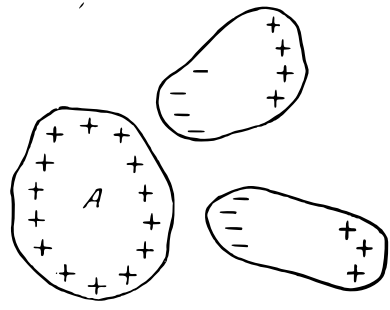


Figure 17.1.: Induced charges in conductors.

17.2.2

In a system of two conductors arranged close to each oilier, having charges q equal in magnitude but opposite in sign, a potential difference $V_1 - V_2$ is produced that is proportional to q:

$$V_1 - V_2 = \frac{1}{C}\, q,$$

where $C = q/(V_1 - V_2)$ is the *mutual capacitance* of the two conductors.

The mutual capacitance of two conductors is numerically equal to the charge that it is necessary to transfer from one conductor to the other to change the potential difference between them by one unit.

17.2.3

The mutual capacitance C of two conductors depends upon their shapes, dimensions and relative positions. Moreover, C depends upon the dielectric properties of the medium surrounding the conductors. If the medium is homogeneous and isotropic, C is directly proportional to the relative permittivity (14.2.4) of the medium.

When one of the conductors is moved away to infinity, the potential difference $V_1 - V_2$ between them increases and their mutual capacitance is reduced, tending to the capacitance of the remaining isolated conductor.

17.2.4

A *capacitor* is a system of two charged conductors, insulated from each other and having charges of equal magnitude and opposite sign, provided that their shapes and relative position are such that the conductors set up a concentrated electrostatic field in a limited region of space. In the case of parallel-plate capacitors, the conductors are called *plates*. The capacitance of a capacitor is the mutual capacitance of its plates (or, in the general case, conductors).

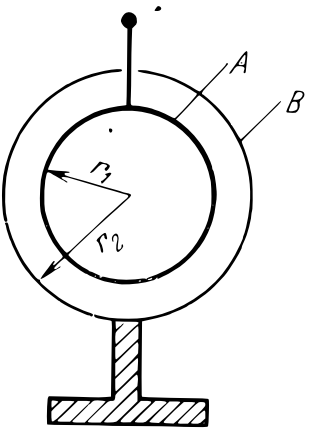


Figure 17.2.: A spherical capacitor.

17.2.5

The capacitance of a *parallel-plate capacitor*, consisting of two metal plates, is

$$C = \frac{\varepsilon_0 \varepsilon_r S}{d} \qquad \text{(in SI units.)}$$

$$C = \frac{\varepsilon_r S}{4\pi d} \qquad \text{(in cgse units.)}$$

where ε_r is the relative permittivity of the medium filling the space between the plates, S is the area of each plate, and d is the distance between them. For a multiple-plate capacitor consisting of n plates, the formula for the capacitance contains $S(n-1)$ instead of S. The capacitance formula is valid only for small d values, when the lack of uniformity of the electrostatic field at the edges of the capacitor plates can be ignored.

17.2.6

A *spherical capacitor* consists of two concentric hollow metal spheres A and B, of radii r_1 and r_2 (Figure 17.2). The spheres are charged on their surfaces and set up fields only outside themselves (15.1.4). Hence, in the space between the spheres the field is set up only by the charge of sphere A. Outside the capacitor, the fields of the oppositely charged spheres A and B mutually eliminate each other.

The capacitance of a spherical capacitor is calculated by the formula

$$C = \frac{4\pi\varepsilon_0\varepsilon_r\, r_1 r_2}{r_2 - r_1} \qquad \text{(in SI units.)}$$

$$C = \frac{\varepsilon_r\, r_1 r_2}{r_2 - r_1} \qquad \text{(in cgse units.)}$$

As $r_2 \to \infty$ and $1/r_2 \to 0$, the inner sphere becomes an isolated one and $C = 4\pi\varepsilon_0\varepsilon_r\, r_1$ (cf. (17.1.3)). For any finite values of r_1 and r_2

$$C = 4\pi\varepsilon_0\varepsilon_r\, r_1 \frac{r_2}{r_2 - r_1} > 4\pi\varepsilon_0\varepsilon_r\, r_1,$$

i.e. the capacitance of a spherical capacitor is greater than that of an isolated hollow sphere.

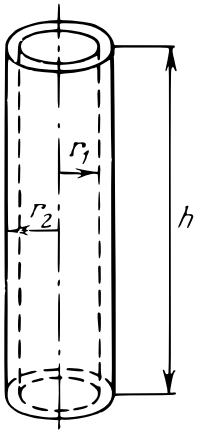


Figure 17.3.: A cylindrical capacitor.

17.2.7

A *cylindrical capacitor* consists of two hollow coaxial metal cylinders of height h and radii r_1 and r_2 (Figure 17.2).

The formula for the capacitance of a cylindrical capacitor (or of a coaxial cable) is of the form

$$C = \frac{2\pi\varepsilon_0\varepsilon_r h}{\ln r_2/r_1} \qquad \text{(in SI units.)}$$

$$C = \frac{\varepsilon_r h}{2\ln r_2/r_1} \qquad \text{(in cgse units.)}$$

17.2.8

All types of capacitors are characterized by their *breakdown voltage*, which is a potential difference across the plates at which an electric discharge (22.5.1) passes through the layer of dielectric in the capacitor. The breakdown voltage depends upon the properties of the dielectric, its thickness and the shape of the plates.

17.2.9

To obtain a high capacitance *capacitors can be connected in parallel*. This is done by connecting the plates of like charge together. Here the total capacitance C is

$$C = \sum_{i=1}^{n} C_i,$$

where C_i is the capacitance of the i-th capacitor.

17.2.10

When *capacitors are connected in series* their oppositely charged plates are connected together. The quantities

added together in this case are reciprocals of the capacitance C_i of each capacitor:

$$C = \sum_{i=1}^{n} \frac{1}{C_i}.$$

The resultant capacitance C is always less than the minimum capacitance of any capacitor in the bank. Upon a connection in series, the possibility of a breakdown (17.2.8) of the capacitors is reduced because the potential difference across each capacitor is only a part of the total potential difference across the whole bank of capacitors.

18 Dielectrics In An Electric Field

18.1 Dipole Moments of Molecules of a Dielectric

18.1.1

Dielectrics are substances that do not conduct electric current. At not especially high temperatures and under conditions when dielectrics are not subject to very strong electric fields, these substances, in contrast to conductors, have no carriers of electric current.

18.1.2

The molecules of a dielectric are electrically neutral and contain an equal number of positive and negative charges. Nevertheless, the molecules do have electrical properties. As a first approximation, a molecule of a dielectric can be regarded as a dipole having the electric dipole moment $\mathbf{p}_e = q\mathbf{l}$ (15.2.3), where q is the magnitude of the total positive (and also total negative) charges, located, respec-

tively, at the centres of gravity of the charges, **l** is the distance between the centres of gravity of the positive and negative charges. As any dipole, a molecule of matter sets up an electric held in the surrounding space (15.2.3).

18.1.3

A dielectric is said to be *nonpolar* (a *nonpolar dielectric*) if the electrons of the atoms in its molecules are arranged symmetrically with respect to their nuclei (H_2, O_2, CCl_4, etc.). In such molecules the centres of gravity of the positive and negative charges coincide when there is no external electric held [$l = 0$ (18.1.2)] and the dipole moment $\mathbf{p}_e$ of the molecule is equal to zero. When a nonpolar dielectric is placed into an external electric held, the electron shells (**??**) in the atoms (or molecules) are deformed and the centres of gravity of the positive and negative charges are displaced with respect to each other ($l \neq 0$). At this an *induced electric dipole moment* appears in atoms (or molecules) of the dielectric. This moment is proportional to the strength $\mathbf{E}$ of the external electric held:

$$\mathbf{p}_e = \varepsilon_0 \alpha \mathbf{E} \qquad \text{(in SI units.)}$$

$$\mathbf{p}_e = \alpha \mathbf{E} \qquad \text{(in cgse units.)}$$

where α is the *polarizability* of the molecule (or atom) and ε_0 is the electric constant in SI units (14.2.7).

The polarizability of a molecule depends only on its volume. It is important that α does not depend upon temperature. The thermal motion of the molecules in nonpolar dielectrics has no effect on the induction of dipole

moments in them. Molecules with such dipole moments are like *quasi-elastic (induced)* dipoles.

18.1.4

A *polar dielectric* is one in which the molecules (or atoms) have electrons arranged asymmetrically with respect to their nuclei (H_2O, HCl, NH_3, CH_3Cl, etc.). In such molecules the centres of gravity of the positive and negative charges do not coincide, but are at a practically constant distance I from each other. With respect to electrical properties, molecules of polar dielectrics are like *rigid dipoles* that have a *permanent dipole moment* $\mathbf{p}_e = \text{const}$.

18.1.5

A *permanent dipole* placed in a homogeneous external electrostatic field is subject to the action of a force couple (4.1.6) with the moment of force (torque) $\mathbf{M}$ equal to $\mathbf{M} = \mathbf{p}_e \times \mathbf{E}$.

The moment $\mathbf{M}$ of the force couple is perpendicular to the plane passing through vectors $\mathbf{p}_e$ and $\mathbf{E}$. From the tip of vector $\mathbf{M}$ rotation through the smaller angle from vectors $\mathbf{p}_e$ to $\mathbf{E}$ is seen to he counterclockwise. In Figure 18.1 the moment of force $\mathbf{M}$ is directed normal to the diagram into the page and tends to turn the dipole so that $\mathbf{p}_e$ and $\mathbf{E}$ are parallel to each other. In real molecules of polar dielectrics, the molecules are deformed in addition to the turning of the dipole axes into alignment with the field. This leads to the induction of a certain dipole




Figure 18.1.: A permanent dipole.

moment (18.1.3).

18.1.6

When a permanent dipole is placed into a non-homogeneous electric field, in which the field strength $\mathbf{E}$ varies along the length l of the dipole, then, in addition to the torque $\mathbf{M}$ (18.1.5), the dipole is subject to force $\mathbf{F}$, which is equal to

$$\mathbf{F} = p_e \frac{\partial E}{\partial l},$$

or, in the more general form:

$$\mathbf{F} = p_{ex} \frac{\partial \mathbf{E}}{\partial x} + p_{ey} \frac{\partial \mathbf{E}}{\partial y} + p_{ez} \frac{\partial \mathbf{E}}{\partial z},$$

where p_{ex}, p_{ey} and p_{ez} are the projections of vector $\mathbf{p}_e$ on the axes of a Cartesian coordinate system. In particular, if vector $\mathbf{E}$ is directed along the OX axis and depends only on the coordinate x: $[E_x = E(x),\ E_y = E_z = 0$ and $\mathbf{E} = E_x \hat{\mathbf{i}}]$, then By the action of force $\mathbf{F}$ a free permanent dipole tends to move to a region of highest field strength.

18.1.7

The potential energy E_p of a permanent dipole in an external electric field is

$$E_p = -\mathbf{p}_e \, \mathbf{E} = -p_e E \cos\theta,$$

where $\mathbf{p}_e$ is the electric dipole moment, $\mathbf{E}$ is the field strength at the point where the dipole is located and θ is the angle be tween the dipole axis and vector $\mathbf{E}$. The

minus sign indicates that the stable portion of the dipole corresponds to the angle $\theta = 0$, at which the potential energy of the dipole has its minimum value and vector $\mathbf{p}_e$ is directed along vector $\mathbf{E}$.

18.2 Polarization of Dielectrics

18.2.1

When a polar dielectric (**??**) is not in an external electric field, the vectors of its dipole moments are chaotically oriented as a result of the random thermal motion of the molecules. Consequently, the sum of the dipole moments of all the molecules is equal to zero in any physically infinitesimal volume ΔV.[3]

No dipole moments of the molecules whatsoever can be induced (18.1.3) in a non-polar dielectric that is not in an external electric field.

[3] Here $\Delta V / ggv_0$, where v_0 is the volume of a single molecule, and an immense number of molecules are contained in volume ΔV.

18.2.2

When a *dielectric* is placed in an external electric field, it *is polarized*. This means that in any element of volume ΔV, the total dipole moment of its molecules is no longer equal to zero. A dielectric in such a state is said to be polarized (*polarized dielectric*). In accordance with the structure of the molecules (or atoms), distinction is made between the following three types of polarization:

(a) *Orientation polarization* of polar dielectrics (18.1.4). The external electric field tends to align the dipole

moments of the permanent dipoles along the direction of the field (18.1.5). This is hindered by the random thermal motion of the molecules which tends to disarrange the dipoles arbitrarily. The combined action of the field and thermal motion results in preferred orientation of the electric dipole moments along the field. This polarization increases with the strength of the electric field and with a drop in temperature.

(b) *Electronic polarization* in non-polar dielectrics (18.1.3). In the molecules of dielectrics of this type dipole moments directed along the field are induced (18.1.3) by the action of the external electric field. The thermal motion of the molecules has no effect on electronic polarization. In gaseous and liquid dielectrics, electronic polarization takes place practically simultaneously with orientational polarization.

(c) *Ionic polarization* in solid dielectrics having ionic crystal lattices (**??**), such as NaCl and CsCl. The external electric field causes displacement of all the positive ions in the direction of the field strength $\mathbf{E}$ and all the negative ions in the opposite direction.

18.2.3

A quantitative measure of the polarization of a dielectric is the polarization vector $\mathbf{P}_e$. The *polarization vector* (or simply the *polarization*) is the ratio of the electric dipole moment of a small volume ΔV of the dielectric to this

volume:

$$\mathbf{P}_e = \frac{1}{\Delta V} \sum_{i=1}^{n} \mathbf{p}_{ei},$$

where $\mathbf{p}_{ei}$ is the electric dipole moment of the i-th molecule, and n is the total number of molecules in the volume ΔV. This volume should be so small that the electric field (15.1.2) within it can be assumed uniform. At the same time, the number n of molecules in it should be sufficiently large to allow statistical methods of investigation (8.2.2) to be applied.

18.2.4

For a homogeneous non-polar dielectric (18.1.3) in a uniform electric field

$$\mathbf{P}_e = n_0 \, \mathbf{p}_e,$$

where n_0 is the number of molecules in unit volume, and $\mathbf{p}_e$ is the dipole moment of a single molecule. Making use of the formula for $\mathbf{p}_e$, (18.1.3) we obtain

$$\begin{aligned} \mathbf{P}_e &= n_0 \varepsilon_0 \alpha \mathbf{E} = \varepsilon_0 \chi_e \mathbf{E} && \text{(in SI units)}, \\ \mathbf{P}_e &= n_0 \alpha \mathbf{E} = \chi_e \mathbf{E} && \text{(in cgse units)}, \end{aligned}$$

where $\chi_e = n_0 \alpha$ is the *dielectric* (or *electric*) *susceptibility of the substance*.

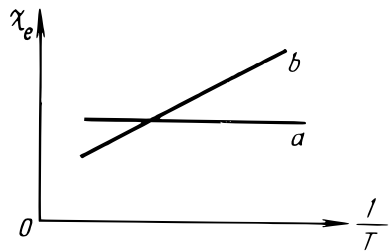


Figure 18.2.: Dependence of χ_e the susceptibility of the substance on absolute temperature on (a) non-polar and (b) polar molecules.

18.2.5

For a homogeneous polar dielectric (18.1.4) in a uniform electric field, $\mathbf{P}_e = n_0 \langle \mathbf{p}_e \rangle$, where $\langle \mathbf{p}_e \rangle$ is the average

value of the component along the field of the permanent dipole moment of the molecule. When a polar dielectric is in a weak external electric field, the dielectric susceptibility is calculated by the *Debye-Langevin formula*:

$$\chi_e = \frac{n_0 p_e^2}{3\varepsilon_0 kT} \qquad \text{(in SI units)},$$

$$\chi_e = \frac{n_0 p_e^2}{3kT} \qquad \text{(in cgse units)}.$$

Here k is Boltzmanns constant (8.4.5), and T is the absolute temperature. The remaining notation is given in (18.1.3). Shown in Figure 18.2 is the dependence $\chi_e = \chi_e(1/T)$ for non polar (a) and for polar (b) molecules. The straight line (b) does not pass through the origin of coordinates because orientational and electronic polarization (18.2.2) usually occur in polar molecules and the dielectric susceptibility consists of two parts: $\chi_e = \chi'_e + \chi''_e$ where χ'_e and χ''_e are expressed by the equations in Sections (18.2.4) and (18.2.5).

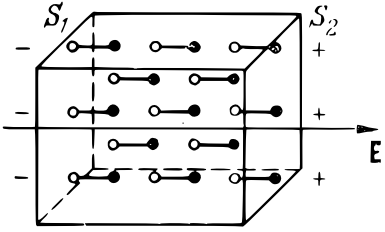


Figure 18.3.: The mutual compensation of the dipole charges of opposite sign alongside one another.

18.2.6

If a dielectric is in a uniform electric field, the electrical neutrality of any volume ΔV of the dielectric, containing a sufficiently large number of molecules, is provided for by the mutual compensation of the dipole charges of opposite sign alongside one another (Figure 18.3). In the thin layers at surfaces S_1 and S_2 of the dielectric, bounding its volume, *surface-bound polarization* charges appear as a result of the polarization of the dielectric. At the surface

where the lines of force (15.1.6) of the external electric field enter the dielectric, negative charges of the ends of the dipole molecules appear. Positive charges appear at the opposite surface. The surface density (15.2.3) σ_p of the polarization charges is calculated by the formula

$$\sigma_p = P_{en},$$

where P_{en} is the projection of vector $\mathbf{P}_e$ on the outward normal to the surface of the dielectric.

In a nonuniform electric field, the polarization of a dielectric is also nonuniform and the polarization vector $\mathbf{P}_e$ depends upon the coordinates. Hence, in addition to surface-bound charges, space polarization charges also appear. These are distributed with the volume charge density (15.2.3) ρ_p:

$$\rho_p = -\boldsymbol{\nabla} \cdot \mathbf{P}_{en},$$

where $\boldsymbol{\nabla} \cdot \mathbf{P}_{en} = \partial P_{ex}/\partial x + \partial P_{ey}/\partial y + \partial P_{ez}/\partial z$ is the divergence of the polarization vector.

18.3 Relation Between Displacement, Field Strength and Polarization Vectors

18.3.1

Distinction is made in substances between two kinds of charges: free and bound.

Bound charges are those included in the composition of atoms and molecules, as well as the charges of ions in crystalline solids with an ionic lattice (**??**). Charges not

bound to the aforementioned particles of matter are said to be free. *Free charges* include:

(a) current-conducting charges in conducting media [conduction electrons in metals and semiconductors (16.4.1), holes in semiconductors (**??**), ions in electrolytes and gases],

(b) surplus charges that are transmitted to a body by various means and violate its electrical neutrality. An example are charges imparted from outside onto the surface of a dielectric.

18.3.2

Generally, an electric held is set up in a dielectric by both free and bound charges. The held strength vector **E** characterizes the resultant held in the dielectric, set up by the two kinds of charges, and depends upon its electrical properties: the relative permittivity (dielectric constant) ε_r (14.2.4). But the primary source of an electric held in a dielectric is the free charges. As a matter of fact, a field of bound charges is set up in a dielectric as a result of its polarization when it is placed in an external electric held set up by free electric charges.

18.3.3

The information contained in Sections (18.3.1) and (18.3.2) call for a certain revision of the Ostrogradsky-Gauss theorem (15.3.3). The algebraic sum of the charges $\sum_{i=1}^{k} q_i$, on the right hand side of the theorem is to be regarded

as the algebraic sum of the free electric charges enclosed by surface S, i.e.

$$\sum_{i=1}^{k} q_i = q_{\text{free}},$$

and the theorem is then of the form

$$\oint_S \mathbf{D}\,\mathrm{d}\mathbf{S} = \oint_S D_n\,\mathrm{d}S = q_{\text{free}} \qquad \text{(in SI units)},$$

$$\oint_S \mathbf{D}\,\mathrm{d}\mathbf{S} = \oint_S D_n\,\mathrm{d}S = 4\pi q_{\text{free}} \qquad \text{(in cgse units)}.$$

In this form the Ostrogradsky-Gauss theorem is valid for an electric field either in homogeneous and isotropic or in non-homogeneous and anisotropic media (cf. (15.3.3)).

18.3.4

For an electric field in vacuum

$$\mathbf{D} = \varepsilon_0 \mathbf{E} \qquad \text{(in SI units)},$$

$$\mathbf{D} = \mathbf{E} \qquad \text{(in cgse units)}.$$

The flux of the field strength vector $\mathbf{E}$ through an arbitrary closed surface S in vacuum is

$$\oint_S \varepsilon_0 E_n\,\mathrm{d}S = q_{\text{free}} \qquad \text{(in SI units)},$$

$$\oint_S E_n\,\mathrm{d}S = 4\pi q_{\text{free}} \qquad \text{(in cgse units)}.$$

In accordance with Section (18.3.2), the flux of vector $\mathbf{E}$ for a field in a substance is

$$\oint_S \varepsilon_0 E_n \, \mathrm{d}S = q_{\text{free}} + q_{\text{bound}} \qquad \text{(in SI units)},$$

$$\oint_S E_n \, \mathrm{d}S = 4\pi(q_{\text{free}} + q_{\text{bound}}) \qquad \text{(in cgse units)}.$$

The sum of bound charges q_{bound} within closed surface S is calculated by the equation

$$q_{\text{bound}} = -\oint_S P_{en} \, \mathrm{d}S,$$

where P_{en} is the projection of the polarization vector on the outward normal to surface $\mathrm{d}S$. Hence

$$\oint_S (\varepsilon_0 E_n + P_{en}) \, \mathrm{d}S = q_{\text{free}} \qquad \text{(in SI units)},$$

$$\oint_S (E_n + 4\pi P_{en}) \, \mathrm{d}S = 4\pi q_{\text{free}} \qquad \text{(in cgse units)}.$$

A correlation with the general formulation of the Ostrogradsky-Gauss theorem (18.3.3) enables a relation to be established between vectors $\mathbf{D}$, $\mathbf{E}$ and $\mathbf{P}_e$:

$$D_n = \varepsilon_0 E_n + P_{en} \qquad \text{(in SI units)},$$
$$D_n = E_n + 4\pi P_{en} \qquad \text{(in cgse units)}.$$

or, by virtue of the arbitrary nature of outward normal

$$\mathbf{D} = \varepsilon_0 \mathbf{E} + \mathbf{P}_{en} \qquad \text{(in SI units)},$$
$$\mathbf{D} = \mathbf{E} + 4\pi \mathbf{P}_{en} \qquad \text{(in cgse units)}.$$

These formulas are generalizations of the formulas in Section (15.3.1). Making use of the results obtained in Section (18.2.3), we have for an isotropic homogeneous medium

$$\mathbf{D} = \varepsilon_0\mathbf{E} + \varepsilon_0\chi_e\mathbf{E} = \varepsilon_0(1+\chi_e)\mathbf{E} \quad \text{(in SI units)},$$
$$\mathbf{D} = \mathbf{E} + 4\pi\chi_e\mathbf{E} = (1+4\pi\chi_e)\mathbf{E} \quad \text{(in cgse units)}.$$

Consequently,

$$\mathbf{D} = \varepsilon_0\varepsilon_r\mathbf{E}, \text{ where } \varepsilon_r = 1+\chi_e \quad \text{(in SI units)},$$
$$\mathbf{D} = \varepsilon_r\mathbf{E}, \text{ where } \varepsilon_r = 1+4\pi\chi_e \quad \text{(in cgse units)}.$$

The quantity ε_r is the relative permittivity (dielectric constant) (cf. (14.2.4)).


For vacuum $\varepsilon_r = 1$ and $\chi_e = 0$.

The concept of ε_r introduced in Section (14.2.4) has a meaning only for isotropic homogeneous media.

18.4 Ferroelectric Materials

18.4.1

Ferroelectrics belong to a group of crystalline dielectrics. The first substance of this type to be investigated was Seignettes salt (potassium sodium tartrate) $NaKC_4H_4O_6 - 4\,H_2O$ and, consequently, they are sometimes called seignette-electrics. An other example of a ferroelectric is barium titanate $BaTiO_3$. Typical of ferroelectrics is a drastic increase in the relative permittivity (dielectric constant) (14.2.4) in a definite temperature range (Figure 18.4).






Figure 18.5.: Dependence of relative permittivity and the dielectric susceptibility on the field strength in ferroelectrics.

18.4.2

The relative permittivity ε_r and the dielectric susceptibility χ_e (18.2.4) of ferroelectrics are functions of the field strength $\mathbf{E}$ in the substance (Figure 18.5). As a result, no linear relation between vectors $\mathbf{P}_e$ and $\mathbf{E}$ is observed in those substances. The dependence of the electric displacement $\mathbf{D}$ on the field strength is of a complex nature and a linear relation between $\mathbf{D}$ and $\mathbf{E}$ exists only at very high $\mathbf{E}$ values (Figure 18.6).

18.4.3

A monocrystal of a ferroelectric is divided into spontaneously polarized regions, called *domains* (cf. (26.5.4)). This *spontaneous polarization* of the domains is a result of the orientation of the dipole moments of the molecules in the domain in a definite direction. In the absence of an external electric field, the polarization vectors of the various domains are directed at random and for a large monocrystal or a polycrystal the total polarization is equal, on an average, to zero. When a ferroelectric is placed in an electric field, the electric moments of the domains are reoriented and the crystal acquires a total polarization not equal to zero.

18.4.4

Domains are formed in ferroelectrics within a definite temperature range, between the upper and lower *Curie points* θ_C^{up} and θ_C^{low} (cf. (26.5.2)). For Seignettes salt (also called

Rochelle salt) (18.4.1), $\theta_C^{\text{up}} = 298\,\text{K}$ and $\theta_C^{\text{up}} = 258\,\text{K}$. At $T \geqslant \theta_C^{\text{up}}$ the forces of interaction between the dipoles cannot resist the thermal motion, the spontaneous polarization of the domains is violated and the ferroelectric is converted into an ordinary polar dielectric. The drastic increase in heat capacity of the substance indicates that a second-order phase transition (12.4.2)) occurs at the Curie point. A disordered phase exists above the Curie point θ_C^{up} and the dielectric is not polarized in the absence of an external field. At $T < \theta_C^{\text{up}}$ there is an ordered phase indicated by the spontaneous polarization in the domains.[4]





Figure 18.6.: The dependence of the electric displacement $\mathbf{D}$ on the field strength in ferroelectrics.

[4] A discussion of the phenomena that occur in ferroelectrics at $T = \theta_C^{\text{low}}$ and lead to the destruction of the domains is beyond the scope of the present handbook.

18.4.5

The phenomenon of *dielectric*, or *ferromagnetic, hysteresis* (lag) is observed in ferroelectrics. As is evident from Figure 18.7, with an increase in the strength of the external field, the magnitude of vector $\mathbf{P}_e$ increases and reaches saturation at point a. Then, as E is reduced to zero, a ferroelectric has *remanent polarization*, characterized by the value of the polarization vector $\mathbf{P}_{e0}$. Polarization completely disappears only after applying a depolarization electric field of the strength $-\mathbf{E}_c$ in the opposite direction. This is called the *coercive force*. Periodic reversal of polarization of a ferromagnetic material is accompanied by the consumption of electric energy, spent in heating the sub stance. The area of the hysteresis loop is proportional to the electric energy that is converted into internal energy per unit volume of the ferroelectric per cycle.



19 Energy Of An Electric Field

19.1 Energy of a Charged Conductor and an Electric Field

[5]

19.1.1

The charging of an electric conductor requires the performance of work that must be done in overcoming the Coulomb forces of repulsion between like charges. This work increases the electrical energy of a charged conductor in the same sense as the potential energy in mechanics (3.3.1). The work δW done in bringing a charge $\mathrm{d}q$ from infinity to the conductor is

$$\delta W = V\,\mathrm{d}q = CV\,\mathrm{d}V,$$

where C and V are the capacitance and potential of the conductor.

[5] It is assumed in this chapter that the electric charges and charged bodies are in an isotropic, homogeneous, nonferromagnetic (18.4.1) medium.

The work required to charge a conductor from zero potential to the potential V is

$$W = \int_0^V CV \, \mathrm{d}V = \frac{CV^2}{2}.$$

Correspondingly, the energy of a *charged isolated conductor* (*intrinsic energy of a charged conductor*) is

$$E_e = \frac{CV^2}{2} = \frac{q^2}{2C} = \frac{1}{2} Vq.$$

The *energy of a charged capacitor* is

$$E_e = \frac{C(\Delta V)^2}{2} = \frac{q^2}{2C} = \frac{1}{2} \Delta V q.$$

where C and q are the capacitance and charge of the capacitor, and ΔV is the potential difference between oppositely charged plates of the capacitor.

19.1.2

The energy of a system of charges, distributed continuously throughout the volume of a dielectric or vacuum, and along the surfaces of charged conductors and an electrified dielectric, is

$$E = \frac{1}{2} \int_{S_{\text{char}}} V\sigma \, \mathrm{d}S = \frac{1}{2} \int_{v_{\text{char}}} V\rho \, \mathrm{d}v,$$

where σ and ρ are the surface and volume density of free charges, V is the potential of the resultant held of all the surface and volume charges at the points of the

elements $\mathrm{d}S$ or $\mathrm{d}v$ of the charged surface or volume (to avoid confusion, volume is denoted here by the lower-case v). Integration is carried out over all charged surfaces S_{char} and throughout all charged volumes v_{char}. The effect of the dielectric is that with a constant distribution of the free charges the values of V differ for the different dielectrics. Thus, in a homogeneous isotropic dielectric that fills the whole field, S_{char} is ε_r-fold less than in vacuum.

19.1.3

The intrinsic energy of a charged conductor is, at the same time, the *energy* of its *electrostatic field*. Hence, for the uniform electrostatic field (15.1.3) of a parallel-plate capacitor (17.2.5) we have

$$E_e = \frac{1}{2}(\Delta V)^2 C = \frac{\varepsilon_0 \varepsilon_r E^2}{2} Sd = \frac{\varepsilon_0 \varepsilon_r E^2}{2} v \quad \text{(in SI units.)}$$

$$E_e == \frac{\varepsilon_r E^2}{8\pi} v \quad \text{(in cgse units).}$$

where $v = Sd$ is the volume of the electrostatic field between the capacitor plates. The energy of the field is proportional to its volume, and the energy per unit volume of the electrostatic field, called the *volume energy density* E_e^d at all points of a uniform field: is the same

$$E_e^d = \frac{E_e}{v} = \frac{\varepsilon_0 \varepsilon_r E^2}{2} = \frac{ED}{2} \quad \text{(in SI units.)}$$

$$E_e^d = \frac{E_e}{v} = \frac{\varepsilon_r E^2}{8\pi} = \frac{ED}{8\pi} \quad \text{(in cgse units).}$$

19.1.4

In the case of nonuniform electrostatic fields, set up by arbitrary charged bodies, the volume energy density at each point of an isotropic medium is expressed by the formulas in the preceding subsection. But when the medium is electrically anisotropic, the volume energy density of the electric field is

$$E_e^d = \frac{1}{2}\,\mathbf{D}\,\mathbf{E} \qquad \text{(in SI units.)}$$

$$E_e^d = \frac{1}{8\pi}\,\mathbf{D}\,\mathbf{E} \qquad \text{(in cgse units).}$$

19.1.5

The energy $\mathrm{d}E_e$ of an infinitesimal volume of an arbitrary electrostatic field in an isotropic medium is

$$\mathrm{d}E_e = E_e^d\,\mathrm{d}v = \frac{\varepsilon_0\varepsilon_r E^2}{2}\,\mathrm{d}v \quad \text{(in SI units).}$$

The total energy E_e of an electrostatic field is

$$E_e = \int_{v_{\text{field}}} \frac{\varepsilon_0\varepsilon_r E^2}{2}\,\mathrm{d}v$$

where integration is carried out throughout the whole volume v_{field} of the field.

19.1.6

The total energy of an electrostatic field set up by an arbitrary charged body is equal to the intrinsic energy of

the body (19.1.1):

$$E_e = \frac{CV^2}{2} = \int_{v_{\text{field}}} \frac{\varepsilon_0 \varepsilon_r E^2}{2}\, \mathrm{d}v$$

This equation can be generalized for the case of an electrostatic field set up by an arbitrary system of charges. The total energy of such a system (19.1.2) coincides with the total energy of the electrostatic field set up by this system of charges:

$$\int_{v_{\text{field}}} E_e^d\, \mathrm{d}v = \frac{1}{2}\int_{s_{\text{char}}} V\sigma\, \mathrm{d}S + \frac{1}{2}\int_{v_{\text{char}}} V\rho\, \mathrm{d}v.$$

19.2 Energy of a Polarized Dielectric

19.2.1

The process of polarizing a homogeneous isotropic dielectric, placed in an external electric field, is accompanied by work done in deforming the electron shells in the atoms and molecules or in turning the dipole axes of the molecules into alignment with the field strength. Therefore, a polarized dielectric has a margin of electric energy.

19.2.2

The volume energy density of a polarized dielectric at a point with the field strength $\mathbf{E}$ equals:

$$\mathrm{d}E_{e\ \text{diel}}^d = \frac{\varepsilon_0(\varepsilon_r - 1)}{2} E^2 \quad \text{(in SI units)}.$$

The volume energy density of a field with the same strength $\mathbf{E}$ in vacuum is

$$\mathrm{d}E^d_{e\ \mathrm{vac}} = \frac{\varepsilon_0 E^2}{2}.$$

The volume energy density of a field in a dielectric is $E^d_e = \varepsilon_0 \varepsilon_r E^2/2$, and according to the energy conservation law it equals

$$E^d_e = E^d_{e\ \mathrm{vac}} + E^d_{e\ \mathrm{diel}}.$$

20 Direct Electric Current

20.1 Concept of an Electric Current

20.1.1

Electrodynamics is the main branch of the science of electricity that deals with the phenomena and processes involved in the motion of electric charges or macroscopic charged bodies. The most vital concept in electrodynamics is that of electric current.

20.1.2

An *electric current* is any ordered motion of electric charges. An electric current produced in conductive media as the result of the ordered motion of free charges by the action of an electric field is called *conduction current*. Examples of conduction currents are the currents in metals and semiconductors, associated with the ordered motion of "free" electrons, and currents in electrolytes, which are the ordered displacement of ions of opposite

signs.

A *convection current* is the ordered motion in space of charged macroscopic bodies. An example of such a current is that associated with the motion of the earth, having a surplus negative charge, along its orbit.

20.1.3

Upon ordered motion of electric charges in a conductor, the equilibrium distribution of charges is violated and the surface of the conductor is no longer an equipotential surface (16.4.3). On the surface of the conductor there is a tangential component of the field strength ($E_\tau \neq 0$) and there should be an electric field inside the conductor (cf. (16.4.3)). The electric current continues until all the points of the conductor become equipotential.

20.1.4

The conditions required for the initiation and existence of an electric current in a conducting medium are as follows:

(a) The availability of free *current carriers* – charged particles – in the medium, capable of ordered motion in it. In metals and semiconductors suitable particles are the conduction electrons (16.4.1); in liquid conductors (electrolytes) they are the positive and negative ions; in gases they are the oppositely charged ions and electrons.

(b) The existence in the given medium of an external electric field whose energy is spent in providing

ordered motion of tin; electric charges. To maintain an electric current, the energy of the electric field must be continuously replenished, i.e. *a source of electric energy* is required. This is a device that converts some kind of energy into the energy of an electric field.

20.1.5

The direction of ordered motion of the positive electric charges is conventionally taken as the direction of the electric current. As a matter of fact, in metallic conductors the current consists of the ordered motion of electrons, which move in the direction opposite to that of the current.

20.2 Current and Current Density

20.2.1

The *current strength* (or simply the *current*) I is a scalar quantity, the rate of flow of electricity. It is equal to the ratio of the charge $\mathrm{d}q$, conveyed through the surface[6] being considered during a small interval of time, to the amount of this time $\mathrm{d}t$:

$$I = \frac{\mathrm{d}q}{\mathrm{d}t}.$$

[6] In the case of conduction current, through the cross section of the conductor.

An electric current is said to be *direct* (*direct electric current*) if its magnitude and direction remain constant with time. For direct current

$$I = \frac{q}{t},$$

where q is the electric charge conveyed through the surface[7] being considered during the finite time interval from 0 to t.

[7] See the note above.

20.2.2

If the current is a direct one, the charges cannot accumulate or be depleted at any part of the conductor. A direct current circuit should be closed and comply with the condition $Q_{S_1} = Q_{S_2}$ where Q_{S_1} the total electric charge passing in unit time through surface S_1 into the volume of the conductor enclosed between the cross sections S_1 and S_2 and Q_{S_2} is the total electric charge emerging from this volume in unit time through surface S_2.

20.2.3

The current density determines the current direction at various points of the surface being considered and the distribution of the current over this surface. The *current density vector* $\mathbf{j}$ is opposite in direction to the motion of the electrons that carry the current in metals[8] and is numerically equal to the ratio of the current $\mathrm{d}I$ through an element of surface normal to the motion of the charged particles to the quantity $\mathrm{d}S'$, which is the area of this element of surface:

[8] In other conducting media vector $\mathbf{j}$ coincides in direction with that of the positively charged current carrier.

$$I = \frac{\mathrm{d}I}{\mathrm{d}S'}.$$

A more general relation between the current density $\mathbf{j}$ and an element of current $\mathrm{d}I$ is

$$\mathrm{d}I = \mathbf{j}\,\mathrm{d}\mathbf{S},$$

where $\mathbf{S} = \hat{\mathbf{n}}\,\mathrm{d}S$ is the vector of an element of surface, and $\hat{\mathbf{n}}$ is the unit vector of the normal to surface $\mathrm{d}S$ and makes angle α with vector $\mathbf{j}$.

20.2.4

The current through an arbitrary surface S is

$$I = \int_S \mathbf{j}\,\mathrm{d}\mathbf{S} = \int_S j_n\,\mathrm{d}S,$$

where $j_n = j\cos\alpha$ is the projection of vector $\mathbf{j}$ on the direction of normal $\hat{\mathbf{n}}$ (20.2.3), and integration is carried out over the whole area of surface S. If the conduction current is being calculated on the basis of the cross section of the conductor for which $j_n = j$, then

$$I = \int_S j\,\mathrm{d}S.$$

20.2.5

The density of direct current is the same over the whole cross section S of a homogeneous conductor. Here

$$I = j\,S.$$

In a direct current circuit, the current density of two cross sections S_1 and S_2 is inversely proportional to the cross-sectional areas:

$$\frac{j_1}{j_2} = \frac{S_2}{S_1}.$$

20.3 Fundamentals of the Classical Electron Theory of Electrical Conduction in Metals

20.3.1

The high electrical conduction of metals is due to the fact that metals contain an immense number of current carriers, the *conduction electrons*, which are formed of the valence electrons (**??**) of the atoms of metal. These electrons do not belong to any definite atom, but are *collective electrons*. According to the classical Drude-Lorentz electron theory, these electrons are regarded as an electron gas (16.4.1) that possesses all the properties of a monoatomic ideal gas (8.4.1).

The number of conduction electrons in unit volume of a monovalent metal is

$$n_0 = \frac{N_A}{m_a}\rho,$$

where N_A is Avogadros number (Appendix II), m_a is the atomic mass of the metal and ρ is its density. In order of magnitude $n_0 \approx (10^{28} \text{to } 10^{29})\ 1/\text{m}^3$.

In the absence of an electric held inside the metal the conduction electrons move at random and collide with the ions of the crystal lattice of the metal (**??**). It is assumed that the mean free path ($\langle\lambda\rangle$) of the electron (10.5.1) should be of the order of magnitude of crystal lattice constants of the metal, i.e. $\langle\lambda\rangle \approx 10^{-10}\,\text{m}$.

The average kinetic energy of thermal motion of the

electrons (10.2.4) is

$$\frac{mv_{\text{rms}}^2}{2} = \frac{3}{2}kT,$$

where m is the mass and v_{rms} is the root-mean-square velocity of the electrons (10.2.3). At the temperature $T = 273\,\text{K}$, the velocity $v_{\text{rms}} \approx 10^3\,\text{m/s}$.

The arithmetic mean velocity $\langle u \rangle$ of thermal motion of the electrons (10.3.6) is of the same order of magnitude.

20.3.2

Electric current in a metal is initiated by the action of the external electric held (20.1.4), which leads to ordered motion of the electrons. The current density $\mathbf{j}$ is equal to the charge of all the electrons that pass in unit time through unit area of the conductors cross section,

$$\mathbf{j} = n_0 e \langle \mathbf{v} \rangle,$$

where n_0 is the number of conduction electrons per unit volume, e is the magnitude of the charge of the electron, and $\langle \mathbf{v} \rangle$ is the average velocity of ordered motion of the electrons due to the action of the external field. At the highest current densities $\langle \mathbf{v} \rangle$ is $10^{-4}\,\text{m/s}$ and is negligibly small compared to the thermal velocities of the electrons (20.3.1).

20.3.3

A steady electric current is established in a circuit in the time $t = L/c$, where L is the length of the circuit and c is

the velocity of light in vacuum. The time t coincides with the time required to establish a steady-state electric field along the circuit and the initiation of ordered motion of the electrons along the whole circuit. Therefore, electric current is started practically simultaneously with the closing of the circuit.

20.3.4

Ohm's law for current density (Ohm's law in differential form) is

$$\mathbf{j} = \varkappa \mathbf{E} = \frac{1}{\rho}\mathbf{E}.$$

The current density in a conductor is the product of the *electrical conductivity* $\varkappa$ by the electric field strength $\mathbf{E}$. The quantity $\rho = 1/\varkappa$ is called the *electrical resistivity*.

According to the classical electron theory, electrical conductivity and resistivity arc calculated by the formulas

$$\varkappa = \frac{n_0 e^2 \langle \lambda \rangle}{2m \langle u \rangle} \quad \text{and} \quad \rho = \frac{2m \langle u \rangle}{n_0 e^2 \langle \lambda \rangle},$$

where n_0 is the number of electrons in unit volume of the metal, $\langle u \rangle$ is the mean free path of the electron (10.5.1), $\langle u \rangle$ is the arithmetic mean velocity of thermal motion of the electrons (10.3.6), and e and m are the magnitude of the charge of the electron and its mass.

20.3.5

By the action of the field the electron acquires a velocity equal to $v_{\max}$ at the end of its mean free path. Upon

collision with an ion at this point, the electron loses its velocity and the energy of ordered motion of the electron is converted into internal energy of the conductor, which is heated as the current passes through.

The *volume density E_h^d of the heating capacity of a current* is the amount of energy generated in unit volume of a conductor in unit time. The *Joule-Lenz law* for the volume density of the healing capacity of a current is

$$E_h^d = \mathbf{j}\,\mathbf{E} = \varkappa E^2 = \frac{1}{\rho}E^2.$$

The *Joule-Lenz law in its differential form* states: the volume density of the heating capacity of a current is equal to the scalar product of the current density vector by the electric held strength vector.

The volume density of the heating capacity of a current is independent of the kind of collisions of the electrons with the crystal lattice points [elastic or inelastic collision (3.5.3)]. It follows from the laws of conservation of energy and momentum that the energy, ΔE transmitted to the ion upon a collision of the electron with an ion, is only a small part of the electrons energy E_{el}. In an inelastic collision

$$\frac{\Delta E}{E_{el}} = \frac{m}{m+M},$$

whereas in an elastic collision

$$\frac{\Delta E}{E_{el}} = \frac{4mM}{(m+M)^2},$$

where m is the mass of the electron and M is the mass of

the ion. Practically, in either case,

$$\frac{\Delta E}{E_{el}} \approx \frac{m}{M} \approx 10^{-4}.$$

20.3.6

The *Wiedemann-Franz law* states that for all metals the ratio of the thermal conductivity K (10.8.5) to the electrical conductivity $\varkappa$ is directly proportional to the absolute temperature T:

$$\frac{K}{\varkappa} \approx 3 \left(\frac{k}{e}\right)^2 T,$$

where k is Boltzmanns constant (8.4.5) and e is the charge of the electron.

20.3.7

The classical electron theory of electrical conduction of metals has the following shortcomings:

(a) it cannot explain the experimentally observed linear relation, in a wide temperature range, between the resistivity ρ and the absolute temperature: $\rho \propto T$.

(b) it yields an incorrect value for the molar heat capacity of metals. This should be equal, according to this theory, to $9\,\mathrm{cal/(mol\,K)}$ and be the sum of the heat capacity of the ionic crystal lattice ($6\,\mathrm{cal/(mol\,K)}$) and the heat capacity of the monoatomic electron gas ($3\,\mathrm{cal/(mol\,K)}$). It is known, however, from the experimentally established Dulong and Petit law

(**??**) that the molar heat capacity of metals differs only slightly from that of other solids and is approximately $6\,\mathrm{cal}/(\mathrm{mol\,K})$. It is impossible on the basis of classical theory to explain the absence of an electron component of heat capacity of metals;

(c) the experimental value of the resistivity ρ and the theoretical value of the arithmetic mean velocity $\langle u \rangle$ of the electrons lead, in formulas of Section (20.3.4), to a value of the mean free path $\langle \lambda \rangle$ of the electron that exceeds the crystal lattice constant of the metal by two orders of magnitude. This contradicts the assumptions of the classical electron theory of the electrical conduction of metals.

21 Direct Electric Current

21.1 Extraneous Forces

21.1.1

A metallic conductor has an electrostatic held that is set up by the electrons and positive ions of the crystal lattice. This is a held of Coulomb forces (14.2.2). Coulomb interaction between the charges in a metal leads to such an equilibrium distribution of charges that the electric held inside the conductor equals zero and the whole conductor is equipotential (16.4.3). Consequently, an electrostatic Coulomb held cannot be the cause of the steady-state process of ordered motion of electrons, i.e. it cannot generate and maintain a direct (constant) current.

21.1.2

Extraneous forces are non-electrostatic forces whose action exerted on the conduction electrons in the conductor initiates their ordered motion and maintains a direct

(constant) electric current in the circuit. In contrast to Coulomb forces, extraneous forces do not join unlike charges; they lead to their separation and maintain a potential difference at the ends of the conductor.

Extraneous forces are the cause of the non-electrostatic electric held, existing in the conductor and providing for ordered motion of the charges from points with a higher potential to points with a lower potential. A steady-state electric held of extraneous forces is set up by *sources of electrical energy* (galvanic cells, electric generators, etc.).

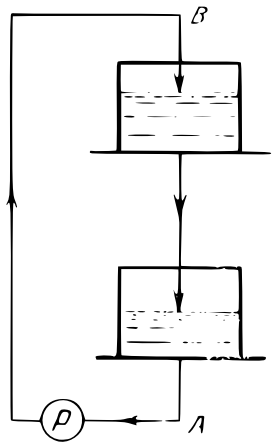


Figure 21.1.: An analogy of a hydraulic system for movement of charges.

21.1.3

In a closed hydraulic system maintaining constant liquid circulation (refer to (Figure 21.1), the liquid moves from point A to point B against the force of gravity due to the influence of external forces exerted by the pump P. The pump generates a consistent difference in hydrostatic pressure between points B and A, prompting the liquid to flow against gravity from B to A. A source of electrical energy plays a similar role in a direct current circuit. Owing to the electric field set up by extraneous forces and existing inside the source, the electric charges move within the source against the forces of the electrostatic field. This maintains a potential difference at the ends of the external circuit that is required for a direct current to flow. At the expense of the energy consumed in the source, work is done to obtain ordered motion of the electric charges.

In a direct current generator, for example, the work of

the extraneous forces (21.1.2) is done at the expense of the mechanical energy required to drive the rotor of the generator.

21.2 Ohm's Law and the Joule-Lenz Law

21.2.1

At any point inside a portion of a conductor that contains a source of electrical energy there is an electrostatic field of Coulomb forces with the strength $\mathbf{E}_{\text{Coul}}$ and an electric field of extraneous forces with the strength $\mathbf{E}_{\text{extr}}$.

According to the principle of superposition of fields (15.2.2) the strength of the resultant field is

$$\mathbf{E} = \mathbf{E}_{\text{Coul}} + \mathbf{E}_{\text{extr}}.$$

Ohms law for current density (20.3.4),

$$\mathbf{j} = \frac{1}{\rho}\,(\mathbf{E}_{\text{Coul}} + \mathbf{E}_{\text{extr}}),$$

enables the following relation to be obtained for portion 1-2 of a homogeneous conductor of cross-sectional area S:

$$I \int_1^2 \rho \frac{\mathrm{d}l}{S} = \int_1^2 \mathbf{E}_{\text{Coul}}\,\mathrm{d}\mathbf{l} + \int_1^2 \mathbf{E}_{\text{extr}}\,\mathrm{d}\mathbf{l},$$

where I is the current in the conductor, $\mathrm{d}\mathbf{l}$ is a vector with the magnitude $\mathrm{d}l$, equal to an element of conductor length, and is directed tangent to the conductor toward the current density vector, and S is the cross-sectional area of the conductor.

21.2.2

The integral $\int_1^2 \mathbf{E}_{\text{Coul}}\,\mathrm{d}\mathbf{l}$ is numerically equal to the work done by the Coulomb forces in moving a unit positive charge from point 1 to point 2. According to (16.3.1)

$$\int_1^2 \mathbf{E}_{\text{Coul}}\,\mathrm{d}\mathbf{l} = V_1 - V_2,$$

where V_1 and V_2 are the potentials at points 1 and 2 of the conductor.

The *electromotive force* (emf) $\mathscr{E}_{12}$, acting over the portion 1-2 of the circuit, is the name given to the linear integral

$$\mathscr{E}_{12} = \int_1^2 \mathbf{E}_{\text{extr}}\,\mathrm{d}\mathbf{l}.$$

The electromotive force $\mathscr{E}_{12}$ is numerically equal to the work done by the extraneous forces in moving a unit positive charge along the conductor from point 1 to point 2. This work is done at the expense of the energy consumed in the source.

The *voltage* (or *voltage drop*) U_{12} across the portion 1-2 is the physical quantity numerically equal to the work done by the resultant field of Coulomb and extraneous forces in moving a unit positive charge along the circuit from point 1 to point 2. Thus

$$U_{12} = \int_1^2 (\mathbf{E}_{\text{Coul}} + \mathbf{E}_{\text{extr}})\,\mathrm{d}\mathbf{l} = \int_1^2 \mathbf{E}\,\mathrm{d}\mathbf{l},$$

or

$$U_{12} = (V_1 - V_2) + \mathscr{E}_{12}.$$

The voltage across the ends of the circuit coincides with the potential difference only when no emf is applied to this portion. The integral

$$R_{12} = \int_1^2 \rho \frac{\mathbf{dl}}{S},$$

is the *resistance* R_{12} in the portion of the circuit between sections 1 and 2. For a homogeneous cylindrical conductor (wire), $\rho = \text{const}$, $S = \text{const}$

$$R_{12} = \rho \frac{l_{12}}{S},$$

where l_{12} is the length of the conductor between cross sections 1 and 2.

21.2.3

The generalized Ohm's law for an arbitrary portion of a circuit is

$$IR_{12} = U_{12} = (V_1 - V2) + \mathscr{E}_{12}.$$

The product of the current by the resistance of a portion of the circuit is equal to the potential difference across this portion plus the emf of all sources of electrical energy connected in the given portion of the circuit. In this form Ohms law is applicable both for *passive portions* of the circuit, not containing sources of electrical energy, as well as for *active portions* that contain such sources.

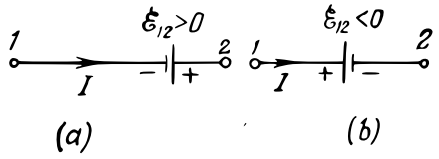


Figure 21.2.: The sign rule for emf sources of electrical energy in a circuit.

21.2.4

The *sign rule* for the emf of sources of electrical energy included in portion 1-2 states that if the current inside the source is from the cathode to the anode, i.e. the strength of the field of extraneous forces coincides in direction with the current in this portion of the circuit, then, in calculations, the emf $\mathscr{E}_{12}$ of this source is considered positive. If the current inside the source is from the anode to the cathode, the emf $\mathscr{E}_{12}$ this source is considered negative (Figure 21.2).

21.2.5

In a closed series electric circuit, the current is the same at all cross sections, and such a circuit is a portion with coinciding ends (points 1 and 2 coincide). In this circuit $V_1 - V_2$ and $R_{12} = R$, the total resistance of the whole circuit.

Ohms law for a closed electric circuit is

$$IR = \mathscr{E}$$

where $\mathscr{E}$ is the algebraic sum of all the emfs applied in the circuit.

If a closed circuit consists of a source of electrical energy with an emf $\mathscr{E}$ and internal resistance r, and the resistance of the external part of the circuit equals R, Ohms law is of the form

$$I = \frac{\mathscr{E}}{R + r}$$

The potential difference across the terminals of the source is equal to the voltage across the external part of the circuit:

$$V_1 - V_2 = RI = \mathscr{E} - Ir.$$

If the circuit is open and has no current ($I = 0$), the potential difference across the terminals of the source is equal to its emf:

$$V_1 - V_2 = \mathscr{E}.$$

A voltmeter connected in parallel with portion 1-2 of a direct current (d.c.) electric circuit measures the potential difference across the ends of this portion, and not the voltage:

$$R_V I_V = V_1 - V_2,$$

where R_V and I_V are the resistance of the voltmeter and its current (Figure 21.3). This follows from the generalized Ohms law (21.2.3) as written for portion 1-2 of the voltmeter circuit, in which there is no emf (see also Sect. (21.3.5)).




Figure 21.3.: Generalized Ohm's law for a portion of the voltmeter circuit.

21.2.6

In a d.c. electric circuit with fixed conductors, the work done by the extraneous forces is completely consumed in

heating the conductors (20.3.5). The energy E, evolved in a circuit during the time t throughout the whole volume of the conductor, is equal to E - IUt, where / is the current and U is the voltage. The quantity of heat Q ((9.2.1)) in calories, cor responding to this energy and evolved in the conductor, is

$$E = IU\,t,$$

where I is the current and U is the voltage. The quantity of heat Q (9.2.1) in calories, corresponding to this energy and evolved in the conductor, is

$$Q = 0.24\,IU\,t.$$

All the other quantities are expressed in SI units (Appendix I). The *Joule-Lenz* law states that the quantity of heat generated by current in a conductor is proportional to the current, voltage and time that the current flows. Other expressions of the Joule-Lenz law are:

$$Q = 0.24\,I^2Rt = 0.24\frac{U^2}{R}t.$$

21.3 Kirchhoff's Laws

21.3.1

The analysis of *complex (branched) circuits* consists in finding the currents in the various portions of the circuit in accordance with their given resistances and applied emfs.

21.3.2

A *branch point*, or *junction*, in a branched circuit, or network, is a point where there are more than two possible directions of the current (Figure 21.4).

Kirchhoff's first law (point rule) states that the algebraic sum of the currents that meet at any junction of a network equals zero:

$$\sum_{i=1}^{n} I_i = 0,$$

where n is the number of conductors joined at the branch point and I_i is the current at the point. Currents flowing toward the branch point are considered positive; those flowing away are considered negative.

Kirchhoff's second law (mesh rule) states that in any closed loop (mesh of a network), arbitrarily chosen in a branched circuit (network), the algebraic sum of the products of the currents I_i by the resistances R_i of the corresponding portions of the loop is equal to the algebraic sum of the emfs in the loop. Thus

$$\sum_{i=1}^{n_1} I_i R_i = \sum_{i=1}^{n_1} \mathscr{E}_i$$

where n_1 the number of portions into which the loop is divided by branch points (junctions). In applying the mesh rule, a definite direction around the loop is chosen (either clockwise or counter clockwise). Currents coinciding in direction with the chosen one are considered positive. The emfs of the sources of electrical energy




Figure 21.4.: Analysing a branched circuit.

are considered positive if they produce currents whose direction coincides with the chosen one.

21.3.3

The following procedure is employed to analyse a complex (branched) d.c. circuit:

(a) The directions of the currents are arbitrarily assigned in all the portions of the circuit.

(b) For m branch points (junctions), $m-1$ independent equations are written on the basis of Kirchhoff's first law.

(c) Arbitrary closed loops are separated out and, alter choosing the direction for going around each loop, a system of equations is written on the basis of Kirchhoffs second law. In a branched circuit consisting of p portions (branches) between adjacent branch points and m branch points (junctions), the number of independent equations based on the mesh rule equals $p-m+1$. In selecting the loop, it is necessary for each new loop to contain at least one portion (branch) not included in the previously considered loops.

21.3.4

To *shunt an ammeter* means to connect an additional resistor R_{sh}, in parallel to the ammeter. This is done so that the ammeter, having the resistance R_0 and designed

to measure a maximum current of I_0, can be applied to measure currents I that exceed current I_0 (Figure 21.5). The required resistance of the shunt is found according to Kirchhoffs laws: $I = I_0 + I_{sh}$ and $I_0 R_0 = I_{sh} R_{sh}$ from which R_{sh} is eliminated:

$$R_{sh} = \frac{I_0 R_0}{I - I_0}$$




Figure 21.5.: Analysing shunting of ammeter.

21.3.5

A potential difference $V_1 - V_2 = U$ across a portion of a circuit is to be measured by a voltmeter designed for a maximum measurement of U_0 volts (21.2.5) at a maximum permissible current of I_0 (with $U_0 = I_0 R_0$)and this potential difference exceeds U_0 (i.e. $U > U_0$). This can be done by connecting an additional *resistor* R_a in series with the voltmeter (Figure 21.6). The required additional resistance is determined from the equation $U = (R_0 + R_a) I_0$, from which

$$R_a = \frac{U}{I_0} - R_0$$




Figure 21.6.: Additional resistor for a voltmeter.

22 Electric Current In Liquids And Gases

22.1 Faraday's Laws of Electrolysis. Electrolytic Dissociation

22.1.1

Liquids are conductors of electric current (*electrolytes*, *ion conductors*) provided that ordered motion of ions can be accomplished in them by the action of an external electric fields.

The ordered motion of ions in conducting liquids takes place in an electric field set up by *electrodes*, which are conductors connected to the terminals of a source of electrical energy. The positive electrode is called the *anode*, the negative electrode, the *cathode*. Positive ions, called *cations*, are the ions of metals and hydrogen, and move toward the cathode. Negative ions, called *anions*, are the ions of acid radicals and of the hydroxyl group, and move toward the anode. Electric current in electrolytes

is accompanied by the phenomenon of *electrolysis*. This is the deposition on the electrodes, or the liberation at them, of the components of the substances contained in the electrolyte or of other substances produced by secondary reactions.

22.1.2

Faraday's first law of electrolysis states that the mass M of a substance deposited on or liberated at an electrode is directly proportional to the electric charge Q passing through the electrolyte. Thus

$$M = kQ = kIt$$

if direct current I is passed during the time t through the electrolyte.

The proportionality factor k is called the *electrochemical equivalent* of the substance. It is numerically equal to the mass of the substance liberated when a unit electric charge passes through the electrolyte and depends upon the chemical nature of the substance.

22.1.3

Faraday's second law of electrolysis states that the electrochemical equivalents of the elements are directly proportional to their chemical equivalents:

$$k = C\,k_{ch}$$

where C is a certain constant universal for all the elements, and k_{ch} is the chemical equivalent and is equal to

$$k_{ch} = \mathrm{d}3\frac{m_a}{z}.$$

Mere m_a is the atomic mass of the element (in kg/mol), and z is its valency.

Hence, $k = \frac{1}{F}\frac{m_a}{z}$, where $F = \mathrm{d} - 3/C$ is *Faraday's constant* (Appendix II).

22.1.4

Faraday's united law of electrolysis, enables the physical meaning of F to be cleared up: at $M = m_a/z$, Faradays constant $F = Q$. The amount of substance equal to $1/z$ moles is called its *gram equivalent*. At $z = 1$ the gram equivalent of substance is equal to one mole. Faradays constant is numerically equal to the electric charge that must he passed through an electrolyte to deposit one gram equivalent of any substance on the electrode.

22.1.5

The splitting of neutral molecules into oppositely charged ions as a result of interaction between the dissolved substance (solute) and the solvent is called *electrolytic dissociation*. It is caused by the thermal motion of the polar molecules (18.1.4) of the solute, consisting of interrelated, oppositely charged ions (**??**), and by the interaction of these molecules with the polar molecules of the solvent. Both causes lead to weakening of the heteropolar bonds

in ionic molecules (**??**) and to the conversion of such molecules into two oppositely charged ions.

The *degree of dissociation* α is the ratio of the number nof molecules dissociated into ions in a certain volume to the total number n0of molecules of the solute in the same volume:

$$\alpha = \frac{n'}{n_0}.$$

22.1.6

The process opposite to electrolytic dissociation (22.1.5) is called *deionization*. It consists in the recombination of ions of opposite signs into neutral molecules. Under conditions of dynamic mobile equilibrium between the dissociation and deionization processes, α is determined by the equation

$$\frac{1-\alpha}{\alpha^2} = \text{const} \times n_0.$$

As $n_0 \to 0$, we have $\alpha \to 1$, i.e. in weak solutions almost all the molecules dissociate. The degree of dissociation α decreases with an increase in the concentration of the solution. In highly concentrated solutions

$$\alpha \approx \frac{\text{const}}{\sqrt{n_0}}.$$

22.2 Atomicity of Electric Charges

22.2.1

It follows from Faraday's laws of electrolysis that all electric charges consist of a whole number of elementary indivisible charges.

22.2.2

The charge Q of any ion is equal to

$$Q = \pm \frac{zF}{N_A},$$

where z is the valency of the ion, F is Faradays constant (22.1.4), and N_A is Avogadros number (Appendix II). The charge of a monovalent ion is equal to the charge e of the electron or proton:

$$Q_1 = e = 1.602 \times 10^{-19}\ \text{C} = 4.803 \times 10^{-10} \text{electrostatic units}.$$

Any electric charge consists of a whole number of elementary charges e (14.1.2).

22.3 Electrolytic Conduction of Liquids

22.3.1

The current density $\mathbf{j}$ (20.2.3) in an arbitrary section SS, perpendicular to the direction of ion motion (Figure 22.1), is equal to the sum of the current densities of the positive and negative ions:

$$\mathbf{j} = \mathbf{j}_+ + \mathbf{j}_-.$$

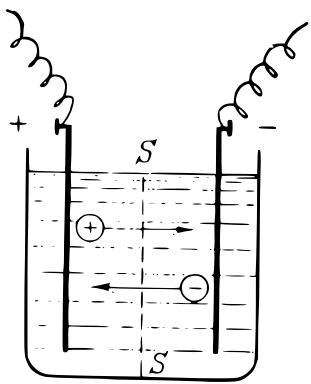


Figure 22.1.: Current density in a conducting liquid.

Here $\mathbf{j}_+ = q_+ n_{0+} \langle \mathbf{v}_+ \rangle$ and $\mathbf{j}_- = q_- n_{0-} \langle \mathbf{v}_- \rangle$, where q_+ and q_-, n_{0+} and n_{0-}, and $\langle \mathbf{v}_+ \rangle$ and $\langle \mathbf{v}_- \rangle$ are the charges, concentrations and average velocities of ordered motion (*drift* due in the action of the electric held) of the positive and negative ions.

22.3.2

The average velocities of ion drift are proportional to the electric field strength $\mathbf{E}$:

$$\langle \mathbf{v}_\perp \rangle = u_+ \mathbf{E} \text{ and,}$$
$$\langle \mathbf{v}_\parallel \rangle = -u_- \mathbf{E},$$

where u_+ and u_- are the *mobilities* of the positive and negative *ions*. The mobility of an ion is equal to the ratio of the magnitude of the average drift velocity vector to that of the field strength vector. The mobility is independent of the field strength vector $\mathbf{E}$. Since there are no bulk charges in electrolytes, $q_+ n_{0+} + q_- n_{0-} = 0$. Moreover, $q_+ = e z_+ = \dfrac{F}{N_A} z_+$ (22.2.2).

22.3.3

Ohm's law of current density in electrolytes (cf. (20.3.4)) is:

$$\mathbf{j} = \frac{F}{N_A} z_+ n_{0+} (u_+ + u_-) \mathbf{E}.$$

The resistivity ρ of an electrolyte (20.3.4) is equal to

$$\rho = \frac{N_A}{F z_+ n_{0+} (u_+ + u_-)}.$$

If a molecule of the solute dissociates into k_+ positive and k_- negative ions, then

$$k_+ z_+ = k_- z_-; \quad n_{0+} = k_+ \alpha n_0 \quad \text{and} \quad n_{0-} = k_- \alpha n_0,$$

where α is the degree of dissociation, n_0 is the concentration of the solute (22.1.5) and

$$\rho = \frac{N_A}{F z_+ k_+ \alpha n_0 (u_+ + u_-)}.$$

The ratio N_A/z_+ is the number of positive ions in one gram equivalent (22.1.4). We introduce the quantity

$$C = \frac{k_+ n_0 z_+}{N_A} = \frac{k_- n_0 z_-}{N_A},$$

which is called the *equivalent concentration of the solution*. It is the number of gram equivalents of the ions of one sign contained in unit volume of the electrolyte (either in the free state or bound in the molecules). Then

$$\rho = \frac{1}{FC\alpha(u_+ + u_-)}.$$

22.4 Electrical Conduction in Gases

22.4.1

Gases, consisting of neutral atoms and molecules, are insulators and do not conduct an electric current. Gases arc capable of conduction after they are ionized.

The *ionization of a molecule* (or *atom*) consists in the detachment of one or several electrons, after which the

molecule (or atom) is converted into a positive ion. If a molecule (or atom) gains electrons, it becomes a negative ion. The reverse process, in which electrons join a positive ion to form a neutral molecule (or atom), is called *recombination*.

22.4.2

To ionize a molecule (or atom) it is necessary to perform the *work of ionization* W_i to overcome the forces of attraction between the electron being detached and the other particles of the molecule (or atom). The work W_i depends upon the energy state of the electron being detached (**??**) in the atom or molecule of the given gas. The ionization energy increases with the electron detachment factor, i.e. with the number of electrons detached from each atom.

22.4.3

The *ionization potential* V_i is the potential difference that the charged particle must traverse in an accelerating electric held in order to accumulate energy equal to the work of ionization W_i. Thus $V_i = W_i/e$, where e is the magnitude of the charge of the particle.

22.4.4

A gas is ionized by external effects: raising the temperature sufficiently, the action of various kinds of radiation, cosmic radiation, bombardment of the molecules (or atoms) of the gas by high-speed electrons or ions, etc.

The *intensity*, or *rate, of ionization* is measured by the number of pairs of particles of opposite sign formed in unit time in unit volume of the gas.

22.4.5

Collision ionization is the process in which a gas is ionized by the action of fast-moving electrons or by ions. The minimum kinetic energy (3.2.1) that an ionizing particle must have is assessed by applying the laws of conservation of momentum and energy. Thus

$$\frac{mv^2}{2} = W_i \left(1 + \frac{m}{M}\right)$$

where W_i is the work of ionization, m is the mass of the electron and M is the mass of the atom.

The smaller the ratio m/M, the closer this energy is to W_i. An electron and a single-charge ion accumulate the same energy $E = e\,\Delta V$ if they traverse the same potential difference ΔV.

It follows from the preceding formula that for collision ionization by electrons and ions, the latter of a mass 10^4 times that of the electron, ions must travel across a greater potential difference in an accelerating field than electrons.

22.5 Various Types of Gas Discharges

22.5.1

A *gas discharge* is the process of current conduction through a gas.




Figure 22.2.: Current-voltage relationship in a semi-self-maintained discharge gas.

A *semi-self-maintained gas discharge* is one caused by external ionizing agents (22.4.4) and ceasing when the ionizing action stops. The curve in Figure 22.2 shows the dependence of the current I in a semi-self-maintained discharge on the voltage U across the electrodes, in the 1st region of the curve, at low voltages, Ohms law, similar to the one for electrolytes (22.3.3), is valid. If electrons and monovalent ions are formed in the gas, then

$$\mathbf{j} = en_0(u_+ + u_-)\mathbf{E},$$

where n_0 is the number of pairs of oppositely charged particles in unit volume, u_+ and u_- are the mobilities of the positive and negative ions, and e is the magnitude of the charge of the electron. In a wide pressure range, from 10 to 10^7 Pa, the mobility of gaseous ions is inversely proportional to the pressure.

22.5.2

The relation between the current I and the voltage U is no longer linear in the 2nd region of the curve in Figure 22.2 because the ion concentration decreases in the gas. In this region U the current increases slower and slower with an increase in U.

Beginning with a certain voltage U_s, the current re mains constant in the 3rd region of the curve in Figure 22.2 when the voltage is in creased. This occurs because, at a constant rate of ionization (22.4.4) in strong electric fields, all the ions formed in unit time in the gas reach the electrodes. No further increase in the current takes place at a fixed rate of ionization. Saturation results because

all the charged particles produced in the gas travel in a strong electric field and reach the electrodes before an appreciable part of them have enough time to recombine with particles of opposite charge.

The saturation current U_s is the maximum current that can be obtained at a given rate (intensity) of ionization:

$$I_s = eN_0$$

where N_0 is the maximum number of pairs of monovalent ions formed in the gas in unit time at a given rate of ionization. The linear relation between I_s and N_0 confirms the ionic nature of electrical conduction in gases.

22.5.3

A *self-maintained gas discharge* is one that continues after the action of the external ionizing agent ceases. To obtain such a discharge it is necessary for new pairs of oppositely charged particles to be formed continuously in the gas. The main source of these particles is collision ionization (22.4.5). At a certain sufficiently high voltage across the electrodes, the electrons are so highly accelerated by the electric held that their energy proves adequate to ionize the gas molecules (22.4.5). This is called *volume ionization*. Secondary electrons, accelerated in the electric held, also ionize the gas molecules. As a result, the number of current carriers in the gas and its electrical conductance are greatly increased (4th region in Figure 22.2. But, by itself, ionization by the action of electrons is insufficient to produce a self-maintained discharge.

Electrons travelling in the direction from the cathode toward the anode ionize the molecules of gas located closer to the anode than the place where the electrons are unitied. If the energy of the positive ions is insufficient for collision ionization of the gas molecules or for knocking electrons out of the metallic cathode (*surface ionization*), electrons can be produced near the cathode of a gas-discharge tube only by external ionizing agents. When the action of these agents is- stopped, the region of collision ionization by electrons contracts toward the anode as the electrons move in this direction. Under these conditions the gas discharge is extinguished as soon as collision ionization ceases.

22.5.4

Surface ionization (22.5.3), initiated at high voltage U, produces secondary electrons and sets up a two-way avalanche of electrons and positive ions. After this the action of the external ionizing agent is no longer essential for continuing the gas discharge. When the voltage U across the electrodes of a gas-discharge tube is raised sufficiently, an *electric breakdown of the gas* occurs. This is the transition from a semi-self-maintained to a self-maintained gas discharge. The voltage $U = U_{bd}$, corresponding to electric breakdown, is called the *ignition potential*, or *breakdown voltage*. The breakdown voltage for a gas discharge in a tube having flat parallel electrodes at the distance d from each other depends upon the product pd, where p is the gas pressure Figure 22.3. In addition, depends on the chemical nature of the gas and the material of the




Figure 22.3.: The breakdown voltage for gas discharge.

cathode.

Self-maintained gas discharges are classified into glow, corona, spark and arc discharges. They are not discussed in the present handbook.

22.6 Certain Information on Plasma

22.6.1

Plasma is a special state of matter, whose most important property is a predominant, or even complete, ionization of the particles of matter. The *degree of ionization* α is the ratio of the number of ionized particles to their initial number. Plasma is classified as *weakly ionized* (when α is a fraction of one percent), *moderately ionized* (when α equals several percent) and *fully ionized* (when α is close to 100 per cent).

Weakly ionized plasma is found in the *ionosphere*, the conducting layer of the atmosphere. The ionosphere extends from 60 to 2×10^4 km above the earths surface.

Fully ionized plasma, formed at ultra-high temperatures (high-temperature plasma), exists on the sun and hot stars. Under laboratory conditions, plasma is produced in gas discharges (22.5.1) and gaseous-discharge lamps. Accelerated plasma is employed as the working medium (11.1.1) in jet engines. Plasma can also be used for the direct conversion of internal energy into electrical energy (magnetohydrodynamic generators and plasma sources of electrical energy).

The great number of charged particles in a plasma provides for its high electrical conductance; in this aspect

its properties approach those of conductors of electric current.

22.6.2

A condition for the existence of a plasma is a certain minimum density $\rho_{\min}$ of charged particles. Beginning with this density, we can speak of a plasma rather than a simple accumulation of separate charged particles. The density $\rho_{\min}$ is determined by the inequality $L \gg D$, where L is a linear dimension of the system of charged particles and D is a typical "plasma" parameter, the length called the *Debye-Hückel screening* radius (it is also called the *Debye shielding length* or *Debye length*):

$$D = \left(\sum_i \frac{4\pi q_i^2 n_i}{k T_i} \right)^{-1/2} \qquad \text{(in cgse units)},$$

$$D = \left(\sum_i \frac{q_i^2 n_i}{\varepsilon_0 k T_i} \right)^{-1/2} \qquad \text{(in SI units)},$$

where q_i is the charge of the i-th species of particles, n_i is their concentration, T_i is their temperature, k is Boltzmanns constant (**??**) and ε_0 is the electric constant. Summation is to be carried out over all the species of particles. The quantity D is the distance over which the Coulomb field of any charge of the plasma is shielded. The shielding occurs because any charge is predominantly surrounded by oppositely charged particles.

According to a more exact definition, a plasma is a quasi neutral assembly of a large number of charged particles

that occupy a region of space with the linear dimensions $L \gg D$. The violation of quasi-neutrality in the plasma is eliminated by the strong electric fields set up in it.

The Debye-Hückel screening radius characterizes the interaction of the particles in the plasma. It was found that $E_p/E_k \propto N^{2/3}$, where $N = 4\pi n D^3/3$. Here E_p is the potential energy of interaction between two particles located at an average distance of $n^{-1/3}$ from each other (n being the concentration of particles), and E_k is the kinetic energy of these particles. The quantity N is the total number of charged particles inside a sphere of radius D, and is called the *Debye number*. If N is large, the plasma is said to be *gaseous* and can be dealt with thermodynamically as an ideal gas with the state equation $p = nkT$ (8.4.5).

22.6.3

Coulomb long-range interaction of charged particles in a plasma leads to its qualitative uniqueness that enables it to be regarded as a special, *fourth state of aggregation of matter. The most important properties of plasma* are:

(a) its strong interaction, due to its high electrical conduction, with external magnetic and electric fields;

(b) specific collective interaction of particles in the plasma (by means of a special held whose nature and origin is beyond the scope of this handbook);

(c) the fact that due to long-range interaction it is a special kind of elastic medium in which various types

of vibrations and waves can be readily excited and propagated.

22.6.4

The motion of plasma in a magnetic held is employed to directly convert the internal energy of an ionized gas into electrical energy. This method is made use of in a *magneto-hydrodynamic (MHD) generator*. This generator operates as follows: gas produced in the combustion of fuel and constituting a plasma passes through a strong traverse magnetic held. In a conducting plasma, as in any conductor moving in such a held, electromagnetic induction (24.1.1) occurs. The induced emf can be taken off by means of electrodes in the external circuit. A schematic diagram of an MHD generator is shown in Figure 22.4.

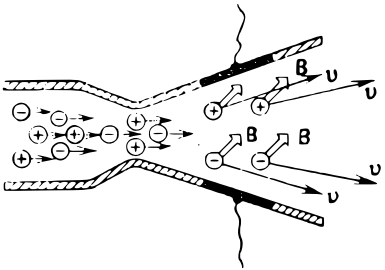


Figure 22.4.: A schematic diagram of an MHD generator.

The ionized gas produced in fuel combustion passes through the nozzle and its internal energy is converted into kinetic energy. As this gas passes through the transverse magnetic field **B**, the positive ions move toward the upper electrode by the action of the induced electric held (24.1.1) and the free electrons move toward the lower electrode. When we connect the electrodes to an external load, a current is obtained in the circuit.

22.6.5

A state of thermodynamic equilibrium is possible at a definite temperature in the plasma when the loss of charged particles due to recombination (22.4.1) is recompensed by

new acts of ionization. The average kinetic energies of the various particles making up such a plasma are the same. The processes of energy exchange between the particles of this plasma, as well as the energy exchange of the plasma with blackbody radiation (36.1.8) are equilibrium processes (8.3.7). A *plasma* with the aforesaid properties is said to be *isothermal*. It exists in the atmospheres of high-temperature stars.

A condition required for a high degree of ionization of a thermodynamically equilibrium plasma, consisting of two kinds of charged particles, equal in magnitude and opposite in sign, is the maximum reduction in the recombination (22.4.1) of the particles. A completely ionized plasma can be obtained at $kT \gg eV_i$ where V_i is the ionization potential (22.4.3) of the gas atoms and kT is the average energy of thermal motion of the plasma particles. For hydrogen and deuterium this corresponds to $T \approx 160\,000\,\mathrm{K}$. Essential under these conditions are the radiation of the plasma and the difficulty of isolating the plasma from the walls of its container (22.6.7).

22.6.6

In the plasma of a gas discharge (22.5.1) (*gas-discharge plasma*) thermodynamical equilibrium (22.6.5) is absent. The charged particles of such a plasma are in an accelerating electric field.

The average kinetic energy of the electrons in a gas-discharge plasma is characterized by a certain *electron temperature* T_e corresponding to the Maxwellian energy distribution of the electrons (10.3.7). Owing to the lack

of thermodynamical equilibrium in such a plasma, T_e is of a conventional nature. The average kinetic energy of the neutral particles is substantially less than that of the electrons. Besides the electron temperature T_e, the parameters of a gas-discharge plasma are: the electron concentration n_e, the number of ionizations per electron per second, the density of the ion or electron current, and the longitudinal electric field strength E_z established along the symmetry axis of the plasma.

22.6.7

The existence of a thermodynamically nonequilibrium gas-discharge plasma is made possible by the energy of the discharge current passing through it. In the absence of an external electric field, the gas-discharge plasma disappears.

The disappearance of an unmaintained gas-discharge plasma that has been left to Itself is called *deionization of the gas*.

In addition to the ionization and recombination processes (22.4.1), a large share of the energy balance of a plasma that exists in a limited volume consists in the interaction between the plasma and the walls confining its volume, as well as the radiation of the plasma and the transport of radiation in it. The diffusion of the charged particles to the walls and their recombination on the walls, and the transfer of energy to the walls by heat conduction (10.8.2) contaminate the plasma with impurities and reduce its energy. To avoid these phenomena, measures are taken to confine the plasma by a magnetic field to

prevent contact with the walls.

Radiation of the plasma in the optical range and in the far ultraviolet consists of: braking radiation (bremsstrahlung) of the electrons that occurs when they are retarded by the ions, ordinary radiation produced by excited particles, and recombination radiation that occurs in the recombination process (22.4.1). In a magnetic field, a plasma also has a special beta tron (synchrotron) radiation, which is beyond the scope of this handbook.

23 Magnetic Field Of Direct Current

23.1 Magnetic Field. Ampere's Law

23.1.1

A *magnetic field* is one of the forms of an electromagnetic field (15.1.2). A magnetic field is set up by moving charged particles, as well as moving bodies carrying electric charges. Magnetic fields act only on moving electric charges and moving charged bodies.

Variable electric fields (displacement currents) (27.3.1) are also sources of magnetic fields.

23.1.2

The main force characteristic of a magnetic field is *vector of magnetic induction* **B** (also called *magnetic flux density*, *magnetic displacement*, or, simply, *magnetic vector*). Vector B is determined by one of three methods:

(a) from Amperes law (23.1.4);

(b) from the effect of the magnetic field on a current-carrying loop (23.4.2);

(c) from the expression for the Lorentz force (24.1.3).

23.1.3

Magnetic fields are represented graphically by lines of magnetic induction. *Lines of magnetic induction (lines of magnetic force)* are curves whose tangent at each point coincides with vector **B** at this point of the field. The directions of the magnetic vector and the lines of magnetic induction are determined by the *corkscrew (Maxwell) rule* (also called the *right-hand screw rule*): if a corkscrew with right-hand thread is screwed in the direction of the current density vector in the conductor (20.2.3), the direction that the corkscrew handle turns indicates the direction of the lines of magnetic induction and the magnetic vector.

Lines of magnetic induction are not interrupted at any point of the magnetic field, i.e. they neither begin nor end. These lines are either closed curves or they extend from infinity to infinity or they are wound infinitely on some surface, covering it densely all over, but never returning again to any point of the surface. A similar situation is observed, for example, in a field set up by a system of a circular current and an infinite rectilinear current passing through the centre of the circular current and perpendicular to its plane.

A magnetic field is said to be *uniform*, or *homogeneous*, if vector **B** is constant at any point in the field. Otherwise,

it is said to be *nonuniform (nonhomogeneous)*.

23.1.4

The force exerted by a magnetic field on a current-carrying conductor placed in the field is called *Ampere's force*.

Ampere's law states that an element of force $\mathrm{d}\mathbf{F}$ exerted on a small element of length $\mathrm{d}l$ of a conductor, carrying a current and located in a magnetic field, is proportional to the vector product of the element $\mathrm{d}\mathbf{l}$ of conductor length by the magnetic induction $\mathbf{B}$:

$$\mathrm{d}F = I\,[\mathrm{d}\mathbf{l} \times \mathbf{B}] \quad \text{(in SI units)},$$

$$\mathrm{d}F = \frac{I}{c}\,[\mathrm{d}\mathbf{l} \times \mathbf{B}] \quad \text{(in Gaussian units, see Appendix I)},$$

Here $\mathrm{d}\mathbf{l}$ is a vector with the magnitude $\mathrm{d}l$ and has the same direction as the density vector $\mathbf{j}$ of the current in the conductor (20.2.3).

Amperes force $\mathbf{F}$, acting in a magnetic field on a current-carrying conductor of finite length, is

$$\mathbf{F} = \int I\,[\mathrm{d}\mathbf{l} \times \mathbf{B}],$$

in which integration is carried out over the whole length of the conductor. In the case of a uniform magnetic field (23.1.3).

$$\mathrm{d}F = I\,Bl\sin\alpha \qquad \text{(in SI units)},$$

$$\mathrm{d}F = \frac{I}{c}\,Bl\sin\alpha \qquad \text{(in Gaussian units)},$$

where α is the angle between the density vector of the current in the conductor and vector $\mathbf{B}$. The relative positions of vectors $d\mathbf{F}$, $\mathbf{B}$ and $d\mathbf{l}$ are shown in Figure 23.1. If $d\mathbf{l}$ is perpendicular to $\mathbf{B}$, the direction of force $d\mathbf{F}$ is found by the *left-hand rule*: if the left hand, opened flat with the fingers parallel to one another and the thumb perpendicular to the fingers, is held so that the magnetic induction vector enters the palm and the fingers indicate the direction of the electric current, the thumb indicates the direction of the force exerted by the magnetic field on the current-carrying conductor.




Figure 23.1.: Directions of vectors $d\mathbf{F}$, $d\mathbf{l}$ and $\mathbf{B}$.

It is evident from Figure 23.1 that vector $d\mathbf{F}$ is perpendicular to the plane passing through vectors $d\mathbf{l}$ and $\mathbf{B}$, and that its direction is such that from the head of vector $d\mathbf{F}$ the direction of shortest rotation from vector d to vector $\mathbf{B}$ is counter-clockwise. In other words, vector $d\mathbf{F}$ coincides in direction with the vector product $[d\mathbf{l} \times \mathbf{B}]$.

23.1.5

It follows that the magnetic induction vector in SI units is numerically equal to the limit of the following ratio: the force exerted by a magnetic field on an element of a current-carrying conductor to the product of the current by the length of an element of the conductor, the limit being taken as the length of the element approaches zero and is positioned in the field so that the limit reaches its

maximum value. Thus

$$B = \frac{1}{I}\left(\frac{\mathrm{d}F}{\mathrm{d}l}\right)_{\max} \qquad \text{(in SI units)},$$

$$B = \frac{c}{I}\left(\frac{\mathrm{d}F}{\mathrm{d}l}\right)_{\max} \qquad \text{(in Gaussian units)},$$

where c is the electrodynamic constant (Appendix I).

23.1.6

In contrast to electrostatic forces (14.2.2), Amperes force is not a central one (3.3.4). Amperes force is perpendicular to the lines of magnetic induction and to the current-carrying conductors.

23.2 The Biot-Savart-Laplace Law

23.2.1

The *Biot-Savart-Laplace law* determines the magnetic induction at any point in a magnetic field set up by a direct electric current flowing along a conductor of any shape. The vector $\mathrm{d}\mathbf{B}$ of magnetic induction at any point C of a magnetic field, set up by an element of a conductor carrying the current I and of the length $\mathrm{d}l$ is determined by the formula

$$\mathrm{d}\mathbf{B} = k\mu_r\,[\mathrm{d}\mathbf{l} \times \mathbf{r}],$$

where $\mathrm{d}\mathbf{l}$ is the vector of an element of length of the conductor (23.1.4), $\mathbf{r}$ is the radius vector from the element $\mathrm{d}\mathbf{l}$




Figure 23.2.: Biot-Savart Laplace law to find magnetic induction at any point in a magnetic field set up by a direct electric current flowing along a conductor of any shape.

of the conductor to point C (Figure 23.2), r is the magnitude of the radius vector $\mathbf{r}$, k is a factor depending only upon the chosen system of units, and μ_r is a dimension less quantity that characterizes the magnetic properties of the medium and called the *relative magnetic permeability* (or simply *relative permeability*) of the medium. The relative permeability does not depend upon the choice of units and equals unity for vacuum. For all substances, except ferromagnetic ones, p,r differs only slightly from unity (26.5.1). See (26.4.5) for a general definition of μ_r.

23.2.2

In SI units $k = \mu_0/4\pi$, where $\mu_0 = 4\pi \times 10^{-7}\,\mathrm{H/m}$ is the *permeability* of free space, or the *magnetic constant* (Appendix II). In Gaussian units, $k = 1/c$, where $c = 3 \times 10^{10}\,\mathrm{cm/s}$ is the electrodynamic constant (Appendix I).

The Biot-Savart-Laplace law is of the form

$$d\mathbf{B} = \frac{\mu_0 \mu_r}{4\pi} \frac{I}{r^3} [d\mathbf{l} \times \mathbf{r}]$$

This form of the Biot-Savart-Laplace law and of all the electromagnetic field equations is said to be *rationalized*.

The product $\mu_0 \mu_r$ is sometimes called the *absolute magnetic permeability* (or simply *permeability*) of the medium.

In Gaussian units

$$d\mathbf{B} = \frac{1}{c} \frac{I}{r^3} [d\mathbf{l} \times \mathbf{r}]$$

The magnitude of vector $\mathrm{d}\mathbf{B}$ is equal to

$$\mathrm{d}\mathbf{B} = \frac{\mu_0 \mu_r}{4\pi} \frac{I \mathrm{d}l \sin\alpha}{r^2} \qquad \text{(in SI units)},$$

$$\mathrm{d}\mathbf{B} = \frac{\mu_r}{c} \frac{I \mathrm{d}l \sin\alpha}{r^2} \qquad \text{(in Gaussian units.)}$$

where α is the angle between vectors $\mathrm{d}\mathbf{l}$ and $\mathbf{r}$.

23.2.3

The *magnetic field strength* $\mathbf{H}$ is the vector characteristic of a magnetic field that, for a homogeneous isotropic medium, is related to B as follows:

$$\mathbf{H} = \frac{\mathbf{B}}{\mu_0 \mu_r} \qquad \text{(in SI units)},$$

$$\mathbf{H} = \frac{\mathbf{B}}{\mu_r} \qquad \text{(in Gaussian units.)}$$

The universal relation between vectors $\mathbf{B}$ and $\mathbf{H}$ for a magnetic field in an arbitrary medium and the more general definition of the magnetic field strength vector $\mathbf{H}$ are discussed in (26.4.4).

The strength of a magnetic field set up by a direct current in a homogeneous isotropic medium is independent of the magnetic properties of the medium. Thus

$$\mathrm{d}\mathbf{H} = \frac{I}{4\pi r^3} [\mathrm{d}\mathbf{l} \times \mathbf{r}], \quad \mathrm{d}H = \frac{I \mathrm{d}l \sin\alpha}{4\pi r^2} \text{ (in SI units)},$$

$$\mathrm{d}\mathbf{H} = \frac{I}{cr^3} [\mathrm{d}\mathbf{l} \times \mathbf{r}], \quad \mathrm{d}H = \frac{I \mathrm{d}l \sin\alpha}{cr^2} \text{ (in Gaussian units.)}$$

where α is the angle between vectors $\mathrm{d}\mathbf{l}$ and $\mathbf{r}$.

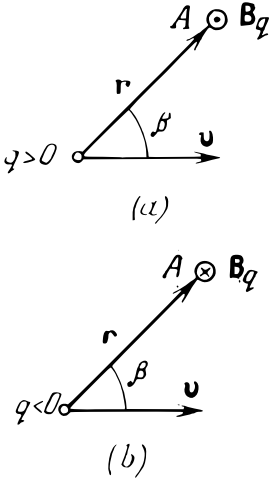


Figure 23.3.: Magnetic field by a travelling electric charge in an unbounded homogeneous and isotropic medium at the constant velocity.

23.2.4

It follows from a comparison of the characteristics of electric (**E** and **D**) and magnetic (**B** and **H**) fields that the electric field strength vector **E** is analogous to the magnetic vector **B**. Both vectors specify the force effects of the fields and depend upon the properties of the medium in which the field is set up.

The analogue of vector **D** of electric displacement (15.3.1) is the magnetic field strength vector **H**.

23.2.5

An electric charge q, travelling in an unbounded homogeneous and isotropic medium at the constant velocity $\mathbf{v}$, sets up a magnetic field whose magnetic induction $\mathbf{B}_q$ can be calculated by the formula

$$\mathbf{B}_q = \frac{\mu_0\mu_r}{4\pi}\frac{q}{r^3}[\mathbf{v}\times\mathbf{r}],\ B_q = \frac{\mu_0\mu_r}{4\pi}\frac{qv\sin\beta}{r^2}\ \text{(in SI units)},$$

$$\mathbf{B}_q = \frac{\mu_r}{c}\frac{q}{r^3}[\mathbf{v}\times\mathbf{r}],\quad B_q = \frac{\mu_r}{c}\frac{qv\sin\beta}{r^2}\quad \text{(in Gaussian units.)}$$

where β is the angle between vectors $\mathbf{v}$ and $\mathbf{r}$, and $\mathbf{r}$ is the radius vector from the travelling charge to the point A being considered in the field. Vectors $\mathbf{B}_q$ and $\mathbf{H}_q$ are perpendicular to the plane passing through vectors $\mathbf{v}$ and $\mathbf{r}$.

When $q > 0$, the shortest rotation from vector $\mathbf{v}$ to vector $\mathbf{r}$ is seen from the head of vector $\mathbf{B}_q$ (and $\mathbf{H}_q$) to be counter Figure 23.3 clockwise (Figure 23.3 (a)). When $q < 0$, then $\mathbf{B}_q$ (and $\mathbf{H}_q$) have the opposite direction (Figure 23.3 (b)). The magnetic field of a moving charge is

variable, because the radius vector $\mathbf{r}$ varies in magnitude and direction as charge q travels even if $\mathbf{v} = \text{const}$. The magnetic field of a moving charge, depending upon angle β between vectors $\mathbf{v}$ and $\mathbf{r}$, is not spherically symmetrical, as in the case of the electrostatic field of a point charge (14.2.3). The magnetic field being considered has mirror symmetry with respect to the direction of $\mathbf{v}$. The field strength is maximum at points in a plane passed through the charge perpendicularly to vector $\mathbf{v}$ (under the condition that $v \ll c$). At all points on a straight line coinciding with vector $\mathbf{v}$ there is no magnetic field induction,

23.3 Simplest Cases of Magnetic Fields Set Up by Direct Currents

23.3.1

Making use of the Biot-Savart-Laplace law we can determine the characteristics ($\mathbf{B}$ and $\mathbf{H}$) of a magnetic field set up by an electric current flowing in a conductor of finite dimensions and arbitrary shape. According to the principle of superposition of fields (15.2.2) the magnetic induction $\mathbf{B}$ at an arbitrary point of a magnetic field of a conductor carrying the current I is equal to

$$\mathbf{B} = \int_L \mathrm{d}\mathbf{B},$$

where $\mathrm{d}\mathbf{B}$ is the magnetic induction of the field set up by an element of the conductor with the length $\mathrm{d}l$. In-

tegration is carried out over the whole length L of the conductor.

23.3.2

A *straight conductor* MN carrying the current I sets up a magnetic field with induction B and strength H at an arbitrary point A equal to[9]

$$B = \frac{\mu_0 \mu_r}{4\pi} \frac{I}{r_0} (\cos\varphi_1 - \cos\varphi_2),\ H = \frac{B}{\mu_0 \mu_r} \text{ (in SI units)},$$
$$B = \frac{1}{c} \frac{I}{r_0}, (\cos\varphi_1 - \cos\varphi_2), \quad H = \frac{B}{\mu_r} \text{ (in Gaussian units.)}$$

[9] It is assumed in all the examples of (??) that the medium is homogeneous, isotropic and completely fills all the space in which the magnetic field exists.

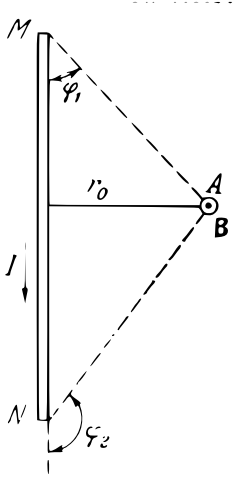


Figure 23.4.: Magnetic field by a current carrying conductor.

where r_0 is the distance from point A to the conductor, φ_1 and φ_2 are the angles formed by the radius vectors from point A to the beginning and end of the conductor (Figure 23.4), μ_r is the relative magnetic permeability of the medium, and μ_0 is the magnetic constant in SI units (Appendix II). For an infinitely long conductor $\varphi_1 = 0$ and $(\varphi_2 = \pi)$

$$B = \frac{\mu_0 \mu_r}{4\pi} \frac{I}{r_0} (\cos\varphi_1 - \cos\varphi_2),\ H = \frac{B}{\mu_0 \mu_r} \text{ (in SI units)},$$
$$B = \frac{1}{c} \frac{I}{r_0}, (\cos\varphi_1 - \cos\varphi_2), \quad H = \frac{B}{\mu_r} \text{ (in Gaussian units.)}$$

23.3.3

For the magnetic field at the centre of a *rectangular turn (loop) carrying the current* I

$$B = \frac{\mu_0 \mu_r}{4\pi} \frac{8I\sqrt{a^2+b^2}}{ab}, \; H = \frac{B}{\mu_0 \mu_r} \quad \text{(in SI units)},$$

$$B = \frac{1}{c}\mu_r \frac{8I\sqrt{a^2+b^2}}{ab}, \; H = \frac{B}{\mu_r} \quad \text{(in Gaussian units.)}$$

where a and b are the sides of the rectangle.

23.3.4

The *magnetic moment* $\mathbf{p}_m$ of a closed loop of arbitrary shape, carrying the current I, is equal to

$$\mathbf{p}_m = I \int_S \mathbf{n}\, \mathrm{d}S \qquad \text{(in SI units)},$$


$$\mathbf{p}_m = \frac{I}{c} \int_S \mathbf{n}\, \mathrm{d}S \qquad \text{(in Gaussian units.)}$$

where $\mathbf{n}$ is a unit vector of the outward normal to element $\mathrm{d}S$ of the surface S, bounded by the current-carrying loop. In the case of a flat loop, surface S is plane and all the normals have the same direction. Hence

$$\mathbf{p}_m = IS\mathbf{n}, \quad p_m = IS \quad \text{(in SI units)},$$

$$\mathbf{p}_m = \frac{1}{c} IS\mathbf{n}, \; p_m = \frac{1}{c} IS \quad \text{(in Gaussian units.)}$$

Vector $\mathbf{p}_m$ is directed so that from its head the current in the circuit is seen to be flowing counterclockwise (Figure 23.5).



23.3.5

The magnetic field set up by a circular turn, or loop, carrying the current I, at an arbitrary point A on the axis of the turn (loop) (Figure 23.6), is specified by

$$\mathbf{B} = \frac{\mu_0 \mu_r}{4\pi} \frac{2\mathbf{p}_m}{(R^2 + h^2)^{3/2}}, \quad \mathbf{H} = \frac{\mathbf{B}}{\mu_0 \mu_r} \quad \text{(in SI units)},$$

$$\mathbf{B} = \mu_r \frac{2\mathbf{p}_m}{(R^2 + h^2)^{3/2}}, \qquad \mathbf{H} = \frac{\mathbf{B}}{\mu_r} \qquad \text{(in Gaussian units.)}$$

Here $\mathbf{p}_m$ is the magnetic moment of a current-carrying turn, or loop, (23.3.4).


The magnitudes of vectors $\mathbf{B}$ and $\mathbf{H}$ equal

$$B = \frac{\mu_0 \mu_r}{2} \frac{IR^2}{(R^2 + h^2)^{3/2}} = \frac{\mu_0 \mu_r IS}{2\pi (R^2 + h^2)^{3/2}}, \quad H = \frac{B}{\mu_0 \mu_r}$$

(in SI units),

$$B = \frac{1}{c} \mu_r \frac{2\pi IR^2}{(R^2 + h^2)^{3/2}} = \frac{1}{c} \mu_r \frac{2IS}{(R^2 + h^2)^{3/2}}, \quad H = \frac{B}{\mu_r}$$

(in Gaussian units.)



where h is the distance from point A to the centre of the turn (loop), R is the radius and S is the area of the turn.

23.3.6

The magnetic field at the centre of a circular turn, or loop, has the characteristics (23.3.5):

$$\mathbf{B} = \frac{\mu_0\mu_r}{4\pi}\frac{2\mathbf{p}_m}{R^3},\ \mathbf{H} = \frac{\mathbf{B}}{\mu_0\mu_r}\text{(in SI units)},$$
$$\mathbf{B} = \mu_r\frac{2\mathbf{p}_m}{(R^3},\qquad \mathbf{H} = \frac{\mathbf{B}}{\mu_r}\quad\text{(in Gaussian units.)}$$

The magnitudes of vectors **B** and **H** equal

$$B = \mu_0\mu_r\frac{I}{2R},\ H = \frac{I}{2R}\quad\text{(in SI units)},$$
$$B = \frac{2\pi}{c}\mu_r\frac{I}{R},\ H = \frac{1}{c}\frac{2\pi I}{R}\quad\text{(in Gaussian units.)}$$

The direction of the magnetic field is along the axis of the loop and perpendicular to its plane (Figure 23.6).

23.3.7

A *toroid* is an annular coil wound on a core having the shape of a torus (Figure 23.7). The magnetic field of a toroid is completely confined within its volume.

The characteristics of this magnetic field are calculated by the formulas

$$B = \mu_0\mu_r\frac{NI}{2\pi r},\ H = \frac{NI}{2\pi r}\quad\text{(in SI units)},$$
$$B = \frac{1}{c}\mu_r\frac{2NI}{r},\ H = \frac{1}{c}\frac{2NI}{r}\quad\text{(in Gaussian units.)}$$

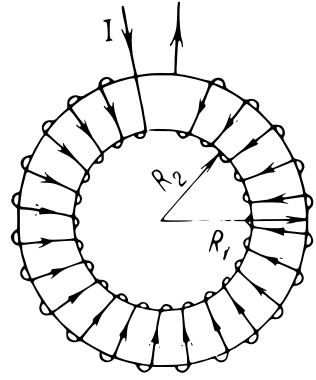


Figure 23.7.: The magnetic field at the centre of a toroid.

The magnetic induction B and the strength H of the magnetic field on the circular centre line of the toroid are equal to

$$B_{\text{cl}} = \mu_0 \mu_r \frac{NI}{2\pi R_{\text{cl}}} = \mu_0 \mu_r n I, \quad H = nI \quad \text{(in SI units)}.$$

Here N is the number of turns of the toroid, I is the current in the turns, r is the radius of a circle in the toroid, $R_{\text{cl}} = (R_1 + R_2)/2$, R_1 and R_2 are the external and internal radii of the torus, and n is the number of turns per unit length of the toroids centre line.

23.3.8

A *solenoid* is a cylindrical coil consisting of a large number of turns of wire in the form of a helix. If the turns are wound tight up against or sufficiently close to one another, the solenoid is dealt with as a system of circular closed current-carrying loops connected in series and having the same radius and a common axis.

The magnetic moment $\mathbf{p}_m$ (23.3.4) of the solenoid is equal to the vector sum of the magnetic moments of all N of its turns. Thus

$$\mathbf{p}_m = NIS\mathbf{n},$$

where I is the current in the solenoids turns, S is the area of a turn, and $\mathbf{n}$ is a unit vector of the normal to the plane of a turn. Vector $\mathbf{p}_m$ is along the axis of the solenoid and coincides in direction with the magnetic field as determined by the cork screw rule (23.1.3).

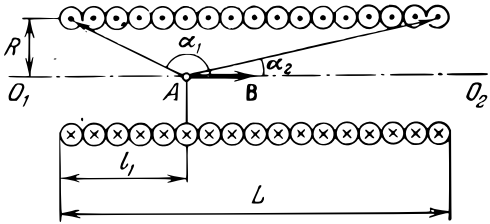


Figure 23.8.: The magnetic field of a solenoid.

The magnetic induction B and strength H of the solenoids magnetic field at an arbitrary point A, lying on its axis, are numerically equal to

$$B = \frac{\mu_0 \mu_r}{2} NI\,(\cos\alpha_2 - \cos\alpha_1), \quad H = \frac{B}{\mu_0 \mu_r} \text{ (in SI units)},$$

$$B = \frac{1}{c}\, 2\pi \mu_r n I \mu_r\,(\cos\alpha_2 - \cos\alpha_1), H = \frac{B}{\mu_0 \mu_r} \text{ (in Gaussian units.)}$$

where $n = N/L$ is the number of turns per unit length of the solenoid, α_2 and α_1 are angles at which the ends of the solenoid are seen from point A ($\alpha_2 < \alpha_1$),

$$\cos\alpha_1 = -\frac{l_1}{\sqrt{R^2 + l_1^2}}, \quad \cos\alpha_2 = \frac{L - l_1}{\sqrt{R^2 + (L - l_1)^2}},].$$

L is the length of the solenoid (Figure 23.8), and R is the radius of the cylindrical coil.

23.3.9

Under the condition that $L \gg R$, the magnetic field inside the solenoid at points on its axis sufficiently distant from

its ends is characterized by the values

$$B = \mu_0 \mu_r n I, \quad H = nI \qquad \text{(in SI units)},$$
$$B = \frac{1}{c}\, 4\pi \mu_r n I, H = \frac{1}{c}\, 4\pi n I \quad \text{(in Gaussian units.)}$$

The magnetic induction B and strength H of the magnetic field of a solenoid of sufficient length, at points of its axis coinciding with its ends, are equal to

$$B = \frac{\mu_0 \mu_r}{2}\, n I, \; H = \frac{1}{2} n I \qquad \text{(in SI units)},$$
$$B = \frac{1}{c}\, 2\pi \mu_r n I, H = \frac{1}{c}\, 2\pi n I \quad \text{(in Gaussian units.)}$$

23.4 Interaction of Conductors. Effect of a Magnetic Field on Current-Carrying Conductors

23.4.1

Amperes force (23.1.4), which acts on an element $\mathrm{d}l$ of length of a straight conductor carrying the current I_1 and is exerted by a long straight conductor carrying the current I_2, located parallel to the first conductor at a distance of a, is numerically equal to

$$\mathrm{d}F = \frac{\mu_0 \mu_r}{4\pi}\, \frac{2 I_1 I_2}{a}\, \mathrm{d}l, \qquad \text{(in SI units)},$$
$$\mathrm{d}F = \frac{1}{c}\, \mu_r \frac{2 I_1 I_2}{a}\, \mathrm{d}l, \qquad \text{(in Gaussian units.)}$$

where μ_0 is the magnetic constant in SI units (23.2.2) and c is the electrodynamic constant (Appendix I). The force $\mathrm{d}F$ is a force of magnetic interaction (24.1.4).

It is assumed that the lengths of the conductors are many times greater than the distance a between them, and that element $\mathrm{d}l$ is located far from the ends of the first conductor. It is moreover assumed that the conductors are in a homogeneous isotropic medium having the relative magnetic permeability μ_r.

The force F exerted on a current-carrying conductor of length l is equal to

$$F = \frac{\mu_0 \mu_r}{4\pi} \frac{2 I_1 I_2}{a} l, \qquad \text{(in SI units)},$$

$$F = \frac{1}{c} \mu_r \frac{2 I_1 I_2}{a} l, \qquad \text{(in Gaussian units.)}$$

Conductors carrying currents I_1 and I_2 that flow in the same direction attract each other. If the currents flow in opposite directions, the conductors repulse each other (see also Sect. (24.1.4)).

23.4.2

A closed flat current-carrying loop, of arbitrary geometric shape, placed in a uniform magnetic held (23.1.3), is subject to a moment of force (torque) $\mathbf{M}$ equal to

$$\mathbf{M} = [\mathbf{p}_m \times \mathbf{B}],$$

where $\mathbf{p}_m$ is the magnetic moment vector of a current-carrying loop (23.3.4), and $\mathbf{B}$ is the vector of magnetic induction (23.1.2) of the held. Torque $\mathbf{M}$ is perpendicular

to the plane passing through vectors $\mathbf{p}_m$ and $\mathbf{B}$ in such a manner that the shortest rotation from $\mathbf{p}_m$ to $\mathbf{B}$ is seen from the head of vector $\mathbf{M}$ to be counterclockwise. The torque tends to turn the loop to a position of stable equilibrium, in which vectors $\mathbf{p}_m$ and $\mathbf{M}$ are parallel to each other.

The preceding formula provides for a definition of the magnetic induction $\mathbf{B}$ (23.1.2): the magnitude of the magnetic induction vector at a given point of a uniform magnetic field is equal to the maximum value of the torque $M_{\max}$ acting in the vicinity of the point on a small flat closed current-carrying loop, having a magnetic moment p_m of unit magnitude:

$$B = \frac{M_{\max}}{p_m} = \frac{M_{\max}}{IS} \qquad \text{(in SI units)},$$

$$B = \frac{M_{\max}}{p_m} = \frac{M_{\max}}{\frac{1}{c}IS} \qquad \text{(in Gaussian units)}.$$

23.4.3

When a closed current-carrying loop is placed into a nonuniform magnetic field (23.1.3) in which the magnetic induction $\mathbf{B}$ of the field varies over distances comparable to the linear dimensions of the loop, the loop is subject to the force $\mathbf{F}$ equal to

$$\mathbf{F} = p_{mx}\frac{\partial \mathbf{B}}{\partial x} + p_{my}\frac{\partial \mathbf{B}}{\partial y} + p_{mz}\frac{\partial \mathbf{B}}{\partial z},$$

where p_{mx}, p_{my} and p_{mz} are the projections of vector $\mathbf{p}_m$ on the axes of Cartesian coordinates. In particular,

when vector $\mathbf{B}$ is along the OX axis and depends only on coordinate x [i.e. $B_x = B(x)$, $B_y = B_z = 0$ and $\mathbf{B} = \mathbf{B}_x\hat{\mathbf{i}}$ then

$$\mathbf{F} = p_{mx}\frac{\mathrm{d}B}{\mathrm{d}x}\hat{\mathbf{i}}.$$

By the action of force $\mathbf{F}$ an unfastened current-carrying loop is attracted into a region with a stronger magnetic field.

23.5 Total Current Law. Magnetic Circuits

23.5.1

The *circulation* of the magnetic induction vector $\mathbf{B}$ along a closed circuit L is an integral of the form:

$$\oint\limits_L \mathbf{B}\,\mathrm{dl} = \oint\limits_L B\,\mathrm{dl}\cos\alpha,$$

where L is the closed loop of arbitrary shape, α is the angle between vectors $\mathbf{B}$ and $\mathrm{d}\mathbf{l}$, and $\mathrm{d}\mathbf{l}$ is the vector of an element of length of the loop in the direction it is circuited.

23.5.2

The *total current law for a magnetic field in vacuum states*:

> the circulation of the magnetic induction vector of a magnetic field along a closed loop in

vacuum is proportional to the algebraic sum of the currents bounded by the loop.

Thus

$$\oint_L \mathbf{B}\,\mathrm{dl} = \mu_0 \sum_{k=1}^{n} I_k \qquad \text{(in SI units)},$$

$$\oint_L \mathbf{B}\,\mathrm{dl} = \frac{4\pi}{c} \sum_{k=1}^{n} I_k \qquad \text{(in Gaussian units)}.$$

where μ_0 is the magnetic constant in SI units (23.2.2), c is the electrodynamic constant (23.2.2) and n is the number of current-carrying conductors bounded by loop L of arbitrary shape. This law is valid for current-carrying conductors of any shape or size.

In calculating the algebraic sum of the currents, a current is considered positive if from the head of the current density vector (20.2.3) the circuiting of loop L is seen to be counter clockwise. Otherwise, the current is considered to be negative. For a generalization of the total current law to cover magnetic fields in an arbitrary media, see (26.4.2).

23.5.3

In contrast to an electrostatic conservative field, in which the circulation of the strength $\mathbf{E}$ along any closed path equals zero (16.1.4), a magnetic field has a curl (it is called a *rotational*, *vortical* or *circuital field*). In such a field the circulation of the magnetic induction vector $\mathbf{B}$ of the field along a closed path is not equal to zero. If no

currents are bound by loop L, the circulation of vector $\mathbf{B}$ along this loop equals zero. But this does not alter the rotational nature of the magnetic field.

23.5.4

The total current law can be written for either vacuum or for an arbitrary medium in the form of the circulation of field strength vector $\mathbf{H}$ (23.2.3) along an arbitrary closed loop L that bounds the currents:

$$\oint_L \mathbf{H}\,\mathrm{dl} = \mu_0 \sum_{k=1}^{n} I_k \qquad \text{(in SI units)},$$

$$\oint_L \mathbf{H}\,\mathrm{dl} = \frac{4\pi}{c} \sum_{k=1}^{n} I_k \qquad \text{(in Gaussian units)}.$$

If no currents are bounded by loop L, the circulation of vector $\mathbf{H}$ along this loop equals zero.

23.5.5

The *flux of the magnetic induction vector* $\mathbf{B}$ (*magnetic flux*) through a surface element of area $\mathrm{d}S$ is the scalar physical quantity equal to

$$\mathrm{d}\Phi_m = \mathbf{B}\,\mathrm{d}S = B_n \mathrm{d}S = B\,\mathrm{d}S\cos\gamma,$$

where $\mathrm{d}S = \hat{\mathbf{n}}\mathrm{d}S$, $\hat{\mathbf{n}}$ is the unit vector of the normal to the surface of area $\mathrm{d}S$, B_n is the projection of vector $\mathbf{B}$ on the direction of the normal (Figure 23.9), and γ is the

angle between vectors $\mathbf{B}$ and $\hat{\mathbf{n}}$. The magnetic flux Φ_m through an arbitrary surface S is

$$\Phi_m = \int_S \mathbf{B}\,\mathrm{d}S = \int_S B_n\,\mathrm{d}S.$$

In calculating this integral, the vectors $\hat{\mathbf{n}}$ of the normals to the elements of surface $\mathrm{d}S$ should be all in the same direction with respect to surface S. Thus, if S is a closed surface, vectors $\hat{\mathbf{n}}$ should be directed either all outward or all inward.

When the field is uniform and S is a plane surface perpendicular to vector $\mathbf{B}$, then $B_n = B = \text{const.}$ and $\Phi_m = BS$.




Figure 23.9.: The projection of vector $\mathbf{B}$ on the direction of the normal.

23.5.6

The *Ostrogradsky-Gauss for a magnetic field* states that the magnetic flux through an arbitrary closed surface equals zero. Thus

$$\oint_S \mathbf{B}\,\mathrm{d}\mathbf{S} = \int_S B_n\,\mathrm{d}S = 0.$$

This theorem is a mathematical expression of the fact that in nature there are no magnetic charges at which lines of magnetic induction begin or end (23.1.3).

The differential form of the Ostrogradsky-Gauss theorem for a magnetic field is one of Maxwell's equations for an electromagnetic field (27.4.2).

23.5.7

A *magnetic circuit* is a set of bodies or regions of space to which a magnetic field is confined. For example, the internal region of a toroid (23.3.7) and that of an infinitely long solenoid (23.3.9) are magnetic circuits. To strengthen their magnetic fields, magnetic circuits are made of materials having a high relative magnetic permeability μ_r (23.2.1), such as iron. The design of magnetic circuits, which are the essential components of electrical machinery and such electric devices as transformers and electromagnets, is based on the laws of magnetic circuits.

23.5.8

Ohm's law for a closed magnetic circuit (the *Hopkinson formula*) is

$$\Phi_m = \frac{F_m}{R_m},$$

where Φ_m is the magnetic flux, which is constant along each portion of the magnetic circuit, $F_m = IN$ is the *magnetomotive* force (*mmf*) or *magnetizing force* (in SI units), N is the number of turns carrying the electric current I for magnetizing the circuit, and R_m is the *total magnetic resistance* (*reluctance*) of the circuit. The magnetic resistance of a magnetic circuit of length l_i is

$$R_{mi} = \int^{l_i} \frac{\mathrm{d}l}{\mu_0 \mu_r S} \text{ (in SI units)},$$

where μ_r is the relative magnetic permeability of the given circuit, μ_0 is the magnetic constant in SI units (23.2.2),

and S is the cross-sectional area of the circuit. When $S = \text{const.}$, $R_{mi} = l_i/\mu_0\mu_r S$ (in SI units).

23.5.9

The total magnetic resistance R_m of the parts of a magnetic circuit connected in series is

$$R_m = \sum_{i=1}^{n} R_{mi},$$

where R_{mi} is the magnetic resistance of the i-th part of the magnetic circuit, and n is the number of parts that make up the circuit.

If n magnetic resistances are connected in parallel, the total magnetic resistance R_m of the circuit is

$$R_m = \frac{1}{\sum\limits_{i=1}^{n} \frac{1}{R_{mi}}}.$$

23.5.10

A *branch point* of a magnetic circuit is a region of space or bodies where there are more than two possible directions of the lines of magnetic induction (23.1.3).

Kirchhoff's first law for branched magnetic circuits states that the algebraic sum of the magnetic fluxes in the branches that join in a branch point is equal to zero. Thus

$$\sum_{i=1}^{n} \Phi_{mi} = 0,$$

where n is the number of branches joined at the branch point cf. (23.3.1).

A magnetic flux is considered positive if the lines of induction enter the branch point, and negative if the lines emerge from it.

23.5.11

Kirchhoff's second law for magnetic circuits states that in any closed loop (mesh of a network), arbitrarily chosen in a branched magnetic circuit (network), the algebraic sum of the products of the magnetic fluxes by the magnetic resistances of the corresponding portions of the circuit (23.5.8) equals the algebraic sum of the magnetomotive forces in this loop (23.5.8):

$$\sum_{i=1}^{k} \Phi_{mi} R_{mi} = \sum_{i=1}^{k} F_{mi},$$

where k is the number of portions that make up the closed loop (cf. (21.3.2)). The fluxes and mmfs F_{mi} are considered positive if the directions of the corresponding lines of magnetic induction (23.1.3) coincide with the arbitrarily chosen direction for circuiting the loop.

23.6 Work Done in Moving a Current-Carrying Conductor in a Magnetic Field

23.6.1

An unfixed current-carrying conductor is moved by Amperes force (23.1.4) when it is placed in a magnetic field. The element of work done by the Ampere force in moving an element, of length $\mathrm{d}l$, of a conductor carrying the current I is

$$\delta W^* = I\,\mathrm{d}\Phi_m^* \qquad \text{(in SI units)},$$
$$\delta W^* = \frac{1}{c}\,I\,\mathrm{d}\Phi_m^* \qquad \text{(in Gaussian units)},$$

where $\mathrm{d}\Phi_m^*$ is the element of magnetic flux (23.5.5) through the element of surface $\mathrm{d}S$ generated by the element of the conductor, of length $\mathrm{d}l$, in its small displacement, and c is the electrodynamic constant (23.2.2).

23.6.2

In a small displacement of a current-carrying conductor of finite length, the work δW done by the Ampere forces is the sum of the elements of work for all the elements of length of the conductor. It is equal to the integral of δW^* calculated along the whole length I of the conductor. Thus

$$\delta W = \int_l I\,\mathrm{d}\Phi_m^* = I\,\mathrm{d}\Phi_m \qquad \text{(in SI units)},$$
$$\delta W = \frac{1}{c}\,I\,\mathrm{d}\Phi_m \qquad \text{(in Gaussian units)},$$

where $\mathrm{d}\Phi_m$ is the magnetic flux through the surface generated by the conductor of length l in a small displacement.

23.6.3

If a conductor of finite length l carries a constant current I and is moved a finite distance, the required work of the Ampere forces for this motion is

$$W = I\Phi_m,$$

where Φ_m is the magnetic flux through the surface generated by the conductor in its motion.

23.6.4

The work done by Ampere forces in the displacement of a closed flat loop carrying the constant current I in a magnetic field from initial position *1* to final position *2* is equal to

$$W_{12} = I(\Phi_{m2} - \Phi_{m1}),$$

where Φ_{m1} and Φ_{m2} are magnetic fluxes "linked to the loop" in positions *1* and *2*, i.e. the magnetic fluxes through a surface bounded by the loop. In calculating these magnetic fluxes, the direction of normal $\hat{\mathbf{n}}$ (23.5.5) is coordinated with the direction of the current in the loop by the corkscrew rule: from the head of the vector of the normal, the current is seen flowing counter clockwise in the loop.

23.6.5

The formulas given above are valid for a current-carrying coil of N turns moving in a magnetic field by Ampere forces, or, in general, for a loop of arbitrary shape. For

example, the work done in a small displacement of a coil carrying the current I is equal to

$$\delta W = I \sum_{i=1}^{N} \mathrm{d}\Phi_{mi} = Id \left(\sum_{i=1}^{N} \mathrm{d}\Phi_{mi} \right) = I \, \mathrm{d}\Psi,$$

where $\Psi = \sum_{i=1}^{N} \Phi_{mi}$ is the total magnetic flux through all N turns of the coil; it is called the *flux linkage of the circuit*.

23.6.6

The work required to move a conductor or closed loop carrying a constant current in a magnetic field is done at the expense of the energy consumed in the current source (21.1.3).

24 Motion Of Charged Particles In Electric And Magnetic Fields

24.1 Lorentz Force

24.1.1

Not only current-carrying conductors (23.1.4) are subject to the action of a magnetic field. This is also true of separate charged particles moving in the field. The force F_L, acting on an electric charge q moving in a magnetic field at the velocity $\mathbf{v}$, is called the *Lorentz force* and is equal to (see also (24.1.5))

$$F_L = q\,[\mathbf{v} \times \mathbf{B}] \qquad \text{(in SI units)},$$

$$F_L = \frac{q}{c}[\mathbf{v} \times \mathbf{B}] \qquad \text{(in Gaussian units)},$$

where q is the algebraic value of the moving charge, $\mathbf{B}$ is the induction of the magnetic field in which the charge is moving (23.1.2), and c is the electrodynamic constant

(23.2.2). The relative arrangement of vectors $\mathbf{v}$, $\mathbf{B}$ and $\mathbf{F}_L$ is shown in Figure 24.1 for positive ($q > 0$) and negative ($q < 0$) charges. The magnitude of the Lorentz force is

$$F_L = qvB \sin \alpha,$$

where α is the angle between vectors $\mathbf{v}$ and $\mathbf{B}$.

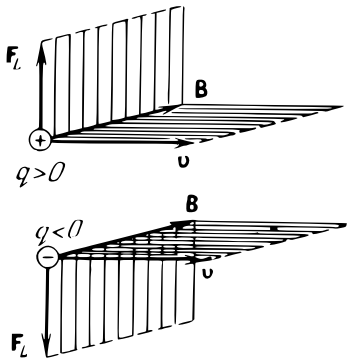


Figure 24.1.: The relative arrangement of vectors $\mathbf{v}$, $\mathbf{B}$ and $\mathbf{F}_L$ for positive and negative charges.

24.1.2

The Lorentz force is always perpendicular to the velocity of the charged particle and imparts normal acceleration (1.4.6) to it. Since the Lorentz force does not change the magnitude of the velocity, but only its direction, this force does no work and the kinetic energy of the charged particle remains constant when it moves in a magnetic field.

24.1.3

Making use of the Lorentz force, magnetic induction $\mathbf{B}$ (23.1.2) can be defined as follows: the magnitude of the magnetic induction vector at a given point of the magnetic field is equal to the maximum Lorentz force $F_{L\max}$ acting on a unit positive charge, which, at the given point, travels at unit velocity. Thus

$$B = \frac{F_{L\max}}{qv}.$$

Here $F_L = F_{L\max}$ under the condition that $\alpha = \pi/2$ (24.1.2). See also Sections (23.1.2) and (23.4.2).

24.1.4

The force exerted on moving charge q_2 by moving charge axis called *the force of their magnetic interaction* (*magnetic force*). For the special case of two positive charges q_1 and q_2, travelling in vacuum at the same velocity $v_1 = v_2 = v \ll c$ along the OX axis, the force F_{int} of magnetic interaction is a force of attraction and is numerically equal to

$$F_{\text{int}} = \frac{\mu_0}{4\pi} \frac{q_1 q_2}{r^2} v^2 \text{ (in SI units)},$$

where r is the distance between the charges, and μ_0 is the magnetic constant (23.2.2).

The force F_{int} of magnetic interaction can be presented in the form

$$F_{\text{int}} = q_2 v \frac{\mu_0 q_1 v}{4\pi r^2} = q_2 v B,$$

where

$$B = \frac{\mu_0 q_1 v}{4\pi r^2}.$$

In this form the force F_{int} coincides with the Lorentz force at $\sin\alpha = l$ (24.1.1) if we assume that B is the induction of the magnetic field (23.1.2) set up by moving charge q_1. In its turn, this field acts on moving charge q_2. Magnetic forces and a magnetic field are the result of the way in which forces are transformed in going over from a fixed to a moving frame of reference, and follows from the formulas of the special theory of relativity (5.1.1).

Comparing force F_{int} with the force F_e of electrostatic repulsion between mutually fixed charges q_1 and q_2 in

vacuum ($\varepsilon_r = 1$) located at the same distance r from each other (14.2.6)

$$F_e = \frac{1}{4\pi\varepsilon_0}\frac{q_1 q_2}{r^2} \text{ (in SI units)},$$

where ε_0 is the electric constant in SI units), we readily find that

$$\frac{F_{\text{int}}}{F_e} = \frac{v^2}{c^2},$$

where c is the electrodynamic constant (23.2.2) and is related to ε_0 and μ_0 by the equation $\varepsilon_0\mu_0 = 1/c^2$ (Appendix I). When the velocity of the charges is small compared to the velocity of light in free space ($v \ll c$), the magnetic interaction between the moving charges is considerably less than their electrostatic interaction. But in the case when the charges are moving in an electrically neutral conductor, the electric forces are compensated (16.4.2), leaving only magnetic interaction. This explains the magnetic interaction of current-carrying conductors (23.4.1). Though the force of magnetic interaction between each pair of electrons is small, the number of pairs is so immense that the resultant force of magnetic interaction of parallel current-carrying conductors is an appreciable amount (23.4.1).

24.1.5

If, in addition to a magnetic field of induction $\mathbf{B}$, a moving electric charge is also subject to the action of an electric field of strength $\mathbf{E}$ (15.1.2), the resultant force $\mathbf{F}$ applied to the charge is equal to the vector sum of the force

$\mathbf{F}_e = q\mathbf{E}$, exerted on the charge by the electric field and the Lorentz force (24.1.1)t

$$\mathbf{F} = q\,\mathbf{E} + q\,[\mathbf{v} \times \mathbf{B}] \qquad \text{(in SI units)},$$
$$\mathbf{F} = q\,\mathbf{E} + \frac{q}{c}\,[\mathbf{v} \times \mathbf{B}] \qquad \text{(in Gaussian units)},$$

The last expression is also called the Lorentz force and, sometimes, the *generalized Lorentz force* or the *Lorentz formula*.

24.1.6

By the action of the Lorentz force (24.1.1), a charged particle travels in a circular path of constant radius r in a uniform magnetic field perpendicular to the particles velocity. This circular path is in a plane perpendicular to vector $\mathbf{B}$, and the Lorentz force is a centripetal one (2.4.3). The radius of the circular path is

$$r = \frac{m}{|q|}\,\frac{v}{B} \qquad \text{(in SI units)},$$
$$r = \frac{cm}{|q|}\,\frac{v}{B} \qquad \text{(in Gaussian units)},$$

where $|q|$ is the absolute value of the particles charge, m is the mass of the particle, v is its velocity, B is the magnetic field induction and c is the electrodynamic constant (23.2.2). If the particle travels in the plane of the drawing (Figure 24.2), its deflection in a field perpendicular to the velocity and directed from behind the drawing depends upon the sign of the charge.




Figure 24.2.: Path of a charged particle in a magnetic field depends on the sign of its charge.




Figure 24.3.: Path of a charged particle is a helix if the velocity vector $\mathbf{v}$ of a charged particle makes the angle α with the direction of vector $\mathbf{B}$ of a uniform magnetic field.

This is the basis for determining the sign of the charge of a particle travelling in a magnetic field.

The period T of revolution (1.5.5) of a charged particle in a uniform magnetic field (23.1.3) is independent of its velocity (when $v \ll c$):

$$T = \frac{2\pi}{B}\frac{m}{|q|} \qquad \text{(in SI units)},$$

$$r = \frac{2\pi}{B}\frac{mc}{|q|} \qquad \text{(in Gaussian units)},$$

The principle of cyclic orbit accelerators of charged particles (24.4.6) is based on the aforesaid.

24.1.7

If the velocity vector $\mathbf{v}$ of a charged particle makes the angle α with the direction of vector $\mathbf{B}$ of a uniform magnetic field, the particle travels along a helix (Figure 24.3) of radius r and pitch h equal to

$$r = \frac{m}{|q|}\frac{v\sin\alpha}{B},\ h = \frac{2\pi}{B}\frac{m}{|q|}v\cos\alpha \quad \text{(in SI units)},$$

$$r = \frac{mc}{|q|}\frac{v\sin\alpha}{B},\ h = \frac{2\pi}{B}\frac{mc}{|q|}v\cos\alpha \quad \text{(in Gaussian units.)}$$

If this motion occurs in a nonuniform magnetic field (23.1.3) whose magnetic induction increases in the direction of motion of the particle, then r and h decrease with an increase in B. This phenomenon is used for focusing charged particles in a magnetic field.

24.2 Hall Effect

24.2.1

The *Hall effect* refers to the setting up of a transverse electric field and potential difference in a current-carrying metal or semiconductor placed in a magnetic field which is perpendicular to the direction of the current density vector (20.2.3). The Hall effect results from the deflection of electrons moving in a magnetic field by the action of the Lorentz force (24.1.1).

Shown in Figure 24.4 (a) are the directions of the magnetic induction **B**, current density **j**, electron velocity **v**, Lorentz force $\mathbf{F}_L$ and the signs of the charges accumulated on the opposite, upper and lower, sides in the case of a metal or electron (n-type) semiconductor (**??**). In a hole (p-type) semiconductor (**??**) the signs of the charges on the surfaces are the opposite of those in the preceding case (Figure 24.4 (b)). The charges are deflected by the magnetic field until the action of the force in the transverse electric field counterbalances the Lorentz force.

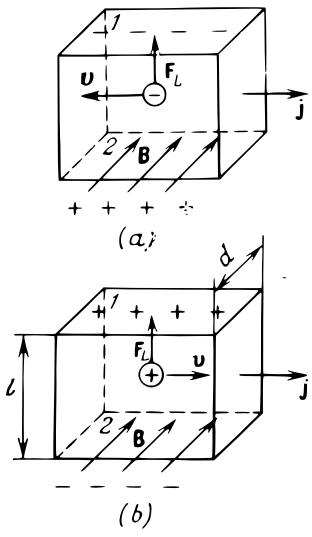


Figure 24.4.: Path of a charged particle is a helix if the velocity vector **v** of a charged particle makes the angle α with the direction of vector **B** of a uniform magnetic field.

24.2.2

The equilibrium potential difference in the Hall effect is

$$\Delta V = V_1 - V_2 = R_H \frac{IB}{d},$$

where I is the current, B is the magnetic field induction (23.1.2), d is the linear dimension of the metal or semiconductor in the direction of vector **B**, and R_H is the Hall coefficient.

The strength $\mathbf{E}_H$ of the transverse electric field in the Hall effect is

$$\mathbf{E}_H = R_H \, [\mathbf{B} \times \mathbf{j}],$$

where $\mathbf{j}$ is the current density vector.

24.2.3

For metals and extrinsic semiconductors (**??**), having a single kind of conduction, the Hall coefficient equals

$$R_H = \frac{A}{n_0 q} \qquad \text{(in SI units)},$$

$$R_H = \frac{A}{c n_0 q} \qquad \text{(in Gaussian units)},$$

where c is the electrodynamic constant (23.2.2), q and n_0 are the charge and concentration of the current carriers, and $A \approx 1$ is a dimensionless factor depending upon how the current-carrier velocities are statistically distributed. The sign of the Hall coefficient coincides with that of the current-carrier charge q. A measurement of the Hall coefficient of a semiconductor indicates its type of electrical conduction. For an n-type semi-conductor (electron conduction) (**??**), $q = -e$ and $R_H < 0$; for a p-type semiconductor (hole conduction) (**??**), $q = e$ and $R_H > 0$.

If both types of electrical conduction are observed in a semi-conductor, the predominant conduction can be determined from the sign of the Hall coefficient. The formula for R_H given in this subsection is inapplicable in such cases.

24.2.4

Provided the type of electrical conduction is known, a measurement of the Hall coefficient enables the concentration n_0 of the current carriers to be determined. For example, the concentration of conduction electrons equals the concentration of atoms in monovalent metals. This means that there is one free electron per atom in the electron gas (20.3.1) of the metal. A known concentration of current carriers enables the mean free path $\langle \lambda \rangle$ of the electron in the metal to be assessed. From the formula of (20.3.4),

$$\langle \lambda \rangle = \frac{2\varkappa m \langle u \rangle}{n_0 e^2},$$

we find that $\langle \lambda \rangle \approx 10^{-8}\,\mathrm{m}$, which exceeds the lattice constants of the metal by two orders of magnitude (see also Sections (20.3.7) and (**??**)).

24.3 Charge-to-Mass Ratio of Particles. Mass Spectroscopy

24.3.1

The *charge-to-mass* ratio of a particle, q/m, is a characteristic of charged particles. Experimental determination of this charge-to-mass ratio is based on measuring the deflection of the particles in electric and magnetic fields acting jointly on them. The mass of the particles is determined from the charge-to-mass ratio q/m and the known charge q.

24.3.2

The *mass spectrum* of particles is the set of their mass values. Applying mass spectrometers and mass spectrographs, special instruments used in *mass spectrometry*, the relative concentrations of isotopes of chemical elements (**??**) and their masses can be measured with exceptionally high accuracy.

24.3.3

In the *Aston mass spectrograph* (Figure 24.5), which was employed to discover the isotopes of various chemical elements, the particles are deflected in the uniform electric field of capacitor C and the magnetic field of coil M, the fields being perpendicular to each other. The lower the velocity of the particles and the greater their charge-to-mass ratio, the more strongly they are deflected toward the capacitor plates. In a uniform magnetic field with the induction $\mathbf{B}$ directed into the drawing, the particles travel along circular arcs (24.1.6). The higher the velocity of the particles and the lower their charge-to-mass ratio, the greater the radii of these arcs.




Figure 24.5.: Schematic diagram of a Aston mass spectrograph.

In a magnetic field a beam of particles is split into several beams, each corresponding to a definite charge-to-mass ratio. The magnetic field focuses particles having different velocities, but the same charge-to-mass ratio, on a single point. The magnetic induction $\mathbf{B}$ is chosen so that the charged particles are focused on a photographic plate AD, which is perpendicular to the plane of the drawing. A series of narrow parallel lines obtained on

the plate corresponds to the various values of the particle charge-to-mass ratio. In Figure 24.5, line $\mathscr{E}_1$ corresponds to particles with a higher charge-to-mass ratio, and line $\mathscr{E}_2$ to particles with a lower one. If the charge-to-mass ratio of the particles of line $\mathscr{E}_1$ is known, as well as the distance between lines $\mathscr{E}_1$ and $\mathscr{E}_1$ and the parameters of the instrument, the charge-to-mass ratio of the particles corresponding to line $\mathscr{E}_1$ can be determined.

If the parallel-plate capacitors are replaced by tubular ones and special electromagnets are used that produce a plane-parallel beam of particles entering the magnetic field, we can achieve *double focusing* of the particles with respect to both energy and direction. With sufficient intensity of the lines on the photo graphic plate, this technique ensures high precision in particle mass measurements. For instance, the masses of the ions of light-weight elements can be measured to an accuracy within 10^{-4} per cent.

24.3.4

The relative concentrations of the isotopes of chemical elements in their natural mixtures are measured by instruments called *mass spectrometers* that electrically record the ion currents. Used in mass spectrometers are ion beams in which the kinetic energies of the ions are close in value. These are called monochromatic (monoenergetic) beams and are produced by ion sources of special design. Even when they are strongly divergent and contain a great number of ions, such beams focus well in a transverse magnetic field. This raises the precision with which the

concentrations of various isotopes can be measured.

24.4 Charged Particle Accelerators

24.4.1

Special installations for obtaining directed beams of charged particles (electrons, protons, atomic nuclei and ions of chemical elements) having an extremely high kinetic energy, under laboratory conditions are called *accelerators*. According to the shape of the path of the particles and the mechanism for accelerating them, distinction is made between *linear*, *cyclic* and *induction accelerators*. In linear accelerators (also called *linacs*) the paths of motion of the particles are close to straight lines; in the cyclic and induction accelerators the paths of the particles are circles or unwinding spirals.

24.4.2

The energy of the accelerated particles is increased by the electric field set up in the accelerator. Depending on the type of accelerator, this field can be electrostatic (15.1.2), induced (25.1.2) or high-frequency alternating. The principle of the betatron, based on the action of an induced electric field, is discussed in section (27.2.3). In a *linear electrostatic accelerator*, a charged particle passes only once through an accelerating electric field with a potential difference $(V_1 - V_2)$. If q is the charge of the particle, the energy acquired by the particle in the

accelerator (**??**) is equal to

$$E = q(V_1 - V_2).$$

In such an accelerator the electric field is set up, for example, by a *Van de Graaff* high-voltage *electrostatic generator*, operating by the principle of multiple transfer of charges to a hollow conductor (16.4.3). This raises the potential of the conductor to values limited only by the leakage of the charge from the conductor.

24.4.3

In *linear resonant accelerators*, the energy of the charged particles is increased by an alternating electric field of super-high frequency, which varies in synchronism with the motion of the particles. Using this type of accelerator, electrons can be accelerated to an energy of the order of dozens of GeV over a path length of several kilometres.

24.4.4

Protons, deuterons and other, heavier, charged particles are accelerated by *resonant cyclic accelerators*, in which a particle repeatedly passes through an electric field synchronized with its motion, increasing its energy each time. A strong transverse magnetic field controls the motion of the particles and returns them periodically to the region of the accelerating electric field. The particles pass definite points of the alternating electric field approximately when the field is in the same phase ("in resonance").

24.4.5

In the *cyclotron*, the simplest resonant cyclic accelerator, an accelerating alternating electric field is set up in the gap between the two halves (*dees*) N and M (Figure 24.6) of a cylindrical box. The dees are placed in a flat closed chamber located between the poles of a strong electromagnet, whose magnetic field is perpendicular to the plane of the drawing. The alternating electric field in the gap between the dees is set up by an electric generator whose terminals are connected to electrodes m and n.




Figure 24.6.: Schematic diagram of a cyclotron.

24.4.6

A particle is accelerated in the gap between the dees M and N each time it crosses this gap after describing semicircles of continuously increasing radii due to the action of the magnetic field. The same time is required for each semicircle (24.1.6). To continuously accelerate the particles it is necessary to com ply with the condition of synchronism (condition of "resonance"): $T = T_0$, where T is the period of revolution of the particle in the magnetic field (24.1.6), and is the period of oscillation of the magnetic field (28.1.2). This condition is violated at relativistic velocities v of the particle, commensurate with the velocity of light c in free space. At such high velocities, the mass m of the particle increases with the velocity (5.6.1) as does the period T (24.1.6).

24.4.7

The feasibility of accelerating charged particles travelling at relativistic velocities in cyclic accelerators follows from the *principle of phase stability* (*autophasing*), which states that each deviation of the period T from the resonance value T_0 (24.4.6) leads to such a change in the energy E of the particle at each acceleration that T varies in the neighborhood of T_0 and, on an average, remains equal to T_0. Thus

$$T_0 \approx T = \frac{2\pi}{B}\frac{m}{|q|} = \frac{2\pi}{B}\frac{E}{|q|c^2},$$

where $E = mc^2$ (5.7.2), $m = m_0/\sqrt{1v^2/c^2}$ (5.6.1), m_0 is the rest mass (5.6.1) of the particle, and c is the velocity of light in free space; the remaining notation is the same as in section (24.1.6).

If, for example, as a result of the increase in mass m and the period T, the particle enters the gap between the dees (Figure 24.6) by the action of the decelerating instead of accelerating electric field, the reduction in particle velocity leads to the reduction in T and the equality $T = T_0$ is reached again.

24.4.8

It follows from the principle of phase stability (24.4.7) that at a sufficiently slow increase in the period T_0 of the electric field, the period T of revolution of the particle in the magnetic field of the accelerator increases correspondingly. This leads to an increase in the average energy $\langle E \rangle$ of all the particles because at constant induction of the

magnetic field any increase in T is possible only owing to the increase in mass as the velocity of the particles increases.

This principle has been applied in an accelerator called the *synchrocyclotron* (also *frequency-modulated cyclotron* and *phasotron*). This device has a constant magnetic field, whereas the frequency $\nu_0 = 1/T_0$ (28.1.2) of the alternating electric field varies slowly with the period $\tau \gg T_0$. The radius of the orbit of the particles in the synchrocyclotron increases with their velocity (24.1.6). This requires a corresponding increase in the size of the synchrocyclotron to reach the maximum energy of the charged particles. The synchrocyclotron built and operated in the USSR, accelerating protons to an energy of 680 MeV, has a magnet with poles 6 m in diameter and a mass of 7×10^6 kg.

24.4.9

The *synchrotron* is an accelerator in which the frequency of the accelerating electric field is constant, and the induction B of the magnetic field varies with time. The period of revolution of a particle in the magnetic field of a synchrotron (24.4.6) is

$$T = \frac{2\pi}{|e|c^2}\,\frac{E}{B},$$

where e is the charge of the electron, and E is its energy. The condition of synchronism (24.4.6) is complied with in a synchrotron at $T_0 = \text{const.}$, provided that the induction of the magnetic field increases proportionally to the

particles energy. Thus

$$B = \frac{2\pi}{|e|c^2}\,\frac{E}{T_0},$$

where T_0 is the period of a high-frequency accelerating electric field.

The following condition is complied with in a synchrotron:

$$\frac{m}{B} = \frac{eT_0}{2\pi} = \text{const}.$$

The particles travel along orbits close to circular ones (24.1.6) and, consequently, a synchrotron is equipped with annular magnets that set up a magnetic field in a comparatively narrow region of the circular orbit.

24.4.10

A *proton synchrotron*, the most powerful accelerator of protons, combines the principles applied in the synchrocyclotron (24.4.8) and in the synchrotron (24.4.9). In this accelerator, the frequency ν_0 of the accelerating electric field is reduced and the induction B of the magnetic held is increased simultaneously and in coordination. The protons being accelerated travel along a circular orbit of constant radius. Therefore, the magnetic field is set up by an annular electromagnet as in the synchrotron.

24.4.11

The condition for simultaneous maintenance of vertical (axial) and radial stability of the design circular orbit in

the synchrotron and proton synchrotron is the variation of magnetic induction B near the design orbit according to the law

$$B = \frac{\text{const.}}{r^n},$$

where r is the distance from the centre of the orbit, and n varies within the limits $0 < n < 1$ (*condition of weak focusing* in the accelerator). With an increase in the maximum energy $E_{\max}$ acquired by the particles in an accelerator having weak focusing, the required mass of the electromagnet increases approximately in proportion to $E^3_{\max}$.

24.4.12

Accelerators having *strong focusing* are resorted to for increasing the maximum energy $E_{\max}$ of particles accelerated in synchrotrons and proton synchrotrons. In these accelerators, two kinds of sector-shaped magnets are used alternately along the almost circular orbit of particle travel. In one kind of sector the magnetic field varies according to the law of section (24.4.11), in which n is much less than zero (for example, $n = -100$), and in the other kind $n \gg 1$. Sectors of the first type provide for radial focusing of the beam of particles being accelerated; sectors of the second kind, for vertical focusing. The application of strong focusing enables substantial reductions to be obtained in the overall size of the accelerator, the mass of the electromagnet and the total cost of the installation. This method is also called alternating-gradient focusing.

24.4.13

To increase the share of energy utilized by accelerated particles for various nuclear reactions (**??**), the bombardment of stationary targets by high-energy particles is replaced by the *colliding beam technique*. It follows from the laws of conservation of energy (3.4.3) and momentum (2.7.1) that in bombarding a stationary target, the share of the kinetic energy E_k of the incident particle, utilized in the nuclear reaction, decreases as E_k is increased. When the technique of colliding beams is used, the total momentum of the particles after collision is reduced and the share of their useful energy is increased. Assume, for example, that in an accelerator with colliding beams of protons the energy of the protons in each beam is equal to 26 GeV. The total momentum of two protons colliding at equal and opposing velocities equals zero. But the collision energy of such two particles reaches 50 GeV. To obtain the same collision energy in bombarding a stationary hydrogen target, a beam of protons with energy of the order of 1400 GeV is required.

25 Electromagnetic Induction

25.1 Basic Law of Electromagnetic Induction

25.1.1

The *phenomenon of electromagnetic induction* is the setting up of an *induced electric field* in a conducting loop, or circuit, located in a varying magnetic field. The energy measure of this induced field is the *electromotive force $\mathscr{E}_i$ of electromagnetic induction*. If the loop is closed, the induced electric field causes ordered motion of electrons in the loop, i.e. a current, called the *induced current*, is produced.

25.1.2

Faraday's law of electromagnetic induction states that the emf of electromagnetic induction in a loop, or circuit, is proportional to the rate of change of the magnetic flux (23.5.5) through the surface area bounded by this loop.

Thus

$$\mathscr{E}_i = -\frac{\mathrm{d}\Phi_m}{\mathrm{d}t} \qquad \text{(in SI units)},$$

$$\mathscr{E}_i = -\frac{1}{c}\frac{\mathrm{d}\Phi_m}{\mathrm{d}t} \qquad \text{(in Gaussian units).}^{10}$$

(23.2.2)

[10] In all the formulas written in Gaussian units, c is the electrodynamic constant.

The cause of the change in the magnetic flux is unessential. It may be due to distortion of the loop or its motion in the external magnetic field or to any other reasons for the change in the magnetic field with time. When a closed conducting circuit (or loop) moves in a magnetic field, emfs are induced in all of the parts of the loop that cut the lines of magnetic induction. The algebraic sum of these emfs (25.1.3) is equal to the total emf of the loop. The work that must be done to move a closed loop, or circuit, in a magnetic field is equal to the work of the current induced in the loop.

In calculating Φ_m and $\mathscr{E}_i$ the directions around the loop (21.3.2) and of the outward normal $\hat{\mathbf{n}}$ ((23.5.5) and (23.5.8)) are to be coordinated so that from the head of vector n the direction around the circuit (or loop) is seen to be counterclockwise. If a closed circuit consists of N turns connected in series (for example, the solenoid in Section (23.3.7)), then the magnetic flux Φ_m in Faradays law is to be replaced by the flux, or magnetic, linkage Ψ of the circuit ((23.6.5):

$$\mathscr{E}_i = -\frac{\mathrm{d}\Psi}{\mathrm{d}t} \qquad \text{(in SI units)},$$

$$\mathscr{E}_i = -\frac{1}{c}\frac{\mathrm{d}\Psi}{\mathrm{d}t} \qquad \text{(in Gaussian units).}$$

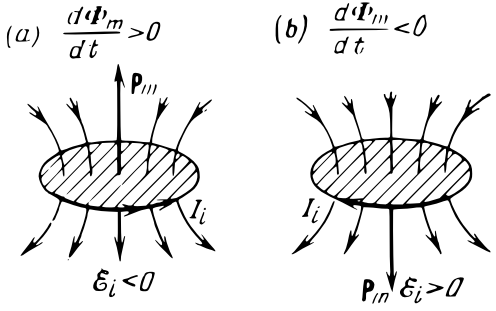


Figure 25.1.: Determining the direction of emf generated.

25.1.3

The emf of electromagnetic induction in a loop (or circuit) is said to be positive if the magnetic moment vector $\mathbf{p}_m$ of the corresponding induction current (23.3.4) makes an acute angle with the lines of magnetic induction of the field that induces this current. Otherwise, $\mathscr{E}_i$ is said to be negative. In Figure 25.1 (a), the emf $\mathscr{E}_i < 0$, whereas in Figure 25.1 (b), $\mathscr{E}_i > 0$.

25.1.4

The minus sign in the formula for complies with the *Lenz law*, which states that upon any change in the magnetic flux through a surface bounded by a closed loop, the current induced in the loop is always of a direction in which the magnetic field set up by the induced current opposes the change in the magnetic flux that induced the current.

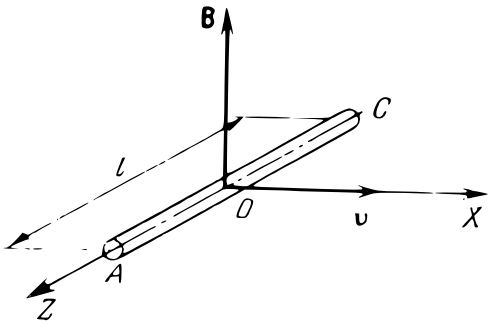


Figure 25.2.: An emf of electromagnetic induction is developed in a part of a conductor which, in its motion, cuts lines of induction of a magnetic field.

25.1.5

An emf of electromagnetic induction is developed in a part of a conductor which, in its motion, cuts lines of induction of a magnetic field (23.1.3). In the case illustrated in Fig. 25.2, the conduction electrons of the metal (20.3.1) are subject to the Lorentz force (24.1.1). Thus $\mathbf{F}_L = e[(\mathbf{v} + \mathbf{v}') \times \mathbf{B}]$, where $\mathbf{v}$ is the velocity of the part AC of the conductor in the magnetic field, whose induction vector $\mathbf{B}$ is perpendicular to the plane passing through the part of the conductor and the velocity vector of its motion. The electrons travel orderly along the conductor at the velocity $\mathbf{v}'$ by the action of the component of the Lorentz force tangent to the conductor in the direction from A to C. The motion of the electrons ceases when the electrostatic field set up in the conductor and acting on the electrons with the force $e\mathbf{E}$ counterbalances the Lorentz force.

According to Ohms law for an open circuit (at $I = 0$) (21.2.5), the equilibrium potential difference $\Delta V = V_A - V_C$ between points A and C that is established at $\mathbf{v}' = 0$ is equal to

$$\Delta V = V_A - V_C = -\mathscr{E}_i,$$

where $\mathscr{E}_i$ is the electromotive force of induction, because there are no sources of electrical energy in part AC of the conductor. The emf of electromagnetic induction in a piece of conductor of length l, moving at the velocity v, is

$$\mathscr{E}_i = -Bvl, \quad \text{or}$$

$$\mathscr{E}_i = -\frac{\mathrm{d}\Phi_m}{\mathrm{d}t} \text{ (in SI units)},$$

where $\mathrm{d}\Phi_m/\mathrm{d}t$ is the ratio of the magnetic flux through the surface generated by the conductor in its motion during an infinitesimal length of time to the value $\mathrm{d}t$ of this length of time or, in other words, the velocity at which the conductor cuts the lines of induction of the magnetic field (cf. Section (25.1.2)).

25.1.6

The phenomenon of electromagnetic induction in stationary closed conducting circuits, located in an external varying magnetic field, cannot be explained by means of the Lorentz force, which has no effect on fixed charges (24.1.1).

The phenomenon of electromagnetic induction in stationary conductors is due to the fact that the varying magnetic field excites a rotational electric field. The

circulation of the strength vector of this field along the closed path L of the conductor (16.1.4) is the emf of electromagnetic induction. Thus

$$\mathscr{E}_i = \oint \mathbf{E}\,\mathrm{d}\mathbf{l} = \frac{\mathrm{d}\Phi_m}{\mathrm{d}t} \qquad \text{(in SI units)},$$

$$\mathscr{E}_i = \oint \mathbf{E}\,\mathrm{d}\mathbf{l} = \frac{\mathrm{d}\Phi_m}{\mathrm{d}t}\,\frac{1}{c}\,\frac{\mathrm{d}\Psi}{\mathrm{d}t} \qquad \text{(in Gaussian units)}.$$

where the partial derivative $\mathrm{d}\Phi_m/\mathrm{d}t$ takes into account the dependence of the magnetic induction flux only on time. The choice of the direction of normal $\hat{\mathbf{n}}$ in calculating the magnetic flux is discussed in Section (25.1.2).

25.1.7

The magnitude q of the electric charge passing through the cross section of the wire of the turn in which the current is induced is

$$q = \frac{\Phi'_m - \Phi''_m}{R} \qquad \text{(in SI units)},$$

$$q = \frac{1}{c}\,\frac{\Phi'_m - \Phi''_m}{R} \qquad \text{(in Gaussian units)},$$

where Φ'_m and Φ''_m are the values of the magnetic flux through the area of the turn in its initial and final positions, and R is the electrical resistance of the turn.

25.2 Phenomenon of Self-Induction

25.2.1

Self-induction is the production of an induced electric field in a circuit as a result of the variations of current in the same circuit. The energy characteristic of the induced field is the emf of self-induction $\mathscr{E}_S$.

25.2.2

The intrinsic magnetic field of the current in the circuit produces the magnetic flux Oms through the surface S bounded by the current-carrying loop. Thus

$$\Phi_{ms} = \int_S B_n \, \mathrm{d}S.$$

where B_n is the projection of the induction vector $\mathbf{B}$ of the magnetic field (23.1.2) on the normal $\hat{\mathbf{n}}$ to the element of surface $\mathrm{d}S$. The quantity Φ_{ms} is called the *magnetic flux of self-induction of the loop*. Making use of the Biot-Savart-Laplace law (23.2.2), Φ_{ms} can be calculated for the case in which the loop is in a non-ferromagnetic medium (26.5.2):

$$\Phi_{ms} = I\frac{\mu_0}{4\pi}\int_S \mathrm{d}S \oint_L \frac{\mu_r}{r^3}[\mathrm{d}\mathbf{l}\times\mathbf{r}]_n \quad \text{(in SI units)},$$

$$\Phi_{ms} = \frac{1}{c}I\int_S \mathrm{d}S \oint_L \frac{\mu_r}{r^3}[\mathrm{d}\mathbf{l}\times\mathbf{r}]_n \quad \text{(in Gaussian units)}, \quad \text{or}$$

$$\Phi_{ms} = LI \quad \text{(in SI units)},$$

$$\Phi_{ms} = \frac{1}{c}LI \quad \text{(in Gaussian units)},$$

where L is called the *self-inductance* of the loop and is determined by the formulas

$$L = \frac{\mu_0}{4\pi} \int_S \mathrm{d}S \oint_L \frac{\mu_r}{r^3} [\mathrm{d}\mathbf{l} \times \mathbf{r}]_n \qquad \text{(in SI units)},$$

$$L = \int_S \mathrm{d}S \oint_L \frac{\mu_r}{r^3} [\mathrm{d}\mathbf{l} \times \mathbf{r}]_n \qquad \text{(in Gaussian units)}.$$

Here μ_0 is the magnetic constant in SI units (23.2.2), μ_r is the relative magnetic permeability of the medium, $\mathbf{r}$ is the radius vector from element $\mathrm{d}\mathbf{l}$ of the loop to element $\mathrm{d}S$ of surface S, bounded by the loop, and subscript n indicates the projection on the normal to the element $\mathrm{d}S$.

25.2.3

The self-inductance L of the loop is numerically equal to the self-induction flux at a current of $I = 1\,\mathrm{A}$ (in SI units) or $I = c$ (in Gaussian units). Self-inductance L depends only upon the geometric shape and dimensions of the loop, as well as on the magnetic properties of the medium it is located in. The self-inductance of a sufficiently long solenoid (**??**) is

$$L = \frac{\mu_0 \mu_r N^2 S}{l} = \mu_0 \mu_r n^2 V \qquad \text{(in SI units)},$$

$$L = \frac{4\pi \mu_r N^2 S}{l} = 4\pi \mu_r n^2 V \qquad \text{(in Gaussian units)},$$

where l and S are the length and cross-sectional area of the solenoid, N is the total number of turns, $n = N/l$ is

the number of turns per unit length, and $V = Sl$ is the volume of the solenoid.

25.2.4

The expression for the emf of self-induction follows from Faradays law (25.1.2):

$$\mathscr{E}_S = -\frac{\mathrm{d}\Phi_{ms}}{\mathrm{d}t} = -\frac{\mathrm{d}}{\mathrm{d}t}(LI) \qquad \text{(in SI units)},$$

$$\mathscr{E}_S = -\frac{1}{c}\frac{\mathrm{d}\Phi_{ms}}{\mathrm{d}t} = -\frac{1}{c^2}\frac{\mathrm{d}}{\mathrm{d}t}(LI) \qquad \text{(in Gaussian units)}.$$

For a rigid (undeformable) loop in a non-ferromagnetic medium (26.5.2) $L = \text{const}$. Hence

$$\mathscr{E}_S = -L\frac{\mathrm{d}I}{\mathrm{d}t} \qquad \text{(in SI units)},$$

$$\mathscr{E}_S = -\frac{L}{c^2}\frac{\mathrm{d}I}{\mathrm{d}t} \qquad \text{(in Gaussian units)}.$$

25.2.5

The electromotive force of self-induction causes a *self-induction current* to flow in the loop. According to the Lenz law (25.1.4), this current counteracts the change in the main current in the circuit, impeding its increase or decrease. The self-inductance of the loop (25.2.3) is a measure of its inertia to changes of the current.

25.2.6

The law for the change of the current in closing and opening a circuit, i.e. with a non-steady state in the




Figure 25.3.: Self induced current as a function of time when it is switched on.




Figure 25.4.: Self induced current as a function of time when it is switched off.

circuit, is

$$I = I_0 \exp\left(-\frac{Rt}{L}\right) + \frac{\mathscr{E}}{R}\left(1 - \exp\left(-\frac{Rt}{L}\right)\right),$$

where I_0 is the current at the initial instant of time ($t = 0$), R is the electrical resistance of the circuit, L is its self-inductance, and is the algebraic sum of the emfs of the sources of electrical energy connected into the circuit (21.2.2).

When the source of emf is switched in there is no initial current in the circuit ($I_0 = 0$):

$$I = \frac{\mathscr{E}}{R}\left(1 - \exp\left(-\frac{Rt}{L}\right).\right)$$

The current in the circuit increases from zero to the value $\mathscr{E}/R$, corresponding to that of the constant current. The higher the ratio R/L (Figure 25.3), the more rapidly the current increases. When the source of emf is switched off, $\mathscr{E} = 0$:

$$I = I_0\left(1 - \exp\left(-\frac{Rt}{L}\right)\right).$$

The current decreases exponentially from the initial value I_0. The higher the ratio R/L, the more rapidly the current decreases (Figure 25.4).

25.3 Mutual Induction

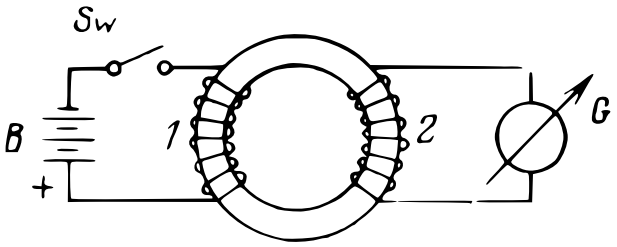


Figure 25.5.: Mutual induction between two coils.

25.3.1

An emf is induced in all conductors in the vicinity of a circuit in which the current varies. This phenomenon is called *mutual induction*. Upon a change in the current I_1 in circuit *1* (Figure 25.5), for example, an emf $\mathscr{E}_{21}$ mutual induction is induced in circuit *2*. It equals

$$\mathscr{E}_{21} = -\frac{\mathrm{d}\Phi_{m21}}{\mathrm{d}t} \qquad \text{(in SI units)},$$

$$\mathscr{E}_{21} = -\frac{1}{c}\frac{\mathrm{d}\Phi_{m21}}{\mathrm{d}t} \qquad \text{(in Gaussian units)},$$

where Φ_{m21} is the magnetic flux through the surface bounded by the second circuit. This flux is due to the magnetic field set up by the current in the first circuit (magnetic flux of mutual induction).

25.3.2

By analogy with section (25.2.2), the magnetic flux Φ_{m21} is proportional to the current I_1. Thus

$$\Phi_{m21} = M_{21} I_1 \qquad \text{(in SI units)},$$

$$\Phi_{m21} = -\frac{1}{c} M_{21} I_1 \qquad \text{(in Gaussian units)},$$

where M_{21} is called the *mutual inductance* of the second and first circuits. The quantity M_{21} depends upon the shape, dimensions and relative arrangement of the circuits, as well as the relative magnetic permeability of the medium surrounding them. The magnetic flux Φ_{m12} through the surface bounded by the first circuit is due to the magnetic field set up by current I_2 in the second circuit. Thus

$$\Phi_{m12} = M_{12} I_2 \qquad \text{(in SI units)},$$

$$\Phi_{m12} = -\frac{1}{c} M_{12} I_2 \qquad \text{(in Gaussian units)},$$

where M_{12} is the mutual inductance of the first and second circuits.

If the circuits are in a non-ferromagnetic medium (26.5.2), then $M_{21} = M_{12}$. or ferromagnetic media M_{21} and M_{12} are not equal and depend, in addition to the above-mentioned factors, on the currents in the two circuits and the way in which they vary.

25.3.3

The expressions for the emf of mutual induction, under the condition that M_{21} and M_{12} are both constant values,

are

$$\mathscr{E}_{21} = -M_{21}\frac{\mathrm{d}I_1}{\mathrm{d}t} \qquad \text{(in SI units)},$$
$$\mathscr{E}_{21} = -\frac{1}{c^2}M_{21}\frac{\mathrm{d}I_1}{\mathrm{d}t} \qquad \text{(in Gaussian units)},$$
$$\mathscr{E}_{12} = -M_{12}\frac{\mathrm{d}I_2}{\mathrm{d}t} \qquad \text{(in SI units)},$$
$$\mathscr{E}_{12} = -\frac{1}{c^2}M_{12}\frac{\mathrm{d}I_2}{\mathrm{d}t} \qquad \text{(in Gaussian units)}.$$

An example of the application of mutual induction is the principle of the transformer which serves to raise or lower the volt age of alternating current.

25.4 Energy of a Magnetic Field Set up by an Electric Current

[14]

[14] It is assumed in this section that the conductors carrying currents are in a non-ferromagnetic, homogeneous and isotropic medium.

25.4.1

To produce an electric current in a closed circuit (or loop) and to increase this current from zero to I it is necessary to do work W to overcome the emf of self-induction that impedes the increase in current (25.2.6). Thus

$$W = \frac{\Phi_{ms}I}{2} = \frac{LI^2}{2} \qquad \text{(in SI units)},$$
$$W = \frac{1}{c}\frac{\Phi_{ms}I}{2} = \frac{1}{c^2}\frac{LI^2}{2} = \qquad \text{(in Gaussian units)},$$

where Φ_{ms} is the magnetic flux of self-induction of the loop (25.2.2) and L is the self-inductance of the loop (25.2.2). According to the energy conservation law, W determines the *intrinsic energy* E_m of current I in a circuit. Thus

$$E_m = \frac{LI^2}{2} \qquad \text{(in SI units)},$$

$$E_m = \frac{1}{c^2}\frac{LI^2}{2} \qquad \text{(in Gaussian units)}.$$

25.4.2

Increasing together with the current in a circuit is the magnetic field set up by this current. Hence, the intrinsic energy of a current is dealt with as *energy of* this *magnetic field*. In a long solenoid (23.3.8), for instance, having a uniform magnetic field (23.1.2),

$$E_m = \frac{1}{2}\mu_0\mu_r n^2 I^2 V \qquad \text{(in SI units)},$$

$$E_m = \frac{2\pi\mu_r}{c^2} n^2 I^2 V \qquad \text{(in Gaussian units)},$$

where V is the volume of the solenoid, n is the number of turns per unit length, μ_0 is the magnetic constant (23.2.2), and μ_r is the relative permeability of the medium.

25.4.3

The *volume energy density* E_m^d of a magnetic field is the energy per unit volume of the field. Thus

$$E_m^d = \frac{\mathrm{d}E_m}{\mathrm{d}V}.$$

For a uniform magnetic field (23.1.3), $E_m^d = E_m/V$. The volume energy density of any, including a nonuniform magnetic field, is expressed by the formula

$$E_m^d = \frac{1}{2}BH = \frac{1}{2}\mu_0\mu_r H^2 = \frac{1}{2}\frac{B^2}{\mu_0\mu_r} \qquad \text{(in SI units)},$$

$$E_m^d = \frac{BH}{8\pi} = \frac{\mu_r H^2}{8\pi} = \frac{1}{8\pi}\frac{B^2}{\mu_r} \qquad \text{(in Gaussian units)}.$$

Here B and H are the magnitudes of the vectors of magnetic induction (23.1.2) and strength (23.2.3) at the point being considered in the magnetic field. The remaining notation is defined in Section (25.4.2).

25.4.4

The energy E_m of a magnetic field, localized in the volume V is

$$E_m = \int_V \frac{BH}{2}\,\mathrm{d}V \qquad \text{(in SI units)},$$

$$E_m = \int_V \frac{BH}{8\pi}\,\mathrm{d}V \qquad \text{(in Gaussian units)}.$$

25.4.5

If the magnetic field is set up by an arbitrary system of n circuits, or loops, with the currents I_1, I_2, $I_3, \ldots, I_n$, the energy of the field can be expressed by the formula of Section (25.4.4), in which B and H are understood to be the magnitudes of vectors $\mathbf{B}$ and $\mathbf{H}$ of the resultant magnetic field, in accordance with the principle of superposition of

fields (15.2.2). Moreover, the energy of the magnetic field in this case is

$$E_m = \sum_{k=1}^{n} \frac{\Phi_{mk} I_k}{2},$$

where Φ_{mk} is the total magnetic flux linked to the k-th loop (23.6.5). In calculating this flux, the normal $\hat{\mathbf{n}}_k$ to the surface bounded by the loop is such that from the head of vector $\hat{\mathbf{n}}_k$ the current is seen to be counterclockwise. The magnetic flux Φ_{mk} equals

$$\Phi_{mk} = \Phi_{msk} + \Phi_{mmk},$$

where Φ_{msk} is the magnetic flux of self-induction of the k-th loop (25.2.2) and Φ_{mmk} is the magnetic flux of its mutual induction, produced by all the other loops carrying current (25.3.1). Hence the energy E_m of the magnetic field is equal to

$$E_m = \sum_{k=1}^{n} \frac{L_k I_k}{2} + \frac{1}{2} \sum_{k=1}^{n} \sum_{l=1(l\neq k)}^{n} M_{kl} I_k I_l \qquad \text{(in SI units)},$$

$$E_m = \frac{1}{c^2} \sum_{k=1}^{n} \frac{L_k I_k}{2} + \frac{1}{2c^2} \sum_{k=1}^{n} \sum_{l=1(l\neq k)}^{n} M_{kl} I_k I_l \quad \text{(in Gaussian un}$$

The first term is the sum of the intrinsic energies of all the cur rents (25.4.1). The second term is called the *mutual energy of the currents*. Here M_{kl} is the mutual inductance of the k-th and l-th loops, or circuits, (25.3.2) with the currents I_k and I_l.

26 Magnetic Materials In A Magnetic Field

26.1 Magnetic Moments of Electrons and Atoms

26.1.1

Magnetic materials are all substances capable of acquiring magnetic properties, i.e. of being magnetized, in an external magnetic field. This means that they can set up their own magnetic field. The magnetic properties of substances are determined by the magnetic properties of their electrons and atoms.[15] Magnetic materials are divided according to their magnetic properties into three main groups: diamagnetic (26.3.2), para magnetic (26.3.5) and ferromagnetic (26.5.1) materials.

[15] The magnetic properties of atomic nuclei are dealt with in (**??**).

26.1.2

The motion of an electron along its orbit in an atom is equivalent to a certain closed loop carrying a current (*orbital current*). According to (23.3.4), the *orbital magnetic moment* $\mathbf{p}_m$ of an electron equals

$$\mathbf{p}_m = IS\hat{\mathbf{n}} \qquad \text{(in SI units)},$$
$$\mathbf{p}_m = \frac{1}{c}IS\hat{\mathbf{n}} \qquad \text{(in Gaussian units)},$$

where $I = e\nu$ is the current, e is the magnitude of the charge of the electron, nu is the number of revolutions of the electron along its orbit in unit time, S is the area of the electron orbit, $\hat{\mathbf{n}}$ is a unit vector of the normal to area S, and c is the electrodynamic constant (23.2.2).

An electron moving along its orbit has an orbital angular momentum $\mathbf{L}_e$ (4.1.4). The orbital magnetic moment is proportional to the orbital angular momentum:

$$\mathbf{p}_m = \gamma \mathbf{L}_e,$$

where

$$\gamma = -\frac{e}{2m} \qquad \text{(in SI units)},$$
$$\gamma = -\frac{e}{2mc} \qquad \text{(in Gaussian units)},$$

The quantity γ is called the *gyromagnetic ratio of orbital moments*.

In the last formulas m is the mass of the electron, e is the magnitude of its charge, and c is the electrodynamic constant (23.2.2).

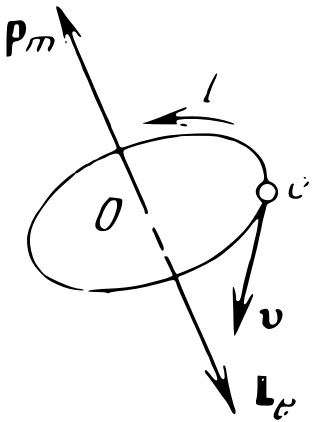


Figure 26.1.: Orientation of vectors $\mathbf{p}_m$ and $\mathbf{L}_e$.

Vectors $\mathbf{p}_m$ and $\mathbf{L}_e$ are opposite in direction and are perpendicular to the orbital plane of the electron (Figure 26.1).

26.1.3

An electron has an *intrinsic angular momentum* s, which is called the spin of the electron. The magnitude of the electron spin is

$$s = \frac{\sqrt{3}}{2}\frac{h}{2\pi} = \frac{\sqrt{3}}{2}\hbar,$$

where $\hbar$ is Plancks constant (Appendix II), and $\hbar = h/2\pi$. The most important feature of electron spin is that it has only two projections on the direction of vector $\mathbf{B}$ of magnetic induction.[16] Thus

$$s_B = \pm\frac{\hbar}{2}.$$

[16] Regardless of whether it is an external magnetic field set up, for instance, by current-carrying conductors, or the internal magnetic field of the substance itself (26.4.2).

26.1.4

Electron spin s corresponds to the spin magnetic moment $\mathbf{p}_{ms}$ which is proportional to the spin and opposite in direction. Thus

$$\mathbf{p}_{ms} = \gamma_s\, s.$$

The quantity γ_s is called the *gyromagnetic ratio of spin moments*:

$$\gamma = -\frac{e}{m} \qquad \text{(in SI units)},$$

$$\gamma = -\frac{e}{mc} \qquad \text{(in Gaussian units)},$$

where the notation is the same as in (26.1.2).

The projection of the electron spin magnetic moment on the direction of the field (**??**) equals

$$p_{msB} = \pm\frac{e\hbar}{2m} \qquad \text{(in SI units)},$$

$$p_{msB} = \pm\frac{e\hbar}{2mc} \qquad \text{(in Gaussian units)},$$

where μ_B is called the *Bohr magneton*, and is a unit for measuring magnetic moments (Appendix II).

26.1.5

The information presented in (26.1.1) through (26.1.4) is valid for each of the Z electrons in an atom. The number Z coincides with the atomic number in Mendeleevs periodic table (**??**).

The *orbital magnetic moment* $\mathbf{P}_m$ of an atom is the vector sum of the orbital magnetic moments $\mathbf{p}_m$ of all its electrons. Thus

$$\mathbf{P}_m = \sum_{i=1}^{Z} \mathbf{p}_{mi}.$$

The *orbital angular momentum* L of the atom is the vector sum of the orbital angular momenta $\mathbf{L}_e$ of all Z electrons. Thus

$$\mathbf{L} = \sum_{i=1}^{Z} \mathbf{L}_{ei}.$$

The atomic orbital magnetic moment $\mathbf{P}_m$ and angular momentum $\mathbf{L}$ have the following relationship:

$$\mathbf{P} = \gamma\mathbf{L},$$

where γ is the gyromagnetic ratio (26.1.2).

26.2 An Atom in a Magnetic Field

26.2.1

If a substance is in an external magnetic field, this field can be assumed uniform (23.1.3) within the limits of an atom. This follows from the smallness of atomic dimensions. Let us assume that an electron in the atom travels along a circular orbit whose plane is perpendicular to the induction vector $\mathbf{B}$ of the magnetic field. The action of the Lorentz force F_L (24.1.1) reduces the force of attraction of the electron to the nucleus. The centripetal force (2.4.3) is found, to equal the difference $F_e - F_L$, where F_e is the Coulomb force (14.2.2) of attraction of an electron to the nucleus (Figure 26.2). This results in a change in the angular velocity $\boldsymbol{\omega}$ (1.5.3) of the electron along its circular orbit.




Figure 26.2.: Forces on the electron.

26.2.2

The change in the angular velocity of the electron occurs in the process of growth of the magnetic field into which the atom is placed. This growth takes place during a finite length of time. At this an induced rotational electric field (25.1.1) is developed that acts on the electron in the atom. The strength $\mathbf{E}$ of this field is directed along a tangent to the electrons orbit and the force acting on the electron is $\mathbf{F} = e\mathbf{E}$ (15.1.2).

26.2.3

Upon an arbitrary position of the electrons orbit with respect to vector **B**, the orbital magnetic moment pm of the electron (26.1.2)) makes an angle α with the direction of the magnetic field (Fig. 26.3). In this case there will be a precessional motion of the orbit about the direction of vector **B** ((4.3.2)). This means that vector $\mathbf{p}_m$, perpendicular to the orbit and maintaining its angle α with the field constant, rotates about the direction, of vector **B** with the angular velocity ω_L. Thus

$$\omega_L = \frac{eB}{2m} \qquad \text{(in SI units)},$$
$$\omega_L = \frac{eB}{2mc} \qquad \text{(in Gaussian units)},$$

Here e is the magnitude of the charge of the electron, m is its mass, H is the magnetic field strength, c is the electrodynamic constant (23.2.2), and ω_L is called the *angular velocity of Larmor precession*.

Larmor's theorem states that the only result of the effect of a magnetic field on an electrons orbit in an atom is the precession (in SI units), of the orbit and vector $\mathbf{p}_m$ with the angular velocity ω_L, about an axis through the nucleus of the atom and parallel to the induction vector **B** of the magnetic field.

26.2.4

The precessional motion of the electrons orbit results in an additional orbital current ΔI_{orb} (Figure 26.3) and the

corresponding induced orbital magnetic moment $\Delta \mathbf{p}_m$ (26.1.2) with the magnitude

$$\Delta p_m = \Delta I_{orb} S_\perp = \frac{e^2 S_\perp}{4\pi m} \qquad \text{(in SI units)},$$

$$\Delta p_m = \frac{1}{c} \Delta I_{orb} S_\perp = \frac{e^2 S_\perp}{4\pi m c^2} \qquad \text{(in Gaussian units)},$$

where $S_\perp$ is the area of the projection of the orbit on a plane perpendicular to the direction of vector $\mathbf{B}$.

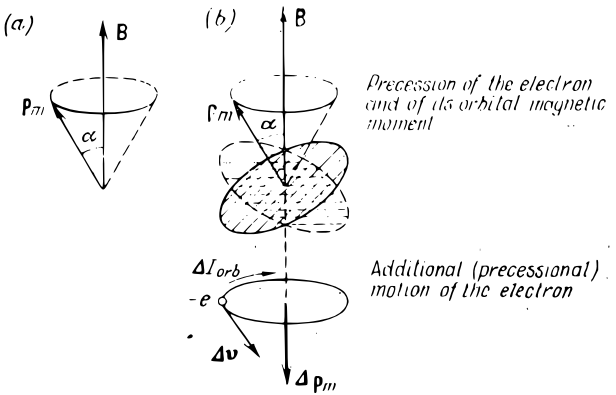


Figure 26.3.: Precession of the electron.

Vector $\Delta \mathbf{p}_m$ has the direction opposite to the magnetic

induction vector $\mathbf{B}$. Thus

$$\Delta \mathbf{p}_m = -\frac{e^2 S_\perp}{4\pi m}\mathbf{B} \qquad \text{(in SI units)},$$

$$\Delta \mathbf{p}_m = -\frac{e^2 S_\perp}{4\pi mc^2}\mathbf{B} \qquad \text{(in Gaussian units)},$$

The notation is the same as in (26.2.3).

The total induced orbital moment $\Delta \mathbf{P}_m$ of the atom (26.1.5)

$$\Delta \mathbf{P}_m = -\frac{e^2 Z \langle S_\perp \rangle}{4\pi m}\mathbf{B} \qquad \text{(in SI units)},$$

$$\Delta \mathbf{P}_m = -\frac{e^2 Z \langle S_\perp \rangle}{4\pi mc^2}\mathbf{B} \qquad \text{(in Gaussian units)},$$

where Z is the number of electrons in the atom, and $\langle S_\perp \rangle = \sum_{i=1}^{z} S_{\perp i}/Z$ is the average area of the projections of the electron orbits on a plane perpendicular to the direction of vector $\mathbf{B}$.

26.3 Diamagnetic and Paramagnetic Materials in a Uniform Magnetic Field

26.3.1

The magnetization of matter is characterized by the *magnetization vector* (*magnetization intensity*) $\mathbf{M}$, which is the ratio of the magnetic moment of a small volume ΔV of the substance to the magnitude of this volume. Thus

$$\mathbf{M} = \frac{1}{\Delta V}\sum_{i=1}^{N} \mathbf{P}_{m\,i}$$

where $\mathbf{P}_{m\,i}$ is the magnetic moment of the i-th atom (or molecule), and N is the total number of atoms (or molecules) in the small volume ΔV. Within the limits of the volume ΔV the magnetic field is assumed uniform. This volume should simultaneously contain a sufficiently large number of particles N (i.e. $N \gg 1$) to enable the physical quantities characterizing the system of particles to be expediently averaged.

26.3.2

Diamagnetic materials are substances in which the magnetic moments of the atoms (or molecules) equal zero in the absence of an external magnetic field. This means that in diamagnetic materials the vector sum of the orbital magnetic moments of all the electrons in an atom equals zero (26.1.5) and that induced magnetic moments (26.2.4) exist only in a magnetic field.

26.3.3

In the volume ΔV of an isotropic diamagnetic material, the induced magnetic moments Δ_m of all the atoms (or molecules) are the same and are opposite in direction to vector $\mathbf{B}$ (26.2.4).

The magnetization vector $\mathbf{M}$ is equal to

$$\mathbf{M} = \frac{N\Delta\mathbf{P}_m}{\Delta V} = n_0\mathbf{P}_m,$$

and, taking (26.2.4) into account:

$$\mathbf{M} = -\frac{n_0 e^2 Z \langle S_\perp \rangle}{4\pi m}\mathbf{B} \qquad \text{(in SI units)},$$

$$\mathbf{M} = -\frac{n_0 e^2 Z \langle S_\perp \rangle}{4\pi m c^2}\mathbf{B} \qquad \text{(in Gaussian units)},$$

where n_0 is the number of atoms (or molecules) in unit volume. The other notation is the same as in (26.2.4). Introducing the notation:

$$\chi'_m = -\frac{n_0 e^2 Z \langle S_\perp \rangle \mu_0}{4\pi m} \qquad \text{(in SI units)},$$

$$\chi'_m = -\frac{n_0 e^2 Z \langle S_\perp \rangle}{4\pi m c^2} \qquad \text{(in Gaussian units)},$$

we have g

$$\mathbf{M} = \chi'_m \frac{\mathbf{B}}{\mu_0} \qquad \text{(in SI units)},$$

$$\mathbf{M} = \chi'_m \mathbf{B} \qquad \text{(in Gaussian units)},$$

where χ'_m is a dimensionless quantity that characterizes the magnetic properties of magnetic materials. For all diamagnetic materials $\chi'_m < 0$.

26.3.4

The *magnetic susceptibility* χ_m is a quantity that is related to χ'_m as follows:

$$1 + \chi_m = \frac{1}{1 - \chi'_m} \qquad \text{(in SI units)},$$

$$1 + 4\pi\,\chi_m = \frac{1}{1 - 4\pi\,\chi'_m} \qquad \text{(in Gaussian units)},$$

from which

$$\chi_m = \frac{\chi'_m}{1 - \chi'_m} \qquad \text{(in SI units)},$$

$$\chi_m = \frac{\chi'_m}{1 - 4\pi\,\chi'_m} \qquad \text{(in Gaussian units)},$$

Practically, $\chi_m = \chi'_m$ for diamagnetic materials, because in absolute value χ'_m is very small: $|\chi'_m| \approx 10^{-6}$.

26.3.5

Paramagnetic materials are substances in which the atoms (or molecules) have a certain constant magnetic moment $\mathbf{P}_m$ in the absence of an external magnetic field. This means that the vector sum of the orbital magnetic moments of all the electrons. of an atom (or. molecule) is not equal to zero (26.1.5).

26.3.6

When a paramagnetic material is placed into a uniform magnetic field (23.1.3), the constant magnetic moments of the atoms (or molecules) precess about the direction of the induction vector $\mathbf{B}$ of the magnetic field at Larmor's angular velocity ω_L (26.2.3).

Thermal motion and collisions of the1atoms (or molecules) of a paramagnetic material lead to a gradual damping of the precession of the magnetic moments and to a reduction in the angles between the directions of the magnetic moment vectors and vector $\mathbf{B}$. The combined actions of the interatomic collisions and the magnetic field lead to a

predominant orientation of the magnetic moments of the atoms in alignment with the external field.

Though the constant magnetic moment $\mathbf{P}_m$ of an atom (or molecule) is of the order of 10^{-23} J/T (10^{-20} erg/G, the magnetic moments of all the particles in unit volume produce a magnetization that considerably exceeds diamagnetic phenomena (26.3.3). A paramagnetic material in an external magnetic field has an intrinsic magnetic field aligned with the external magnetic field.

26.3.7

In the classical theory of paramagnetism the magnitude of the magnetization vector (26.3.1) is expressed by the formula

$$M = n_0 P_m L(a),$$

where n_0 is the number of atoms (or molecules) in unit volume, and $L(a)$ is the classical Langevin function:

$$L(a) = \frac{e^a + e^{-a}}{e^a - e^{-a}} - \frac{1}{a}.$$

The parameter a is of the form $a = P_m B/kT$, where B is the magnetic induction of the field, k is Boltzmanns constant (8.4.5), and T is the absolute temperature. At room temperature and not especially strong external fields, $a \ll 1$ and the function $L(a)$ is, simplified, after expansion into a a series, and we obtain $L(a) \approx a/3$. Hence, the

magnetization vector, is equal to

$$\mathbf{M} = \chi'_m \frac{\mathbf{B}}{\mu_0} \qquad \text{(in SI units)},$$
$$\mathbf{M} = \chi'_m \mathbf{B} \qquad \text{(in Gaussian units)},$$

where χ'_m is determined by the formula

$$\chi'_m = \frac{n_0 P_m^2 \mu_0}{3kT} \qquad \text{(in SI units)},$$
$$\chi'_m = \frac{n_0 P_m^2}{3kT} \qquad \text{(in Gaussian units)}.$$

The quantity χ'_m is related to the magnetic susceptibility χ_m of paramagnetic materials by the formulas given in (26.3.4).

The value of the quantity χ_m is positive for a paramagnetic material and ranges from 10^{-5} to 10^{-3}; therefore, $\chi'_m = \chi_m$ with a high degree of accuracy.

The *Curie law* states that the paramagnetic susceptibility of a substance is inversely proportional to the absolute tempera ture.

26.3.8

In very strong external magnetic fields, saturation magnetization is reached; here $a \gg 1$ and the Langevin function $L(a) \to 1$. This means that the magnetic moments of all the atoms (or molecules) are aligned with the external magnetic field and $M = n_0 P_m$.

26.4 Magnetic Field in Magnetic Materials

26.4.1

Two types of currents that set up magnetic fields, macrocurrents and microcurrents, can be distinguished in matter. What we have called *macrocurrents* here are conduction currents (20.1.2) and convection currents (20.1.2). *Microcurrents* (molecular currents) are those due to the motion of electrons in atoms, molecules and ions.

The magnetic field in a substance is the vector sum of two fields (15.2.2): the *external* magnetic field, set up by the macrocurrents, and the *internal*, or *intrinsic magnetic field*, set up by microcurrents. The magnetic induction vector $\mathbf{B}$ (23.1.2) in the magnetic field in a substance characterizes the resultant magnetic field and is equal to the vector sum of the magnetic inductions of the external $\mathbf{B}_0$ and intrinsic $\mathbf{B}_{intr}$ magnetic fields. Thus

$$\mathbf{B} = \mathbf{B}_0 + \mathbf{B}_{intr}$$

The primary source of magnetic fields in magnetic materials are the macrocurrents. Their magnetic fields are what leads to the magnetization of substances placed in an external magnetic field.

26.4.2

The *total current law for a magnetic field in a substance* is a generalization of the law formulated in (23.5.2):

$$\oint_L \mathbf{B}\,\mathrm{d}\mathbf{l} = \mu_0(I_{mic} + I_{mac}) \qquad \text{(in SI units)},$$

$$\oint_L \mathbf{B}\,\mathrm{d}\mathbf{l} = \frac{4\pi}{c}\mu_0(I_{mic} + I_{mac}) \qquad \text{(in Gaussian units)}.$$

where I_{mac} and I_{mic} are the algebraic sums of the macro- and microcurrents passing through a surface bounded by the loop L.

26.4.3

The algebraic sum of the microcurrents is related to the magnetization vector $\mathbf{M}$ as follows:

$$I_{mic} = \oint_L \mathbf{M}\,\mathrm{d}\mathbf{l} \qquad \text{(in SI units)},$$

$$I_{mic} = c\oint_L \mathbf{M}\,\mathrm{d}\mathbf{l} \qquad \text{(in Gaussian units)},$$

where $\oint \mathbf{M}\,\mathrm{d}\mathbf{l}$ is the circulation of the magnetization vector $\mathbf{M}$ (26.3.1) along the closed loop L through which the microcurrents are threaded.

The final form of the total current law (26.4.2) is

$$\oint_L \left(\frac{\mathbf{B}}{\mu_0} - \mathbf{M} \right) \mathrm{d}\mathbf{l} = I_{mac} \qquad \text{(in SI units)},$$

$$\oint_L (\mathbf{B} - 4\pi\mathbf{M})\, \mathrm{d}\mathbf{l} = \frac{4\pi}{c} I_{mac} \qquad \text{(in Gaussian units)}.$$

26.4.4

The vector

$$\mathbf{H} = \frac{\mathbf{B}}{\mu_0} - \mathbf{M} \qquad \text{(in SI units)},$$

$$\mathbf{H} = \mathbf{B} - 4\pi\mathbf{M} \qquad \text{(in Gaussian units)}.$$

is called the *strength of the magnetic field* existing in an arbitrary medium (cf. (23.2.3)). The total current, law for a magnetic field in an arbitrary medium is written in a form identical to that in (23.5.4):

$$\oint_L \mathbf{H}\, \mathrm{d}\mathbf{l} = I_{mac} \qquad \text{(in SI units)},$$

$$\oint_L \mathbf{H}\, \mathrm{d}\mathbf{l} = \frac{4\pi}{c} I_{mac} \qquad \text{(in Gaussian units)}.$$

The circulation of the magnetic field strength vector along an arbitrary closed loop is equal (or proportional) to the algebraic sum of the macrocurrents through the surface hounded by this loop.

26.4.5

For an isotropic medium, the relation between the magnetic induction vector $\mathbf{B}$ and the magnetization vector $\mathbf{M}$ (26.3.1) leads to the following result for vector $\mathbf{H}$ (26.4.4):

$$\mathbf{H} = (1 - \chi'_m)\frac{\mathbf{B}}{\mu_0} \qquad \text{(in SI units)},$$
$$\mathbf{H} = (1 - 4\pi\chi'_m)\mathbf{B} \qquad \text{(in Gaussian units)}.$$

Substituting for $(1 - \chi'_m)$ or $(1 - 4\pi\chi'_m)$ on the basis of Sect. 26.3.4, we have

$$\mathbf{H} = \frac{\mathbf{B}}{\mu_0\mu_r} \qquad \text{(in SI units)},$$
$$\mathbf{H} = \frac{\mathbf{B}}{\mu_r} \qquad \text{(in Gaussian units)}.$$

where

$$\mu_r = 1 + \chi_m \qquad \text{(in SI units)},$$
$$\mu_r = 1 + 4\pi\chi_m \qquad \text{(in Gaussian units)}.$$

The quantity μ_r thus introduced is called the *relative magnetic permeability* of the substance (see also (23.2.1)). In these formulas χ_m is the magnetic susceptibility (26.3.4).

26.5 Ferromagnetic Materials

26.5.1

Ferromagnetic materials are substances in which the intrinsic (internal) magnetic field (26.4.1) is hundreds or




Figure 26.4.: The dependence of the magnetization (26.3.1) on the strength H of the external magnetic field and magnetic saturation M_s.




Figure 26.5.: The dependence of the magnetic induction **B** on **H**.

even thousands of times stronger than the external magnetic field applied to the substance.

Ferromagnetism is observed in the crystals of the transition metals (**??**), iron, cobalt and nickel and of certain alloys, provided that $d/a \gg 1.5$, where d is the diameter of the atom and a is the diameter of the unfilled electronic shell of the atom (**??**).

26.5.2

The principal properties of ferromagnetic materials, distinguishing them from other magnetic materials are:

(a) The dependence of the magnetization (26.3.1) on the strength H of the external magnetic field is characterized by *magnetic saturation* M_s, which begins at $H \geqslant H_s$ (Figure 26.4).

(b) The dependence of the magnetic induction **B** on **H** is characterized by the increase according to a linear law at $H \geqslant H_s$ (Figure 26.5).

(c) The dependence of the relative magnetic permeability μ_r on the field strength H is of a complex nature (Figure 26.6).

(d) *Magnetic hysteresis* exists in ferromagnetic materials. This refers to the lag in the variation of magnetization from the variation in the strength of the external magnetizing field, which is variable in magnitude and direction. This lag is due to the depen-

dence of M on its previous values (past history) in magnetizing the substance.

(e) The properties of ferromagnetic materials enumerated above[17] are observed at temperatures below the *Curie point* θ_C (18.4.4). At temperatures $T \geqslant \theta_C$, thermal motion breaks up the regions of spontaneous magnetization (26.5.4) and the ferromagnetic material, losing its special features, is converted into a paramagnetic substance (26.3.5). The Curie points for iron, nickel, cobalt and Permalloy are 1043, 631, 1403 and 823 K.





Figure 26.6.: The dependence of the relative magnetic permeability μ_r on the field strength H.

26.5.3

The *hysteresis loop* is a curve showing the change in the magnetization of a ferromagnetic material located in an external magnetic field as the strength of this field is varied from $+H_s$ to $-H_s$ and back again, where H_s is the field strength corresponding to magnetic saturation (Figure 26.7). The magnetization $\pm M_s$ at $H = \pm H_s$ is called *saturation magnetization*. The magnetization $\pm M_r$ that remains in a ferromagnetic material in the absence of an external field ($H = 0$) is called the *residual*, or *remanent, magnetization*. This factor is the basis for making permanent magnets.

The strength $\pm H_c$ of the external field that completely demagnetizes a substance is called the *coercive force*. The coercive force specifies the property of a ferromagnetic material to retain its residual magnetization. *Hard*, or *retentive, magnetic materials* have a high coercive force.

[17] As well as many others that are beyond the scope of this handbook.



They have a wide hysteresis loop and are used to make permanent magnets. *Soft*, or *non-retentive, magnetic materials* have a low coercive force. They have a narrow hysteresis loop and are used to make trans former cores.

The reversal of magnetization is associated with a change in the orientation of the regions of spontaneous magnetization (26.5.4) and requires that work be done at the expense of the energy of the external magnetic field. The amount of heat evolved in reversing magnetization is proportional to the area of the hysteresis loop.

26.5.4

At temperatures below the Curie point (26.5.2) a ferromagnetic material is made up of *domains*, which are small *regions of uniform spontaneous magnetization*. The linear dimensions of these domains range from 10^{-5} to 10^{-4} m. Within each domain the substance is magnetized to saturation (26.5.2). In the absence of an external magnetic field, the magnetic moments of the various domains are oriented in space so that the resultant magnetic moment of the whole ferromagnetic body equals zero.

Owing to the effect of the external magnetic field, the magnetic moments of whole domains are oriented in a ferromagnetic material, rather than those of the separate particles as in the case of paramagnetic materials (26.3.6). As a result, the sub stance is magnetized.

Ferromagnetic properties can only exist in the crystalline state of substances in which the interaction between the neighbouring atoms of the crystal lattice leads to the total energy of the system of electrons that provides

for compliance with the conditions for the existence of ferromagnetism (26.5.1).

26.5.5

Measurement of the gyromagnetic ratio (26.1.4) for ferromagnetic bodies indicates that the elementary carriers of magnetism in ferromagnetic materials are the spin magnetic moments of the electrons (26.1.4). The modern quantum mechanical theory of ferromagnetism explains the nature of the spontaneous magnetization of ferromagnetic materials (26.5.4) and the reasons for the development of a strong intrinsic magnetic field (26.4.1).

Ferromagnetic properties are possessed by crystals of substances whose atoms have inner shells and subshells (**??**) unfilled by electrons and having a nonzero value of the projections of the resultant spin moment on the direction of the magnetic field (26.1.3). Developed between the spins of such electrons is a specific kind of quantum mechanical interaction that is not of a magnetic origin. It is called exchange interaction (**??**). As a result, the state of the system of electrons in fer romagnetic materials is found to be stable upon parallel align ment of the spins, and spontaneous magnetization (26.5.4) is developed along with a strong intrinsic magnetic field.

27 Fundamentals of Maxwell's Theory

27.1 General Features o! Maxwell's Theory

27.1.1

Maxwell's theory is a systematic theory of a unified electromagnetic field (15.1.2) set up by an arbitrary system of charges and currents. Maxwell's theory enables the *principal problem of electrodynamics* to be solved: determining the characteristics of electric and magnetic fields on the basis of a given distribution of charges and currents that set up these fields. Maxwell's theory is a generalization of fundamental laws that describe electrical and electromagnetic phenomena. These include the Ostrogradsky-Gauss theorem (18.3.3), the total cur rent law (26.4.2), and the law of electromagnetic induction (25.1.2).

27.1.2

Maxwell's theory is of a phenomenological nature. This is manifested in the fact that it does not deal with the internal mechanism of the phenomena that occur in a medium and lead to the production of electric and magnetic fields. The medium is described in this theory by three quantities that specify its electrical and magnetic properties. These are the relative permittivity (dielectric constant) ε_r (18.3.4), relative magnetic permeability μ_r (26.4.5) and the electrical conductivity $\varkappa$ (20.3.4).

27.1.3

Maxwell's theory deals with macroscopic fields set up by macroscopic charges and currents that are concentrated in volumes incommensurably greater than those of atoms (or molecules). It is assumed that the distances from the sources of the fields to the points in space being considered substantially exceed the linear dimensions of atoms (or molecules). Therefore, macroscopic fields change appreciably only at distances that are huge compared to the linear dimensions of atoms (or molecules). Moreover, the periods of time required for changes in variable electric and magnetic fields are considered to be considerably longer than those required for intra-molecular processes.

27.1.4

The macroscopic charges and currents are the sets of microscopic charges and currents that set up their micro-

fields (electric and magnetic), varying continuously with time at each point in space.

The macroscopic fields dealt with in Maxwell's theory are *averaged micro-fields*. Averaging is carried out over time intervals considerably longer than those typical of inter-atomic processes, and over volumes of fields many times greater than the volumes of atoms and molecules (27.4.5).

27.1.5

Maxwell's theory is one of *short-range action*, according to which electrical and magnetic interactions take place in electric and magnetic fields and propagate at a finite velocity equal to that of light in the given medium. This important consequence is taken into account in the electromagnetic theory of light developed by Maxwell.

27.2 Maxwell's First Equation

27.2.1

Maxwell's first equation in integral form is a generalization of Faraday's law of electromagnetic induction in the form (25.1.2):

$$\oint_L \mathbf{E}\,\mathrm{d}\mathbf{l} = -\frac{\partial \Phi_m}{\partial t} \qquad \text{(in SI units)},$$

$$\oint_L \mathbf{E}\,\mathrm{d}\mathbf{l} = -\frac{1}{c}\frac{\partial \Phi_m}{\partial t} \qquad \text{(in Gaussian units)},$$

According to Maxwell, this law is valid for any closed circuit, or loop, and hot only current-conducting ones, conceivably selected in a variable magnetic field. This means that a variable magnetic field sets up a rotational electric field at any point in space, regardless of whether or not there is a conductor at that point.

27.2.2

Using the following expression for the magnetic flux (23.5.5):

$$\Phi_m = \oint\limits_S \mathbf{B}\,\mathrm{d}S = \oint\limits_S B_n\,\mathrm{d}S,$$

and the Stokes theorem from vector analysis:

$$\oint\limits_S \mathbf{E}\,\mathrm{d}\mathbf{l} = \oint\limits_S \boldsymbol{\nabla}\times\mathbf{E}\,\mathrm{d}\mathbf{S},$$

where $\mathrm{d}\mathbf{S} = \hat{\mathbf{n}}\,\mathrm{d}S$ ($\hat{\mathbf{n}}$ being the unit vector of the normal to the element $\mathrm{d}S$ of surface), we can convert Maxwell's first equation as given in (27.2.1) to *Maxwell's first equation in differential form*:

$$\boldsymbol{\nabla}\times\mathbf{E} = -\frac{\partial\mathbf{B}}{\partial t} \qquad \text{(in SI units)},$$

$$\boldsymbol{\nabla}\times\mathbf{E} = -\frac{1}{c}\frac{\partial\mathbf{B}}{\partial t} \qquad \text{(in Gaussian units)},$$

Here $\boldsymbol{\nabla}\times\mathbf{E}$ is expressed in Cartesian coordinates by the determinant

$$\boldsymbol{\nabla}\times\mathbf{E} = \begin{vmatrix} \hat{\mathbf{i}} & \hat{\mathbf{j}} & \hat{\mathbf{k}} \\ \frac{\partial}{\partial x} & \frac{\partial}{\partial y} & \frac{\partial}{\partial z} \\ E_x & E_y & E_z \end{vmatrix}.$$

27.2.3

An inductive type of electron accelerator, the *betatron* (24.4.2), is based on setting up a rotational electric field in space by the action of an alternating magnetic field.

In the alternating magnetic field produced by an electromagnet with conical pole pieces A and C (Figure 27.1, a rotational electric field is set up in accelerating chamber D, having the form of a closed ring. The lines of force (15.1.6) of the rotational electric field lie in plane MN, which is perpendicular to the axis OO' of symmetry of the pole pieces. These lines are circles with their centre at point K. At all points of any circle the field strength vector $\mathbf{E}$ has a constant numerical value and is tangent to the circle. Electrons in the accelerating chamber travel along circular paths and after repeated travel along the stable circular orbit the electron is accelerated to considerable energy.

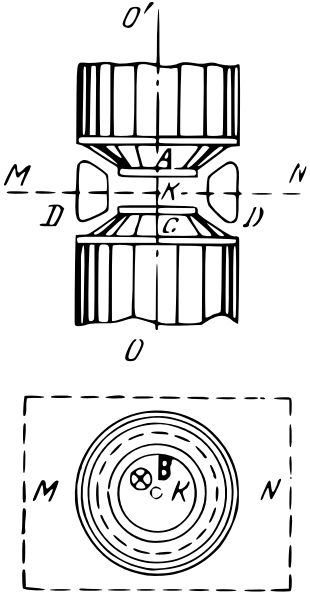


Figure 27.1.: The working of a betatron.

27.2.4

The strength $\mathbf{E}$ of the rotational electric field in a betatron is equal to

$$E = -\frac{1}{2} r \frac{\mathrm{d}\langle B \rangle}{\mathrm{d}t}$$

where $\langle B \rangle$ is the average value of magnetic induction at the instant of time t within the limits of the circular electron orbit of radius r.

A condition for a stable orbit of the electron in the betatron is: $B = \langle B \rangle / 2$, where B is the instantaneous value of the magnetic induction on the orbit.

The orbit of an electron in the betatron is stable if:

(a) The whole orbit lies in a single plane. This condition, called *axial focusing*, is achieved due to the special shape of the pole pieces of the electromagnet. This shape provides for gradual weakening of the magnetic field induction in the direction from the centre of the orbit to its periphery.

(b) Provision is made to return electrons that have accidentally left the stable orbit back to it again. This is called *radial focusing* and is achieved by a space distribution of the magnetic field in which the, magnetic induction decreases more slowly from the axis to the periphery than $1/r$, where r is the distance from a given point in the field to the axis of symmetry OO'.

27.3 Displacement Current. Maxwell's Second Equation

27.3.1

Maxwell generalized the total current law, (26.4.2) and (26.4.4), by assuming that a variable electric field, in the same way as an electric current, is a source of a magnetic field. The quantitative measure of the magnetic effect of a variable electric held is the displacement current.

27.3.2

The *displacement current density* (20.2.3) is

$$\mathbf{j}_{dis} = \frac{\partial \mathbf{D}}{\partial t} \qquad \text{(in SI units)},$$
$$\mathbf{j}_{dis} = \frac{1}{4\pi}\frac{\partial \mathbf{D}}{\partial t} \qquad \text{(in Gaussian units)},$$

The displacement current through the arbitrary surface S is a physical quantity numerically equal to the flux of the displacement current density vector through this surface. Thus

$$I_{dis} = \int_S \frac{\partial \mathbf{D}}{\partial t}\,\mathrm{d}\mathbf{S} = \frac{\partial \Phi_e}{\partial t} \qquad \text{(in SI units)},$$
$$I_{dis} = \int_S \frac{1}{4\pi}\frac{\partial \mathbf{D}}{\partial t}\,\mathrm{d}\mathbf{S} = \frac{1}{4\pi}\frac{\partial \Phi_e}{\partial t} \qquad \text{(in Gaussian units)},$$

where $\Phi_e = \int_s \mathbf{D}\,\mathrm{d}\mathbf{S}$ is the flux of the electric displacement vector through the surface S (15.3.2).

Taking the displacement currents into account, any variable current has a closed circuit. Displacement currents "flow" through a part of a circuit where there is no conductor, for example, between the plates of a capacitor being charged or discharged. Shown in Figure 27.2. are the vectors j s and the lines of induction of the magnetic fields of displacement currents in charging (Figure 27.2 (a)) and in discharging (Figure 27.2 (b)) a capacitor.

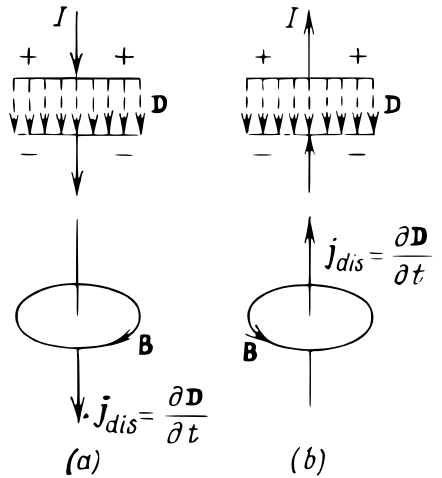


Figure 27.2.: Understanding charging and discharging of a capacitor using the displacement current.

27.3.3

According to (18.3.4), the displacement vector in any dielectric is equal to

$$\mathbf{D} = \varepsilon_0 \mathbf{E} + \mathbf{P}_e \qquad \text{(in SI units)},$$
$$\mathbf{D} = \mathbf{E} + 4\pi \mathbf{P}_e \qquad \text{(in cgse units)},$$

where $\mathbf{P}_e$ is the polarization vector (18.2.3).

The displacement current density in a dielectric is

$$\mathbf{j}_{dis} = \varepsilon_0 \frac{\partial \mathbf{E}}{\partial t} + \frac{\partial \mathbf{P}_e}{\partial t} \qquad \text{(in SI units)},$$
$$\mathbf{j}_{dis} = \frac{1}{4\pi} \frac{\partial \mathbf{E}}{\partial t} + \frac{\partial \mathbf{P}_e}{\partial t} \qquad \text{(in cgse units)}.$$

In these last formulas, the first term $\varepsilon_0 \, \partial \mathbf{E}/\partial t$ (or, correspondingly, $1/4\pi \;\; \partial \mathbf{E}/\partial t$ is called the *displacement current density in vacuum*, whereas the second term $\partial \mathbf{P}_e/\partial t$ is called the *polarization current density*. The second term is the density of the current due to the ordered motion of charges in the dielectric: either the displacement of charges in a molecule of a non-polar dielectric. (18.1.3) or the turning of the dipoles in polar dielectrics (18.1.5). The displacement current docs not evolve Joule heal (21.2.6) in vacuum or in metals. In this it differs from conduction currents.

27.3.4

Maxwell added the displacement current to the right-hand side of the. total current law in the form given in (26.4.4), writing this law in the form

$$\oint_L \mathbf{H}\,\mathrm{dl} = I_{mac} + I_{dis} \qquad \text{(in SI units)},$$

$$\oint_L \mathbf{H}\,\mathrm{dl} = \frac{4\pi}{c}(I_{mac} + I_{dis}) \qquad \text{(in Gaussian units)}.$$

This equation is called *Maxwell's second equation in integral form*. It shows that the circulation of the magnetic field strength vector along an arbitrary closed circuit, or loop, L is equal to the algebraic sum of the macro-currents and the displacement current through a surface bounded by this loop.

27.3.5

Making use of the Stokes theorem from vector analysis

$$\oint_L \mathbf{H}\,\mathrm{d}\mathbf{l} = \oint_S \boldsymbol{\nabla}\times\mathbf{H}\,\mathrm{d}\mathbf{S}$$

where $\mathrm{d}\mathbf{S} = \hat{\mathbf{N}}\mathrm{d}S$, and $\hat{\mathbf{n}}$ is a unit vector of the normal to the element $\mathrm{d}S$ of surface, and of the expression for the total current

$$I = I_{mac} + I_{dis} = \int_S (\mathbf{j} + \mathbf{j}_{dis})\,\mathrm{d}\mathbf{S}$$

Maxwell's second equation can be written in differential form:

$$\boldsymbol{\nabla}\times\mathbf{H} = \mathbf{j} + \frac{\partial\mathbf{D}}{\partial t} \qquad \text{(in SI units)},$$

$$\oint_L \mathbf{H}\,\mathrm{d}\mathbf{l} = \frac{4\pi}{c}(I_{mac} + I_{dis}) \qquad \text{(in Gaussian units)}.$$

In these equations, $\boldsymbol{\nabla}\times\mathbf{H}$ has the same meaning as $\boldsymbol{\nabla}\times\mathbf{E}$ in (27.2.2).

27.3.6

In the absence of conduction currents ($\mathbf{j} = 0$), Maxwell's first and second equations are of symmetrical form except for sign in their right-hand sides:

$$\boldsymbol{\nabla}\times\mathbf{E} = \frac{\partial\mathbf{B}}{\partial t},\ \boldsymbol{\nabla}\times\mathbf{H} = \frac{\partial\mathbf{D}}{\partial t} \qquad \text{(in SI units)},$$

$$\boldsymbol{\nabla}\times\mathbf{E} = -\frac{1}{c}\frac{\partial\mathbf{B}}{\partial t},\ \boldsymbol{\nabla}\times\mathbf{H} = \frac{1}{c}\frac{\partial\mathbf{D}}{\partial t} \qquad \text{(in Gaussian units)}.$$

Comparing Maxwell's equations[18], we reach the following conclusions:

(a) Electric and magnetic fields are interrelated: a change of an electric field with time sets up a magnetic field[19]. In its turn, a variable magnetic field is the source of a rotational electric field.

(b) The different signs at the right-hand sides of Maxwell's equations comply with the law of conservation of energy and with the Lenz law (25.1.4). If the signs of $\partial\mathbf{B}/\partial t$ and $\partial\mathbf{D}/\partial t$ were the same, an infinitesimal increase in one of the fields would lead to an increase without limit of both fields, whereas an infinitesimal decrease in one of the fields would lead to the disappearance of both fields. The above-mentioned difference in the signs of the right-hand (a) sides of Maxwell's equations is a necessary condition for the existence of a stable electromagnetic field.

The different signs in the right-hand sides of Maxwell's equations correspond to the fact that the directions of $\partial\mathbf{D}/\partial t$ and $\mathbf{H}$ form a "right-hand screw" system (Figure 27.3 (a)), whereas the directions of $\partial\mathbf{B}/\partial t$ and $\mathbf{E}$ form a "left-hand screw" system (Figure 27.3 (b)).

27.4 Complete Set of Maxwell's Equations for an Electromagnetic Field

27.4.1

A complete set of Maxwell's equations for an electromagnetic field includes, in addition to the equations dealt with

[18] The numeration of Maxwell's equations is a conditional one and is frequently the opposite of that accepted in this handbook.

[19] The magnetic field is always a rotational one (23.5.3).




Figure 27.3.: Relationship between quantities in Maxwell's equations.

in sections (27.2.1), (27.2.2), (27.3.4) and (27.3.5), the Ostro-gradsky-Gauss theorem for an electric field (18.3.3):

$$\oint_S \mathbf{D}\mathrm{d}\mathbf{S} = 4\pi q_{\text{free}} \quad \text{in cgse units}$$

and the same theorem for a magnetic field (23.5.6):

$$\oint_S \mathbf{B}\mathrm{d}\mathbf{S} = 0 \quad \text{in cgse units}$$

Maxwell proposed that the theorem for the flux of an electric field displacement vector is valid, not only for a steady-state electrostatic field, but for a variable electric field as well.

27.4.2

Making use of the Gauss theorem from vector analysis:

$$\oint_S \mathbf{A}\mathrm{d}\mathbf{S} = \int_V \boldsymbol{\nabla} \cdot \mathbf{A}\, \mathrm{d}V,$$

and introducing the volume density ρ of free charges: $\rho = \mathrm{d}q_{\text{free}}/\mathrm{d}V$ (where $\mathrm{d}V$ is an element of volume), it is possible to obtain *Maxwell's third equation in differential form*:

$$\boldsymbol{\nabla} \cdot \mathbf{D} = \rho \qquad \text{(in SI units)},$$
$$\boldsymbol{\nabla} \cdot \mathbf{D} = 4\pi\rho \qquad \text{(in Gaussian units)},$$

In these equations, $\nabla \cdot \mathbf{A}$ (where $\mathbf{A}$ is an arbitrary vector) is determined in Cartesian coordinates as follows:

$$\nabla \cdot \mathbf{A} = \frac{\partial A_x}{\partial x} + \frac{\partial A_y}{\partial y} + \frac{\partial A_z}{\partial z},$$

where $\mathbf{A} = A_x\hat{\mathbf{i}} + A_y\hat{\mathbf{j}} + A_z\hat{\mathbf{k}}$ and $\hat{\mathbf{i}}$, $\hat{\mathbf{j}}$, and $\hat{\mathbf{k}}$ are unit vectors along the coordinate axes.

27.4.3

The *complete set of Maxwell's equations* includes four equations:

$$\nabla \times \mathbf{E} = -\frac{\partial \mathbf{B}}{\partial t}, \qquad \nabla \cdot \mathbf{D} = \rho, \qquad \text{(in SI units)},$$

$$\nabla \times \mathbf{H} = \mathbf{j} + \frac{\partial \mathbf{D}}{\partial t}, \qquad \nabla \cdot \mathbf{B} = 0, \qquad \text{(in SI units)},$$

$$\nabla \times \mathbf{E} = -\frac{1}{c}\frac{\partial \mathbf{B}}{\partial t}, \qquad \nabla \cdot \mathbf{D} = 4\pi\rho, \qquad \text{(in Gaussian units)},$$

$$\nabla \times \mathbf{H} = \frac{4\pi}{c}\mathbf{j} + \frac{1}{c}\frac{\partial \mathbf{D}}{\partial t}, \qquad \nabla \cdot \mathbf{B} = 0, \qquad \text{(in Gaussian units)}.$$

27.4.4

The system of Maxwell's equations is supplemented by equations that specify the electric and magnetic properties of the medium. For macro-currents in an isotropic medium, which comply with Ohm's law (20.3.4), these equations are of the form

$$\mathbf{D} = \varepsilon_0\varepsilon_r\mathbf{E}, \ \mathbf{B} = \mu_0\mu_r\mathbf{H} \ \mathbf{j}_{mac} = \varkappa\mathbf{E} \qquad \text{(in SI units)},$$

$$\mathbf{D} = \varepsilon_r\mathbf{E}, \ \mathbf{B} = \mu_r\mathbf{H} \ \mathbf{j}_{mac} = \varkappa\mathbf{E} \qquad \text{(in Gaussian units)}.$$

Here ε_0 and μ_0 are the electric constant (14.2.7) and the magnetic constant (23.2.2) in SI units, ε_r and μ_r are the relative dielectric constant and relative magnetic permeability, and x is the electrical conductivity.

To solve a system of Maxwell's equations, it is also necessary to specify the boundary conditions for the vectors characterizing the electromagnetic field. Thus

$$
\begin{aligned}
D_{n_1} - D_{n_2} &= \sigma, & E_{t_1} &= E_{t_2}, && \text{(in SI units)},\\
B_{n_1} &= B_{n_2}, & H_{t_1} - H_{t_2} &= j_{sur}, && \text{(in SI units)},\\
D_{n_1} - D_{n_2} &= 4\pi\sigma, & E_{t_1} &= E_{t_2}, && \text{(in Gaussian units)}\\
B_{n_1} &= B_{n_2}, & H_{t_1} - H_{t_2} &= \frac{4\pi}{c} j_{sur}, && \text{(in Gaussian units)}
\end{aligned}
$$

where σ is the surface density of free charges, $\hat{\mathbf{n}}$ is a unit vector of the normal to the interface (boundary) between media and extends from medium $\in$ to medium ∞, $\hat{\mathbf{t}}$ is a unit vector of the tangent to the interface, and j_{sur} is the projection of the density vector of surface conduction currents on the direction $[\hat{\mathbf{t}}\,\hat{\mathbf{n}}]$. For given boundary and initial conditions, i.e. known values of vectors $\mathbf{E}$ and $\mathbf{H}$ at the initial instant of time $(t = 0)$ the system of Maxwell's equations has a unique solution.

27.4.5

Maxwell's equations are invariant with respect to the Lorentz transformations (5.3.2).

In the special theory of relativity (5.1.1) it is shown that a common electromagnetic field can be different in different inertial frames of reference (2.1.2). In particular,

one of the fields, either electric or magnetic, may be absent in one of the coordinate systems and be present in the other. The following formulas are used for the Lorentz transformations of the projections on the coordinate axes of the vectors **E**, **H**, **D** and **B** of the electric and magnetic fields, in going over from fixed inertial frame of reference K to frame K' which travels with respect to frame K at the constant velocity V in a straight line along the OX axis:

$$
\begin{aligned}
&E_x = E'_x, \quad E_y = \gamma(E'_y + VB'_z), \quad E_z = \gamma(E'_z - VB'_y), && \text{(in SI units)},\\
&H_x = H'_x, \quad H_y = \gamma(H'_y - VD'_z), \quad H_z = \gamma(H'_z + VD'_y), && \text{(in SI units)},\\
&D_x = D'_x, \quad D_y = \gamma\left(D'_y + \frac{\beta}{c}H'_z\right), \quad D_z = \gamma\left(D'_z + \frac{\beta}{c}H'_y\right), && \text{(in Gaussian units)},\\
&B_x = B'_x, \quad B_y = \gamma\left(B'_y - \frac{\beta}{c}E'_z\right), \quad B_z = \gamma\left(B'_z + \frac{\beta}{c}E'_y\right), && \text{(in Gaussian units)},\\
&E_x = E'_x, \quad E_y = \gamma\left(E'_y + \beta\, H'_z\right), \quad E_z = \gamma\left(E'_z + \beta\, H'_y\right), && \text{(in Gaussian units)},\\
&H_x = H'_x, \quad H_y = \gamma\left(H'_y - \beta\, E'_z\right), \quad H_z = \gamma\left(H'_z + \beta\, E'_y\right), && \text{(in Gaussian units)}.
\end{aligned}
$$

Where $\beta = V/c$ and $\gamma = 1/\sqrt{1 - V^2/c^2}$.

27.4.6

The classical Lorentz theory of the electron is a further development of Maxwell's theory of the electromagnetic field.

The Lorentz theory is based on a definite model that implies certain conceptions of the structure of matter. It is assumed that atoms consist of negatively and positively charged particles, and that the great variety of electrical

and magnetic phenomena can be explained by a definite spatial arrangement, motion and interaction of charges and micro-currents. At each point in space certain electric and magnetic micro-fields exist with the strengths $\mathbf{e}$ and $\mathbf{h}$. These fields result from the combined action of all the charges and micro-currents. The micro-fields comply with a system of equations similar to Maxwell's equations (27.4.3). Maxwell's equations for macroscopic fields E and B (27.1.3) can be obtained by averaging the equations of the electron theory (27.1.4), and they are found to be the averaged microfields e and h. Thus

$$\mathbf{E} = \langle \mathbf{e} \rangle, \ \mathbf{B} = \mu_0 \langle \mathbf{h} \rangle \quad \text{(in SI units)}.$$

Vectors $\mathbf{D}$ and $\mathbf{H}$ are found to be related to $\langle \mathbf{e} \rangle$ and $\langle \mathbf{h} \rangle$ by the polarization vector $\mathbf{P}_e$ (18.2.3) and the magnetization vector $\mathbf{M}$ (26.3.1) as indicated in (18.3.4) and (26.4.4). Thus

$$\mathbf{D} = \varepsilon_0 \mathbf{E}, + \mathbf{P}_e, \qquad \mathbf{H} = \frac{\mathbf{B}}{\mu_0} - \mathbf{M}, \qquad \text{(in SI units)},$$

$$\mathbf{D} = \mathbf{E}, + 4\pi \mathbf{P}_e, \qquad \mathbf{H} = \mathbf{B} - 4\pi \mathbf{M}, \qquad \text{(in Gaussian units)}.$$

Part IV.

Oscillations and Waves

28 Free Harmonic Oscillations

28.1 Harmonic Oscillations

28.1.1

Oscillations, including vibrations and variations, are processes (motions or changes of state) that are repeated more or less regularly with time. According to the physical nature of the oscillatory process and the "mechanism" by which it is initiated, distinction is made between *mechanical oscillations*, commonly called vibrations (swinging of pendulums; vibration of strings; reciprocation and oscillation of machine components; vibration of buildings, bridges and other structures; compression and rarefaction of air as sound is propagated through it; rolling, pitching and heaving of ships; sea waves; etc.), *electromagnetic oscillations* (oscillations of alternating electric current in a circuit, variations in the field strength and magnetic induction vectors, $\mathbf{E}$ and $\mathbf{B}$, of an alternating electromagnetic field, etc.), and *electromechanical vibrations* (vibration of the diaphragm of a telephone receiver, of the diaphragm

in an electromagnetic loudspeaker, etc.) and others.

The system executing the oscillation (or vibration) is called the *oscillatory (vibratory) system*. *Free (natural) oscillations* are ones that occur in the absence of externally applied variable action on the system. They are due to some initial deviation of the system from a state of stable equilibrium. *Forced oscillations (vibrations)* are ones set up in a system as a result of variable external effects (for instance, current oscillation in an electric circuit caused by a varying emf, swinging of a pendulum due to varying external forces, etc.).

28.1.2

Oscillations (vibrations) are said to be *periodic* if all the physical quantities that characterize the oscillatory (vibratory) system and vary during its oscillation are repeated in successive time intervals. The minimum time interval T complying with this condition is called the *period of oscillation* (or vibration). This is the time required for one *complete oscillation* (vibration) of the system. The *frequency* of *periodic oscillations* (vibrations) is the quantity $\nu = 1/T$, equal to the number of complete oscillations (vibrations) executed by the system in unit time. The angular, or circular, frequency is the quantity $\omega = 2\pi\nu = 2\pi/T$, which is equal to the number of complete oscillations accomplished in 2π units of time.

28.1.3

In periodic oscillations the dependence of a varying quantity s on the time t complies with the condition $s\,(t+T) = s(t)$.

The periodic oscillation of the quantity $s(t)$ is said to be *harmonic* if

$$s(t) = A\sin(\omega t + \varphi_0) \quad \text{or} \quad s(t) = A\cos(\omega t + \varphi_1)$$

where $\omega = 2\pi\nu = (2\pi/T) =$ const. is the *angular*, or *circular, frequency of harmonic vibration*, $A = s_{\max} =$ const. > 0 is the maximum value of the varying quantity s and is called the *amplitude of oscillation*, and φ_0 and $\varphi_1 = \varphi_0 - \pi/2$ are constant quantities.

The value of s at some arbitrary instant of time t is determined by the *phase of the oscillation* $\Phi(t) = \omega t + \varphi_0$ [and, respectively, $\Phi_1(t) = \omega t + \varphi_1$]. The quanti ties φ_0 and φ_1 are the *initial phases of the oscillation*, i.e. the values of $\Phi(t)$ and $\Phi_1(t)$ at the instant $(t = 0)$ of time reference: $\varphi_0 = \Phi(0)$ and $\varphi_1 = \Phi_1(0)$.

28.1.4

The first and second time derivatives of a harmonically varying quantity $s(t)$ also vary harmonically at the same angular frequency:

$$\frac{\mathrm{d}s}{\mathrm{d}t} = A\omega\cos(\omega t + \varphi_0) = A\omega\sin\left(\omega t + \varphi_0 + \frac{\pi}{2}\right),$$
$$\frac{\mathrm{d}^2 s}{\mathrm{d}t^2} = -A\omega^2\sin(\omega t + \varphi_0) = sA\omega^2\sin\left(\omega t + \varphi_0 + \pi\right),$$

where the amplitudes of $\mathrm{d}s/\mathrm{d}t$ and $\mathrm{d}^2s/\mathrm{d}t^2$ are equal, respectively, to $A\omega$ and $A\omega^2$. The initial phase of $\mathrm{d}s/\mathrm{d}t$ is equal to $(\varphi_0 + \pi/2)$, i.e. the phase difference of the variations of $\mathrm{d}s/\mathrm{d}t$ and s is constant and equal to $\pi/2$ (the quantity $\mathrm{d}s/\mathrm{d}t$ has a phase lead of $\pi/2$ with respect to s). The initial phase of $\mathrm{d}^2s/\mathrm{d}t^2$ equal, to $(\varphi_0 + \pi)$, i.e. the phase difference of the variations of $\mathrm{d}^2s/\mathrm{d}t^2$ and s is constant and equal to π (the quantity $\mathrm{d}^2s/\mathrm{d}t^2$ has a phase lead of π with respect to s). Curves of the dependence on the time t of the quantities s, $\mathrm{d}s/\mathrm{d}t$ and $\mathrm{d}^2s/\mathrm{d}t^2$ for harmonic variations and with $\varphi_0 = 0$ are shown in Figure 28.1.

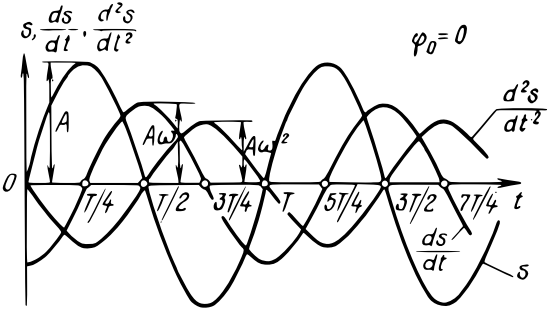


Figure 28.1.: Time dependence of s, $\mathrm{d}s/\mathrm{d}t$ and $\mathrm{d}^2s/\mathrm{d}t^2$ for harmonic variations and with $\varphi_0 = 0$.

28.1.5

It is evident from the second equation in (28.1.4) that a harmonically varying quantity s satisfies the differential

equation

$$\frac{\mathrm{d}^2 s}{\mathrm{d}t^2} + \omega^2 s = 0.$$

The general solution of this equation is of the form

$$s = A_1 \sin \omega t + A_2 \cos \omega t,$$

where A_1 and A_2 are arbitrary constants of integration. The values of A_1 and A_2 can be found from the initial conditions, i.e. when the values of s and $\frac{\mathrm{d}s}{\mathrm{d}t}$ are known for the initial instant of time ($t = 0$). Thus

$$A_1 = \frac{1}{\omega} \left(\frac{\mathrm{d}s}{\mathrm{d}t} \right)_{t=0} \quad \text{and} \quad A_2 = s(0).$$

The general solution can be transformed to the standard form for harmonic oscillations (vibrations) given in (28.1.3):

$$s = A \sin(\omega t + \varphi_0),$$

where $A = \sqrt{A_1^2 + A_2^2}$ and $\varphi_0 = \arctan(A_2/A_1)$.

Thus, the quantity s has harmonic variations if and only if it satisfies the differential equation given at the beginning of this subsection. This equation is called the *differential equation of harmonic variations* (or vibrations or oscillations).

28.1.6

Harmonic oscillations (vibrations) can be represented graphically by means of a vector in a plane. For this purpose vector A is drawn from the origin of coordinates O in the plane XY (Figure 28.2). The magnitude of vector




Figure 28.2.: Representing harmonic oscillations by means of a vector in a plane: the *vector diagram method*.

A is equal to the amplitude A of the oscillation being considered and the vector makes the angle $\varphi = \omega t + \varphi_0$, equal to the phase of the oscillation at the given instant of time t, with the coordinate axis OX.

In the course of time angle φ increases so that vector A rotates at a constant angular velocity about point O equal to the angular frequency of oscillation (vibration) ω. The corresponding projection of vector A on the vertical axis OY varies harmonically according to the relation

$$A_y = s = A\sin(\omega t + \varphi_0).$$

The graphical representation of harmonic vibrations (or oscillations or variations) by means of a rotating amplitude vector is called the *vector diagram method*. It is extensively applied, for instance, in adding together harmonic oscillations having the same direction (28.4.2).

28.1.7

According to the Euler formula for complex numbers,

$$e^{i\varphi} = \cos\varphi + i\sin\varphi,$$

where $i = \sqrt{-1}$. Hence the harmonic oscillation (vibration)

$$s = A\sin(\omega t + \varphi_0) = A\cos(\omega t + \varphi_1),$$

where $\varphi_1 = \varphi_0 - \pi/2$, can be written in the exponential form

$$\tilde{s} = \tilde{A}\, e^{i\omega t} = A\, e^{i(\omega t + \varphi_1)},$$

where $\tilde{A} = Ae^{i\varphi_1}$ is the complex amplitude. Only the real part of the complex function $\tilde{s}$, denoted by $\mathrm{Re}\{\tilde{s}\}$, has a physical meaning:

$$\mathrm{Re}\{\tilde{s}\} = s = A\cos(\omega t + \varphi) = A\sin(\omega t + \varphi_0),$$

where $\varphi_0 = \varphi_1 + \pi/2$.

28.2 Mechanical Harmonic Vibrations

28.2.1

If a particle vibrates harmonically in a straight line along the coordinate axis OX about the equilibrium position, taken as the origin of coordinates, the dependence of the coordinate x of the particle on the time t is of the form given in (28.1.3) (with $s = x$). Thus

$$x = A\sin(\omega t + \varphi_0).$$

The projections of the velocity v and acceleration a of the particle on the OX axis are:

$$\begin{aligned} v_x &= v_0\cos(\omega t + \varphi_0), \quad \text{and} \\ a_x &= -a_0\sin(\omega t + \varphi_0), \end{aligned}$$

where $v_0 = A\omega$ is the amplitude of the velocity, and $a_0 = A\omega^2 = v_0\omega$ is the amplitude of the acceleration.

The force $\mathbf{F}$ acting on the particle equals

$$\mathbf{F} = m\mathbf{a} \quad \text{and} \quad F_x = -m\omega^2 x,$$

where m is the mass of the particle. Consequently, force $\mathbf{F}$ is proportional to the displacement of the particle from the equilibrium position and opposite in direction:

$$\mathbf{F} = -m\omega^2 x\hat{\mathbf{i}},$$

where $\hat{\mathbf{i}}$ is a unit vector of the OX axis.

Such a dependence of the force on the displacement is typical for an elastic force (3.3.6). Hence, forces of other physical origin, satisfying the same kind of relationship, are said to be *quasi-elastic* forces.

28.2.2

The *kinetic energy* of a particle vibrating harmonically in a straight line is equal to

$$\begin{aligned} E_k &= \frac{mv^2}{2} = \frac{mv_0^2}{2}\cos^2(\omega t + \varphi_0), \\ &= \frac{m\omega^2 A^2}{2}\cos^2(\omega t + \varphi_0), \quad \text{or} \\ &= \frac{m\omega^2 A^2}{4}[1 + \cos(2\omega t + 2\varphi_0). \end{aligned}$$

The kinetic energy of the particle varies periodically from 0 to $m\omega^2 A^2/2$ as it vibrates harmonically with the angular fre quency 2ω and the amplitude $m\omega^2 A^2/4$ about its average value of $m\omega^2 A^2/4$.

The *potential energy* of a particle vibrating harmonically in a straight line due to the effect of a quasi-elastic force

is equal to

$$E_p = -\int_0^x F_x \, \mathrm{d}x = \frac{m\omega^2 x^2}{2} = \frac{m\omega^2 A^2}{2} \sin^2(\omega t + \varphi_0) \quad \text{or}$$
$$= \frac{m\omega^2 A^2}{4}[1 - \cos(2\omega t + 2\varphi_0),$$
$$= \frac{m\omega^2 A^2}{4}[1 + \cos(2\omega t + 2\varphi_0 + \pi).$$

The *potential energy* of the particle varies periodically from 0 to $m\omega^2 A^2/2$ as it vibrates harmonically with the angular frequency 2ω and the amplitude $m\omega^2 A^2/4$ about its average value of$m\omega^2 A^2/2$. The variations of the potential and kinetic energies have a phase difference of π, so that the total mechanical energy of the particle remains constant in vibration:

$$E = E_k + E_p = \frac{m\omega^2 A^2}{2} = \text{const.}$$

Curves of the dependence of E_k, E_p and E on the time t for the case when $\varphi_0 = 0$ are shown in Figure 28.3.

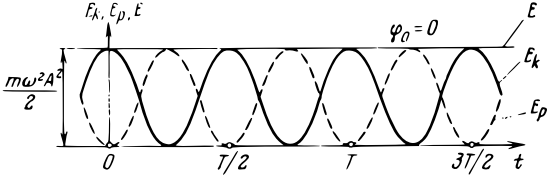


Figure 28.3.: Variation of total, kinetic and potential energy over time for harmonic vibrations.

28.2.3

Example 1. A *linear harmonic oscillator* is a particle of mass m having harmonic vibration along a straight line by the action of elastic force $\mathbf{F}_{el} = -kx\hat{\mathbf{i}}$ (3.3.6). Serving as an example of such a system is the spring pendulum, where a weight of mass m is suspended by an absolutely elastic spring (k is a factor specifying the elastic properties of the spring). The motion equation is

$$m\frac{\mathrm{d}^2x}{\mathrm{d}t^2} = -kx \quad \text{or} \quad \frac{\mathrm{d}^2x}{\mathrm{d}t^2} + \frac{k}{m} = 0.$$

It follows from (28.1.5) that an oscillator (spring pendulum) has harmonic vibration according to the equation $x = A\sin(\omega t + \varphi_0)$ with an angular frequency ω and period T equal to

$$\omega = \sqrt{\frac{k}{m}}, \quad \text{and} \quad T = 2\pi\sqrt{\frac{m}{k}}.$$

The potential energy of a linear harmonic oscillator is

$$E_p = \frac{kx^2}{2}.$$

28.2.4

Example 2. A *compound*, or *physical, pendulum* is a rigid body capable of oscillating under the action of the gravity force mg about a horizontal axis O, which does not pass through the centre of gravity of the body, and is called the *axis of oscillation*, or *swing* (Figure 28.4). The centre of gravity

of the pendulum coincides with its centre of mass C (7.3.2). Point O, the intersection of the axis of oscillation with a vertical plane passing through the centre of gravity of the pendulum and perpendicular to its *axis of oscillation*, is called its *point of suspension*.

In the absence of friction forces in the suspension, the motion equation of the pendulum is of the form (4.3.4)

$$I\frac{\mathrm{d}^2\alpha}{\mathrm{d}t^2} = -mgd\sin\alpha,$$

where α is the angle of deviation of the pendulum about its axis of oscillation from the equilibrium position, $d = \bar{OC}$ is the distance from the centre of mass of the pendulum to its axis of oscillation, I is the moment of inertia (4.2.1) about the same axis, m is the mass of the pendulum, and g is the free fall acceleration. Upon small oscillations of the pendulum $\sin\alpha \approx \alpha$ and the motion equation of the pendulum is of the form

$$\frac{\mathrm{d}^2\alpha}{\mathrm{d}t^2} + \frac{mgd}{I}\alpha = 0,$$

i.e. angle α satisfies the differential equation of harmonic vibrations (28.1.5). Hence, in the absence of friction, small oscillations of a compound pendulum are harmonic:

$$\alpha = \alpha_0\sin(\omega t + \varphi_0),$$

where α_0 is the amplitude of variation of angle α, and

$$\omega = \sqrt{\frac{mgd}{I}}, \quad \text{and} \quad T = 2\pi\sqrt{\frac{I}{mgd}}.$$

are the angular frequency and period of small oscillations of a compound pendulum.

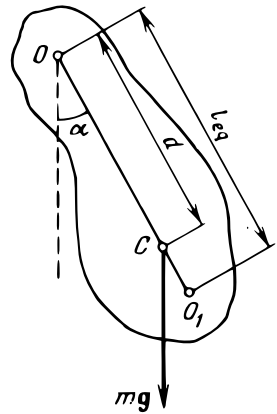


Figure 28.4.: A compound pendulum and its parameters.

28.2.5

Example 3. A *simple pendulum* is a particle suspended by a weightless, inextensible thread and oscillating in a vertical plane by the action of the gravity force. The simple pendulum is the limiting case of the compound (physical) pendulum, whose whole mass is concentrated at the centre of mass, so that $d = I$, the length of the simple pendulum. The moment of inertia of a simple pendulum with respect to its axis of oscillation is $I = ml^2$.

Correspondingly, the angular frequency and period of small oscillations of this pendulum are

$$\omega = \sqrt{\frac{g}{l}} \quad \text{and} \quad T = 2\pi\sqrt{\frac{l}{g}}.$$

Small oscillations of compound and simple pendulums are examples of *isochronous vibrations*, i.e. vibrations whose frequency and period are independent of their amplitude.

In the general case, the period of a compound pendulum depends upon its amplitude α_0. Thus

$$T = 2\pi\sqrt{\frac{I}{mgd}}\left[1 + \left(\frac{1}{2}\right)^2 \sin^2\frac{\alpha_0}{2} + \left(\frac{1}{2}\cdot\frac{3}{4}\right)^2 \sin^4\frac{\alpha_0}{2} + \dots\right].$$

The variation in the value of T when α_0 is increased to 15° does not exceed 0.5 per cent.

28.2.6

The *equivalent length l_{eq} of a compound pendulum* is the length of a simple pendulum that has the same period of

oscillation. Thus

$$l_{eq} = \frac{I}{md} = d + \frac{I_C}{md} > d,$$

where I_C is the moment of inertia of the compound pendulum with respect to an axis passing through the centre of mass C of the pendulum and parallel to its axis of oscillation. Point O_1, lying on the straight line OC at the distance of l_{eq} from the point of suspension O (Figure 28.4), is called the *centre of oscillation of the compound pendulum*.

The centre of oscillation O_1 and the point of suspension O are interchangeable: if the pendulum is suspended so that its axis of oscillation passes through point O_1, then point O will coincide with the new position of the centre of oscillation, i.e. the equivalent length and period of oscillation of the pendulum remain unchanged.

28.2.7

Small free vibrations of electrons in a plasma (22.6.1) are called *Langmuir oscillations of the plasma*. They are caused by the forces of an electric field, which is set up in an electrically neutral plasma as the result of some random deviation of the spatial distribution of the electrons from their equilibrium distribution.

Assume that in a flat layer of plasma of thickness l (Figure 28.5) the electrons are displaced over the small distance s along the positive direction of axis OX. This leads to the formation of a surplus positive charge at the left-hand part of the layer and a surplus negative charge at the right-hand part.

Example 4.




Figure 28.5.: Langmuir oscillations of electrons in a plasma under action of an electric field.

Consequently, an electric field is set up, whose strength $\mathbf{E}$ is along the OX axis and its projection on this axis is $E_x = n_0 es/\varepsilon_0$ where n_0 is the electron concentration in the plasma, e is the magnitude of the charge of the electron, and ε_0 is the electric constant. According to Newton's second law, the motion equation for the electrons of the plasma in this electric field is of the form:

$$m\frac{\mathrm{d}^2 s}{\mathrm{d}t^2} = -eE_x = -\frac{e^2 n_0}{\varepsilon_0} \quad \text{or} \quad \frac{\mathrm{d}^2 s}{\mathrm{d}t^2} + \frac{e^2 n_0}{m\varepsilon_0}\, s = 0.$$

where m is the mass of the electron. Thus, the electrons of the plasma have free harmonic vibrations at the angular frequency

$$\omega = e\sqrt{\frac{n_0}{m\varepsilon_0}}$$

which is called the *Langmuir plasma frequency*, or simply, the *plasma frequency*.

28.3 Free Harmonic Oscillations in an Oscillatory Electric Circuit

28.3.1

An example of an electric circuit in which free electric oscillations may occur is the simple *oscillatory circuit* (Figure 28.6). It consists of a capacitor of capacitance C connected in series to an induction coil with the self-inductance L. When the previously charged capacitor is connected to the coil, free oscillations of the capacitor charge and the current in the coil are produced. This




Figure 28.6.: An example of simple electric oscillatory circuit with a capacitor C and an inductor L.

sets up a variable electromagnetic field that propagates through space at a velocity equal to that of light. Hence, if the linear dimensions l of the circuit are not too large ($l \ll c/\nu$, where $c = 3 \times 10^8$ m/s is the velocity of light in vacuum, and ν is the frequency of oscillation in the circuit), it can be assumed that at each instant of time t the current I is the same at all parts of the circuit. Such a variable current is said to be *quasi-stationary*. According to Ohm's law (21.2.3) for the portion $1 - L - 2$ of the circuit (Figure 28.6)

$$IR = V_1 - V_2 + \mathscr{E}_s \quad \text{or} \quad IR = -\frac{q}{C} - L\frac{\mathrm{d}I}{\mathrm{d}t}.$$

Here q and $V_1 - V_2 = -q/C$ are the charge of the capacitor and the potential difference of its plates at the arbitrary instant t of time being considered, R is the electric resistance of the oscillatory circuit, i.e. of the part $1 - L - 2$ of the circuit, and $\mathscr{E}_s = -L(\mathrm{d}I/\mathrm{d}t)$ is emf of self-induction in the coil (25.2.4). If follows from the law of conservation of electric charge (14.1.3) that the quasi-stationary current in the circuit is $I = \mathrm{d}q/\mathrm{d}t$. Therefore, the differential equation for the variation of charge q is of the form

$$\frac{\mathrm{d}^2q}{\mathrm{d}t^2} + \frac{R}{L}\frac{\mathrm{d}q}{\mathrm{d}t} + \frac{q}{LC} = 0.$$

28.3.2

Free electric oscillations in an oscillatory circuit are *harmonic* if its electrical resistance $R = 0$. Thus

$$\frac{\mathrm{d}^2q}{\mathrm{d}t^2} + \frac{q}{LC} = 0.$$

The angular frequency ω and the period T of these oscillations satisfy the *Thomson formula*:

$$\omega = \frac{1}{\sqrt{LC}} \quad \text{and} \quad T = 2\pi\sqrt{LC}.$$

The charge q of the capacitor and current I in the circuit vary according to the equations

$$q = q_0 \sin(\omega t + \varphi_0), \quad \text{and}$$
$$I = I_0 \cos(\omega t + \varphi_0) = I_0 \sin\left((\omega t + \varphi_0) + \frac{\pi}{2}\right)$$

where q_0 is the amplitude of the capacitor charge, $I_0 = \omega q_0 = q_0\sqrt{LC}$ is the amplitude of the current, and φ_0 is the initial phase of capacitor charge oscillation. The current in the circuit has a phase lead of $\pi/2$ over the capacitor charge.

The potential difference $u = V_2 - V_1$ of the capacitor plates also varies according to a harmonic law and is in phase with charge q. Thus

$$u = \frac{q}{C} = U_0 \sin(\omega t + \varphi_0),$$

where $U_0 = q_0/C$ is the amplitude of the potential difference. The amplitude of the current is

$$I_0 = U_0\sqrt{\frac{C}{L}}.$$

The quantity $\sqrt{L/C}$ is called the *characteristic*, or *wave, impedance of the oscillatory circuit*.

28.3.3

With free harmonic oscillations in an oscillatory circuit, there is a periodic transfer of the energy E_e of the electric field of the capacitor into energy E_m of the magnetic field of the inductance coil and back again. Thus

$$\begin{aligned} E_e &= \frac{q^2}{2C} = \frac{q_0^2}{2C}\sin^2(\omega t + \varphi_0), \\ &= \frac{q_0^2}{4C}\left[1 - \cos(2\omega t + 2\varphi_0)\right], \\ E_m &= \frac{LI^2}{2} = \frac{LI_0^2}{2}\cos^2(\omega t + \varphi_0), \\ &= \frac{LI_0^2}{4}\left[1 + \cos(2\omega t + 2\varphi_0)\right], \end{aligned}$$

For this reason, the oscillations in an electrical oscillatory circuit are frequently said to be *electromagnetic oscillations in the circuit*.

The values of E_e and E_m vary in electromagnetic oscillations within the limits from 0 to their maximum values, equal, respectively, to $q_0^2/2C$ and $LI_0^2/2$, in which $q_0^2/2C = LI_0^2/2$. The variations of E_e and E_m are displaced in phase. At the instants of time when $E_e = 0$,

$$E_m = E_{m\ \max} = LI_0^2/2.$$

On the other hand, when $E_m = 0$,

$$E_e = E_{e\ \max} = \frac{q_0^2}{2C}.$$

The total energy of electromagnetic oscillations is constant with time. Thus

$$E = E_e + E_m = \frac{q_0^2}{2C} + \frac{LI_0^2}{2} = \text{const.}$$

28.4 Adding Harmonic Oscillations

28.4.1

The *addition of oscillations* (vibrations or variations) consists in finding the equation for the resulting oscillation of a system when this system simultaneously participates in several oscillatory processes. Distinction is made between two limiting cases: the combining of oscillations having the same direction and the combining of mutually perpendicular oscillations. The first case corresponds, for example, to the vibration of weight *1* (Figure 28.7) which vibrates with respect to weight *2* on spring a, and together with weight *2* on spring b. This same situation occurs in superposing the variations of scalar physical characteristics of an oscillatory or variable system (pressure, temperature, density, electric charge, current, etc.).




Figure 28.7.: A combined oscillation of two springs with two weights.

28.4.2

Two harmonic oscillations having the same direction, such as

$$s_1 = A_1 \sin(\omega_1 + \varphi_1) \quad \text{and}$$
$$s_2 = A_2 \sin(\omega_2 + \varphi_2)$$

can be added together by using the vector diagram method (28.1.6).

Shown in Figure 28.8 are the vectors $A_1(t)$ and $A_2(t)$ of the first and second oscillations at the arbitrary instant t of time when the phases of these oscillations equal: $\Phi_1 = \omega_1 + \varphi_1$ and $\Phi_2 = \omega_2 + \varphi_2$. The resultant oscillation $s = s_1 + s_2$ corresponds to the vector $A(t) = A_1(t) + A_2(t)$ whose projection on the vertical axis OY is equal to s. Thus

$$s = A(t) \sin \Phi(t).$$

According to the cosine law

$$[A(t)]^2 = A_1^2 + A_2^2 + 2A_1A_2 \cos[\Phi_2(t) - \Phi_1(t)], \quad \text{and}$$
$$\tan \Phi(t) = \frac{A_1 \sin \Phi_1(t) + A_2 \sin \Phi_2(t)}{A_1 \cos \Phi_1(t) + A_2 \cos \Phi_2(t)}.$$




Figure 28.8.: Vector addition of two oscillations.

28.4.3

Two harmonic oscillations s_1 and s_2 are said to be *coherent* if their phase difference is independent of time. Thus

$$\frac{\mathrm{d}}{\mathrm{d}t}[\Phi_2(t) - \Phi_1(t)] = 0, \quad \text{and} \quad \Phi_2(t) - \Phi_1(t) = \text{const}. \tag{28.1}$$

Since $\Phi_2(t) - \Phi_1(t) = (\omega_2 - \omega_1)t + (\varphi_2 - \varphi_1)$, the angular frequency of coherent oscillations should be the same, i.e. $\omega_2 = \omega_1 = \omega$. At any instant of time the phase difference of coherent oscillations is equal to the difference of their initial phases: $\Phi_2(t) = -\Phi_1(t) = \varphi_2 - \varphi_1$. Consequently,

the resultant oscillation is harmonic and has the same angular frequency ω, i.e.

$$s = s_1 + s_2 = A\sin(\omega t + \varphi_0),$$

where

$$A^2 = A_1^2 + A_2^2 + 2A_1A_2\cos(\varphi_2 - \varphi_1) \quad \text{and}$$
$$\tan\varphi_0 = \frac{A_1\sin\varphi_1 + A_2\sin\varphi_2}{A_1\cos\varphi_1 + A_2\cos\varphi_2}.$$

In accordance with the values of the initial phase differences of the oscillations being added together, the amplitude A of the resultant oscillation varies within the limits from

$$\text{from } A = |A_1 - A_2| \text{ at } \varphi_2 - \varphi_1 = \pm(2m+1)\pi$$
$$\text{to } A = A_1 + A_2 \text{ at } \varphi_2 - \varphi_1 = \pm 2m\pi,$$

where $m = 0, 1, 2, \ldots$ is any integral non-negative number. When $\varphi_2 - \varphi_1 = \pm 2m\pi$, the oscillations being added are said to be *co-phased* (or simply, *in phase*), whereas at $\varphi_2 - \varphi_1 = \pm(2m+1)$ they are said to be *anti-phased* (or *in opposition*).

28.4.4

Harmonic oscillations of different frequency ($\omega_2 \neq \omega_1$) are *incoherent* because their phase difference, equal to $(\omega_2 - \omega_1)t + (\varphi_2 - \varphi_1)$, varies continuously with time. If such oscillations are superposed, an anharmonic resultant oscillation is obtained. The amplitude vectors $\mathbf{A}_1$ and $\mathbf{A}_2$ of the added oscillations (Figure 28.8) rotate at different

velocities, so that the parallelogram constructed on the vectors is continuously deformed and its diagonal, vector **A** of the resultant oscillation, varies in length and rotates at variable angular velocity.

Two harmonic oscillations having different angular frequencies ω_1 and ω_1 can be approximately considered to be coherent only during the time interval Δt in which the phase difference of these oscillations varies only slightly:

$$|\omega_2 - \omega_1|\Delta t \ll 2\pi \quad \text{or} \quad \Delta t \ll \tau_{\text{coh}},$$

where $\tau_{\text{coh}} = 2\pi/|\omega_2 - \omega_1|$ is the *coherence time* of the oscillations being considered.

28.4.5

Anharmonic oscillation obtained as a result of superposing two harmonic oscillations having the same direction and slightly differing frequencies ($|omega_2 - \omega_1| \ll \omega_1$) produces what are called *beats*. It proves convenient to take as the time reference t the instant when the phases of the two oscillations being superposed, s_1 and s_2, coincide and are equal to φ_0. Then

$$s_1 = A_1 \sin(\omega_1 t + \varphi_0), \quad \text{and}$$
$$s_2 = A_2 \sin(\omega_2 t + \varphi_0) = A_2 \sin[\omega_1 t + \varphi_0 + \varphi(t)],$$

where $\varphi(t) = (\omega_2 - \omega_1)t$. The resultant oscillation satisfies the relation

$$s = A(t)\ \sin[\omega_1 t + \varphi_0 + \psi(t)],$$

where

$$[A(t)]^2 = A_1^2 + A_2^2 + 2A_1A_2\cos\varphi(t), \quad \text{and}$$
$$\tan\psi(t) = \frac{A_2\sin\varphi(t)}{A_1 + A_2\cos\varphi(t)}.$$

In particular, when $A_1 = A_2 = A_0$,

$$A(t) = 2A_0\cos\frac{\omega_2 - \omega_1}{2}\,t, \quad \text{and}$$
$$\psi(t) = \frac{\omega_2 - \omega_1}{2}\,t.$$

so that

$$s = 2A_0\cos\frac{\omega_2 - \omega_1}{2}\,t\,\sin\left(\frac{\omega_2 - \omega_1}{2}\,t + \varphi_0\right).$$

The quantity $|A(t)|$, characterizing the swing of the oscillalions in beating, varies within the limits from $|A_1 - A_2|$ to $A_1 + A_2$ with the angular frequency $\Omega = |\omega_2 - \omega_1|$, called the *angular beat frequency*. Since the beat frequency is much lower than the frequency of oscillation ($\Omega \ll \omega_1$), the variable quantity $|A(t)|$ is conditionally called the *beat amplitude*. The beat period T_b and the *beat frequency* ν_b are equal to

$$T_b = \frac{2\pi}{\Omega} = \frac{2\pi}{|\omega_2 - \omega_1|} = \frac{1}{\left|\frac{1}{T_1} - \frac{1}{T_2}\right|}, \quad \text{and}$$
$$\nu_b = \frac{1}{T_b} = |\nu_2 - \nu_1|.$$

where T_1, ν_1, T_2 and ν_2 are the periods and frequencies of the superposed oscillations. Curves of the dependence of s on t in beating are shown in Figure 28.9 for the case when $A_1 = A_2 = A_0$.

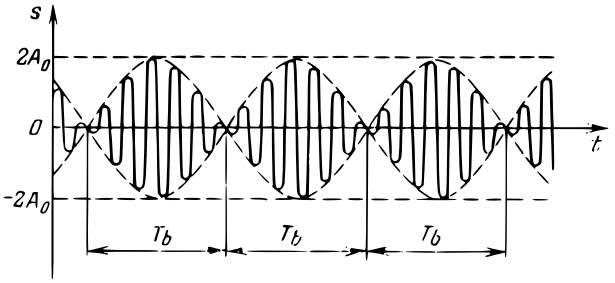


Figure 28.9.: Dependence of s on t for beats.

28.4.6

As a result of the superposition of harmonic oscillations, coinciding in direction and having angular frequencies that are integral *multiples* of their lowest frequency, i.e. ω, 2ω, 3ω, etc., a *periodic* non-harmonic oscillation with the period $T = 2\pi/\omega$ is obtained. On the other hand, any complex *periodic oscillation* $s = f(t)$ can be represented as the sum of simple harmonic oscillations having angular frequencies, which are integral multiples of the *basic angular frequency* $\omega = 2\pi/T$, where T is the period of the oscillation. Thus

$$s = f(t) = \frac{a_0}{2} + \sum_{n=1}^{\infty} (a_n \cos n\omega t + b_n \sin n\omega t)$$

$$= \frac{a_0}{2} + \sum_{n=1}^{\infty} A_n \sin(n\omega t + \varphi_n),$$

where

$$a_n = \frac{2}{T}\int_{-T/2}^{T/2} f(t)\,\cos n\omega t\,\mathrm{d}t \quad (n = 0,)$$

$$= \frac{a_0}{2} + \sum_{n=1}^{\infty} A_n \sin(n\omega t + \varphi_n),$$

Such a representation of the periodic function $f(t)$ is called the *expansion of this function into a Fourier series*, or the *harmonic analysis of a complex periodic oscillation*. The terms of the Fourier series corresponding to the harmonic oscillations with the angular frequencies ω, 2ω, 3ω, etc. are called the *first*, or *fundamental*, *second*, *third*, etc. *harmonics* of the complex periodic oscillation $s = f(t)$. The whole set of these harmonics forms the *spectrum of the oscillations* $s = f(t)$. The composition of the spectrum depends on the form of the periodic function $s = f(t)$. In the simplest cases, the spectrum can consist of a small number of harmonics.

The oscillation spectrum is often understood to be the *frequency spectrum*, i.e. the set of frequencies of simple harmonic oscillations that can be superimposed to obtain the complex oscillation being considered. Periodic oscillations have discrete (line) *frequency spectra*.

28.4.7

Non-periodic oscillations have, as a rule, *continuous frequency spectra*, i.e. they can be represented as the result of the superposition of a great many harmonic oscillations, whose frequencies have all possible values in a certain

range (from 0 to ∞ in the general case). The harmonic analysis of such oscillations consists in presenting them in the form of a *Fourier integral*:

$$s = f(t) = \int_0^\infty [a(\omega)\cos\omega t + b(\omega)\sin\omega t]\,\mathrm{d}\omega,$$

where

$$a(\omega) = \frac{1}{\pi}\int_{-\infty}^{\infty} f(\xi)\cos\omega\xi\,\mathrm{d}\xi,$$
$$b(\omega) = \frac{1}{\pi}\int_{-\infty}^{\infty} f(\xi)\sin\omega\xi\,\mathrm{d}\xi.$$

Certain nonperiodic oscillations, called *almost periodic* (*quasi-periodic*) oscillations have a line frequency spectrum. But the included angular frequencies are incommensurable with one another, because their ratios are expressed by irrational numbers.

28.4.8

Modulation is the change of any parameter of a periodic oscillation (for instance, the amplitude or frequency) according to a definite law during a length of time considerably longer than the period of the oscillation.

In *amplitude modulation*, for example, *of the harmonic oscillation*

$$s = A_0\sin(\omega_0 t + \varphi_0),$$

the modulated oscillation is of the form

$$s = A_0[1 + b(t)]\sin(\omega_0 t + \varphi_0),$$

where $|b(t)| < 1$.

If amplitude modulation is carried out according to the harmonic law $b(t) = b_0 \cos \Omega t$, where $b_0 = \text{const.}$ and $\Omega \ll \omega_0$ then

$$s = A_0[1 + b_0 \cos \Omega t] \sin(\omega_0 t + \varphi_0).$$

This modulated oscillation has a line frequency spectrum because it can be represented as the sum of three harmonic oscillations with the angular frequencies ω_0, $\omega_0 - \Omega$ and $\omega_0 + \Omega$, and amplitudes equal, respectively, to A_0, $A_0 b_0/2$ and $A_0 b_0/2$. Thus

$$\begin{aligned} &A_0 \,(1 + b_0 \cos \Omega t) \sin(\omega_0 t + \varphi_0) \\ &\quad = A_0 \sin(\omega_0 t + \varphi_0) + \frac{A_0 b_0}{2} \,(\sin[(\omega_0 + \Omega) t + \varphi_0] \\ &\qquad + \sin[(\omega_0 - \Omega) t + \varphi_0]) \end{aligned}$$

In *frequency modulation of the harmonic oscillation* $s = A_0 \sin(\omega_0 t + \varphi_0)$, carried out according to a harmonic law, the modulated oscillation is of the form

$$s = A_0 \sin[\omega_0 (1 + b_0 \cos \Omega t)\, t + \varphi_0],$$

where $b_0 < 1$ and $\Omega \ll \omega_0$.

Accordingly, in *phase modulation*, the initial phase of the oscillation is changed. Thus

$$s = A_0 \sin(\omega_0 t + \Delta\varphi \cos \Omega t),$$

where $\Omega \ll \omega_0$.

In the general case oscillations can be modulated simultaneously in amplitude and in phase (or frequency). An example of such modulated oscillations is beating (28.4.4).

28.4.9

Addition of mutually perpendicular harmonic oscillations of equal frequency. Assume that point M oscillates simultaneously along the coordinate axes OX and OY according to the law:

$$x = A_1 \sin(\omega t + \varphi_1), \quad \text{and}$$
$$y = A_2 \sin(\omega t + \varphi_2),$$

where x and y are the Cartesian coordinates of point M. The path equation for the resultant motion of point M in plane XOY can be found by eliminating parameter t from the expression for x and y. Thus

$$\frac{x^2}{A_1^2} + \frac{y^2}{A_2^2} - \frac{2xy}{A_1 A_2} \cos(\varphi_2 - \varphi_1) = \sin^2(\varphi_2 - \varphi_1).$$

This path is an ellipse (Figure 28.10) and point M describes this ellipse during a time equal to the period of the oscillations being added together ($T = 2\pi/\omega$). Hence, the resultant motion of point M is called *elliptically polarized oscillation*.

The orientation of the axes of the ellipse in plane XOY, as well as its dimensions depend upon the amplitudes A_1 and A_2 of the oscillations being combined and on their initial phase difference $\varphi_2 - \varphi_1$. If $\varphi_2 - \varphi_1 = (2m+1)\pi/2$, where $m = 0, \pm 1, \pm 2, \ldots$ the axes of the ellipse coincide with the coordinate axes OX and OY, and the lengths of the semiaxes are equal to the amplitudes A_1 and A_2. Thus

$$\frac{x^2}{A_1^2} + \frac{y^2}{A_2^2} = 1.$$




Figure 28.10.: The path of the resultant motion of addition of mutually perpendicular harmonic oscillations of equal frequency.

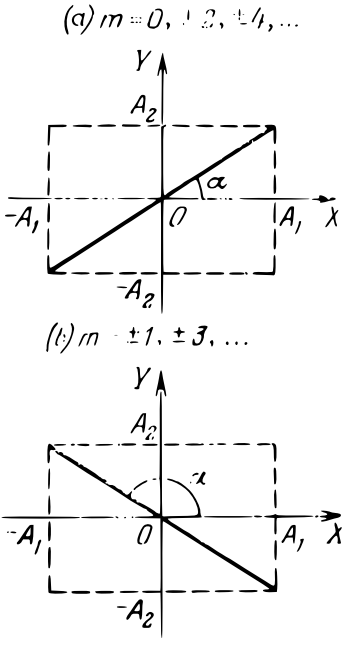


Figure 28.11.: The addition of (a) co-phased and (b) anti-phased oscillations.

If, in addition, $A_1 = A_2$, the path of point M is a circle. Such resultant motion of point M is called *circularly polarized oscillation*.

When $\varphi_2 - \varphi_1 = m\pi$, where $m = 0, \pm1, \pm2, \ldots$ the ellipse degenerates into a straight line. Thus

$$y = \pm\frac{A_2}{A_1}\,x.$$

The plus sign corresponds to even values of m, i.e. to the addition of co-phased oscillations (Figure 28.11 (a)); the minus sign, to odd values of m, i.e. to the addition of oscillations that arc in opposition (anti-phased) (Figure 28.11 (b)). In either case, point M executes *linearly polarized oscillation*. It oscillates with harmonic motion at the frequency of the oscillations being combined and with the amplitude $A = \sqrt{A_1^2 + A_2^2}$ along a straight line that makes the angle $\alpha = \arctan(A_2 \cos m\pi / A_1)$ with the axis OX.

28.4.10

In the addition of mutually perpendicular oscillations having the angular frequencies $p\omega$ and $q\omega$, where p and q are whole numbers, we obtain

$$x = A_1 \sin(p\omega t + \varphi_1), \quad \text{and}$$
$$y = A_2 \sin(q\omega t + \varphi_2).$$

The values of coordinates x and y of the oscillating point M are simultaneously repeated after equal periods T_0 of time, equal to the least common multiple of $T_1 = 2\pi/p\omega$

and $T_2 = 2\pi/q\omega$, which arc the periods of oscillation along the OX and OY axes. Hence, the path of point M is a closed curve whose shape depends upon the ratios of the amplitudes, frequencies and initial phases of the oscillations being combined. Such closed paths of point M, which has simultaneous harmonic oscillations in two mutually perpendicular directions, are called *Lissajous figures*.

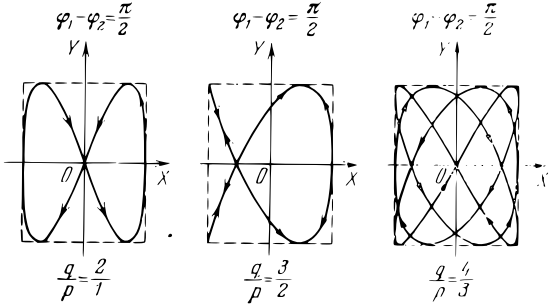


Figure 28.12.: Lissajous figures are resultant of addition of mutually perpendicular oscillations having angular frequencies as multiples of whole numbers.

Lissajous figures arc inscribed into rectangles whose centre coincides with the origin of coordinates and whose sides are parallel to coordinate axes OX and OY. The distances of these sides from the axes are equal, respectively, to A_2 and A_1. The ratio of the frequencies $q\omega$ and $p\omega$ of the combined oscillations is equal to the ratio of the number of times the corresponding Lissajous figure touches a side of the rectangle parallel to the OX axis to the number of times it touches a side parallel to the OY axis. Shown in Figure 28.12 are the Lissajous figures for

three different values of the ratio q/p ($2:1$, $3:2$ and $4:3$) and for initial phase differences of $\Delta\varphi = \varphi_1 - \varphi_2 = \pi/2$.

29 Damped And Forced Oscillations

29.1 Damped Oscillations

29.1.1

The *damping of an oscillation or vibration* is its gradual weakening in the course of time due to the loss of energy of the oscillatory (vibratory) system. Free oscillations (vibrations) of real systems are always damped. The damping of free mechanical vibrations is due chiefly to friction and the excitation of elastic waves (30.1.3) in the surrounding medium. Damping in electrical oscillatory systems is due to thermal losses in the conductors making up the system or located in its variable electric field, energy losses on the radiation of electromagnetic waves (31.1.1), and heat losses in dielectrics and ferromagnetic materials as a result of electrical and magnetic hysteresis (18.4.5) and (26.5.2).

The damping of oscillations depends upon the proper-

ties of the oscillatory system. A system is said to be *linear* if the para meters characterizing physical properties of the system, essential in the process being considered, do not change in the course of the process. Linear systems are described by linear differential equations. A spring pendulum (28.2.3), for instance, moving in a viscous medium, is a linear system if the resistance coefficient of the medium and the elasticity of the spring are independent of the velocity and displacement of the pendulum. An electrical oscillatory circuit (28.3.1) can be considered linear if its electrical resistance R, capacitance C and inductance L are independent of the current in the circuit, and the voltage. In the majority of cases real oscillatory or vibratory systems arc sufficiently close, with respect to their properties, to linear ones.

29.1.2

The differential equation for the free damped oscillation of a linear system is of the form:

$$\frac{\mathrm{d}^2 s}{\mathrm{d}t^2} + 2\beta \frac{\mathrm{d}s}{\mathrm{d}t} + \omega_0^2 s = 0. \tag{29.1}$$

Here s is the physical characteristic of the system that varies in the oscillation, $\beta = \text{const.} > 0$ is the *damping factor*, and ω_0 is the angular frequency of free *undamped* oscillation of the same system, i.e. in the absence of energy losses (at $\beta = 0$).

Example 1. *Free damped oscillation of a spring pendulum* (28.2.3). A pendulum of mass m, oscillating in a straight line along the OX axis due to the elastic force

of its spring, is also subject to a resisting force $\mathbf{F}_{\text{res}} = -b\mathbf{v}$, where $\mathbf{v}$ is the velocity of the pendulum and $b = \text{const.} > 0$ is the *resistance coefficient*. The differential equation of free damped oscillation of the pendulum is

$$m\frac{\mathrm{d}^2x}{\mathrm{d}t^2} = -b\frac{\mathrm{d}x}{\mathrm{d}t} - kx, \quad \text{or}$$
$$\frac{\mathrm{d}^2x}{\mathrm{d}t^2} + 2\beta\frac{\mathrm{d}x}{\mathrm{d}t} + \omega_0^2 x = 0,$$

where $\beta = b/2m$, $\omega_0 = \sqrt{k/m}$, and k is a factor specifying the elastic properties of the spring.

Example 2. *Free damped oscillation in an electric oscillatory circuit*. The electrical resistance of a real circuit $R \neq 0$, and the differential equation of the oscillation in the circuit (28.3.1) is of the form

$$\frac{\mathrm{d}^2q}{\mathrm{d}t^2} + 2\beta\frac{\mathrm{d}q}{\mathrm{d}t} + \omega_0^2 q = 0,$$

where $\beta = R/2L$ and $\omega_0 = 1/\sqrt{LC}$.

29.1.3

If damping is small ($\beta < \omega_0$) the dependence of s on t that satisfies the equation of damped oscillation (29.1.2) is of the form

$$s = A_0 e^{-\beta t}\sin(\omega t + \psi_0).$$

Here $\omega = \sqrt{\omega_0^2 - \beta^2}$ and the constant quantities A_0 and ψ_0 depend upon the initial conditions, i.e. upon the values of s and $\mathrm{d}s/\mathrm{d}t$ at the initial instant of time ($t = 0$). The

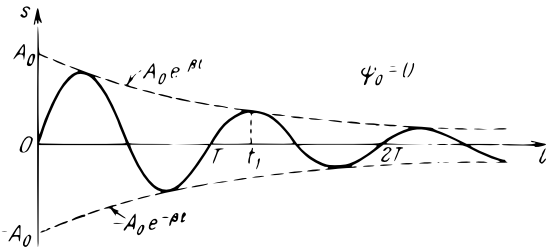


Figure 29.1.: The curve of the dependence of s on t at $\psi_0 = 0$ for damped oscillations.

curve of the dependence of s on t at $\psi_0 = 0$ is shown in Figure 29.1.

Damped oscillations are not periodical ones (28.1.2). For example, the maximum value of the varying quantity s, reached at a certain instant t_1 of time, is never repeated subsequently (at $t > t_1$). But the quantity s becomes zero in damped oscillation as it varies in a single direction (decreases, for instance) and also reaches its maximum and minimum values after *equal* time intervals. Thus

$$T = \frac{2\pi}{\omega} = \frac{2\pi}{\sqrt{\omega_0^2 - \beta^2}}.$$

For this reason, the quantities T and ω are conditionally called the *period (conditional period)* and *angular frequency (conditional angular frequency) of damped oscillation*.

The quantity

$$A = A_0 \exp(-\beta t)$$

Is called the *amplitude of damped oscillation*, where A_0 is the initial amplitude. The amplitude of damped os-

cillation decreases in the course of time; the greater the damping factor β, the more rapidly the amplitude decreases.

The time interval $\tau = 1/\beta$ during which there is an e-fold decrease in the amplitude of damped oscillation, is called the *relaxation time*.

29.1.4

The logarithmic decrement of damping is the dimensionless quantity δ, equal to the natural logarithm of the ratio of the amplitudes of damped oscillation at the instants of time t and $t + T$ (where T is the conditional period of oscillation). Thus

$$\delta = \ln \frac{A(t)}{A(t+T)} = \beta T = \frac{T}{\tau} = \frac{1}{N},$$

where N is the number of oscillations in which the amplitude is reduced e-fold.

The relation between the angular frequency ω of damped oscillation of a system and the logarithmic decrement of damping δ is

$$\omega = \omega_0 \sqrt{1 - \left(\frac{\omega}{\omega_0}\right)^2 \left(\frac{\delta}{2\pi}\right)^2}.$$

29.1.5

The Q factor (or quality factor or storage factor) of an oscillatory system is the dimensionless quantity Q, equal to the product of 2π by the ratio of the energy of oscillation

$E(t)$ of the system at the arbitrary time instant t to the decrease of this energy during the length of time from t to $t+T$, i.e. during one conditional period of damped oscillation. Thus

$$Q = 2\pi \frac{E(t)}{E(t) - E(t+T)}.$$

Since the energy $E(t)$ is proportional to the square of the amplitude $A(t)$ of the oscillation,

$$Q = 2\pi \frac{A^2(t)}{A^2(t) - A^2(t+T)} = \frac{2\pi}{1 - \exp(-2\beta T)} = \frac{2\pi}{1 - \exp(-2\delta)}.$$

At low values of the logarithmic decrement of damping δ, the Q factor of an oscillatory system is $Q = \pi/\delta$. Here the conditional period of damped oscillation T is practically equal to the period T_0 of free undamped oscillation and, consequently, $Q = \pi/\beta T_0 = \omega_0/2\beta$. For example, the Q factor of an electrical oscillatory circuit (28.3.1) is $Q = \sqrt{L/C}/R$, and that of a spring pendulum (29.1.2) is $Q = \sqrt{km}/b$.

29.1.6

The conditional period of damped oscillation increases with the damping factor β and becomes infinite at $\beta = \omega_0$. If $\beta > \omega_0$ the differential equation of motion of the system

$$\frac{\mathrm{d}^2 s}{\mathrm{d}t^2} + 2\beta \frac{\mathrm{d}s}{\mathrm{d}t} + \omega_0^2 s = 0,$$

has the following general solution:

$$s = C_1 \exp(-\alpha_1 t) + C_2 \exp(-\alpha_2 t),$$

where $\alpha_1 = \beta + \sqrt{\beta^2 - \omega_0^2}$, $\alpha_2 = \beta - \sqrt{\beta^2 - \omega_0^2}$ and C_1 and C_2 are constant factors depending upon the initial conditions. If the initial values (at the instant of time $t = 0$) equal: $s = s_0$ and $\mathrm{d}s/\mathrm{d}t = v_0$, then

$$C_1 = -\frac{\alpha_2 s_0 + v_0}{\alpha_1 - \alpha_2} \quad \text{and} \quad C_2 = \frac{\alpha_1 s_0 + v_0}{\alpha_1 - \alpha_2}$$

Such motion of the system is not of an oscillatory nature and is said to be *aperiodic*. Depending upon the initial conditions, aperiodic motion of the system may be either of two kinds (Figure 29.2). Type a motion occurs when s_0 and v_0 are opposite in sign and $|v_0| > \alpha_1 |s_0|$. Otherwise, the aperiodic motion is of the b type.




Figure 29.2.: The different types of aperiodic motions.

29.2 Forced Mechanical Vibration

29.2.1

A variable external force, applied to a system and causing its forced mechanical vibration, is called the *disturbing*, or *driving*, force.

The *differential equation of forced vibration* (or *oscillation*) of the simplest linear system (29.1.1), the spring pendulum (29.1.2), executed along the OX axis due to the action of the variable external force $\mathbf{F}(t)$ is:

$$\frac{\mathrm{d}^2 x}{\mathrm{d}t^2} + 2\beta \frac{\mathrm{d}x}{\mathrm{d}t} + \omega_0^2 x = \frac{1}{m} F_x(t).$$

If $F_x(t)$ is a periodic function of time, then, after application of the force to the pendulum, the *forced vibration* begins *with a transient condition*. The pendulum simultaneously participates in two vibrations:

$$x = x_1(t) + x_2(t)$$

The first term corresponds to free damped oscillation[20] of the pendulum (29.1.3):

$$x_1(t) = A_0 \exp(-\beta t) \sin(\omega t + \psi_0),$$

where $\omega = \sqrt{\omega_0^2 - \beta^2}$.

The second term corresponds to the undamped periodic oscillation of the pendulum at a frequency equal to that of the driving force $F_x(t)$.

The amplitude value of $x_1(t)$, equal to $A_0 \exp(-\beta t)$, is reduced at a more or less rapid rate after the beginning of the forced vibration (or oscillation). During the time $\tau = 4.6/\beta$ the amplitude of $x_1(t)$ decreases by a factor of 100. Consequently, after a certain time τ following the beginning of vibration ($\tau \approx \tau_0$), free vibration of the pendulum practically ceases: $x(t) \approx x_2(t)$. The pendulum reaches a state of *steady forced vibration* (or oscillation) at the frequency of the driving force.

[20] It is assumed that $\beta < \omega_0$. Otherwise, the free motion of the pendulum would be aperiodic (29.1.6), i.e.

$$x_1(t) = C_1 \exp\left(-(\beta + \sqrt{\beta^2 - \omega_0^2})t\right) + C_2 \exp\left(-(\beta - \sqrt{\beta^2 - \omega_0^2})t\right).$$

29.2.2

When the driving force varies according to a harmonic law, i.e. $F_x = F_0 \cos \Omega t$, the steady-state forced vibration of the pendulum is also harmonic at the same frequency. Thus

$$x = A \cos(\Omega t + \varphi_0).$$

The amplitude A of this vibration and the phase shift φ_0 between the displacement and the driving force depend upon the relation between the angular frequencies of the forced vibration (Ω) and the free undamped vibration (ω_0) of the pendulum. Thus

$$A = \frac{F_0}{m\sqrt{(\omega_0^2 - \Omega^2)^2 + 4\beta^2\Omega^2}}, \quad \text{and}$$
$$\tan\varphi_0 = -\frac{2\beta\Omega}{\omega_0^2 - \Omega^2}.$$

At $\Omega = 0$ we obtain $\varphi_0(0) = 0$ and $A(0) = A_0 = F_0/m\omega_0^2 = F_0/k$ which is the *static displacement* of the pendulum from its equilibrium position by the constant force $F_x = F_0$. At $\Omega \to \infty$, the amplitude $A(\Omega) \to 0$ and $\tan\varphi_0 \to 0$, whereas $\varphi_0 \to -\pi$. The curves of the functions $A(\Omega)$ and $\varphi_0(\Omega)$ are shown in Figure 29.3 and Figure 29.4 for various values of the damping factor β.




Figure 29.3.: The curves of the functions $A(\Omega)$ for various values of the damping factor β.

29.2.3

The amplitude of the displacement in the case of steady-state forced harmonic vibration (oscillation) of the pendulum reaches its maximum value at the angular frequency

$$\Omega_r = \sqrt{\omega_0^2 - 2\beta^2} = \sqrt{\omega^2 - \beta^2},$$

where ω is the angular frequency of free damped vibration of the pendulum (29.1.3). The frequency Ω_r is called the *resonance frequency*.




Figure 29.4.: The curves of the functions $\varphi_0(\Omega)$ for various values of the damping factor β.

The maximum amplitude is

$$A_{\max} = A(\Omega_r) = \frac{F_0}{2m\beta\omega} = \frac{\pi F_0}{m\delta\omega^2},$$

where δ is the logarithmic decrement of damping (29.1.4). When $\beta \ll \omega_0$, $\Omega_r \approx \omega_0$ $\varphi_0(\Omega_r) \approx -\pi/2$, and $A_{\max} \approx QA_0$, where $Q \approx \pi/\delta$ is the Q factor of the pendulum (29.1.5) and A_0 is the static displacement (29.2.2).

The drastic increase in the amplitude of forced mechanical vibration (or oscillation) as the angular frequency of the driving force approaches the value Ω_r is the phenomenon called *mechanical resonance*. Accordingly, the curves of the dependence of A on Ω, shown in Figure 29.3 are called *resonance curves*.

As the damping factor β is increased, the peaks on the resonance curves are rapidly reduced (at small β values the amplitude $A_{\max} \approx 1/\beta$) and the resonance frequency Ω_r is slowly decreased.

29.2.4

The *velocity of the pendulum* in steady-state forced harmonic vibration (oscillation) is

$$v_x = \frac{\mathrm{d}x}{\mathrm{d}t} = -A\Omega\sin(\Omega t + \varphi_0) = A_v\cos(\Omega t + \alpha).$$

Here $A_v = A\Omega$ and $\alpha = \varphi_0 + \pi/2$ are the amplitude of the velocity and the phase difference between the velocity

and the driving force:

$$A_v = \frac{F_0\Omega}{m\sqrt{(\omega_0^2-\Omega^2)^2+4\beta^2\Omega^2}} = \frac{F_0}{m\sqrt{\dfrac{(\omega_0^2-\Omega^2)^2}{\Omega^2}+4\beta^2}}, \quad \text{and}$$

$$\tan\alpha = -\cot\varphi_0 = \frac{\omega_0^2-\Omega^2}{2\beta\Omega}.$$

The amplitude of the velocity is maximal at $\Omega = \omega_0$ and equals

$$(A_v)_{\max} = A_v(\omega_0) = \frac{F_0}{2m\beta}.$$

In this case, $\alpha = 0$, i.e. the velocity of the pendulum oscillates in phase with the driving force. As $\Omega \to \infty$, the amplitude $A_v \to 0$ and $\alpha \to -\pi/2$, whereas as $\Omega \to 0$, the amplitude $A_v \to 0$ and $\alpha \to \pi/2$.

29.2.5

The *acceleration of the pendulum* in steady-state forced harmonic vibration (oscillation) is

$$\begin{aligned} a_x &= dv[2]xt = -A\Omega^2\cos(\Omega t+\varphi_0) \\ &= A_a\cos(\Omega t+\gamma). \end{aligned}$$

Here $A_a = A\Omega^2$ and $\gamma = \varphi_0 + \pi$ are the amplitude of the acceleration and the phase difference between the acceleration and the driving force:

$$A_a = \frac{F_0\Omega^2}{m\sqrt{(\omega_0^2-\Omega^2)^2+4\beta^2\Omega^2}} = \frac{F_0}{m\sqrt{[(\omega_0/\Omega)^2)^2-1]^2+(2\beta/\Omega)^2}}.$$

The amplitude of acceleration is maximal at

$$\Omega = \frac{\omega_0}{\sqrt{1 + (\beta/\omega_0)^2}} \approx \sqrt{\omega_0^2 - \beta^2}.$$

At $\Omega = 0$, the amplitude $A_a = 0$, whereas as $\Omega \to \infty$ the amplitude of the acceleration tends to the value $A_a(\infty) = F_0/m$.

29.2.6

In steady-state forced vibration, the energy loss of the vibratory system, due to dissipative forces (**??**), is completely compensated by the work performed on the system by the driving force. The work, for example, done in one complete oscillation by the force of resistance acting on the spring pendulum is

$$W_1 = -b \int_0^T \left(\frac{\mathrm{d}x}{\mathrm{d}t}\right)^2 \mathrm{d}t = -2m\beta A^2\Omega^2 \int_0^T \sin^2(\Omega t + \varphi_0)\,\mathrm{d}t$$
$$= -m\beta A^2\Omega^2,$$

where $b = 2m\beta$ is the resistance coefficient (29.1.2).

The work done during the same time by the driving force $F_x = F_0 \cos \Omega t$ is

$$W_2 = F_0 \int_0^T \frac{\mathrm{d}x}{\mathrm{d}t} \cos \Omega t\,\mathrm{d}t = -A\Omega F_0 \int_0^T \cos \Omega t \sin(\Omega t \varphi_0)\,\mathrm{d}t$$
$$= -\frac{1}{2} A\Omega F_0 \sin \varphi_0 = -W_1,$$

since $\sin \varphi_0 = 2m\beta A\Omega / F_0$.

29.2.7

If the driving force acting on the spring pendulum varies periodically, but not according to a harmonic law, it can he represented as the sum of the harmonics of this force (28.4.6). These have different amplitudes, initial phases and angular frequencies that are multiples of $\Omega = 2\pi/T$, where T is the period of variation of the driving force. Since the pendulum is a linear vibratory (or oscillatory) system (29.1.1), each harmonic of the driving force acts on the system as if there were no other harmonics. Therefore, the steady-state forced oscillation of the pendulum, caused by an arbitrary periodic driving force, can be dealt with as the result of superposing steady-state forced oscillations due to each harmonic component of the driving force acting separately.

The "contribution" of the various harmonic components to the resultant oscillation depends upon their frequency and amplitude. Owing to resonance phenomena, an essential role, is played by only the harmonic components of the driving force that have an angular frequency close to the resonance frequency of the pendulum (29.2.3). If the damping factor β of the pendulum is small, the pendulum can execute steady-state forced oscillation close to the harmonic one, even if the driving force is far from harmonic. An example of such forced oscillation is that of a pendulum subject to short periodical external action in the form of impacts in a single direction and repeated over equal lengths of time, which are equal to the period of free oscillation of the pendulum.

29.3 Forced Electrical Oscillation

29.3.1

To obtain forced oscillation in an electrical oscillatory circuit (28.3.1) it is necessary to connect into it a source of electrical energy, whose emf $\mathscr{E}$ varies with time (Figure 29.5).

In electrical engineering a source of electrical energy, characterized by its emf and internal electrical resistance, is called a *seat*, or *source, of emf (voltage source)*. According to Ohms law for the portion $1-R-L-2$ (21.2.3), the quasi-stationary current (28.3.1), produced in the circuit in forced oscillation, can be found from the formula

$$IR = V_1 - V_2 - L\frac{\mathrm{d}I}{\mathrm{d}t} + \mathscr{E}(t). \tag{29.2}$$

Here $V_2 - V_1 = q/C$ is the potential difference across the capacitor plates, q is the capacitor charge, and the internal electrical resistance of the source of emf is assumed to be negligibly small compared to R (such a source of emf is said to be *ideal*). From the law of conservation of electrical charge (14.1.3) it follows that $I = \mathrm{d}q/\mathrm{d}t$. Hence, the *differential equation of forced electrical oscillation in a circuit* can be presented in a form similar to the equation for forced mechanical vibration (29.2.1):

$$\frac{\mathrm{d}^2q}{\mathrm{d}t^2} + 2\beta\frac{\mathrm{d}q}{\mathrm{d}t} + \omega_0^2 q = \frac{1}{L}\mathscr{E}(t).$$

Here $\beta = R/2L$ is the damping factor for free oscillation in a circuit, and $\omega_0 = 1/\sqrt{LC}$ is the angular frequency of free undamped oscillation (i.e. at $R = 0$).

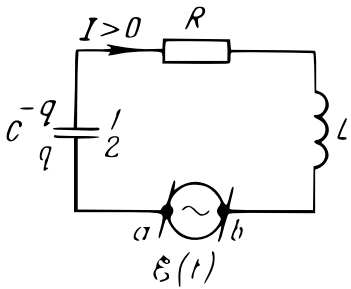


Figure 29.5.: Setup for obtaining forced electrical oscillaiors with RLC circuit.

29.3.2

If the driving emf $\mathscr{E}(t)$ varies according to the harmonic law $\mathscr{E}(t) = \mathscr{E}_0 \cos \Omega t$, then at steady-state forced oscillation (29.2.1), the capacitor charge varies harmonically at the same angular frequency Ω:

$$q = q_0 \cos(\Omega t + \varphi_0).$$

The amplitude q_0 and the initial phase φ_0 are determined by the formulas

$$q_0 = \frac{\mathscr{E}_0}{\Omega\sqrt{R^2 + (\Omega L - 1/\Omega C)^2}} = \frac{\mathscr{E}_0}{L\sqrt{(\omega_0^2 - \Omega^2)^2 + 4\beta^2\Omega^2}} \quad \text{and}$$

$$\tan\varphi_0 = \frac{R}{\Omega L - 1/\Omega C} = -\frac{2\beta\Omega}{\omega_0^2 - \Omega^2}$$

At $\Omega = 0$, the phase $\varphi_0(0) = 0$ and $q_0(0) = \mathscr{E}_0 C$ which is the charge of the capacitor at a constant potential difference between the plates equal to $\mathscr{E}_0$. At $\Omega \to \infty$, the amplitude $q_0 \to 0$, and $\varphi_0 \to -\pi$. The curves showing the dependence of φ_0 on Ω are shown in Figure 29.4, and those of the dependence of q_0 on Ω, in Figure 29.3, where $A = q_0$ and $A_0 = q_0(0) = \mathscr{E}_0 C$.

29.3.3

With steady-state forced oscillation in the circuit, the current is

$$I = \frac{\mathrm{d}q}{\mathrm{d}t} = -q_0\Omega \sin(\Omega t + \varphi_0) = I_0 \cos(\Omega t - \varphi).$$

The amplitude of the current $I_0 = q_0\Omega$ and the initial phase $-\varphi = \varphi_0 + \pi/2$ are determined by the formulas:

$$I_0 = \frac{\mathscr{E}_0}{\sqrt{R^2 + (\Omega L - 1/\Omega C)^2}} \quad \text{and}$$
$$\tan\varphi = \frac{\Omega L - 1/\Omega C}{R}.$$

Curves showing the dependence of I_0 on Ω for various values of R are called resonance curves of the oscillatory circuit and are shown in Figure **??**; curves of the dependence of φ on Ω are shown in Figure **??**. The resonance angular frequency Ω_r, corresponding to the maximum amplitude of the current in the circuit in forced oscillation, is independent of R. Thus

$$\Omega_r = \omega_0 = \frac{1}{\sqrt{LC}}.$$

The current amplitude at resonance is $I_0(\Omega_r) = \mathscr{E}_0/R$, and the phase difference between the current and emf is $\varphi(\Omega_r) = 0$. When $\Omega < \omega_0$, $\varphi < 0$, i.e. the current leads the emf in phase; the lower the frequency Ω, the greater this phase lead ($\varphi = -\pi/2$ at $\Omega = 0$). When $\Omega > \varphi_0$, ($\varphi > 0$, i.e. the current lags in phase behind the emf; the higher the frequency Ω, the greater this phase lag ($\varphi \to \pi/2$ as $\Omega \to \infty$).

29.3.4

The potential difference across the terminals a and b of an ideal source of harmonic emf (Figure 29.5) is equal to

its emf. Thus

$$u = V_a - V_b = \mathscr{E}_0 \cos \Omega t.$$

The potential drops across various portions of the circuit illustrated in Figure 29.5 and having the variable sinusoidal (harmonic) current $I = I_0 \cos(\Omega t - \varphi)$, a capacitor of capacitance C, resistor of resistance R and a coil of inductance L are as follows:

$$\begin{aligned} u_C &= V_2 - V_1 = \frac{q}{C} = U_C \cos\left(\Omega t - \varphi - \frac{\pi}{2}\right), \\ u_R &= IR = U_R \cos(\Omega t - \varphi), \\ u_L &= L\frac{\mathrm{d}I}{\mathrm{d}t} = U_L \cos\left(\Omega t - \varphi + \frac{\pi}{2}\right). \end{aligned}$$

The variation of u_R is in phase with that of current I in the circuit, u_L leads the current in phase by $\pi/2$, and u_C lags behind the current in phase by $\pi/2$. Here

$$u_C + u_R + u_L = u = \mathscr{E}_0 \cos \Omega t.$$

29.3.5

The amplitude values of u_C , u_L and u_R are equal, respectively, to

$$U_C = X_C I_0, \quad U_L = X_L I_0 \quad \text{and} \quad U_R = RI_0.$$

where $X_C = 1/\Omega C$ is the *capacitive reactance* of the circuit, and $X_L = \Omega L$ is the *inductive reactance* of the circuit. The quantity $X = X_L - X_C = \Omega L - 1/\Omega C$ is called the *reactance of the circuit*, R is called the *resistance* and $Z = \sqrt{R^2 + (\Omega L - 1/\Omega C)^2}$ is called its *impedance*.

The formulas in (29.3.3) for the amplitude of the sinusoidal current in the circuit and its initial phase can be rewritten in the form:

$$I_0 = \frac{\mathscr{E}_0}{Z} \quad \text{and} \quad \tan\varphi = \frac{X}{R},$$

with $\cos\varphi = R/Z$ and $\sin\varphi = X/Z$.

At resonance $\Omega = 1/\sqrt{LC}$ and $X_L = X_C$,so that the reactance of the circuit becomes zero and the impedance reaches its minimum value, which is equal to the resistance R. Thus

$$X(\Omega_r) = 0 \quad \text{and} \quad Z(\Omega_r) = Z_{\min} = R.$$

In this case $U_R = 0$ and $U_C = U_L = \sqrt{L/C}\,\mathscr{E}_0/R$.

29.3.6

The *effective value of a periodic current* (and, accordingly, the emf, voltage, etc.) is the root-mean-square value of the current during the time T of its variation. Thus

$$I_{\text{eff}} = \sqrt{\frac{1}{T}\int_0^T I^2\,\mathrm{d}t}$$

For a sinusoidal current and a sinusoidal emf

$$I_{\text{eff}} = \frac{I_0}{\sqrt{2}} \quad \text{and} \quad \mathscr{E}_{\text{eff}} = \frac{\mathscr{E}_0}{\sqrt{2}}.$$

An element of work done by sinusoidal current during the short time $\mathrm{d}t$ in the circuit illustrated in Figure 29.5 is equal to

$$\delta W = Iu\,\mathrm{d}t = I_0\mathscr{E}_0\cos(\Omega t - \varphi)\,\cos\Omega t\,\mathrm{d}t.$$

The *instantaneous power of the current in the circuit* is

$$P_{\text{ins}} = \frac{\delta W}{\mathrm{d}t} - Iu = I_0 \mathscr{E}_0 \cos(\Omega t - \varphi)\, \cos \Omega t.$$

The average value of the instantaneous power during a period is called the *active*, or *true, power* P of the current in the electric circuit. Thus

$$\begin{aligned} P &= \frac{1}{T} \int_0^T P_{\text{ins}}\, \mathrm{d}t = \frac{1}{2} I_0 \mathscr{E}_0 \cos \varphi \\ &= I_{\text{eff}} \mathscr{E}_{\text{eff}} \cos \varphi. \end{aligned}$$

The factor $\cos \varphi$ is called the *power factor*. Since $I_{\text{eff}} = \mathscr{E}_{\text{eff}}/Z$ and $\cos \varphi = R/Z$,

$$P = \frac{R}{Z^2} \mathscr{E}_{\text{eff}}^2.$$

At resonance $Z = R$ and the active power reaches its maximum value

$$P = \frac{\mathscr{E}_{\text{eff}}^2}{R} = \frac{\mathscr{E}_0^2}{2R}.$$

30 Elastic Waves

30.1 Longitudinal and Transverse Waves in an Elastic Medium

30.1.1

A body is said to be *elastic* and its deformation, due to the application of external forces, is *elastic deformation* if it completely disappears after the external forces are removed. According to *Hooke's law* elastic deformation is directly proportional to the external effects that cause it, i.e. it has a linear dependence on these effects. At sufficiently small deformation, all bodies can he assumed, practically, to be elastic.

The elastic properties of bodies depend upon the nature of the thermal motion of their molecules and their forces of interaction. For example, a gaseous body changes its shape without hindrance to suit the shape of the vessel it is contained in; gas has no *elasticity of shape*. But a gas has *elasticity of volume*, i.e. the capacity to resist changes in its volume. This property of a gas is due to

the thermal motion of its molecules and is manifested in the change in the pressure p of the gas when its volume V is changed.

According to *Hooke's law for volume deformation*, the change $\mathrm{d}p$ in the pressure of a gas for a small change $\mathrm{d}V$ in its volume is directly proportional to the relative volume defor mation, called the volume strain. Thus

$$\mathrm{d}p = -K\frac{\mathrm{d}V}{V},$$

where K is called the *bulk modulus of elasticity* of the gas. For an ideal gas (8.4.1) the value of K depends upon the kind of thermodynamic process of compression (**??**) being carried out. At a very slow change in the volume of the gas, the process can be considered isothermal (8.3.7), whereas at a rapid change it can be considered adiabatic (8.3.7). In the former case $K = p$ and in the latter $K = \varkappa p$, where $\varkappa$ is the adiabatic exponent (9.5.11).

30.1.2

The elasticity of a crystalline solid is due to the forces of mutual attraction and repulsion of its particles (ions, atoms or molecules) that make up the body and that have random thermal vibration about the points of its crystal lattice. The forces of interaction of the particle impede deformation of the crystal lattice that is associated with both the volume and shape of the body. Therefore, in addition to their bulk elasticity, solids also have elasticity of form, which is manifested by their resistance to shear deformation (**??**).

The elasticity of liquids is also due to the forces of intermolecular interaction. But, owing to the fact that the average time τ that molecules of a liquid remain in a temporarily settled state (13.2.4) is very short, liquids, like gases, possess only bulk elasticity. They manifest elasticity of form only with respect to variable deformation of ultrahigh frequency with a period that is less than or of the order of τ.

30.1.3

Elastic waves are *mechanical disturbances* (deformations) propagated in an elastic medium. Bodies that act on the medium and cause these disturbances are called sources of the waves. A member of the audience in a theatre, for instance hears the speech and singing of the actors and the sounds of the musical instruments due to the variations in the pressure of the air, reaching the audience and caused by the sources of sound.

Sonic, or *acoustic, waves* are elastic waves of low intensity, i.e. weak mechanical disturbances propagated in an elastic medium.

Sonic waves, acting on the organs of hearing of people, are capable of producing auditory sensations if the frequency ν of their corresponding vibrations lies in the range from 16 to 2×10^4 Hz (*audible sound*). Elastic waves with a frequency $nu < 16\,\text{Hz}$ are said to be *infrasonic*, whereas those with a frequency $\nu > 2 \times 10^4$ Hz are *ultrasonic* (elastic waves) with $\nu \gg 10^9$ Hz are often said to be *hypersonic*.

30.1.4

The propagation of elastic waves in a medium does not involve the transport of matter.[21] In a boundless medium, it consists in exciting forced vibrations of parts of the medium that are farther and farther away from the source of the waves. It is feasible here to digress from the discrete (molecular) structure of the medium, dealing with it as a *continuous medium*, distributed continuously in space and possessing definite elastic properties.

A *particle* of such a medium, having forced vibration, is understood to be a small element of its volume whose size, however, is many times greater than the intermolecular distances so that it contains an enormous number of molecules. Practically, such a particle can be dealt with as a point because even in a gas the intermolecular distances are extremely small (of the order of 10^{-8} m under standard conditions).

[21] A certain transport of matter (mass transfer) may occur in the propagation in a medium of strong disturbances (for example, shock waves in explosions), when the vibration of the particles of the medium becomes nonlinear.

30.1.5

An elastic wave is said to be *longitudinal* if the particles of the medium vibrate in the direction of wave propagation. Longitudinal waves are associated with bulk deformation of the elastic medium and can therefore propagate in any kind of medium: solid, liquid or gaseous. An example of such waves are the sonic waves in air.

An elastic wave is said to be *transverse* if the particles of the medium vibrate, remaining in planes perpendicular to the direction of wave propagation. Transverse waves are associated with shear deformation of the elastic medium,

and, consequently, can be generated and propagated only in media having elasticity of shape, i.e. in solids. An example of transverse waves are those propagated along the strings of musical instruments.

Special properties are found in *surface* waves, which propagate along the free surfaces of liquids (or the interface between two immiscible liquids), being a perturbance of the surface due to external effects (dropping of bodies into the liquid, the motion of ships, the wind, etc.). The forces of gravity and surface tension play a decisive role in the generation and propagation of these waves. In surface waves the particles of liquid have transverse and longitudinal vibrations simultaneously, describing elliptical or more complex paths.

30.1.6

A medium is said to be *uniform* if its physical properties, essential in the problem being considered, do not change from point to point. A medium that is uniform with respect to certain physical properties may be non-uniform with respect to others. A mono-crystalline body, for example, is uniform with respect to its elastic properties and, at the same time, optically non-uniform for X-rays.

A medium is *isotropic* if its physical properties that are essential in the problem being considered are the same in all directions. A medium that is isotropic with respect to certain physical properties may be anisotropic with respect to others. Cubic crystals, for instance, are optically isotropic, but are anisotropic with respect to other properties. Gases and liquids are isotropic with

respect to any physical properties.

30.1.7

A medium is said to be *linear* if there is a directly proportional relation between the quantities characterizing the external effects being considered that act on the medium and the changes they lead to in the state of the medium. An elastic medium, for example, obeying Hooke's law (30.1.1) is linear with respect to its mechanical properties. A dielectric is a linear medium with respect to its electrical properties if its dielectric constant (14.2.4) is independent of the electric field strength. By analogy, a magnetic material is a linear medium with respect to its magnetic properties if its relative magnetic permeability (26.4.5) is independent of the magnetic induction of the field.

30.2 Travelling Wave Equation

30.2.1

Travelling waves are ones which, in contrast to standing waves (30.5.4), transport energy from one part of space to another.

The *travelling wave equation* is the dependence on the coordinates and time of the scalar or vector quantities that characterize the vibration of the medium as the wave being considered is propagated through it. For waves in a solid medium, for instance, such a quantity may be the vector of displacement of the particles of the medium (30.1.4)

from their equilibrium position or the three projections of the vector on the coordinate axes. Longitudinal waves in a gas or liquid are usually characterized by the surplus pressure of the vibrating medium, equal to the difference between its variable and equilibrium pressures.

A *ray* is a curve whose tangent at each point coincides with the direction of propagation of a wave, i.e. with the direction of energy transport by the wave (30.3.5). In a uniform medium (30.1.6) rays are straight lines.

30.2.2

An elastic wave is said to be *sinusoidal*, or *harmonic*, if the corresponding vibration of particles of the medium is harmonic (28.1.3). The frequency of this vibration is called the *wave frequency*. Variations in pressure in a gaseous or liquid medium through which a sinusoidal wave propagates also take place according to a harmonic law at a frequency equal to the wave frequency. In a transverse sinusoidal wave, particles of the medium can simultaneously vibrate with harmonic motion at the wave frequency in two mutually perpendicular directions, each of which is perpendicular to the direction of wave propagation. Depending upon the kind of polarization of the resultant vibration (28.4.9), distinction is made between the following *types of polarization of transverse sinusoidal waves: elliptical, circular and linear (or plane)*.

30.2.3

A mechanical disturbance (deformation) propagates in an elastic medium at the finite velocity v. Therefore, disturbances, initiated by the wave source at the instant t_0 of time, reach an arbitrary point M of the medium at the instant $t - t_0$. The greater the path l that the wave travels from its source to point M, the greater the difference $t - t_0 = l/v$. Consequently, the vibration at point M lags in phase behind that at the source of the waves.

The *wave surface*, or *wavefront*, is the locus of all the points at which the phase of the vibration has the same value at the instant of time being considered. The difference $t - t_0$ is the same for all points in a wavefront. Through each point of a medium subject to wave motion one wavefront can be passed that corresponds to the value of the phase of the vibration at this point at the instant of time being considered. Many different values of the phase of a vibration correspond to a family of wavefronts. In a uniform isotropic medium (30.1.6) the wavefronts are orthogonal to the rays (30.2.1).

30.2.4

A wave is said to be *plane* if its wavefronts constitute a system of parallel planes. In a plane wave, propagating along the OX axis, all values of s, characterizing the vibratory motion of the medium, depend only upon the time t and the coordinate x of the point M being considered in the medium. If there is no absorption of waves

in the medium (30.3.7), the vibration at point M differs from that at the origin of coordinates O only in that it is shifted in time by the amount x/v, where v is the wave velocity. Hence, in a plane wave, propagating along the *positive* direction of the OX axis, s is a function of the difference $(t - x/v)$ and the *equation* of such a *plane* wave is:

$$s = f\left(t - \frac{x}{v}\right).$$

Accordingly, the equation for a plane wave propagating in the opposite direction is

$$s = f\left(t + \frac{x}{v}\right).$$

30.2.5

The *equation of a plane sinusoidal*, or simply *sine, wave*, propagating in a non-absorbing medium along the positive direction of the OX axis, is

$$\begin{aligned} s &= A\sin\left[\omega\left(t - \frac{x}{v}\right) + \varphi_0\right] \\ &= A\sin\left(\omega t - \frac{\omega}{v}x + \varphi_0\right) \quad \text{or} \\ &= A\sin\left(\frac{2\pi}{T}t - \frac{2\pi}{vT}x + \varphi_0\right), \end{aligned}$$

where A = const. is the amplitude of vibration and is called the *wave amplitude*, $\omega = 2pi/T$ is the angular frequency of the wave, T is the period of vibration, and φ_0 is the initial phase of the vibration (at the instant of time $t = 0$) in points of the coordinate plane $x = 0$. The

quantity $\Phi = \omega t - \omega_x/v + \varphi_0$, equal to the phase of the vibration at an arbitrary point with the coordinate x, is called the *phase of the plane wave* (see also (30.2.6)).

30.2.6

The distance $\lambda = vT$ that a sine wave travels during the time equal to the period of vibration is called the *wavelength*. The wavelength is equal to the distance between two closest points in a medium in which the phase difference of the vibration equals 2π.

Along with the wavelength, use is made of another characteris tic of a sine wave. It is the *wavenumber*

$$k = \frac{2\pi}{\lambda} = \frac{2\pi}{vT} = \frac{\omega}{v}.$$

Hence, the equation of a plane sine wave (30.2.5) can be written in the form

$$\begin{aligned} s &= A\sin\left(\omega t - \frac{2\pi}{\lambda}x + \varphi_0\right) \\ &= A\sin\left(\omega t - kx + \varphi_0\right). \end{aligned}$$

Accordingly, the phase of this plane wave is $\Phi = \omega t - kx + \varphi_0$.

30.2.7

The *wave vector* is the vector $\mathbf{k}$, equal in magnitude to the *wavenumber* k and having the direction along the ray (30.2.1) at the point M being considered in the medium. The wave vector of a plane sine wave does not depend on

the choice of point M, and the equation for such a wave can be written in the form

$$s = A \sin(\omega t - \mathbf{kr} + \alpha),$$

where $\mathbf{r}$ is the radius vector of point M, and α is the initial phase of vibration at the origin of coordinates, i.e. at the point $\mathbf{r} = 0$.

On the basis of the Euler formula (28.1.7), the equation of a plane sine wave can be written in exponential form, which is convenient for differentiation:

$$\tilde{s} = A \exp i(\omega t - \mathbf{kr} + \delta),$$

where $\delta = \alpha - \pi/2$. Only the real part of the complex quantity $\tilde{s}$ is of physical meaning, i.e. the quantity $s = \mathrm{Re}\{\tilde{s}\}$. Therefore, in making use of $\tilde{s}$ to determine some characteristic of a wave, it is necessary to discard the imaginary part of the final complex expression.

30.2.8

A wave is said to be *spherical* if its wavefronts are con centric spheres. The centre of these spheres is called the *wave centre*. Such waves are generated in a uniform isotropic medium by a solitary point source. The *equation of a diverging spherical wave* is of the form

$$\frac{1}{r} f\left(t - \frac{r}{v}\right),$$

where r is the distance from the wave centre to the point M being considered in the medium, and v is the wave velocity.

In the case of a *spherical sine wave*

$$\frac{a_0}{r}\,\sin\left(\omega t - k\mathbf{r} + \alpha\right),$$

where $a_0/ = A(r)$ is the wave amplitude (30.3.6), a_0 is a physical quantity, numerically equal to the wave amplitude at unit distance from the wave centre, α is the initial phase of vibration at the wave centre, and $\Phi = \omega t - kr + \alpha$ is the phase of the spherical wave.

In the exponential form, the equation of a spherical sine wave is

$$s = \frac{a_0}{r}\exp i\left(\omega t - \mathbf{kr} + \delta\right) = \frac{a_0}{r}\exp i\left(\omega t - kr + \delta\right),$$

where $\delta = \alpha - \pi/2$, $\mathbf{r}$ is the radius vector from the wave centre to the point M being considered, and wave vector $\mathbf{k}$ at point M is in the direction radially away from the wave centre.

Real sources of waves are always of finite size. But they can be dealt with as point sources and the waves they generate in a uniform isotropic medium as spherical ones if the distance r from the source to the points being considered in the medium is considerably greater than the dimensions of the source. When r is extremely great, any small portions of a wavefront can be regarded as being plane surfaces.

30.2.9

The propagation of waves in a uniform isotropic medium can be described by a partial differential equation, called

the *wave equation*. Thus

$$\frac{\partial^2 s}{\partial x^2} + \frac{\partial^2 s}{\partial y^2} + \frac{\partial^2 s}{\partial z^2} = \frac{1}{v^2}\,\frac{\partial^2 s}{\partial t^2}, \quad \text{or}$$

$$\Delta s = \frac{1}{v^2}\,\frac{\partial^2 s}{\partial t^2}.$$

Here s is a physical quantity that characterizes a disturbance propagating in the medium at the velocity v,

$$\Delta = \frac{\partial^2}{\partial x^2} + \frac{\partial^2}{\partial y^2} + \frac{\partial^2}{\partial z^2},$$

is the Laplace operator, or Laplacian. This equation is satisfied, among others, by a plane wave (30.2.7) and a diverging spherical wave (30.2.8).

Function s, characterizing a *sine wave* in a uniform isotropic medium, satisfies two partial differential equations at the same time:

$$\Delta s = -k^2 s,$$

where k is the wavenumber (30.2.6), and

$$\frac{\partial^2 s}{\partial t^2} = -k^2 s,$$

where co is the angular frequency of the wave.

30.2.10

The velocity v of propagation of a *sine wave* is called the *phase velocity*. It is equal to the velocity of displacement in space of the points in a surface that corresponds to any

fixed value of the phase of a sine wave. For example, in the case of a plane sine wave (30.2.6) it follows from the condition $\omega t - kx + \varphi_0 = \text{const.}$ that $\mathrm{d}x/\mathrm{d}t = \omega/k = v$. In the same way, in the case of a spherical sine wave (30.2.8), it follows from the condition $\omega t - kr + \alpha = \text{const.}$ that $\mathrm{d}r/\mathrm{d}t = \omega/k = v$.

30.3 Phase Velocity and Energy of Elastic Waves

30.3.1

The *phase velocity of sonic waves (velocity of sound) in a liquid or gas* is

$$v = \sqrt{\frac{K}{\rho}},$$

where ρ is the density of the undisturbed medium, and K is the bulk modulus of elasticity of the medium (30.1.1). The frequency of audible sonic waves $\nu > 16\,\text{Hz}$, and the process of deforming the medium can be assumed to be adiabatic (8.3.7), i.e. $K = -V(\mathrm{d}p/\mathrm{d}V)_{ad}$. The relation between the pressure p and volume V for an ideal gas (8.4.1) in an adiabatic process is: $pV^{\varkappa} = \text{const.}$, where $\varkappa$ is the adiabatic exponent (9.5.11), so that $K = \varkappa p$. Therefore, the *velocity of sound in an ideal gas* is equal to

$$v = \sqrt{\frac{\varkappa p}{\rho}} = \sqrt{\frac{\varkappa RT}{\mu}},$$

where μ, is the molar mass of the gas, T is its absolute temperature, and R is the universal gas constant.

30.3.2

The *phase velocity of transverse elastic waves* in a uniform isotropic solid medium is

$$v = \sqrt{\frac{G}{\rho}},$$

where G is the shear modulus of the medium (**??**) and ρ is its density.

The propagation of longitudinal waves in a *thin long rod* is associated with its longitudinal tension and compression. Hence, the phase velocity of such waves is

$$v = \sqrt{\frac{E}{\rho}},$$

where E is Young's modulus (**??**) for the rod material.

The *velocity of propagation of transverse waves along a stretched string (a thin flexible cord)* is

$$v = \sqrt{\frac{F}{\rho S}},$$

where F is the stretching force (tension) in the string, and ρ and S are the density of the string material and the cross-sectional area of the string.

30.3.3

An elastic medium in which mechanical waves propagate has kinetic energy of vibratory motion of its particles

and potential energy due to deformation (30.1.1). If $\mathbf{v}_1$ the velocity of particles of the medium, then the *volume kinetic energy density of the medium* is

$$E_k^d = \frac{\mathrm{d}E_k}{\mathrm{d}V} = \frac{1}{2}\rho v_1^2,$$

where ρ is the density of the medium, and $\mathrm{d}E_k$ is the kinetic energy of all the particles in the small volume $\mathrm{d}V$ of the medium. This volume has been selected so that throughout it the velocity $\mathbf{v}_1$ is the same.

The *volume potential energy density of an elastically deformed medium* is

$$E_p^d = \frac{\mathrm{d}E_p}{\mathrm{d}V} = \frac{1}{2}\rho v^2 \varepsilon^2,$$

where $\mathrm{d}E_p$ is the potential energy of a uniformly deformed small portion of the medium of volume $\mathrm{d}V$, v is the phase velocity in the medium, and ε is the relative deformation.

The *volume energy density of elastic waves* is understood to be the volume density E^d of the mechanical energy of a medium due to the propagation of these waves. Thus

$$E^d = E_k^d + E_p^d = \frac{1}{2}\rho(v_1^2 + v^2\varepsilon^2).$$

30.3.4

If a longitudinal plane travelling wave (30.2.4) propagates in a medium, then $v_1 = \partial s/\partial t$, where s is the displacement of the particles, and $\varepsilon = \partial s/\partial x = -v_1/v$, so that

$$E_p^d = E_k^d \quad \text{and} \quad E^d = \rho v_1^2 = \rho\left(\frac{\partial s}{\partial t}\right)^2.$$

At each point of the medium subject to wave motion, E_k^d and E_p^d are *alike* functions of time. Consequently, E^d also varies with time. This principle is valid for any travelling waves in an elastic medium, regardless of the shape of their wavefronts and the type of deformation of the medium. It follows from the law of conservation of energy as applied to the process of the propagation of vibrations in an elastic medium.

To set regions of the medium more and more distant from the wave source into vibratory motion it is necessary to expend energy, which is supplied to the medium by the source. Consequently, the propagation of elastic waves is inseparably associated with the transport of energy from certain parts of the medium to others. This is precisely why the volume energy density E^d of the waves depends both on the coordinates and on the time as well.

For a plane travelling sine wave in a non-absorbing medium (30.2.5)

$$\begin{aligned} E^d &= \rho A^2 \omega^2 \cos^2(\omega t - kx + \varphi_0) \\ &= \frac{1}{2}\rho A^2 \omega^2 [1 + \cos 2(\omega t - kx + \varphi_0)], \end{aligned}$$

where $A = \text{const.}$ is the wave amplitude.

In the case of a diverging spherical sine wave in a non-absorbing medium (30.2.8)

$$E^d = \rho A^2 \omega^2 \cos^2(\omega t - kr + \alpha),$$

where $A = a_0/r$ is the amplitude of the wave.

The average volume energy density over one period is

$$E^d = \frac{1}{2}\rho A^2 \omega^2.$$

30.3.5

The *velocity of energy transfer by a wave* is equal to the velocity in space of a surface corresponding to the maximum value of the volume density E^d of the wave's energy. For sine waves this velocity is equal to the phase velocity v.

The *energy flux* $\mathrm{d}\Phi_E$ through the small surface $\mathrm{d}S$ is the ratio of the energy $\mathrm{d}E$ transferred through this surface in a short lime interval to the magnitude of this interval $\mathrm{d}t$. Thus

$$\mathrm{d}\Phi_E = \frac{\mathrm{d}E}{\mathrm{d}t}.$$




Figure 30.1.: Velocity vector of energy transfer by the wave.

If v is the velocity vector of energy transfer by the wave (Figure 30.1), then

$$\mathrm{d}E = E^d v\,\mathrm{d}t\,\mathrm{d}S\,\cos\alpha = E^d(\mathbf{v}\mathrm{d}\mathbf{S})\,\mathrm{d}t \quad \text{and}$$
$$\mathrm{d}\Phi_E = E^d\,(\mathbf{v}\mathrm{d}\mathbf{S}) = (\mathbf{U}\,\mathrm{d}\mathbf{S}),$$

where E^d is the volume energy density of the wave, $\mathrm{d}\mathbf{S} = \hat{\mathbf{n}}\mathrm{d}S$ is the vector of surface $\mathrm{d}S$, $\hat{\mathbf{n}}$ is a unit vector of the normal to the surface, and α is the angle between $\mathbf{v}$ and $\mathrm{d}\mathbf{S}$.

The vector $\mathbf{U} = E^d\mathbf{v}$, having the direction of energy transfer by the wave, is called the *U_{mov} vector (energy flux density vector of the wave)*. In magnitude it equals the ratio of the energy flux $\mathrm{d}\Phi_E$ through the small surface $\mathrm{d}S$ to the area $\mathrm{d}S_\perp = \mathrm{d}S\cos\alpha$ of the projection of this surface on a plane perpendicular to the direction of energy transfer: $U = \mathrm{d}\Phi_E/\mathrm{d}S_\perp$.

30.3.6

The *wave intensity* I is the magnitude of the average value of the U_{mov} vector. Wave intensity is numerically equal to the energy transferred by the wave in unit time through unit area of a surface perpendicular to the direction of wave propagation. The intensity of a travelling sine wave is proportional to the square of its amplitude. For plane and spherical sine waves

$$I = |\langle \mathbf{U} \rangle| = v \left\langle E^d \right\rangle = \frac{1}{2} \rho v \omega^2 A^2.$$

When a spherical wave propagates in a non-absorbing medium, the same amount of energy is transferred in unit time through any spherical surface of radius r with its centre at the wave centre. This energy is equal to that expended during the same time by the wave source: $4\pi r^2 I = \text{const}$. Hence, the intensity and amplitude of a spherical wave decrease with an increase in the distance from the wave centre according to the relations

$$I(r) = \frac{i_0}{r^2} \quad \text{and} \quad A(r) = \frac{a_0}{r},$$

where i_0 and a_0 are physical quantities numerically equal to the intensity and amplitude of the wave at the distance $r = 1\,\text{m}$ from the wave centre.

It can be shown in the same way that in the case of a plane sine wave in a non-absorbing medium, the amplitude A of the wave is independent of the coordinates.

30.3.7

The conversion of wave energy into other forms of energy, taking place in the propagation of waves through a medium, is called wave absorption. In a uniform medium the absorption of elastic waves is due chiefly to the processes of internal friction, or viscosity (10.8.4), and heat conduction (10.8.5). The amplitude A and intensity I of a plane wave, propagating in an absorbing medium along the positive direction of axis OX, varies according to the exponential law

$$A(x) = A_0 \exp(-\alpha x) \quad \text{and} \quad I(x) = I_0 \exp(-2\alpha x).$$

Here A_0 and I_0 are the amplitude and intensity of the wave at the points $x = 0$, and α is the *linear absorption coefficient* for elastic waves and depends upon the properties of the medium and the wave frequency.

30.3.8

The *dispersion of waves* is the dependence of the phase velocity of sine waves in a medium on their frequency. A medium in which this phenomenon is observed is said to be a *dispersive medium*. The dispersion of acoustic waves in a boundless medium depends upon the properties of the medium and is always accompanied by the absorption of sound.

30.4 Principle of Superposition of Waves. Group Velocity

30.4.1

The *principle of superposition of waves* states that in a linear medium (30.1.7) waves are propagated independently of one another, so that the resultant disturbance at any point in the medium upon the simultaneous propagation of several waves is equal to the sum of the disturbances corresponding to each of the waves separately.

For example, if n different mechanical waves are propagated simultaneously through a linear medium the resultant displacement $\mathbf{s}$, velocity $\mathbf{v}$ and acceleration $\mathbf{a}$ of the particles of the medium at the arbitrary instant t of time are

$$\mathbf{s} = \sum_i^n \mathbf{s}_i, \quad \mathbf{v} = \sum_i^n \mathbf{v}_i, \quad \text{and} \quad \mathbf{a} = \sum_i^n \mathbf{a}_i,$$

where $\mathbf{s}_i$, $\mathbf{v}_i$, $\mathbf{a}_i$, and acceleration that the particles being considered would have at the instant of time t if only the i-th wave was propagated in the medium.

30.4.2

On the basis of the principle of wave superposition and a Fourier expansion ((28.4.6) and (28.4.7)) any nonsine wave can be replaced by an equivalent system of sine waves, i.e. it can be represented in the form of a *group of waves*, called a *wave train* or packet. The totality of frequency values for these sine waves is called the *frequency spectrum* (or simply *spectrum*) of the nonsine wave. In accordance with the nature of the oscillation excited by the wave, the wave's frequency spectrum can be either discrete (28.4.6) or continuous (28.4.7).

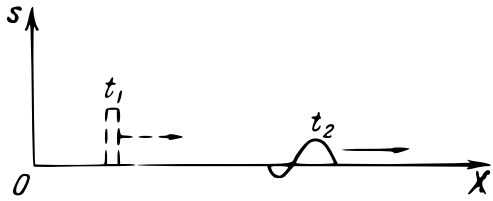


Figure 30.2.: The "spread" of a train wave in a dispersive medium.

The law of propagation of an arbitrary disturbance (signal), which is a nonsine wave, in a linear medium is simple only provided that the medium is nondispersive (30.3.8). In this case the signal travels in the medium without changing its "shape" because all the sine waves making up the wave train have the same phase velocity, which is equal to the velocity of the signal.

In a dispersive medium, the sine components of the wave train, corresponding to the nonsine wave, propagate at different velocities. Therefore, this wave train "spreads" as it propagates, thereby changing the "shape" of the signal. If, for example, a signal propagating along the OX axis in a dispersive medium had the "shape" shown by dash lines in Figure 30.2 at the instant of time t_1, then at the instant t_2 it could have the different "shape" shown by a solid line.

30.4.3

The simplest wave train is the *plane quasi-sine wave* obtained by the superposition of two plane waves of the same amplitude and with frequencies and wavenumbers

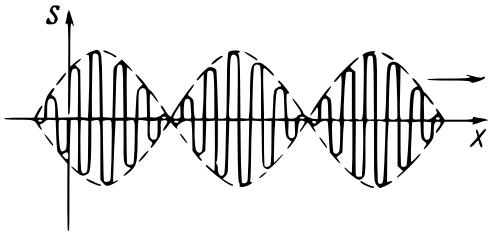


Figure 30.3.: The dependence of s on x.

close in value propagating along the OX axis. Thus

$$\begin{aligned} s &= A_0 \sin(\omega t - kx) + A_0 \sin[(\omega + \mathrm{d}\omega)\, t - (k + \mathrm{d}k)\, x] \\ &= 2A_0 \cos\left(\frac{t\,\mathrm{d}\omega - x\,\mathrm{d}k}{2}\right) \sin(\omega t - kx). \end{aligned}$$

The dependence of s on x at some fixed instant of time is shown in Figure 30.3.

This wave differs from a sine wave in that its amplitude

$$A = A_0 \left| \left(\frac{t\,\mathrm{d}\omega - x\,\mathrm{d}k}{2}\right) \right|$$

is a slowly varying function of the coordinate x and time t. Taken as the velocity of propagation of this nonsine wave is a velocity u of point M in which the amplitude A has some fixed value (for example, $A = 0$ or $A = 2A_0$). Consequently, the law of motion of point M is: $t\,\mathrm{d}\omega - x\,\mathrm{d}k = \text{const}$. From this

$$u = \frac{\mathrm{d}x}{\mathrm{d}t} = \frac{\mathrm{d}\omega}{\mathrm{d}k}.$$

Velocity u is called the *group velocity*. It is equal to the velocity of energy transfer by a quasi-sine wave. The group velocity $u = \mathrm{d}\omega/\mathrm{d}k$ is suitable for describing energy transfer (signal transmission) by nonsine waves having a different frequency spectrum provided that the spectrum is not very wide and that the dispersion of waves in the medium at these frequencies is not too great.

The relation between the group velocity ($u = \mathrm{d}\omega/\mathrm{d}k$) and the phase velocity ($v = \omega/k$) of waves is of the form:

$$u = v - \lambda \frac{\mathrm{d}v}{\mathrm{d}\lambda},$$

where λ is the wavelength (30.2.6). In a nondispersive medium $\mathrm{d}v/\mathrm{d}\lambda = 0$ and the group and phase velocities coincide.

30.5 Interference of Waves. Standing Waves

30.5.1

Two waves are said to be *coherent* if their phase difference is independent of time. Coherent waves correspond to coherent oscillations (or vibrations) (28.4.3). The sources of co herent waves are called *coherent sources*. Sine waves of equal frequency are always coherent. Waves of different frequencies are coherent only for the length of time that the oscillations (or vibra tions) they excite are co herent (28.4.4).

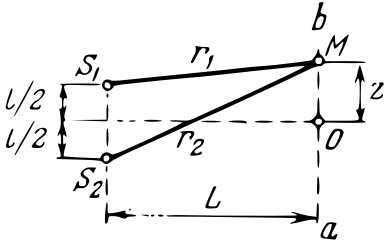


Figure 30.4.: Superposing of two incoherent sine waves.

In superposing incoherent sine waves, generated by point sources S_1 and S_2 (Figure 30.4), the square of the

amplitude A of the resultant nonharmonic vibration at arbitrary point M varies periodically with time t according to the relation (see (28.4.2) and (30.2.8)):

$$A^2 = A_1^2 + A_2^2 + 2A_1A_2\cos[(\omega_2 - \omega_1 t - (k_2 r_2 - k_1 r_1) + (\alpha_2 - \alpha_1)].$$

Here A_1 and A_2, and k_1, and k_2, and α_1 and α_2 are the amplitudes at point M, angular velocities, wavenumbers and the initial phases of the two spherical waves being superposed.

The period of variation of A_2 is equal to $T = 2\pi/|\omega_2 - \omega_1|$. The average value of the square of the amplitude during the period is

$$\langle A^2 \rangle = A_1^2 + A_2^2.$$

In the superposition of incoherent waves, the squares of their amplitudes are added together.

30.5.2

The *interference of waves* is the phenomenon, in super posing waves, of their mutual strengthening, stable with time, at certain points in space and their weakening at others, depend ing upon the relations between the phases of these waves.

Only coherent waves display interference, provided that they correspond to vibrations in the same or almost the same direction.

In superposing coherent spherical waves, generated by

the point sources S_1 and S_2 (Figure 30.4),

$$s_1 = A_1 \sin(\omega t - kr_1 + \alpha_1) = A_1 \sin \Phi_1 \quad \text{and}$$
$$s_2 = A_2 \sin(\omega t - kr_2 + \alpha_2) = A_2 \sin \Phi_2;$$

amplitude A and phase Φ of the resultant harmonic vibrations at point M (where $s = s_1 + s_2 = A \sin \Phi$) are determined from the relations (28.4.3):

$$A^2 = A_1^2 + A_2^2 + 2A_1A_2 \cos[k(r_2 - r_1) - (\alpha_2 - \alpha_1)] \quad \text{and}$$
$$\tan \Phi = \frac{A_1 \sin \Phi_1 + A_2 \sin \Phi_2}{A_1 \cos \Phi_1 + A_2 \sin \Phi_2}.$$

Since the difference of the initial phases $\alpha_2\alpha_1 = \text{const.}$ for the vibration of the coherent sources S_2 and S_1 the resulting interference of the two waves at various points M depends on the quantity $\Delta = r_2 - r_1$, called the *path difference of the waves*. At interference maxima, the amplitude of the resultant vibration is $A = A_1 + A_2$, whereas at interference minima $A = |A_1 - A_2|$. Maxima are observed at the points M that comply with the condition

$$k\Delta - (\alpha_2 - \alpha_1) = \pm 2m\pi,$$

where $m = 0, 1, 2, \ldots$ is the *order of the interference maximum*.

The condition for interference minima is of the form

$$k\Delta - (\alpha_2 - \alpha_1) = \pm(2m - 1)\pi,$$

where $m = 0, 1, 2, \ldots$ is the *order of the interference minimum*. Since the wavenumber $k = 2\pi/\lambda$, where λ is the wavelength in the given medium, the conditions for

interference maxima and minima can be presented in the form:

$$\Delta = \pm m\lambda + \frac{\alpha_2 - \alpha_1}{2\pi}\lambda \text{ (maxima)},$$
$$\Delta = \pm(2m-1)\frac{\lambda}{2} + \frac{\alpha_2 - \alpha_1}{2\pi}\lambda \text{ (minima)}.$$

Finally, when $\alpha_2 = \alpha_1$ the conditions take the form:

$$\Delta = \pm m\lambda \text{ (maxima)},$$
$$\Delta = \pm(2m-1) \text{ (minima)}.$$

On the straight line ab, parallel to and at the distance L from the line passing through the sources S_1 and S_2, (Figure 30.4), the central maximum of zero order is at point O, equidistant from sources S_1 and S_2. If the distance between the sourcea $l \ll L$ then for point M on line ab, at the distance $z \ll L$ from point O, the path difference of the waves is

$$\Delta = \frac{lz}{L}.$$

Maxima of the mth and $(m+1)$th orders correspond to the values

$$z_m = \frac{m\lambda L}{l} \quad \text{and}$$
$$z_{m+1} = \frac{(m+1)\lambda L}{l},$$

so that the difference between adjacent maxima equals $\lambda L/l$.

30.5.3

When waves interfere, their energies cannot be simply added together. At interference maxima, the intensity of the resultant wave is greater than the sum of the intensities of the superposed waves, and at minima, it is less than their sum. Wave interference leads to a redistribution of vibrational energy between neighbouring regions of the medium. But on an average, for a large region of space, the energy of the resultant wave is equal to the sum of the energies of the interfering waves. This follows from the laws of conservation and conversion of energy.

30.5.4

A special case of wave interference is standing waves. A *standing wave* is one that is formed by the superposition of two travelling sine waves that are propagating toward each other and have the same frequency and amplitude. In the case of transverse waves, they also have the same polarization (30.2.2). A standing wave is formed, for instance, in a stretched flexible string when one end is fixed and vibratory motion is imparted to the other end.

In the superposition of two coherent travelling plane waves of the form

$$s_1 = A\sin(\omega t - kx) \quad \text{and}$$
$$s_2 = A\sin(\omega t + kx + \alpha),$$

where α is the phase difference at points $x = 0$, a *plane*

standing wave is formed. It is described by the equation

$$s = s_1 + s_2 = 2A\cos\left(kx + \frac{\alpha}{2}\right)\sin\left(\omega t + \frac{\alpha}{2}\right).$$

In contrast to the amplitude A of travelling waves, the *amplitude A_{st} of a standing wave* is a periodic function of the coordinate x:

$$A_{st} = 2A\left|\cos\left(kx + \frac{\alpha}{2}\right)\right|.$$

30.5.5

Points of a standing wave at which $A_{st} = 0$ are called its *nodes*, points at which the amplitude A_{st} reaches its maximum value ($A_{st} = 2A$) are called the *antinodes*. The positions of the nodes and antinodes are determined from the conditions:

$$kx + \frac{\alpha}{2} = (2m+1)\frac{\pi}{2} \text{ nodes},$$
$$kx + \frac{\alpha}{2} = m\pi\frac{\pi}{2} \text{ antinodes},$$

where $m = 0, 1, 2, \ldots$.

The distances between two adjacent nodes and between two adjacent antinodes are the same and equal to half the wavelength λ of the travelling waves. This distance is called the *length of the standing wave*: $\lambda_{st} = \lambda/2$. The distance between adjacent nodes and antinodes of a standing wave is equal to $\lambda_{st}/2$.

30.5.6

In a travelling wave the phase of the vibration depends upon the coordinate x of the point being considered. In a standing wave all the points between two nodes vibrate with differ ent amplitudes, but in the *same* phase (cophased) because the argument of the sine in the equation of a standing wave (30.5.4) is independent of the coordinate x. In passing through a node, the phase of the vibration changes abruptly by π, so that the sign of $\cos(kx + \alpha/2)$ is reversed.

Illustrated in Figure 30.5 is the nature of the motion of various points on a stretched flexible string of length l when a transverse standing wave is established in it. The left end O of the string is set into harmonic motion and the right end N is fixed.

In this case, as the wave is reflected from the place where the string is fixed, its phase is changed by π, so that a node of the standing wave is formed at this point. The phase difference of the reflected and incident waves at point O (where $x = 0$) is $\alpha = -(2kl + \pi)$. The nodes of the standing wave are designated by small circles in Figure 30.5, and the instant of time t_0 is selected so that $\sin(\omega t_0 + \alpha/2) = 0$.

30.5.7

In a standing wave (30.5.4), the velocity of vibratory motion of the particles of the medium is

$$v_1 = \frac{\partial s}{\partial t} = 2A\omega \cos\left(kx + \frac{\alpha}{2}\right) \cos\left(\omega t + \frac{\alpha}{2}\right),$$

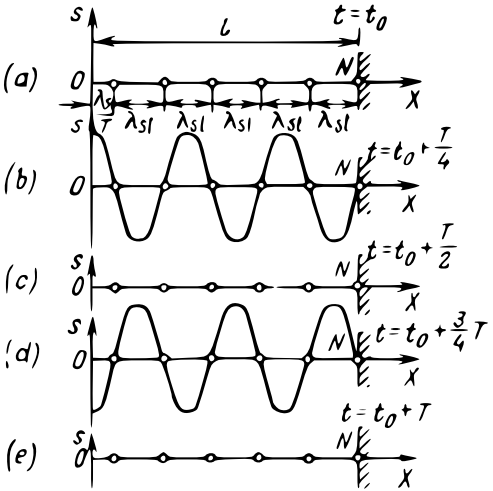


Figure 30.5.: The nature of motion of various points on a stretched flexible string when a transverse wave is established in it.

and the relative deformation of the medium is

$$\begin{aligned}\varepsilon = \frac{\partial s}{\partial k} &= -2Ak \sin\left(kx + \frac{\alpha}{2}\right) \sin\left(\omega t + \frac{\alpha}{2}\right) \\ &= 2Ak \sin\left(kx + \frac{\alpha}{2}\right) \cos\left(\omega t + \frac{\alpha}{2} + \frac{\pi}{2}\right).\end{aligned}$$

Thus, in contrast to a travelling wave (30.3.4), in a standing wave ε has a phase lead of $\pi/2$ over v_1. Consequently, at the instants of time when reaches its amplitude value, ε becomes zero and vice versa. Moreover, the amplitudes of v_1 and ε depend upon the coordinate x, but in different ways. Thus, the anti nodes of the particle velocity and nodes of deformation of the medium are at the antinodes of the standing wave (30.5.5), whereas the antinodes of the deformation and the nodes of the velocity are at the nodes of the standing wave.

In an elastic standing wave, the energy is periodically converted from potential energy, localized mainly near the deformation antinodes, into kinetic energy, localized mainly near the velocity antinodes, and back again. Therefore, energy periodically migrates from the nodes of a standing wave to its antinodes and back again. But in the nodes and antinodes themselves the energy flux density is identically equal to zero. The average value of the energy flux density over one period is equal to zero at any point on a standing wave, because the two travelling waves that form the standing wave transmit equal amounts of energy over a period in opposite directions. This is why they have been called standing waves.

30.5.8

In the free vibrations of strings, rods and columns of gas, standing waves are set up in them. The frequencies of these waves comply with definite conditions, i.e. they can have only certain discrete values, which are called the *natural frequencies of vibration* of the corresponding vibratory system. Displacement nodes (deformation antinodes) are located at the rigidly fixed ends of strings or rods, and displacement antinodes (defor mation nodes) are located at the free ends of the rods. In the vibrations of a cylindrical column of gas in a pipe, a pressure antinode is located at the closed end of the pipe and a pressure node at the open end.

If l is the length of the string, rod or gas column, v is the phase velocity of the wave and λ is the wavelength, then for strings and rods fixed at both ends and for gas columns in pipes that are open or closed at both ends, a whole number of lengths $\lambda_{st} = \lambda/2$ of the standing wave fits into the length l, i.e.

$$l = m\lambda_{st} = \frac{m\lambda}{2},$$

where $m = 1, 2, 3, \ldots$.

The natural frequency of vibrations of such systems is

$$\nu = \frac{mv}{2l}.$$

For rods fixed at one end and free at the other, or for pipes closed at one end and open at the other,

$$l = (2m-1)\frac{\lambda_{st}}{2} = (2m-1)\frac{\lambda}{4},$$

and the natural frequency of vibration is

$$\nu = \frac{(2m-1)v}{4l}.$$

30.6 Doppler Effect in Acoustics

30.6.1

The *Doppler effect* refers to the change in the frequency of waves, observed or recorded by a receiver, or detector, which is due to motion of the source of the waves and the detector (or observer). For example, as a rapid train approaches a stationary ob server, the pitch of the loco motive whistle is higher, and as the train passes the observer and travels away it is lower, than the pitch of the same whistle when the train is standing still.

Assume that the detector D of acoustic waves in a gas eous (or liquid) medium is fixed with respect to the medium, and that the source S is moving away at the velocity along a straight line joining them (Figure 30.6 (a)). During the period T_0 of its vibration, the source travels in the medium a distance of $v_1 T_0 = v_1/\nu_0$, where ν_0 is the source's fre quency of vibration. Therefore, upon motion of the source the wavelength λ in the medium differs from its value λ_0 when the source is stationary:

$$\lambda = \lambda_0 + v_1 T_0 = (v + v_1)T_0 = \frac{(v + v_1)}{\nu_0},$$

where v is the phase velocity of the wave in the medium. The frequency of the wave recorded by the detector is

$$\nu = \frac{v}{\lambda} = \frac{\nu_0}{1 + v_1/v}.$$

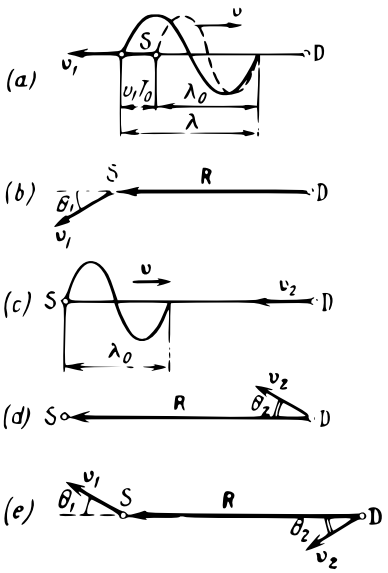


Figure 30.6.: Analysis of the Doppler effect due to motion of the source and the detector.

If the velocity vector of the source makes the arbitrary angle θ_1 with the radius vector $\mathbf{R}$, connecting the stationary detector to the source (Figure 30.6 (b)), then

$$\nu = \frac{\nu_0}{1 + v_1 \cos\theta_1 / v}.$$

30.6.2

When the source is stationary and the detector approaches it at the velocity $\mathbf{v}_2$ along a straight line joining them (Figure 30.6 (c)), the wavelength in the medium is $\lambda = \lambda_0 = v/\nu_0$. But the velocity of propagation of the wave with respect to the detector is $v + v_2$. Hence, the wave frequency recorded by the detector is

$$\nu = \frac{v + v_2}{\lambda_0} = \nu_0 \left(1 + \frac{v_2}{v}\right).$$

In the case when the velocity vector $\mathbf{v}_2$ makes the arbitrary angle θ_2 with radius vector $\mathbf{R}$, connecting the travelling detector to the stationary source (Figure 30.6 (d)),

$$\nu = \nu_0 \left(1 + \frac{v_2}{v} \cos\theta_2\right).$$

30.6.3

In the most general case, when both the detector and source of acoustic waves are travelling with respect to the medium at arbitrary velocities (Figure 30.6 (e)),

$$\nu = \nu_0 \frac{1 + \dfrac{v_2}{v} \cos\theta_2}{1 + \dfrac{v_1}{v} \cos\theta_1}.$$

This formula can also be presented in the form

$$\nu = \nu_0 \left(1 - \frac{V\cos\theta}{v}\left[1 - \frac{v_1}{v}\cos\theta_1 + \left(\frac{v_1}{v}\cos\theta_1\right)^2 - \ldots\right]\right),$$

where $\mathbf{V} = \mathbf{v}_1 - \mathbf{v}_2$ is the velocity of the wave source with respect to the detector, and θ is the angle between vectors $\mathbf{V}$ and $\mathbf{R}$. The quantity $V\cos\theta$, equal to the projection of $\mathbf{V}$ on the direction of $\mathbf{R}$, is called the *ray velocity of the source*.

When $v_1 \ll v$,

$$\nu \approx \nu_0 \left(1 - \frac{V\cos\theta}{v}\right).$$

31 Electromagnetic Waves

31.1 Properties of Electromagnetic Waves

31.1.1

Electromagnetic waves are disturbances of an electromagnetic field (i.e. a variable electromagnetic field) that propagate through space. The statement of the existence of electromagnetic waves follows directly from Maxwell's equations (27.4.3). For an electromagnetic field, distant from the free electric charges (18.3.1) and macroscopic currents (26.4.1) that it was set up by, these equations are of the form:[22]

$$\boldsymbol{\nabla} \times \mathbf{E} = -\frac{\partial \mathbf{B}}{\partial t}, \quad \boldsymbol{\nabla} \times \mathbf{H} = \frac{\partial \mathbf{D}}{\partial t},$$
$$\boldsymbol{\nabla} \cdot \mathbf{D} = 0, \qquad \boldsymbol{\nabla} \cdot \mathbf{B} = 0.$$

[22] All equations in Chapter 31 are written in SI units.

31.1.2

If the medium is a uniform and isotropic dielectric (30.1.6), having no ferroelectric (18.4.1) or ferromagnetic (26.5.1)

properties, then $\mathbf{D} = \varepsilon_r \varepsilon_0 \mathbf{E}$ and $\mathbf{B} = \mu_r \mu_0 \mathbf{H}$, where ε_r and μ_r are constant scalar quantities independent both of the coordinates and of time. Here Maxwell's equations (31.1.1) can be rewritten in the form

$$\begin{aligned} \boldsymbol{\nabla} \times \mathbf{E} &= -\mu_r \mu_0 \frac{\partial \mathbf{H}}{\partial t}, & \boldsymbol{\nabla} \times \mathbf{H} &= \varepsilon_r \varepsilon_0 \frac{\partial \mathbf{E}}{\partial t}, \\ \boldsymbol{\nabla} \cdot \mathbf{E} &= 0, & \boldsymbol{\nabla} \cdot \mathbf{H} &= 0. \end{aligned}$$

or in projections on the axes of Cartesian coordinates:

$$\begin{aligned} \frac{\partial E_z}{\partial y} - \frac{\partial E_y}{\partial z} &= -\mu_r \mu_0 \frac{\partial H_x}{\partial t}, & \frac{\partial H_z}{\partial y} - \frac{\partial H_y}{\partial z} &= \varepsilon_r \varepsilon_0 \frac{\partial E_x}{\partial t}, \\ \frac{\partial E_x}{\partial z} - \frac{\partial E_z}{\partial x} &= -\mu_r \mu_0 \frac{\partial H_y}{\partial t}, & \frac{\partial H_x}{\partial z} - \frac{\partial H_z}{\partial x} &= \varepsilon_r \varepsilon_0 \frac{\partial E_y}{\partial t}, \\ \frac{\partial E_y}{\partial x} - \frac{\partial E_x}{\partial y} &= -\mu_r \mu_0 \frac{\partial H_z}{\partial t}, & \frac{\partial H_y}{\partial x} - \frac{\partial H_x}{\partial y} &= \varepsilon_r \varepsilon_0 \frac{\partial E_z}{\partial t}, \\ \frac{\partial E_x}{\partial x} + \frac{\partial E_y}{\partial y} + \frac{\partial E_z}{\partial z} &= 0, & \frac{\partial H_x}{\partial x} + \frac{\partial H_y}{\partial y} + \frac{\partial H_z}{\partial z} &= 0. \end{aligned}$$

31.1.3

It follows from Maxwell's equations (31.1.2) that the strength vectors $\mathbf{E}$ and $\mathbf{H}$ of a variable electromagnetic field and their projections onto the axes of Cartesian coordinates comply in a uniform, isotropic, nonconducting

medium, with the wave equation (30.2.9):

$$\Delta\mathbf{E} - \varepsilon_r\varepsilon_0\mu_r\mu_0\frac{\partial^2\mathbf{E}}{\partial t^2} = 0, \qquad \Delta\mathbf{H} - \varepsilon_r\varepsilon_0\mu_r\mu_0\frac{\partial^2\mathbf{H}}{\partial t^2} = 0,$$

$$\Delta E_x - \varepsilon_r\varepsilon_0\mu_r\mu_0\frac{\partial^2 E_x}{\partial t^2} = 0, \quad \Delta E_y - \varepsilon_r\varepsilon_0\mu_r\mu_0\frac{\partial^2 E_y}{\partial t^2} = 0,$$

$$\Delta E_z - \varepsilon_r\varepsilon_0\mu_r\mu_0\frac{\partial^2 E_z}{\partial t^2} = 0,$$

$$\Delta H_x - \varepsilon_r\varepsilon_0\mu_r\mu_0\frac{\partial^2 H_x}{\partial t^2} = 0, \quad \Delta H_y - \varepsilon_r\varepsilon_0\mu_r\mu_0\frac{\partial^2 H_y}{\partial t^2} = 0,$$

$$\Delta H_z - \varepsilon_r\varepsilon_0\mu_r\mu_0\frac{\partial^2 H_z}{\partial t^2} = 0.$$

Thus a variable electromagnetic field really propagates in space in the form of waves with the phase velocity

$$v = \frac{c}{\sqrt{\varepsilon_r\mu_r}}, \text{ where } c = \frac{1}{\sqrt{\varepsilon_0\mu_0}} = 3\times 10^8 \text{ m/s}.$$

In vacuum $\varepsilon_r = \mu_r = 1$. Hence, c is the *velocity of electromagnetic waves* in vacuum (in free space).

31.1.4

Electromagnetic waves are *transverse* waves: vectors $\mathbf{E}$ and $\mathbf{H}$ of the field lie in a plane perpendicular to the direction of wave propagation, i.e. to the wave velocity vector $\mathbf{v}$ at the point being considered in the field. This can he most readily demonstrated by the example of a plane wave, propagating along the positive direction of axis OX (30.2.4):

$$\mathbf{E} = f\left(t - \frac{x}{v}\right) \quad \text{and} \quad \mathbf{H} = \varphi\left(t - \frac{x}{v}\right).$$

Vector $\mathbf{E}$ and $\mathbf{H}$ and their projections on the coordinate axes are independent of y and z:

$$\frac{\partial E_x}{\partial y}=\frac{\partial E_x}{\partial z}=\frac{\partial E_y}{\partial y}=\frac{\partial E_y}{\partial z}=\frac{\partial E_z}{\partial y}=\frac{\partial E_z}{\partial z}=0 \quad \text{and}$$
$$\frac{\partial H_x}{\partial y}=\frac{\partial H_x}{\partial z}=\frac{\partial H_y}{\partial y}=\frac{\partial H_y}{\partial z}=\frac{\partial H_z}{\partial y}=\frac{\partial H_z}{\partial z}$$

It follows from Maxwell's equations (31.1.2) that for the field of a plane wave,

$$\frac{\partial E_x}{\partial x}=\frac{\partial E_x}{\partial t}=0 \quad \text{and} \quad \frac{\partial H_x}{\partial x}=\frac{\partial H_x}{\partial t}=0,$$

i.e. E_x and H_x are independent of both coordinates and time.

Hence, for a *variable* field of a plane wave $E_x=H_x=0$, and the vectors $\mathbf{E}$ and $\mathbf{H}$ are perpendicular to the direction of wave propagation:

$$\mathbf{E}=E_y\hat{\mathbf{j}}+E_z\hat{\mathbf{k}} \quad \text{and} \quad \mathbf{H}=H_y\hat{\mathbf{j}}+H_z\hat{\mathbf{k}}$$

where $\hat{\mathbf{j}}$ and $\hat{\mathbf{k}}$ are unit vectors of the coordinate axes.

31.1.5

Vectors $\mathbf{E}$ and $\mathbf{H}$ of the field of an electromagnetic wave are mutually perpendicular, so that $\mathbf{v}$, $\mathbf{E}$ and $\mathbf{H}$ form a right-hand set of three vectors (Figure **??**).

As a matter of fact, for the field of a plane wave (31.1.4),

$$E_y=f_1\left(t-\frac{x}{v}\right) \quad \text{and} \quad E_z=f_2\left(f-\frac{x}{v}\right),$$
$$H_y=\varphi_1\left(t-\frac{x}{v}\right) \quad \text{and} \quad E_z=f_2\left(f-\frac{x}{v}\right),$$

It follows from Maxwell's equations (31.1.2) that

$$\sqrt{\varepsilon_r\varepsilon_0}\frac{\partial E_y}{\partial \xi} = \sqrt{\mu_r\mu_0}\frac{\partial H_z}{\partial \xi} \quad \text{and}$$
$$\sqrt{\varepsilon_r\varepsilon_0}\frac{\partial E_z}{\partial \xi} = -\sqrt{\mu_r\mu_0}\frac{\partial H_y}{\partial \xi} \quad \text{and}$$

where $\xi = t - x/v$. Therefore, for a variable field of a plane wave

$$H_y = -\sqrt{\frac{\varepsilon_r\varepsilon_0}{\mu_r\mu_0}}E_z, \quad H_z = -\sqrt{\frac{\varepsilon_r\varepsilon_0}{\mu_r\mu_0}}E_y, \quad \text{and} \quad (\mathbf{EH}) = 0.$$

The mutually perpendicular vectors $\mathbf{E}$ and $\mathbf{H}$ oscillate in phase: they become zero simultaneously and reach their maximum values simultaneously. The relation between their magnitudes is

$$\sqrt{\varepsilon_r\varepsilon_0}E = \sqrt{\mu_r\mu_0}H,$$

which is valid for any travelling electromagnetic wave (30.2.1) regardless of the shape of its wavefronts (30.2.3).

31.1.6

A *monochromatic wave* is an electromagnetic wave of a single definite frequence ν, i.e. an electromagnetic sine wave. At each point of the electromagnetic field of a monochromatic wave, the projections of vectors $\mathbf{E}$ and $\mathbf{H}$ on the coordinate axes of an inertial frame of reference have harmonic oscillations (28.1.3) of the same frequency, equal to the wave frequency ν.

For example, in the case of a *plane monochromatic wave*, propagating along the positive direction of axis OX,

$$E_y = A_1 \sin(\omega t - kx), \qquad H_y = -\sqrt{\frac{\varepsilon_r \varepsilon_0}{\mu_r \mu_0}} E_z,$$

$$E_z = A_1 \sin(\omega t - kx + \varphi), \qquad H_z = -\sqrt{\frac{\varepsilon_r \varepsilon_0}{\mu_r \mu_0}} E_y,$$

where $\omega = 2\pi\nu$ is the angular frequency of the wave, k is the wavenumber (30.2.6), A_1 and A_2 are the amplitudes of E_y and E_z, and φ is the phase difference between the oscillations of E_z and E_y.

31.1.7

For an arbitrary value of φ (31.1.6), a plane monochromatic wave is *elliptically polarized*, i.e. at each point of the wave's field, vectors $\mathbf{E}$ and $\mathbf{H}$, while remaining mutually perpendicular, vary with time so that their heads describe ellipses lying in a plane perpendicular to the direction of wave propagation:

$$\frac{E_y^2}{A_1^2} + \frac{E_z^2}{A_2^2} - \frac{2E_y E_z}{A_1 A_2} \cos\varphi = \sin^2\varphi, \quad \text{and}$$

$$\frac{H_y^2}{A_2^2} + \frac{H_z^2}{A_1^2} - \frac{2H_y H_z}{A_1 A_2} \cos\varphi = \frac{\varepsilon_r \varepsilon_0}{\mu_r \mu_0} \sin^2\varphi.$$

In particular, when $A_1 = A_2$ and $\varphi = \pm(2m+1)\pi/2$, where $m = 0, 1, 2, \ldots$ the ellipses become circles:

$$E_y^2 + E_z^2 = A_1^2 \quad \text{and} \quad H_y^2 + H_z^2 = \frac{\varepsilon_r \varepsilon_0}{\mu_r \mu_0} A_1^2.$$

Such a wave is said to be *circularly polarized*.

When $\varphi = \pm m\pi$, where $m = 0, 1, 2, \ldots$, the ellipses degenerate into straight lines:

$$\frac{E_y}{A_1} + \frac{E_z}{A_2} = 0 \quad \text{and} \quad \frac{H_y}{A_2} + \frac{H_z}{A_2} = 0.$$

Such a wave is said to be *linearly*, or *plane, polarized*. Shown in Figure 31.1 are the values of $a\mathbf{E}$ and $\mathbf{H}$ of the field of a plane, linearly polarized, monochromatic wave at various points along the ray (OX axis) at the same instant of time. Axes OY and OZ are in the directions of oscillation of vectors $\mathbf{E}$ and $\mathbf{H}$, respectively, so that $E_z = H_y = 0$.

According to accepted terminology, the plane passing through the electric vector $\mathbf{E}$ and the ray is called the *plane of polarization* of the linearly polarized wave. Previously, this plane was called the plane of *wave oscillation*, and the plane of polarization was called the one passing through the magnetic vector $\mathbf{H}$ and the ray (this obsolete terminology may still be found in the literature).

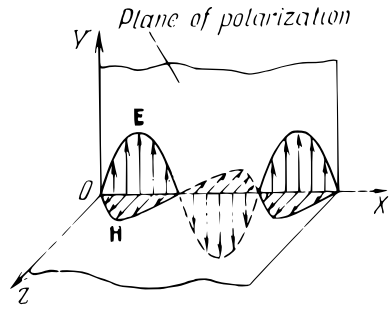


Figure 31.1.: Velocity vector of energy transfer by the wave.

31.1.8

An arbitrary plane monochromatic wave can be represented as a combination of two plane monochromatic waves of the same frequency as the first wave and simultaneously propagating in the same direction as the first wave, but linearly polarized in mutually perpendicular planes. For example, a plane monochromatic wave, propagating along the OX axis (31.1.6) can be dealt with as the result of superposition of a y-wave ($\mathbf{E}_1 = \mathbf{E}_y$) and a z-wave ($\mathbf{E}_2 = \mathbf{E}_z$).

31.2 Energy of Electromagnetic Waves

31.2.1

The *volume energy density of an electromagnetic field* in an isotropic medium is

$$E^d = \frac{\varepsilon_r \varepsilon_0}{2} E^2 + \frac{\mu_r \mu_0}{2} H^2,$$

where ε_r and μ_r are the relative permittivity (dielectric constant) and relative permeability of the medium. From the relations between the magnitudes of vectors $\mathbf{E}$ and $\mathbf{H}$ of the field set up by an electromagnetic wave (31.1.5) it follows that the volume energy density of electromagnetic waves is equal to

$$\begin{aligned} E^d &= \varepsilon_r \varepsilon_0 E^2 = \mu_r \mu_0 H^2 = \sqrt{\varepsilon_r \varepsilon_0 \mu_r \mu_0}\, EH \\ &= \frac{\varepsilon_r \mu_r}{c} EH, \end{aligned}$$

where c is the velocity of electromagnetic waves in free spaee (31.1.3).

31.2.2

In the case of a plane, linearly polarized, monochromatic wave, propagating along the positive direction of axis OX, the field strength $E = A \sin(\omega t - kx)$. Consequently, the volume energy density of this wave is

$$E^d = \varepsilon_r \varepsilon_0 A^2 \sin^2(\omega t - kx).$$

The value of E^d at each point of this field varies periodically with the frequency ω/π in a range from 0 to $E^d_{max} = \varepsilon_r\varepsilon_0 A^2$.

The average value of E^d over one period is proportional to the square of the amplitude of the field strength:

$$\left\langle E^d \right\rangle = \frac{\omega}{\pi}\int_0 E^d \,\mathrm{d}t = \frac{1}{2}\varepsilon_r\varepsilon_0 A^2.$$

If the plane monochromatic wave has an arbitrary (elliptical) polarization (31.1.7), then, according to (31.1.8),

$$E^d = \varepsilon_r\varepsilon_0[A_1^2\sin^2(\omega t - kx) + A_2^2\sin^2(\omega t - kx + \varphi)] \quad \text{and}$$
$$\left\langle E^d \right\rangle = \frac{1}{2}\varepsilon_r\varepsilon_0(A_1^2 + A_2^2).$$

31.2.3

The energy flux density vector (30.3.5) of an electromagnetic wave is called the *Umov-Poynting* vector $\mathbf{P}$ (more frequently, it is called the *Poynting vector*). The velocity of energy transfer by a monochromatic wave is equal to the phase velocity $v = c\sqrt{\varepsilon_r\mu_r}$ of this wave (30.3.5). Therefore, the Umov-Poynting vector for such a wave is

$$\mathbf{P} = E^d\mathbf{v} = [\mathbf{E}\cdot\mathbf{H}]$$

In the case of a plane, lintirly polarized, monochromatic wave (31.2.2) the Umov-Poynting vector is in the direction of wave propagation and is numerically equal to

$$P = \sqrt{\frac{\varepsilon_r\varepsilon_0}{\mu_r\mu_0}}A^2\sin^2(\omega t = kx).$$

When a plane monochromatic wave is elliptically polarized (31.1.7),

$$P = \sqrt{\frac{\varepsilon_r \varepsilon_0}{\mu_r \mu_0}} [A_1^2 \sin^2(\omega t - kx) + A_2^2 \sin^2(\omega t - kx + \varphi)].$$

31.2.4

The *intensity I of an electromagnetic wave* is a physical quantity numerically equal to the energy transferred by the wave in unit time through unit area of a surface located perpendicular to the direction of wave propagation. The intensity of an electromagnetic wave is equal to the absolute value of the average Umov-Poynting vector during a period of its complete oscillation:

$$I = |\langle P \rangle|.$$

The intensity of a travelling monochromatic wave is

$$I = \left| \left\langle \mathbf{E^d} \right\rangle \right| v,$$

where v is the phase velocity of the wave, and $\left\langle E^d \right\rangle$ is the average value of the volume energy density of the field of the wave. The intensity of a plane, linearly polarized, travelling monochromatic wave (31.2.2) is proportional to the square of the amplitude A of oscillation of the wave's field strength vector $\mathbf{E}$. Thus

$$I = \frac{1}{2} \sqrt{\frac{\varepsilon_r \varepsilon_0}{\mu_r \mu_0}} A^2.$$

When a plane monochromatic wave is elliptically polarized (31.1.7), its intensity is equal to the sum of the intensities

of the y- and z-waves that form the wave being considered (31.1.8):

$$I = I_y + I_z = \frac{1}{2}\sqrt{\frac{\varepsilon_r \varepsilon_0}{\mu_r \mu_0}}\,(A_1^2 + A_2^2).$$

Note. The *intensity of light*, i.e. the electromagnetic waves dealt with in optics, is commonly understood to be the square of the amplitude of oscillation of the light wave's field strength vector $\mathbf{E}$.

31.2.5

The intensity I of a spherical, linearly polarized, monochromatic wave is related to the amplitude A of oscillation of vector $\mathbf{E}$ in the same way as for a plane wave (31.2.4). But the amplitude and intensity of a spherical wave decrease as the distance r increases from the wave centre (30.3.6):

$$A = \frac{a_0}{r} \quad \text{and} \quad I = \frac{i_0}{r^2}.$$

31.2.6

Electromagnetic waves exert pressure on the obstacles in their path that absorb and reflect the waves. The *pressure of electromagnetic waves* is explained by the fact that due to the effect of the waves' electric field charged particles of matter are put into ordered motion and are subject to the action of Lorentz forces exerted by the magnetic field (24.1.1).

According to Maxwell's theory the pressure of electromagnetic waves is equal to

$$p = \frac{I}{v}(1 + R)\cos^2 i = \left\langle E^d \right\rangle (1 + R)\cos^2 i,$$

where I is the intensity of the wave incident on the obstacle, v is its velocity, $\left\langle E^d \right\rangle$ is the average value of the volume energy density of the wave, i is the angle of incidence (31.5.2), and R is the reflection coefficient (31.5.6).

31.3 Electromagnetic Radiation

31.3.1

The process of exciting electromagnetic waves and emitting them into surrounding space by some system is called the *radiation* of these *waves*. The system itself is called the *radiating system*. The field set up by these electromagnetic waves is called the *radiation field*. According to the concepts of classical electrodynamics, electromagnetic waves are excited by electric charges travelling with acceleration (in particular, an electric circuit in which the current varies). Vavilov-Cherenkov radiation can also occur in matter (34.6.1).

The simplest radiating system is the electric dipole (15.2.3) whose dipole moment $\mathbf{p}_e$ varies with time. Such an "oscillating" dipole is called an *oscillator*, or *elementary vibrator*. Oscillators are extensively used in physics for simulating and calculating the radiation fields of real systems. If the radiating system is electrically neutral and its size is small compared to the length λ of the waves

it radiates, then in the wave zone of the system, i.e. at points whose distance from the system equals $r \gg \lambda$, the radiation field is almost the same as that of an oscillator having the same electric dipole moment as the whole radiating system.

31.3.2

A *linear harmonic oscillator* is an electric dipole whose moment $\mathbf{p}_e$ varies according to the harmonic law:


$$\mathbf{p}_e = \mathbf{p}_0 \sin \omega t \text{ where } \mathbf{p}_0 = \text{const}.$$

At point M of the wave zone of a linear harmonic oscillator, located in vacuum, the vectors $\mathbf{E}$ and $\mathbf{H}$ of the radiation field at the instant of time t are equal to:

$$\mathbf{E}(t) = -\frac{\mu_0 \omega^2}{4\pi r^3}[[\mathbf{p}_0 \times \mathbf{r}] \times \mathbf{r}] \sin(\omega t - kr),$$
$$\mathbf{H}(t) = -\frac{\omega^2}{4\pi c r^3}[\mathbf{p}_0] \times \mathbf{r}] \sin(\omega t - kr),$$

where $\mathbf{r}$ is the radius vector from point O, where the dipole is located, to point M (Figure 31.2). Vectors $\mathbf{E}$ and $\mathbf{H}$ are mutually perpendicular and lie in a plane perpendicular to the radius vector $\mathbf{r}$. Hence, $\mathbf{E}$, $\mathbf{H}$ and $\mathbf{r}$ form a right-hand set of three vectors.

Vector $\mathbf{E}$ is tangent to the meridian, and vector $\mathbf{H}$ is tangent to the latitudinal circle passing through point M of a sphere of radius r having its centre at point O.



31.3.3

The Umov-Poynting vector at point M of the wave zone of a linear harmonic oscillator is

$$\mathbf{P} = \frac{\mu_0 \omega^4 p_0^2 \sin^2\theta}{16\pi^2 c r^3} \mathbf{r} \sin^2(\omega t - kr),$$

where θ is the angle between vectors $\mathbf{p}_0$ and $\mathbf{r}$.

The intensity of the electromagnetic wave at point M is

$$I = \frac{\mu_0 \omega^4 p_0^2 \sin^2\theta}{32\pi^{2cr^2}}$$

The dependence of I on θ for a fixed value of r, shown in polar coordinates (Figure **??**), is called the *polar directional diagram of oscillator (dipole) radiation*. The dipole radiates most intensively in directions that make an angle $\theta = \pi/2$ with its axis, i.e. in a plane passing through the middle of the dipole and perpendicular to its axis. Along its axis ($\theta = 0$ and $\theta = \pi$) the dipole does not radiate at all.

The average power of radiation of a linear harmonic oscillator is

$$\langle P^r \rangle = 2\pi r^2 \int_0^\pi I \sin\theta \, \mathrm{d}\theta = \frac{\mu_0 \omega^4 p_0^2}{12\pi c}.$$

31.3.4

The instantaneous power of radiation of charge q, travelling at the acceleration $\mathbf{a}$, is

$$P^r_{\text{ins}} = \frac{\mu_0}{6\pi c} q^2 a^2.$$

If the charge executes harmonic oscillation of the amplitude l_0 and angular frequency ω, the average power of its radiation is

$$\langle P^r \rangle = \frac{\mu_0 q^2 \omega^4 l_0^2}{12\pi c}.$$

According to classical theory the radiation of light by atoms is due to the vibration of electrons in them. Owing to the consumption of energy to produce radiation this vibration is gradually damped, i.e. its amplitude varies according to the law (29.1.3):

$$l_0 = l_{00} \exp(-\beta t)$$

where l_{00} is the initial amplitude and β is the damping factor. The energy of vibration of an electron (28.2.2) is

$$E = m_e \omega^2 l_0^2/2,$$

where m_e is the mass of the electron. Since $-\mathrm{d}E = \langle P^r \rangle \, \mathrm{d}t = 2\beta E \, \mathrm{d}t$ and $q = -e$, the relaxation time (29.1.3) of this vibration, called the average *de-excitation time of the atom*, is

$$\tau = \frac{1}{\beta} = \frac{12\pi c m_e}{\mu_0 e^2 \omega^2}.$$

For visible light $\omega \approx 4 \times 10^{15}/\mathrm{s}$ and $\tau \approx 2 \times 10^{-8}/\mathrm{s}$

31.4 Electromagnetic Spectrum

31.4.1

Depending upon the frequency nu (or wavelength $\lambda = c/\nu$ in vacuum, where c is the velocity of electromagnetic waves

in free space), as well as on the way in which they are radiated and recorded (or detected), distinction is made between several kinds of electromagnetic waves: radio waves, optical radiation, X-rays and gamma rays.

Radio waves are electromagnetic waves of a length λ in free space that exceeds 5×10^{-5} m (correspondingly, $\nu < 6 \times 10^{12}$ Hz).

In connection with special features of their propagation and generation, the full range of radio waves is commonly divided into nine bands (Table 31.1).

Table 31.1.: Full range of radio waves divided into nine bands.

Band Name	**Wavelength** (m)	**Frequency** (Hz)
Very-long (myriametric) waves	Over 10^4	Less than 3×10^4
Long (kilometric) waves	10^4 to 10^3	3×10^4 to 3×10^5
Medium (hectometric) waves	10^3 to 10^2	3×10^5 to 3×10^6
Short (decametric) waves	10^2 to 10	3×10^6 to 3×10^7
Metric waves	10 to 1	3×10^7 to 3×10^8
Decimetric waves	1 to 10^{-1}	3×10^8 to 3×10^9
Centimetric waves	10^{-1} to 10^{-2}	3×10^9 to 3×10^{10}
Millimetric waves	10^{-2} to 10^{-3}	3×10^{10} to 3×10^{11}
Submillimetric waves	10^{-3} to 10^{-5}	3×10^{11} to 6×10^{12}

31.4.2

Radio frequencies are divided into twelve bands according to the international regulations for radio communications. These bands and their corresponding wavelength in free space are listed in Table 31.2.

Band No.	Frequency Band	Designation	Wavelength Band	Wave Designation
Band 1	3 Hz to 30 Hz	Extremely Low Frequency (ELF)	100 Mm to 10 Mm	Dekamegametric waves
Band 2	30 Hz to 300 Hz	Super Low Frequency (SLF)	10 Mm to 1 Mm	Megametric waves
Band 3	0.3 kHz to 3 kHz	Voice Frequency (VF)	1000 km to 100 km	Hectokilometric waves
Band 4	3 kHz to 30 kHz	Very Low Frequency (VLF)	100 km to 10 km	Myriametric waves
Band 5	30 kHz to 300 kHz	Low Frequency (LF)	10 km to 1 km	Kilometric waves
Band 6	0.3 MHz to 3 MHz	Medium Frequency (MF)	1 km to 0.1 km	Hectometric waves
Band 7	3 MHz to 30 MHz	High Frequency (HF)	100 m to 10 m	Dekametric waves
Band 8	30 MHz to 300 MHz	Very High Frequency (VHF)	10 m to 1 m	Metric Frequency
Band 9	0.3 GHz to 3 GHz	Ultra High Frequency (UHF)	1 m to 0.1 m	Decimetric waves
Band 10	3 GHz to 30 GHz	Super High Frequency (SHF)	10 cm to 1 cm	Centimetric waves
Band 11	30 GHz to 300 GHz	Extremely High Frequency (EHF)	10 mm to 1 mm	Millimetric waves
Band 12	0.3 THz to 3 THz	Hyper High Frequency (HHF)	1 mm to 0.1 mm	Decimillimetric waves

Table 31.2.: Radio-frequency band designations with corresponding frequency and wavelength ranges. Note: In the terminology accepted in the U.S.A. the extremely low frequency (ELF) band includes frequencies from 3 Hz 3 kHz, i.e. the first three bands of the list given here.

31.4.3

Optical radiation, or *light*, refers to electromagnetic waves (electromagnetic radiation) of a wavelength in vacuum ranging from 10 nm to 1 mm (by convention). Optical radiation includes infrared, visible and ultraviolet radiation.[23]

Infrared (IR) radiation is the electromagnetic radiation emitted by heated bodies. Its wavelength in vacuum is within the range from 1 mm to 770 nm ($1\,\text{nm} = 10^{-9}\,\text{m}$).

Visible radiation, or *visible light*, is electromagnetic radiation of a wavelength in vacuum from 770 nm to 380 nm. It is capable of directly producing a visible sensation in the human eye.

Ultraviolet (UV) radiation is electromagnetic radiation of a wavelength in vacuum from 300 nm to 10 nm.

[23] According to the recommendation of the Committee for Scientific and Engineering Terminology of the USSR Academy of Sciences [Physical Optics (Terminology), Collection of Recommended Terms, Issue 74, Nauka Publishers, 1968, Moscow] optical radiation also includes X-rays, the range of wavelengths of optical radiation being established from 0.1 Å (10^{-11} nm) to 1 cm.

31.4.4

X-radiation, or *X-rays* (also called *Roentgen rays*), is the electromagnetic radiation produced in the interaction of charged particles and photons (37.1.4) with atoms of matter. Its wavelength in vacuum ranges within the wide conditional limits from 10 nm or 100 nm to 10^{-2} pm or 1 pm ($1\,\text{pm} = 10^{-12}\,\text{m}$).

Gamma radiation, or *gamma rays*, is electromagnetic radiation of a wavelength in vacuum less than 10^{-1} nm. It is emitted by excited atomic nuclei upon radioactive transformations and nuclear reactions. It is also formed in particle decay, in particle-antiparticle, annihilation (**??**) and other processes.

31.5 Reflection and Refraction of Electromagnetic Waves at the Interface Between Two Dielectric Media

31.5.1

The *refractive index (absolute refractive index) of a medium* is the quantity n, which is equal to the ratio of the velocity c of the electromagnetic waves in vacuum to their phase velocity v in the medium: $n = c/v$. From (31.1.3) it follows that $n = \sqrt{\varepsilon_r \mu_r}$, where ε_r and μ_r are the relative dielectric permittivity and relative magnetic permeability of the medium.

For media having no ferromagnetic properties, $\mu_r \approx 1$ and $n \approx \varepsilon_r$.

The *relative refractive index of two* media (of the second medium with respect to the first) is the quantity n_{21}, equal to the ratio of the refractive indices of these media: $n_{21} = n_2/n_1$. For non-ferromagnetic media $n_{21} = \sqrt{\varepsilon_{r2}/\varepsilon_{r1}}$.

31.5.2

When an electromagnetic wave falls on the interface between two media, it is partly reflected from the interface and partly refracted as it enters the second medium.

In Figure 31.3 the line AB is the plane interface between the media. Rays *1*, *1′* and *2* represent the directions of propagation of the incident, reflected and refracted plane waves. They are called the *incident*, *reflected* and *refracted rays*, respectively, and the angles between them

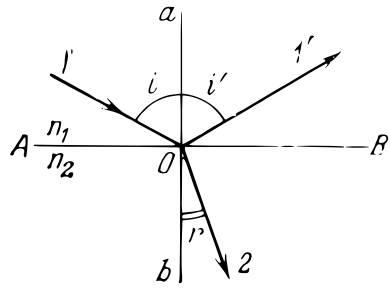


Figure 31.3.: Reflection and refraction of a wave at the interface between two media.

and the angles they make with the perpendicular ab to the interface at the point of incidence O are: i is the *angle of incidence*, i' is the *angle of reflection* and r is the *refractive angle*.

The *plane of incidence* is the plane passing through the incident ray and perpendicular to the interface at the point of incidence.

31.5.3

The laws of reflection and refraction of electromagnetic waves at the interface between two dielectric media can be obtained on the basis of the boundary conditions for an electromagnetic field (27.4.4). In the first medium the field of the reflected wave ($\mathbf{E}^{\text{rfl}}$ and $\mathbf{H}^{\text{rfl}}$) is superposed on the field of the incident wave ($\mathbf{E}^0$ and $\mathbf{H}^0$). In the second medium there is only the field ($\mathbf{E}^{\text{rfr}}$ and $\mathbf{H}^{\text{rfr}}$) of the refracted wave (propagating in this medium). Hence, the boundary conditions are of the form (assuming that $\mu_{r2} = \mu_{r1} = 1$):

$$E_\tau^0 + E_\tau^{\text{rfl}} = E_\tau^{\text{rfr}}, \qquad \varepsilon_{r1}(E_n^0 + E_n^{\text{rfl}}) = \varepsilon_{r2} E_n^{\text{rfr}},$$
$$H_\tau^0 + H_\tau^{\text{rfl}} = H_\tau^{\text{rfr}}, \qquad (H_n^0 + H_n^{\text{rfl}}) = H_n^{\text{rfr}}.$$

Here E_τ, H_τ, E_n and H_n are the projections of vectors $\mathbf{E}$ and $\mathbf{H}$ on the tangential plane and the normal to the interface between the media. It follows from these relations that in the incidence of a plane monochromatic wave on a smooth plane interface between media, the following laws are complied with (regardless of the kind of polarization of this wave):

(a) The reflected and refracted waves are also monochromatic waves of the same frequency as the incident one.

(b) The *law of reflection* states that the reflected ray lies in the plane of incidence, and the angle of reflection is equal to the angle of incidence ($i' = i$).

(c) The *law of refraction* states that the refracted ray lies in the plane of incidence and that the refractive angle is related to the angle of incidence by *Snell's law*:

$$\frac{\sin i}{\sin r} = \frac{n_2}{n_1} = n_{21}.$$

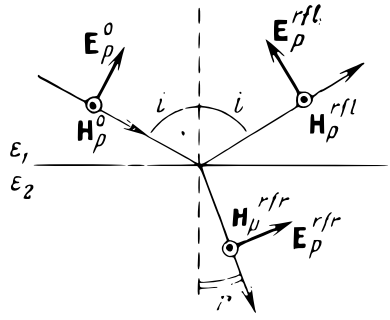


Figure 31.4.: *P*-waves reflected and refracted from interface of the media.

31.5.4

Making use of the boundary conditions (31.5.3) the relations can be found between the phases, amplitudes and intensities of incident, reflected and refracted monochromatic waves.

It is sufficient for this purpose, according to (31.1.8), to know the above-indicated relations for linearly polarized waves of two types: *p-waves*, whose vector $\mathbf{E} = \mathbf{E}_p$ lies in the plane of incidence and whose vector $\mathbf{H} = \mathbf{H}_p$ is perpendicular to this plane (Figure 31.4), and *s-waves*, whose vector $\mathbf{E} = \mathbf{E}_s$ is perpendicular to the plane of incidence and whose vector $\mathbf{H} = \mathbf{H}_s$ lies in this plane (Figure 31.5).

The relations between the amplitudes of oscillation of vector $\mathbf{E}$ in the incident (A^0), reflected (A^{rfl}) and refracted

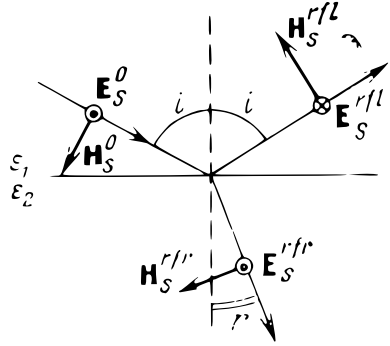


Figure 31.5.: *S*-waves reflected and refracted from interface of the media.

(A^{rfr}) waves in the cases of p- and s-waves are expressed by the *Fresnel formulas*:

$$A_p^{\text{rfl}} = -A_p^0 \frac{\tan(i-r)}{\tan(i+r)}, \qquad A_p^{\text{rfr}} = A_p^0 \frac{2\cos i \sin r}{\sin(i+r)\cos(i-r)},$$
$$A_s^{\text{rfl}} = -A_s^0 \frac{\sin(i-r)}{\sin(i+r)}, \qquad A_s^{\text{rfr}} = A_s^0 \frac{2\cos i \sin r}{\sin(i+r)}.$$

In particular, with normal incidence of waves on the interface between media ($i = r = 0$),

$$A_p^{\text{rfl}} = -A_p^0 \frac{n_{21}-1}{n_{21}+1}, \qquad A_p^{\text{rfr}} = A_p^0 \frac{2}{n_{21}+1},$$
$$A_s^{\text{rfl}} = -A_s^0 \frac{n_{21}-1}{n_{21}+1}, \qquad A_s^{\text{rfr}} = A_s^0 \frac{2}{n_{21}+1}.$$

In the Fresnel formulas A_p^0 and A_s^0 are positive quantities, whereas A_p^{rfr} and A_s^{rfr} are also positive for any possible angles of incidence and refractive angles. This indicates that the refracted and incident waves are in phase. Quantities A_p^{rfl} and A_s^{rfl} can be either negative or positive. In the first case, illustrated in Figure 31.4 and Figure 31.5, the phase of oscillation of vector $\mathbf{E}$ is changed by π upon reflection (the phase of oscillation of vector $\mathbf{H}$ does not change). In the second case, the phase of oscillation of vector $\mathbf{E}$ remains unchanged (and, accordingly, the phase of oscillation of vector $\mathbf{H}$ changes by π).

31.5.5

The values of the phase difference in the oscillation of vector $\mathbf{E}$ upon the reflection of $p-$ and $s-$type electromagnetic waves are listed in Table **??**, in accordance with

the conditions (i.e. depending on the angle of incidence i and the relative refractive index n_{21} of the media).

The angle of incidence i_{Br}. at which the reflected and refracted rays are perpendicular to each other is called *Brewster's angle*.

When $i = i_{\text{Br}}$, then $i + r = \pi/2$ and it follows from the law of wave refraction (31.5.3) that tan iBr = w21. It is evident from the Fresnel formulas (31.5.4) that at $i = i_{\text{Br}}$ the amplitude $A_p^{\text{rfl}} = 0$, i.e. the p-wave is not reflected from the interface between the media, but completely passes from medium *1* into medium *2*.

Condition	$i + r < \pi/2$ ($i < i_{\text{Br}}$)		$i + r > \pi/2$ ($i > i_{\text{Br}}$)	
Wave Type	$n_{21} > 1$ ($i > r$)	$n_{21} < 1$ ($i < r$)	$n_{21} > 1$ ($i > r$)	$n_{21} < 1$ ($i < r$)
p-wave	π	0	0	π
s-wave	π	0	π	0

Table 31.3.: The values of the phase difference in the oscillation of vector **E** upon the reflection of $p-$ and $s-$type electromagnetic waves.

31.5.6

The *coefficient of reflection* (or *reflection coefficient*) R of an electromagnetic wave from the interface of two media is the ratio of the intensities (31.2.4) of the reflected and

incident waves:

$$R = \frac{I^{\text{rfl}}}{I_0} = \left(\frac{A^{\text{rfl}}}{A^0}\right)^2.$$

The reflection coefficients of the p- and s-waves are equal to

$$R_p = \frac{\tan^2(i-r)}{\tan^2(i+r)}, \quad R_s = \frac{\sin^2(i-r)}{\sin^2(i+r)}.$$

In particular, with normal incidence of waves on the interface between two media ($i = r = 0$)

$$R_p = R_s = \left(\frac{n_{21}-1}{n_{21}+1}\right)^2.$$

When the incident wave is arbitrarily polarized, the reflection coefficient is

$$R = \frac{I_p^{\text{rfl}} + I_s^{\text{rfl}}}{I_p^0 + I_s^0} = \frac{R_p I_p^0 + R_s I_s^0}{I_p^0 + I_s^0}$$

where I_p^0 and I_s^0 are the intensities of the p- and s-components of the incident wave whose intensity is $I^0 = I_p^0 + I_s^0$.

31.5.7

The *transmission factor*, or *transmittance*, T is the ratio of the intensity of the transmitted (refracted) wave to that of the incident wave. Thus

$$T = \frac{I^{\text{rfr}}}{I_0} = \sqrt{\frac{\varepsilon_{r2}}{\varepsilon_{r1}}}\left(\frac{A^{\text{rfr}}}{A_0}\right)^2 = n_{21}\left(\frac{A^{\text{rfr}}}{A_0}\right)^2.$$

The transmission factors for the p- and s-waves are

$$T_p = \frac{4\cos^2 i \sin i \sin r}{\sin^2(i+r)\cos^2(i-r)} \quad T_s = \frac{4\cos^2 i \sin i \sin r}{\sin^2(i+r)}.$$

In particular, upon normal incidence of waves on the interface between media ($i = r = 0$),

$$T_p = T_s = \frac{4n_{21}}{(n_{21}+1)^2}.$$

31.5.8

When $n_{21} = (n_2/n_1) < 1$ the refractive anprle is greater than the angle of incidence:

$$\sin r = \frac{\sin i}{n_{21}} \quad \text{and} \quad r > i.$$

The angle of incidence at which the refractive angle becomes equal to $\pi/2$ is called the *critical angle* i_{cr}. Angle $i_{cr} = \arcsin n_{21}$. When $i \geqslant i_{cr}$, the intensities of the reflected and incident waves are the same, i.e. the wave is completely reflected from the interface between the media ($R = 1$). This phenomenon is called *total internal reflection*.

31.6 Doppler Effect

31.6.1

Upon motion of the source and detector of electromagnetic waves toward each other the Doppler effect is observed

(30.6.1). The laws governing this phenomenon for electromagnetic waves can he established on the basis of the special theory of relativity.

Assume the detector D to be stationary with respect to an inertial frame of reference K, and that the source S travels with respect to K along the positive direction of axis OX at the velocity $\mathbf{V}$ (Figure 31.6). Source S is stationary in frame of reference K' and is located at its origin of coordinates. The axes of coordinate systems K and K' are parallel pairwise (axis $O'X'$ coincides with axis OX). Illustrated in Figure 31.6 is the position of source S at the instant of time $t = t' = 0$.

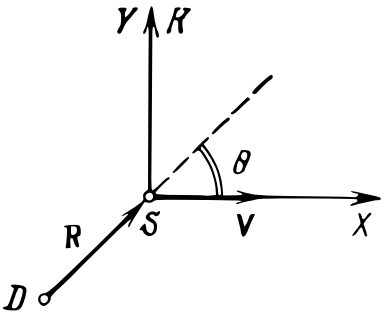


Figure 31.6.: Source S moving with velocity $\mathbf{V}$ in frame K.

According to Einstein's relativity principle (5.1.2), the equation of a spherical monochromatic wave (30.2.8), sent by the source at this instant of time in the direction of the detector D, is of identical form in frames of reference K and K':

$$\tilde{s} = \frac{a_0}{r} \exp i(\omega t + kx\cos\theta + ky\sin\theta + \delta) \quad \text{and} \qquad \text{(a)}$$

$$\tilde{s'} = \frac{a_0'}{r} \exp i(\omega' t' + k'x'\cos\theta' + k'y'\sin\theta' + \delta'). \qquad \text{(b)}$$

Here $\omega' = \omega_0$ and ω are the angular frequencies of vibration of the source and detector, $k = \omega/c$ and $k' = \omega'/c$ are the wavenumbers (it is assumed that the wave propagates in vacuum), and θ and θ' are the angles between the directions of observation and of velocity $\mathbf{V}$ (OX axis), measured in the frames of reference of the detector (K) and for the source (K').

Expression (b) should be obtained from expression (a) by replacing the variables x, y and t by x', y' and t' in

accordance with Lorentz's transformations (5.3.2):

$$\begin{aligned}&\omega' t' + k' x' \cos\theta' + k' y' \sin\theta' + \delta' \\ &\quad \equiv \omega \left(\frac{t' + V x'/c^2}{\sqrt{1-(V/c)^2}} \right) + k \left(\frac{x' + V t'}{\sqrt{1-(V/c)^2}} \right) \cos\theta + k y' \sin\theta + \delta.\end{aligned}$$

Consequently,

$$\begin{aligned}\omega' &= \frac{\omega}{\sqrt{1-(V/c)^2}} \left(1 + \frac{V}{c} \cos\theta \right), \\ k' \cos\theta' &= \frac{k}{\sqrt{1-(V/c)^2}} \left(\cos\theta + \frac{V}{c} \right), \\ k' \sin\theta' &= k \sin\theta \quad \text{and} \quad \delta' = \delta.\end{aligned}$$

Hence, the relations describing the Doppler effect for electromagnetic waves in vacuum are of the form:

$$\begin{aligned}\omega &= \frac{\omega_0 \sqrt{1-(V/c)^2}}{1 + \frac{V}{c} \cos\theta} \quad \text{and} \\ \nu &= \frac{\nu_0 \sqrt{1-(V/c)^2}}{1 + \frac{V}{c} \cos\theta}.\end{aligned}$$

31.6.2

At low velocities of the wave source with respect to the detector ($V \ll c$), the relativistic formula for the Doppler effect (31.6.1) coincides with the classical formula (30.6.3):

$$\nu \approx \nu_0 \left(1 - \frac{V}{c} \cos\theta \right).$$

When the source travels with respect to the detector along the straight line that joins them (θ= 0 or π), the *longitudinal Doppler effect* is observed. If the source and detector approach each other ($\theta = \pi$):

$$\nu = \nu_0 \sqrt{\frac{1 + V/c}{1 - V/c}} > \nu_0,$$

whereas if they travel away from each other ($\theta = 0$),

$$\nu = \nu_0 \sqrt{\frac{1 + V/c}{1 - V/c}} < \nu_0.$$

31.6.3

Following from relativistic theory of the Doppler effect (31.6.1) is the existence of the *transverse Doppler effect*. It is observed when $0 = \pi/2$ and $\theta = 3\pi/2$, i.e. when the source travels perpendicular to the line of observation. Thus

$$\nu = \nu_0 \sqrt{1 - (V/c)^2}.$$

The transverse Doppler effect is substantially weaker than the longitudinal effect (due to the smallness of V/c). This effect is due to the different passage of time in the frames of reference in which the detector and source of waves are fixed. Therefore, the experimental detection of the transverse Doppler effect was one of the most vital experimental proofs of the special theory of relativity.

31.6.4

The Doppler effect, associated with the thermal motion of the gas atoms that radiate light, leads to Doppler *broadening of spectral lines*. The range of frequencies of light recorded by the detector extends from $\nu_0 - \Delta\nu_D/2$ to $\nu_0 + \Delta\nu_D/2$, where ν_0 is the frequency of monochromatic radiation of a stationary atom. The amount of Doppler broadening $\Delta\nu_D \propto \sqrt{T/m}$, where T is the absolute temperature and m is the mass of the atom.

Part V.

Optics

32 Interference of Light

32.1 Monochromaticity and Time Coherence of Light

32.1.1

Optics is the branch of physics concerned with the study of the nature of light (31.4.3), the laws of its production, propagation and interaction with matter. Wave optics deals with optical phenomena in which the wave nature of light is manifested (for instance, interference, diffraction, polarization and dispersion of light). Since light comprises electromagnetic waves, wave optics is based on Maxwells equations (27.4.3) and the relations that follow from them for electromagnetic waves (Section 31.1).

Classical wave optics deals with media that are linear with respect to their optical properties (30.1.7), i.e. media in which the dielectric constant er and the magnetic permeability μ_r are independent of the intensity of the light (31.2.4). Consequently, the principle of superposition (30.4.1) is valid in wave optics.

Phenomena that are observed in the propagation of light in nonlinear media are investigated in *nonlinear optics*. Nonlinear optical effects become appreciable at the very high intensities of light radiated by powerful lasers (**??**).

32.1.2

It has been experimentally established that the effect of light on a photocell, photographic film, fluorescent screen or other devices that record light is determined by the *electric vector* $\mathbf{E}$ of the electromagnetic field set up by the light wave. The same conclusion is reached by classical electronic theory, according to which the processes caused in matter by light are associated with the effect of the field of the light wave on charged particles of matter, i.e. on the electrons and ions. The frequency of visible and more short-waved light is so high ($\nu \gtrsim 10^{15}$ Hz) that only electrons can execute forced vibration anywhere near appreciable in amplitude.

The force exerted by the electromagnetic field (24.1.5) on an electron is

$$\mathbf{F} = -e(\mathbf{E} + [\mathbf{v}_1 \times \mathbf{B}]) = -e(\mathbf{E} + \mu_r\mu_0[\mathbf{v}_1 \times \mathbf{H}]).$$

Where $-e$ and $\mathbf{v}_1$ are the charge and velocity of the electron, and $\mathbf{B} = \mu_r\mu_0\mathbf{H}$ is the vector of magnetic induction. It follows from (31.1.5) that the absolute value of the magnetic component of force $\mathbf{F}$ is substantially less than its electrical component.

Thus

$$\mu_r\mu_0[\mathbf{v}_1 \times \mathbf{H}] \leqslant \mu_r\mu_0 v_1 H = \frac{v_1}{v}E \ll E \quad \text{and} \quad \mathbf{F} \approx -e\mathbf{E},$$

because the velocity of electromagnetic waves is $v \approx 10^8$ m/s, and the velocity of the electron in the atom upon forced vibrations set up by light is $v_1 \approx 10^6$ m/s.

32.1.3

In superposing light from two nonlaser sources[24] (for instance, two identical gas-discharge lamps), or even from different portions of the same source, no interference (30.5.2) is observed. Consequently, independent sources of light are incoherent (30.5.1) and their radiation is nonmonochromatic (31.1.6).

[24] This refers to ordinary light sources (incandescent lamps, discharge lamps, electric arcs, etc.), based on the principle of spontaneous radiation (**??**)

The reason for this resides in the very mechanism by which light is radiated by the atoms (or molecules or ions) of the source. The excited atom radiates during an extremely short de-excitation time, of the order of $\tau \approx 10^{-8}$ s (31.3.4), after which it returns to its normal (unexcited) state, having expended its surplus energy on radiation. Following a certain period of time the atom may again be excited, obtaining energy externally, and begin to emit radiation again. Such intermittent radiation of light by atoms in the form of separate short impulses – *wave trains*, or *packets* – is typical of any light source, regardless of the specific processes that occur in the source and excite its atoms. In spontaneous radiation (**??**), the atoms emit radiation independently of one another with random initial phases that vary without any order from one event of emission to another. Therefore, spontaneously radiating atoms are incoherent sources of light.

Induced, or stimulated, emission of radiation is quite

another matter. It is produced in a nonequilibrium (active) medium by the action of a variable electromagnetic field (**??**). Stimulated emission of radiation by all the particles of a system is coherent with the monochromatic radiation that it is produced by, having the same frequency, polarization and direction of propagation. These features of stimulated emission of radiation are made use of in lasers and masers (**??**).

32.1.4

A real wave, radiated during a limited period of time and encompassing a limited region of space, is not monochromatic. The spectrum of its angular frequencies (28.4.7) is of finite width $\Delta\omega$, i.e. it includes angular frequencies from $\omega - \Delta\omega/2$ to $\omega + \Delta\omega/2$. During the time interval $\Delta t \ll= \tau_{coh} = \pi/\Delta\omega$ such a wave can be considered as an approximately monochromatic wave with the angular frequency ω.

The quantity τ_{coh} is called the *time coherence of a nonmonochromatic wave*. During the time interval τ_{coh} the phase difference of the vibrations corresponding to waves of the frequencies $\omega + \Delta\omega/2$ and $\omega + -\Delta\omega/2$ changes by π. A wave with the angular frequency co and phase velocity v propagates during this time over the distance $l_{coh} = \tau_{coh} = \pi v/\Delta\omega$.

The quantity l_{coh} is called the *coherence length*, or the *harmonic wave train length*, of the corresponding nonmonochromatic wave being considered. The closer a given wave is to a monochromatic one, the less the width $\Delta\omega$ of its frequency spectrum and the greater its

coherence time and coherence length. For example, for visible sunlight, having a continuous frequency spectrum from 4×10^{14} to 8×10^{14} Hz, $\tau_{coh} \approx 10^{-14}$ s and $l_{coh} \approx 10^{-8}$ m. The coherence time of stimulated radiation is substantially longer than the de-excitation time of the atom (31.3.4). For example, τ_{coh} reaches 10^{-5} s for a continuous-wave laser and the coherence length $l_{coh} \approx 10^{3}$ m.

32.2 Interference of Light. Spatial Coherence of Light

32.2.1

To obtain coherent light waves by means of conventional (nonlaser) light sources, light from a single source is split into two or more systems of waves. Each system represents the radiation of the same atoms of the source. Hence, by virtue of their common origin, these systems of waves are coherent with one another and interfere when superposed. Light can be split into coherent systems of waves by its reflection or refraction. Illustrated as an example in Figure 32.1 is the principle of the *Fresnel mirrors*. Light from point source S is incident on two plane mirrors A_1O and A_1O arranged perpendicular to the plane of the drawing and joined along line O. The angle α be tween the planes of the mirrors is very small. Light from source S propagates after being reflected as two beams having their centres at points S_1 and S_2, which are the virtual images of source S in the mirrors. These beams are coherent and upon being superposed produce an interference pattern

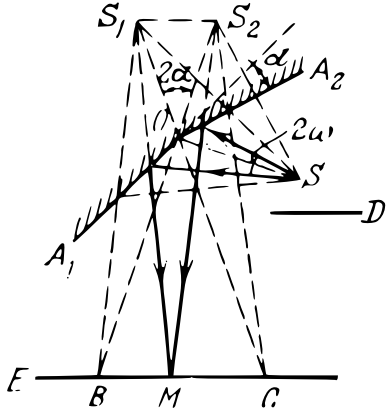


Figure 32.1.: Fresnel mirrors and interference of light.

on screen E (the region BC is sometimes called the *field of interference*). The result of the interference at some point M on the screen depends upon the wavelength λ of the light and the path difference of the waves (30.5.2) from the coherent virtual sources and S_2 to point M.

Thus,

$$\Delta = r_2 - r_1 = \overline{MS_2} - \overline{MS_1}.$$

The initial phases of vibration of sources S_1 and S_2 are the same. Hence, the *conditions for interference maxima and minima* (30.5.2) are of the form

$$r_2 - r_1 = \pm m\,\lambda,$$

for a maximum of the m-th order ($m = 0,\ 1,\ 2, \dots$),

$$r_2 - r_1 = \pm\,(2m - 1)\frac{\lambda}{2},$$

for a minimum of the m-th order ($m = 0,\ 1,\ 2, \dots$).

The angle 2ω at apex S between the two rays of light that converge at point M of the interference pattern after being reflected from mirrors A_1O and A_2O is called the *aperture angle of the interference*. This angle usually varies very little upon changing the position of point M within the limits of the field of interference.

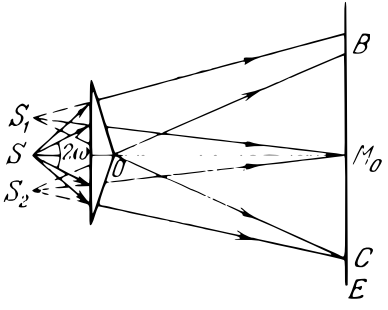


Figure 32.2.: the Fresnel biprism.

32.2.2

The principles of the techniques used for observing interference by means of the *Fresnel biprism* (Figure 32.2) and the *Billet split lens* (Figure 32.3) are similar to those of the Fresnel mirrors. The biprism consists of two identical

triangular prisms joined together at their bases and prepared as a whole. The refracting angles a at the upper and lower edges of the biprism are very small (of the order of a fraction of one degree). Light from source S is refracted in the biprism and propagates in it in the form of two systems of waves, corresponding to the coherent virtual sources of light S_1 and S_2. The interference of these waves is observed in the region of their overlapping on screen E.

The Billet split lens consists of two halves L_1 and L_2 of a collecting lens, cut along a diameter. The two halves are slightly displaced laterally (spread apart). In consequence, they produce two noncoinciding real images S_1 and S_2 of the point source of light S. The interference of light from these coherent secondary sources is observed on screen E. The space between parts L_1 and L_2 of the split lens is covered by opaque screen A.

The value of the aperture angle 2ω of interference is shown in Figure 32.2 and Figure 32.3 for the central point M_0 of the interference pattern obtained by means of a biprism and a split lens.

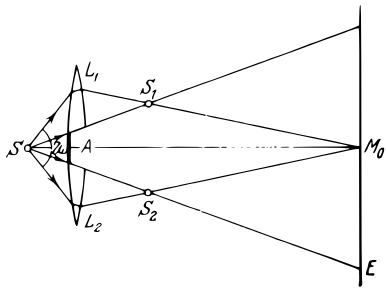


Figure 32.3.: Billet split lens.

32.2.3

The *width of an interference fringe* (as the bands are called) is the distance between two adjacent interference maxima (or minima). When the Fresnel mirrors or similar devices (biprisms or split lenses) are employed to obtain interference, the width of an interference fringe (30.5.2) is $\lambda L/l$. Here l is the distance between sources S_1 and S_2, and L is the distance from them to screen E. The

wavelength of visible light is extremely short ($\lambda \approx 5 \times 10^{-7}\,\mathrm{m}$). Therefore, to obtain an interference fringe of a width that can be resolved by the eye, it is necessary to comply with the condition: $l \ll L$. Consequently, the angle α in the Fresnel mirrors and the refracting angles α of the biprism must be very small.

The possibility of observing interference fringes also depends on the *degree of contrast*, i.e. on the degree of different illumination of the screen at the maxima and minima. The illuminance is proportional to the intensity I of the incident light. A quantitative characteristic of the degree of contrast of the interference pattern is the dimensionless quantity called the *visibility of fringes*:

$$V = \frac{I_{\max} - I_{\min}}{I_{\max} + I_{\min}},$$

where $I_{\max}$ and $I_{\min}$ are the values of the light intensities in the interference maxima and minima on the screen. The human eye reliably distinguishes fringes if their visibility $V > 0.1$, i.e. when $I_{\min} < 0.82 I_{\max}$.

In superposing two likewise polarized coherent monochromatic waves, with the amplitudes and intensities A_1, I_1, A_2 and I_2, the visibility of the fringes is

$$V = \frac{2A_1A_2}{A_1^2 + A_2^2} = \frac{2\sqrt{I_1 I_2}}{I_1 + I_2}.$$

The visibility of theiringes is a maximum ($V = 1$) when $A_1 = A_2$.

32.2.4

In an interference arrangement of the type of the Fresnel mirrors, illuminated by a point source S (Figure 32.1), the superposed waves are never ideally monochromatic (32.1.3). Hence, these waves are only *partly coherent*. They are capable of interference only under the condition that the vibration, excited by them at point M being considered on the screen, corresponds to one and the same harmonic train, or packet, of radiation of source S (32.1.4) i.e. if

$$|r_2 - r_1| < v\tau_{\text{coh}} \quad \text{or} \quad |r_2 - r_1| < l_{\text{coh}}.$$

Here $r_2 - r_1$ is the path difference of the superposed waves, v is their velocity, τ_{coh} and xc0h and l_{coh} are coherence time and coherence length of light from source S (32.1.4). *Partly coherent vibrations are combined* at point M. These vibrations are excited by the same source S at different instants of time, t and $t+\tau$, where $\tau = |r_2 - r_1|/v$. Therefore, the visibility of the interference pattern in such arrangements essentially depends on the *time-coherence of the vibrations*, which is limited by the mono-chromaticity of the light from source S, i.e. its coherence time Tcoh (32.1.4). At $\tau \ll \tau_{\text{coh}}$ the superposed vibrations are practically fully coherent and the visibility of the interference fringes (at equal intensity of the superposed waves) $V \approx 1$. If, however, $\tau \geqslant \tau_{\text{coh}}$ the superposed vibrations are incoherent and there is no interference ($V = 0$).

Thus, to observe the interference of light at large path differences $r_2 - r_1$ (and corresponding large values of τ) it is necessary for the light to have a sufficiently long

coherence time, i.e. a sufficiently high degree of monochromaticity.

32.2.5

The positions on the screen of all the interference maxima, with the exception of the zero-order maximum, depend upon the wavelength of the light. For two wavelengths λ_1 and λ_2, the higher the order m to be observed, the more their maxima of the m-th order are displaced from each other. Therefore, as m is increased, the visibility of interference fringes, obtained by the illumination of Fresnel mirrors with nonmonochromatic light, is impaired. Fringes, corresponding to different values of λ, are superposed on one another, and the interference pattern is blurred.

Assume that the wavelength of light is within the limits from λ to $\lambda + \Delta\lambda$, and the angular frequency, from ω to $\omega - \Delta\omega$, where $\Delta\omega = 2\pi v \Delta\lambda/\lambda^2$. Then, according to the *Rayleigh criterion*, the interference pattern is still distinguishable up to a maximum of the m_0 order for light with the wavelength $\lambda + \Delta\lambda$ (where $\Delta\lambda > 0$), which is superposed on the screen on the nearest interference minimum for light of wavelength λ:

$$m_0(\lambda + \Delta\lambda) = (2m_0 + 1)\frac{\lambda}{2}, \text{ from which}$$

$$m_0 = \frac{\lambda}{2\Delta\lambda}.$$

Thus, interference can be observed at path differences of

the waves that comply with the condition

$$|r_2 - r_1| \leqslant \frac{\lambda^2}{2\Delta\lambda} = \frac{\pi v}{\Delta\omega} = v\tau_{\text{coh}}.$$

This result agrees with the assessment made in (32.2.4) on the basis of the concept of time coherence of vibrations.

32.2.6

Partly coherent light, of a total intensity I, can be dealt with as the combination of two components: the coherent component of intensity γI, where γ is the *degree of coherence of the light*, and the incoherent component of the intensity $(1-\gamma)I$.

When partly coherent waves are superposed, only their coherent components interfere. The incoherent components produce the uniformly illuminated background of the interference pattern. Therefore, as the degree of coherence of the light is reduced, the visibility V of the interference fringes decreases. Thus

$$V = \frac{2\sqrt{I_1 I_2}}{I_1 + I_2}\,\gamma.$$

When the intensities of partly coherent waves are the same $V = \gamma$.

32.2.7

As a rule, in an interference device with mirrors (or a biprism), a brightly illuminated narrow slit, parallel to the joint O between the mirrors, is used instead of a point

source of light. In this case, the interference patterns, obtained on the screen from the various portions along the length of the slit, are displaced with respect to one another inthe direction of the slit S. Accordingly, a system of interference fringes, parallel to joint O of the mirrors, is observed on the screen.

The visibility of the interference fringes is reduced as the width of the slit S is increased. This is due to the fact that the interference fringes that could be obtained on the screen from various narrow slits into which slit S could be conceivably divided would be displaced with respect to one another. An interference pattern in monochromatic light of wavelength λ is sharp and distinct if the following approximate condition is complied with:

$$b \sin \omega \leqslant \frac{\lambda}{4},$$

where b is the slit width and 2ω is the aperture angle of interference (32.2.1).

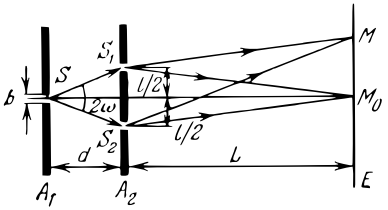


Figure 32.4.: Young's double-slit method for interference of light.

32.2.8

The principle of *Young's two-slit interference method* is illustrated in Figure 32.4. The source of light is a brightly illuminated narrow slit S in screen A_1. Light from slit S falls on a second opaque screen A_2 having two identical narrow slits S_1 and S_2 parallel to slit S. Two systems of cylindrical waves are propagated in the space beyond screen A_2 their interference is observed on screen E. The visibility of the interference fringes for small path differences is determined mainly by the degree

of agreement in the way the vibrations are executed at points of slits S_1 and S_2. These slits can be considered as the "sources" of the waves interfering on the screen.

32.2.9

The coherence of vibrations executed at the same instant of time at various points of a plane Q, perpendicular to the direction of wave propagation, is called spatial coherence (as distinguished from time coherence of vibrations, executed at one and the same point, but at different instants of time).

Spatial coherence depends upon the conditions for the radiation and formation of light waves. For instance, a light wave emitted by a point source has complete spatial coherence. In the case of an ideal plane wave, the amplitude and phase of the vibration are the same at all points, of plane Q, i.e. there is also complete spatial coherence. Spatial coherence is also maintained over the whole cross section of a light beam emitted by a laser.

In a real wave, emitted by a host of independent atoms of an extended nonlaser light source, the phase difference of the vibrations at two points K_1 and K_2 of plane Q is a random function of time. The random variations of the phase difference increase with the distance between the points. The *length of spatial coherence* is the distance l_{sc} between points K_1 and K_2 of plane Q at which the random changes of phase difference reach a value equal to it.

If in Youngs two-slit interference arrangement the distance l between slits S_1 and S_2 is greater than or equal

to l_{sc} the visibility of the interference fringes equals zero. To ensure spatial coherence in the illumination of slits S_1 and S_2, the width b of inlet slit S should be sufficiently narrow. Thus

$$b < \frac{\lambda d}{l} \quad \text{and} \quad \theta < \frac{\lambda}{l},$$

where d is the distance between screens A_1 and A_2 and $\theta = b/d$ is the angular dimension of the light source, i.e. slit S.

The length of spatial coherence $l_{sc} = \lambda/\theta$ increases with the distance from the light source. For example, for a star of diameter D, located at the distance r, $\theta = D/r$ and $l_{sc} = \lambda r/D$. The area of a circle of radius l_{sc} is called the *dimension of spatial coherence*, and the volume of a right cylinder having such a circle as its base and a height equal to length of the harmonic wave train (32.1.4) $l_{\text{coh}} = v\tau_{\text{coh}}$, is called the *volume of coherence*.

32.3 Interference of Light in Thin Films

32.3.1

Examples of light interference observed under everyday conditions are the iridescent colouring of thin films (soap bubbles, films of petroleum or other oils on the surface of water, transparent films of oxides on the surfaces of heat-treated metal components, called temper colours, etc.). The formation of partly coherent waves, displaying interference upon superposition, occurs in these cases due to the reflection of light, incident on the film, from its

upper and lower surfaces. This interference depends upon the phase difference acquired by the superposed waves in the film and depending upon their optical path difference.

32.3.2

The *optical path*, or *optical distance*, s of light is the product of the geometric path length l travelled by light in the medium by the refractive index of the medium (31.5.1): $s = nl$. The quantity s is equal to the path travelled by light in vacuum during the time it covers the path l in the given medium.

The *optical-path difference* of two waves is the difference in the optical path of these waves: $\Delta s = s_2 - s_1$ (the optical-path difference is frequently denoted by Δ or δ). An optical-path difference Δs corresponds to a change in the phase by $\Delta\Phi = 2\pi\Delta s/\lambda_0$, where $\lambda_0 = n\lambda$,is the *wavelength of the light in vacuum*, λ is the light wavelength in a medium with the refractive index n.

Paths of propagation of waves, having the same optical length, arc said to be *tautochronous*. Light requires equal amounts of time to travel them. In an optical system (microscope, telescope, etc.), for example, all possible paths of the rays of light from some point on the object to the corresponding point on its image are tautochronous.

32.3.3

Assume that a plane monochromatic light wave *1* is incident at the angle i on a plane-parallel homogeneous plate of thickness d and transparent to light (Figure 32.5).

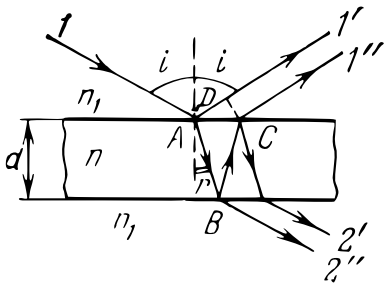


Figure 32.5.: Relfection and refraction of light on a plate.

[25] It is assumed that $i < i_{\mathrm{Br}}$ and that $n > n_1$. When $n < n_1$, a phase difference of π occurs upon reflection of light from point B and $\Delta s = 2dn\cos r + \lambda_0/2$, i.e. it differs from the value of Δs for the case when $n > n_1$ by λ_0, has no effect on the result of the interference.

Owing to the reflection of light from the upper and lower surfaces of the plate, two plane waves propagate in the directions of the reflected rays *1′* and *1″*. Their optical-path difference is

$$\Delta s = n(\overline{AB} + \overline{BC}) - n_1\left(\overline{AD} + \frac{\lambda_1}{2}\right) = 2dn\cos r - \frac{\lambda_0}{2}.$$

where n_1 and n_2 are the refractive indices of the surrounding medium and of the plate, D is the foot of a perpendicular erected on ray *1′* from point C, member $\lambda_1/2$ takes into account the phase difference of π as light is reflected from point A (31.5.5),[25] r is the refractive angle, and λ_0 is the wavelength of the light in vacuum.

The conditions for interference maxima of reflection are

$$2dn\cos r = (2m+1)\frac{\lambda_0}{2}, \quad \text{or}$$
$$2d\cos r = (2m+1)\frac{\lambda}{2},$$

where $m = 0, 1, 2, \ldots$ is the order of the interference maximum.

The conditions for interference minima of reflection are

$$2dn\cos r = m\lambda_0, \quad \text{or}$$
$$2d\cos r = m\lambda,$$

where $m = 1, 2, \ldots$ is the order of the interference minimum.

The optical-path difference for the waves passing through the plate (rays *2′* and *2″*) is $\Delta s = 2dn\cos r$, i.e. it differs from Δs for the reflected light by $\lambda_0/2$. Therefore,

the maxima of reflection correspond to the minima of transmission of light and vice vcra. If the plate is illuminated with white light, it has additional colouring in the reflected and transmitted light.

The maximum thickness d of the plate at which it is still possible to observe interference fringes is limited by the coherence time τ_{coh} of the light (32.1.4). Thus

$$2dn\cos r < c\tau_{\text{coh}} \quad \text{or} \quad 2dcosr < l_{\text{coh}},$$

where $l_{\text{coh}} = v\tau_{\text{coh}} = c\tau_{\text{coh}}/n$ is the coherence length.

32.3.4

In the calculation of the optical-path difference of interfering waves in a plate (32.3.3) only two waves were taken into account. They correspond to the first reflection from the upper and from the lower surfaces of the plate; the possibility of multiple reflection of light was neglected. Such simplification is justified only if the intensity I_2 of the wave corresponding to the second reflection from the lower surface of the plate is substantianlly less than the intensity I_1 of the wave corresponding to the first reflection.

If R is the coefficient of reflection (31.5.6) from the upper and lower surfaces of the plate, then $I_2 = R^2 I_1$. As a rule $R^2 \ll 1$. At the interface, for instance between air and glass ($n_{21} = 1.5$), at angles of incidence $i < 50^\circ$, the coefficient of reflection $R < 0.05$. In certain special cases, when I_2 is comparable to I_1 it is necessary to deal with multiwave interference (32.4).

32.3.5

In considering the interference of light in thin films, distinction is made between interference fringes of equal inclination (isoclinic fringes) and those of equal thickness (isopachic fringes). *Equal-inclination fringes* are observed when a diverging (or converging) beam of light is incident at various angles i on a thin plane-parallel film. These, for instance, are the conditions that prevail when the film is illuminated by an extended source or scattered sunlight. Since d and n are the same all over the film, the optical-path difference of the interfering waves varies along the surface of the film only owing to the variation in the angle of incidence i.

The conditions of interference are the same for all rays incident on the surface of the film and reflected from it at the same angle. Consequently, the interference pattern in this case is said to be made up of equal-inclination fringes. Equal-inclination fringes are observed on screen E arranged in the focal plane of a convergent lens L (Figure 32.6). With no lens available the interference pattern could only be observed at infinity, at the point of intersection of the parallel rays $1'$ and $1''$, $2'$, and $2''$ etc. Therefore, equal-inclination fringes are said to be localized at infinity. For their visual observation it would be necessary for the eyes to accommodate to infinity.

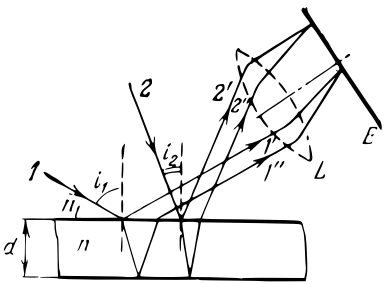


Figure 32.6.: The conditions for interefernce for equal inclination fringes.

32.3.6


Equal-thickness fringes are observed in reflecting a parallel or almost parallel beam of light rays (i = const.)

from a thin transparent film whose thickness d is not the same at various places. The optical-path difference of the interfering waves varies in going from certain points on the surface of the film to other points with a corresponding change in the film thickness d. Hence the conditions of interference are the same for points having the same values of d. This is why the interference pattern being considered is said to he made up of equal-thickness fringes. Equal-thickness fringes are localized close to the surface of the film. Hence, they can he observed by accommodation of the eyes practically to the films surface.

When light interferes in a thin transparent wedge with a small wedge angle α, equal-thickness fringes have the form of straight hands parallel to the edge of the wedge. If the wedge is illuminated by monochromatic light with the wavelength λ_0 in vacuum, normally incident on the wedge surface ($i = 0$), the width of the interference fringes (32.2.3) is equal to $\lambda_0/2n\alpha$, where n is the absolute refractive index of the wedge material.

32.3.7

Equal-thickness fringes having the form of concentric rings, and called *Newton's rings*, are observed in the interference of light in the thin air clearance between a flat glass plate A and a flat-convex lens L pressed tightly against the plate (Figure 32.7). The flat surface of the lens is parallel to the plate surface and light is normally incident to the lens surface. The centre of Newtons rings coincides with point O of contact between the lens and plate. At a small distance r from point O the optical-path difference of the






Figure 32.7.: Newton's rings are fringes of equal thickness.

waves reflected from the upper and lower surfaces of the nir clearance is

$$\Delta s \approx n\frac{r^2}{R} + \frac{\lambda_0}{2},$$

where $n \approx 1$ (for air), and R is the radius of the convex surface on the lens.

Note. In calculations concerning Newtons rings, the wave reflected from the upper (flat) surface of the lens need not be taken into account because the optical-path difference between this wave and the waves reflected from the boundaries of the air clearance is greater than the coherence length for nonlaser light (32.3.3).

In reflected monochromatic light with the wavelength in air $\lambda = \lambda_0/n \approx \lambda_0$, the radii of the dark and bright Newtons rings are

$$r_{\text{dark}} = \sqrt{mR\lambda} \quad \text{and}$$
$$r_{\text{bright}} = \sqrt{(2m+1)\frac{R\lambda}{2}},$$

where $m = 0, 1, 2, \ldots$. The dark spot in the centre of the pattern corresponds to the change in the phase of the wave by π when it is reflected from the lower surface of the air clearance.

If white light is incident on the lens, a central dark spot is observed in the reflected light, surrounded by a system of coloured rings. These rings correspond to the interference maxima of the reflection of light with various values of wavelength λ.

32.4 Multiwave Interference

32.4.1

Special interference instruments, such as the diffraction grating (33.3.4), the Fabry-Perot etalon and others are used to obtain interference of many light waves with close or equal amplitudes. The amplitude A of the resultant vibration and its intensity $I = A^2$ at arbitrary point M can be found by applying the method of vector diagrams for adding oscillations or vibrations having the same direction (28.4.2).

32.4.2

Shown in Figure 32.8 is a vector diagram of the addition of vibrations in interference of N waves. At the point M being considered, these vibrations set up coherent vibrations in the same direction with equal amplitudes $A_i = A_1$ and a phase difference, independent of i, between $(i+1)$-th and i-th vibrations. Thus $\Phi_{i+1}(t) - \Phi_i(t) = \Delta\varphi_0$. The amplitude of the resultant vibration is

$$A = 2 \times \overline{OO}_1 \left| \sin \frac{\alpha}{2} \right|,$$

where

$$\alpha = 2\pi - N\Delta\varphi_0, \quad \text{and} \quad \overline{OO}_1 = \frac{A_1}{2\left| \sin \dfrac{\Delta\varphi_0}{2} \right|}.$$

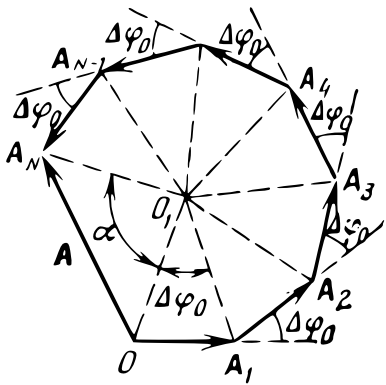


Figure 32.8.: Analysing interferene of multiple waves.

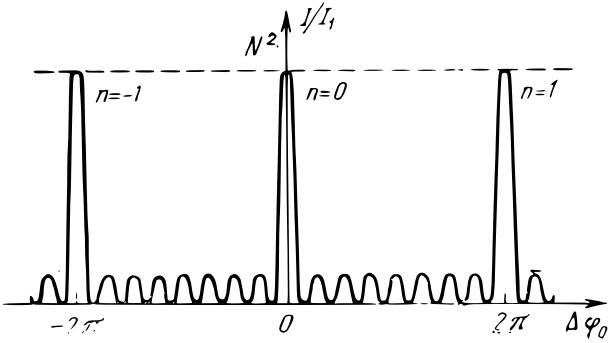


Figure 32.9.: The nature of the dependence of I/I_1 on $\Delta\varphi_0$.

Hence,

$$A = A_1 \left| \frac{\sin \dfrac{N\Delta\varphi_0}{2}}{\sin \dfrac{\Delta\varphi_0}{2}} \right|, \quad \text{and} \quad I = I_1 \frac{\sin^2 \dfrac{N\Delta\varphi_0}{2}}{\sin^2 \dfrac{\Delta\varphi_0}{2}}.$$

where $I_1 = A_1^2$ is the intensity of the vibration set up at point M by each of the N interfering waves separately.

32.4.3

The *principal maxima in the interference* of N waves (32.4.2) are at points M that comply with the condition: $\Delta(\varphi_0 = \pm 2n\pi$ where $n = 0, 1, 2, \ldots$ is the *order of the principal maximum*. The amplitude and intensity of vibration at the principal maxima are:

$$A_{\max} = NA_1 \quad \text{and} \quad I_{\max} = N^2 I_1.$$

Interference minima ($A = 0$) comply with the condition:

$$\Delta\varphi_0 = \pm 2\pi \frac{p}{N},$$

where p may be any positive whole number except a multiple of N.

The nature of the dependence of I/I_1 on $\Delta\varphi_0$ (32.4.2) is shown in Figure 32.9. Between each pair of adjacent interference minima there is a maximum, either a principal or a subordinate maximum. At high N values the intensities of the subordinate maxima are negligibly small compared to that of the principal maxima. The values $\Delta\varphi_0 = \pm(2\pi n \pm 2\pi/N)$ correspond to two minima that bound a principal maximum of the n-th. order. Therefore, the "width" of the principal maximum, equal to $4\pi/N$, is inversely proportional to the number N of interfering waves, and its intensity is proportional to A^2.

The fact that the interference pattern changes in such a manner as N is varied fully complies with the law of conservation of energy. The total energy of vibration at all points of the screen on which the interference pattern is observed is proportional to N.

32.4.4

If the number N of interfering / waves (32.4.2) is increased indefinitely, and their amplitudes A_1 and phase differences $\Delta\varphi_0$ are correspondingly reduced so that NA_1 and $N\Delta\varphi_0$ remain finite quantities equal to A_0 and $\Delta\varphi_0$, then, in the limit, the vector diagram (Figure 32.8) assumes the form illustrated in Figure **??**. Vector A, the amplitude

of the resultant vibration, closes the arc BC of a circle. The length of this arc is equal to A_0 and its central angle $\angle BOC = \Delta\varphi$. Therefore, the radius of the circle $\overline{OB} = A_0/\Delta\varphi$, and the amplitude A and intensity I of the resultant vibration equal

$$A = A_0 \left| \frac{\sin \dfrac{\Delta\varphi}{2}}{\dfrac{\Delta\varphi}{2}} \right|, \quad \text{and} \quad I = I_0 \frac{\sin^2 \dfrac{\Delta\varphi}{2}}{\left(\dfrac{\Delta\varphi}{2}\right)^2}.$$

where $I_0 = A_0^2$.

Interference minima are at points of the interference pattern for which

$$\Delta\varphi = \pm 2m\pi,$$

where $m = 1, 2, \ldots$. *Interference maxima* are at points for which

$$\Delta\varphi = \pm 2k_m\pi,$$

where $m = 1, 2, \ldots$ is the *order of the maximum*. The values of factor k_m are determined from the transcendental equation $\tan k_m\pi = k_m\pi$. For the central, zero-order maximum $k_0 = 0$ and $\Delta\varphi_0$. The amplitude and intensity of vibration at a zero-order maximum are equal to A_0 and I_0. For all other maxima ($m \geqslant 1$) it can be assumed approximately that

$$k_m = \frac{(2m + l)}{2} \quad \text{and} \quad \Delta\varphi = \pm(2m + 1)\pi.$$

Accordingly, the ratio of the intensities for the m-th and zero-order maxima equals

$$\frac{I_m}{I_0} = \frac{4}{(2m + 1)^2\pi^2}.$$

Order of the maximum	**0**	**1**	**2**	**3**	**4**
I_m/I_0	1 0.045	0.016	0.008	0.005	

Table 32.1.: Intensity of m-th and 0-th order maximum as a function of order.

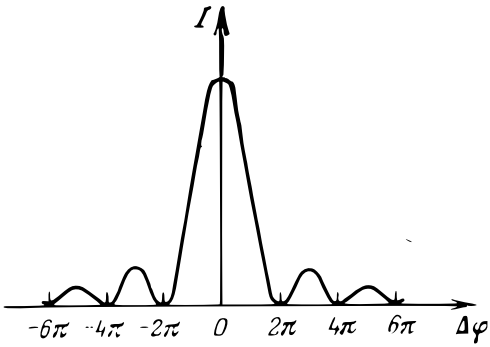


Figure 32.10.: The dependence of I on $\Delta\varphi_0$.

This ratio decreases rapidly with an increase of m (Table 32.1). The shape of the curve showing the dependence of I on $\Delta\varphi_0$ is shown in Figure 32.10.

33 Diffraction of Light

33.1 Huygens-Fresnel Principle

33.1.1

If the position of the wavefront (30.2.3) is known at a certain instant t of time, as well as the velocity v of the wave, the position of the wavefront at the subsequent instant $t + \Delta t$ can he determined on the basis of the *Huygens principle*. According to this principle, each point on the surface $S(t)$, through which the wavefront passes at the instant t can be regarded as a source of secondary waves, and the sought-for position $S(t + \Delta t)$ of I he wavefront at the instant of time $t + \Delta t$ coincides with the envelope of all the secondary waves at this later time. It is assumed here that in a homogeneous medium the secondary waves radiate only forward, i.e. in directions making acute angles with the outward normals to the wavefront. In a homogeneous isotropic medium, the secondary waves are spherical (Figure 33.1).

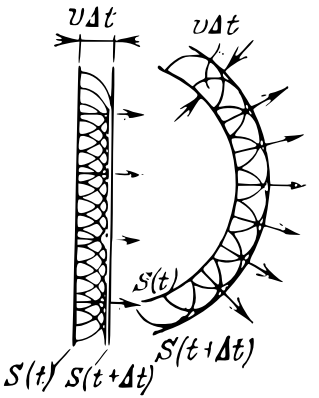


Figure 33.1.: The spherical wavefront.

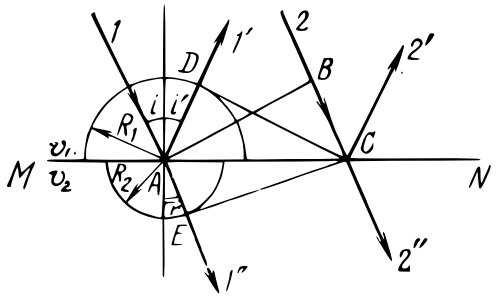


Figure 33.2.: Analysing reflection and refraction using Huygen's principle.

33.1.2

The Huygens principle can be used to derive laws for the reflection and refraction of light at the interface between two media. The line MN in Figure 33.2 represents the plane interface between two media in which the velocities of light equal v_1 and v_2. Incident on this interface at the angle i is a plane wave (rays *1* and *2*). At the instant t of time the wavefront (plane AB) reaches the interface at point A. Hence point A begins to radiate secondary waves, propagating both in the first medium (reflected wave) and in the second medium (transmitted wave).

During the time Δt required for the incident wave to travel the distance $\overline{BC}$ (where $\Delta t = \overline{BC}/v_1$), the front of the secondary wave, radiated from point A, reaches points of a semisphere in the first medium having the radius $R_1 = v_1\Delta t = \overline{BC}$, and points of a semisphere in the second medium having the radius $R_2 = v_2\Delta t = v_2\overline{BC}/v_1$. The front ol the reflected wave (rays *1′* and *2′*,

propagating at the angle i' of reflection is the plane DC, tangent to a sphere of radius R_1 with its centre at point A.

Correspondingly, the front of the transmitted (refracted) wave (rays $1''$ and $2''$), propagating at the refraction angle r, is the plane CE, tangent to a semisphere of radius R_2 with its centre at point A. The *law of light reflection*:

$$i = i',$$

follows from the equality of triangles ACD and ACB. The law of light refraction follows from the rectangular triangles ACB and ACE, which have a common hypotenuse. Thus

$$\frac{\sin i}{\sin r} = \frac{\overline{BC}}{\overline{AE}} = \frac{v_1}{v_2} = n_{21},$$

where n_{21} is the relative refractive index of the second and first media (31.5.1).

33.1.3

The Huygens principle is a purely geometrical one. It indicates no method of calculating the amplitude of the wave that is an envelope of the secondary waves. Therefore, the Huygens principle is insufficient for deriving the laws of propaga-tion of light waves. An approximate method of solving this problem, which is a development of the Huygens principle on the basis of the idea proposed by Fresnel on the coherence of secondary waves and their interference upon superposition is called the *Huygens-Fresnel principle*. This principle can be expressed by the following series of propositions:

(a) In calculating the amplitude of light vibration, set up by source S_0, at arbitrary point M, the source can be replaced by a system of secondary sources. These sources are small portions $\mathrm{d}s$ of any closed auxiliary surface S arranged so that it encloses the source S_0, but does not enclose point M being considered.

(b) The secondary sources are coherent with S_0 and with one another. Hence, the secondary waves they set up interfere upon superposition. Interference calculations are simplest when S is the wavefront for the light from source S_0 because, in this case, the phases of vibration of all secondary sources are the same.

(c) The amplitude $\mathrm{d}A$ of the vibration set up at point M by a secondary source is proportional to the ratio of the area $\mathrm{d}s$ of the corresponding portion of wavefront S to the distance r from this portion to point M and depends upon the angle α between the outward normal to the wavefront and the direction of a line from the element $\mathrm{d}s$ of area to point M. Thus

$$\mathrm{d}A = f(\alpha)\frac{a\mathrm{d}s}{r},$$

where a is a quantity proportional to the amplitude of the primary wave at points of the element $\mathrm{d}s$ of area; $f(\alpha)$ decreases monotonically from 1 at $\alpha = 0$ to 0 at $\alpha \geqslant \pi/2$ (secondary sources do not radiate backward).[26]

(d) If part of surface S is an opaque screen, the corresponding secondary sources (closed by the screen)

[26] As shown by Kirchhoff, $f(\alpha) \propto (1 + \cos\alpha)$, i.e. the function becomes zero only at $\alpha = \pi$; at small angles of diffraction α, however, this more exact relation is of no significance.

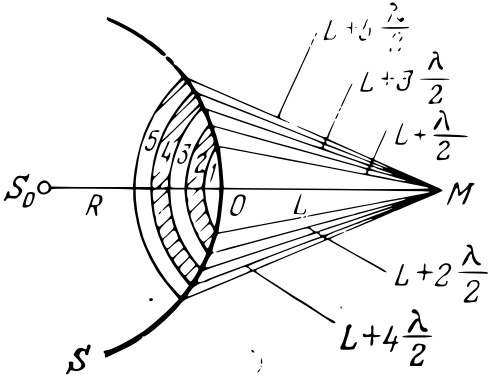


Figure 33.3.: Establishing rectilinear propagation of light from Huygen's principle.

do not radiate, whereas the rest radiate in the same way as in the absence of screens.[27]

[27] Actually, the material of the opaque screen has an effect on the radiation of the open secondary sources that are close to the edge of the screen (at a distance of the order of the wavelength of the light).

33.1.4

On the basis of the Huygens-Fresnel principle, the *law of rectilinear propagation of light* in a homogeneous medium can be substantiated from the wave point of view. Assume that S_0 is a point source of monochromatic light (Figure 33.3) and M is the point of observation. As the auxiliary surface S, a spherical surface of radius R is chosen so that the distance L from point M to this sphere ($L = \overline{OM}$) is of the order of R. Next, surface S is divided into annular portions of small area, called Fresnel zones, as shown in Figure 33.3, where λ is the wavelength of the light.

Vibrations set up at point M by two adjacent zones are opposite in phase, because the path difference from like points of these zones to point M is equal to $\lambda/2$. Consequently, the amplitude of the resultant vibration at point M is equal to $A = A_1 - A_2 + A_3 - A_4 + \ldots$ where A_i is the amplitude of vibration set up at point M by secondary sources, located within the limits of the i-th zone. At č<c LlX, the areas of all the zones are the same:

$$\sigma_i = \frac{\pi R L \lambda}{(R + L)},$$

and very small (at $R = L = 10\,\text{cm}$ and $\lambda = 5 \times 10^{-5}\,\text{cm}$ we obtain $\sigma_i = 8 \times 10^{-5}\,\text{cm}^2$). With an increase in i, the distance r_i from the zone to point M also increases, as does angle α_i between the normal to the surface of the zone and the direction of a line from the zone to point M.

Therefore, according to the Huygens-Fresnel principle,

$$A_1 > A_2 > A_3 > \ldots \quad \text{and} \quad A_i \approx (A_{i-1} + A_{i+1})/2.$$

Consequently, the amplitude of vibration at point M is equal to $A \approx A_1/2$ i.e. the resultant effect of the whole open wavefront is equal to one-half of the effect of the first (central) Fresnel zone, whose radius is very small. Thus, it can be assumed that practically light is propagated from S_0 to M in a straight line.

33.1.5

If an opaque screen, covering all, except the first, Fresnel zones for the point M of observation is placed in the path

of monochromatic light from source S_0, the amplitude and intensity of light at point M are doubled and quadrupled, respectively, compared to their values in the absence of the screen: $A = A_1$ and $I = A_1^2$. Light can be intensified to a substantially greater extent by means of a *zone plate*. This is a glass plate to which an opaque coating has been applied in the form of rings which enclose only the even (or only the odd) Fresnel zones, i.e. every other zone. A zone plate has the same effect on light as a converging lens.

33.2 Fresnel Diffraction

33.2.1

The *diffraction of light* is the whole set of phenomena due lo the wave nature of light and observed in its propagation in a medium with sharply defined optical inhomogeneities (for example, in passing through apertures in opaque screens or close to the boundaries of opaque bodies). In its narrower sense, diffraction refers to the bending of light around small opaque obstacles, i.e. deviations from the laws of geometrical optics.

Distinction is made between two kinds of light diffraction: *Fresnel diffraction*, or *diffraction with convergent rays*, and *Fraunhofer diffraction*, or *diffraction with parallel rays*. In the former, a spherical or plane wave is incident on the obstacle and the diffraction pattern is observed on a screen at a finite distance behind the obstacle. In the latter, a plane wave is incident on the obstacle and the diffraction pattern is observed on a screen located in

the focal plane of a converging lens placed in the path of the light that passes by the obstacle. In Fresnel diffraction, a diffraction image of the obstacle is obtained on the screen; in Fraunhofer diffraction, the diffraction image is of the distant light source.

33.2.2

In the simplest Fresnel diffraction problems, the diffraction pattern can be investigated by using the method of Fresnel zones (33.1.4).

Example 1. *Fresnel diffraction by a small circular aperture* in an opaque screen AB (Figure 33.4). When the aperture is illuminated by monochromatic light of wavelength λ, a system of alternating dark and bright interference rings is observed on screen E, which is parallel to AB. These rings have a common centre at point O located opposite the centre of the aperture. If for point O an even number $2k$ (where $k = 1, 2, \dots$) of Fresnel zones fit into the aperture, there is a dark spot at point O the amplitude of light at point O is less than in the absence of a screen:

$$A \approx \frac{1}{2}(A_1 - A_{2k}) < \frac{A_1}{2},$$

where A_i is the amplitude corresponding to only the ith zone. If the number of zones is odd $(2k + 1)$, there is a bright spot at point O and

$$A \approx \frac{1}{2}(A_1 + A_{2k+1}) > \frac{A_1}{2}.$$

If the aperture is illuminated by white light, a system of concentric coloured rings is observed on screen E.

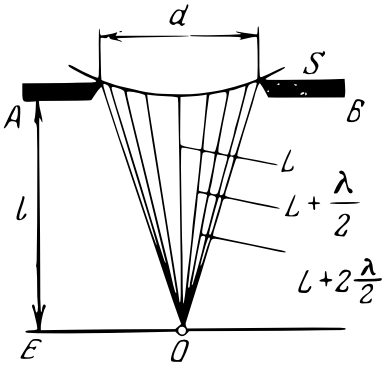


Figure 33.4.: Fresnel diffraction by a small circular aperture.

The number of Fresnel zones that fit into the aperture and the degree of contrast of the interference pattern depend upon the ratio of the diameter d of the aperture to the distance l between screens AB and E. As d/l is increased, the amplitude of light at the centre of screen E approaches $A_1/2$ and the degree of contrast of the interference rings is reduced.

33.2.3

Example 2. *Fresnel diffraction by a small disk* (opaque round screen). The method of constructing open Fresnel zones on the wavefront S of the incident monochromatic spherical wave is illustrated in Figure 33.5. The interference pattern on screen E consists of alternating bright and dark rings with their centre at point O, where the interference maximum (*Poisson's spot*) is always observed. The amplitude of light at point O is one-half of the amplitude Alt corresponding to the effect at this point of only the single first open Fresnel zone: $A = A_1/2$.

When the disk is illuminated by white light, a white spot is observed at the centre of the screen. This spot is surrounded by a system of concentric coloured rings. As the ratio of the diameter d of the disk to its distance l from screen E is increased, the brightness of Poissons spot is gradually reduced and the next dark ring becomes broader, forming a region of shadow beyond the disk.

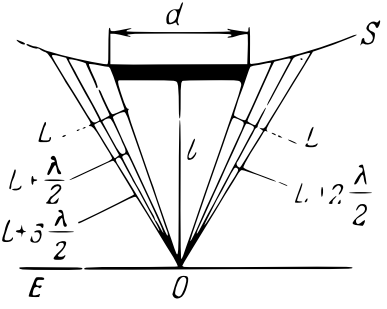


Figure 33.5.: Fresnel diffraction by a small disk.

33.3 Fraunhofer Diffraction

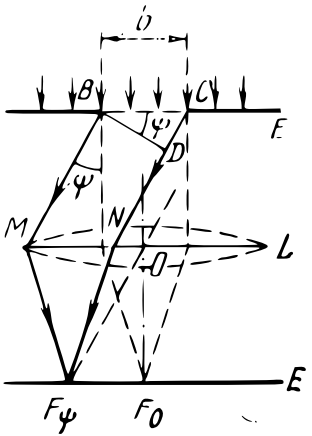


Figure 33.6.: Diffraction of light by a narrow long slit.

33.3.1

Example 1. *Diffraction of light by a narrow long slit* in an opaque screen (Figure 33.6). The slit width $\overline{BC} - b$, and its length in the direction perpendicular to the plane of the figure is $l \gg b$. Light is normally incident on the surface of the slit so that vibrations at all points of the slit are in phase.

The diffraction pattern is observed on screen E, which is placed in the focal plane of converging lens L. Parallel rays BM and CN, travelling from the edges of the slit at the *diffraction angle* ψ) to the direction of incident light, are collected by the lens at its secondary focus F_ψ. The lens are made so that the paths of the rays of light BMF_ψ and DNF_ψ , where D is the foot of the perpendicular dropped from point B to ray CN, are tautochronous paths (32.3.2). Therefore, the result of the interference at point $F_\psi$of the screen depends upon the path difference $\overline{CD} = b \sin \psi$ and the wavelength λ of the light.

(a) *Approximate solution.* The slit can be divided in width into Fresnel zones, having the form of strips parallel to edge B, such that the path difference from the edges of the strips is equal to $\lambda/2$. The number of such Fresnel zones that fit into the slit is equal to $2b|\sin \psi|\lambda$ the zones radiate light entirely equally in the direction being considered; and the vibrations set up at point by two adjacent zones are equal in amplitude and opposite in phase. Therefore, when there is an even number of zones:

$$b \sin \psi = \pm 2m \frac{\lambda}{2},$$

where $m = 1, 2, 3\ldots$ and a diffraction minimum is observed (complete darkness). When the number of zones is odd:

$$b \sin \psi = \pm(2m + 1)\frac{\lambda}{2},$$

where $m = 1, 2, 3\ldots$ and a diffraction maximum corresponding to one Fresnel zone, is observed. The brightest central maximum is observed at the principal focus F_0 of the lens ($\psi = 0$). With an increase in m the width of the Fresnel zones and the intensity of the maxima are rapidly reduced.

(b) *Exact solution.* The slit is divided into a very great number of identical very narrow strips, parallel to edge B. Secondary waves radiated by these elements of the slit, set up vibrations at point F_ψ, that have the same small amplitudes, and their initial phases continuously fill an interval of width $\Delta\varphi = (2\pi b \sin \psi)/\lambda$. According to (32.4.4), the amplitude and intensity of light at point F_{psi} equal:

$$A_\psi = A_0 \left| \frac{\sin \dfrac{\pi b \sin \psi}{\lambda}}{\dfrac{\pi b \sin \psi}{\lambda}} \right|, \quad \text{and} \quad I_\psi = I_0 \frac{\sin^2 \dfrac{\pi b \sin \psi}{\lambda}}{\left(\dfrac{\pi b \sin \psi}{\lambda}\right)^2},$$

where A_0 and I_0 are the amplitude and intensity at the central maximum ($\psi = 0$).

The condition for diffraction minima of light is the same as in the approximate solution:

$$b \sin \psi = \pm 2m\frac{\lambda}{2},$$

where $m = 1, 2, 3 \ldots$ The condition for diffraction maxima is of the form

$$\tan \frac{\pi b \sin \psi}{\lambda} = \frac{\pi b \sin \psi}{\lambda},$$

and it differs only slightly from the condition obtained by means of the Fresnel zones method.

33.3.2

If white light, instead of monochromatic light, falls on the slit, the central maximum is white with iridescent colouring along its edges. All the other interference fringes are coloured because different angles ψ and different points F_ψ on the screen correspond to both minima and maxima of the same orders m, depending upon the wavelength λ.

As the width b of the slit is reduced, the width of the central maximum is increased because of the increase of angles

$$\psi_1 = \pm \arcsin \frac{\lambda}{b},$$

which correspond to minima of the first order, limiting the central maximum. At $b \leqslant \lambda$ the illumination of the screen is reduced monotonically from the centre (point F_0) toward the edges. When the slit is very wide ($b \gg \lambda$), a bright and sharp image of Ithe light source, formed by lens L according to the laws of geometrical optics, is seen on the screen.

33.3.3

Example 2. *Diffraction of light by a circular aperture.* A plane monochromatic light wave is normally incident on the aperture, i.e. perpendicular to the plane of the aperture. The diffraction pattern is observed in the focal plane of a converging lens arranged beyond the aperture so that its optical axis is perpendicular to the plane of the aperture. The diffraction pattern has the form of a bright white spot at the principal focus F_0 of the lens and, concentric about this spot, alternating dark and bright rings. The intensity of the bright rings is very low compared to that I_0 of the central maximum, and decreases with an increase in their radius. For instance, the intensity of the nearest maximum of the first order to the central one is $I_1 < 0.02 I_0$.

The diffraction angle ψ_1 corresponding to the first dark ring, bounding the central maximum, complies with the condition

$$\sin \psi_1 = 1.22 \frac{\lambda}{D},$$

where D is the diameter of the aperture and λ is the wavelength of the light.

If light falls on the aperture at a small angle α to the normal to the plane of the aperture, the interference pattern remains practically unchanged, but its centre is displaced to a secondary focus of the lens, corresponding to the angle $\psi = \alpha$.

33.3.4

Example 3. *Diffraction of light by a one-dimensional grating*. A one-dimensfbnal *diffraction grating* is a system of large number N of parallel slits in a screen, the slits being identical in width and separated by opaque strips, also of equal width. Shown in Figure 33.7 are only two adjacent slits of the grating. The quantity $d = a+b$, where $a = \overline{CD}$ is the width of an opaque strip between two slits and $b = \overline{BC}$ is the slit width, is called the *diffraction grating constant*, or *interval*.

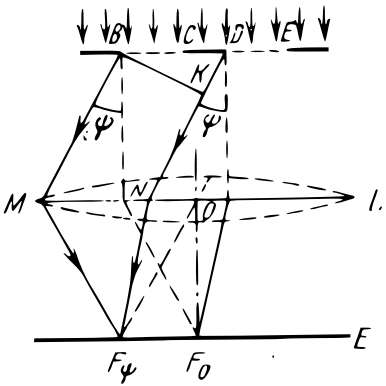


Figure 33.7.: Diffraction of light by a one-dimensional grating.

In analysing the diffraction pattern on screen E, mounted in the focal plane of converging lens L, it is necessary to take into account the interference of the secondary waves not only from different portions of one slit, but from the different slits as well. If a plane monochromatic wave is normally incident on the grating, the vibrations at all points of the slits are in phase.

Vibrations set up at the arbitrary point of the focal plane of lens L by each of the slits coincide in amplitude (A_1) and differ in phase. For each pair of adjacent slits the phase difference $\Delta\varphi_0$ between these vibrations is the same. It depends upon the wavelength λ and the path difference from like points of the slits (for instance, points B and D), i.e. on the length $\overline{KD} = d\sin\psi$, where K is the foot of the perpendicular, dropped from point B to the ray DN. Thus

$$\Delta\varphi_0 = \frac{2\pi d}{\lambda}\sin\psi.$$

Therefore, according to sections (32.4.2) and (33.3.1), the amplitude and intensity of the resultant vibration at point

F_ψ equal

$$A = A_0 \left| \frac{\sin \dfrac{\pi b \sin \psi}{\lambda}}{\dfrac{\pi b \sin \psi}{\lambda}} \cdot \frac{\sin \dfrac{\pi N \sin \psi}{\lambda}}{\sin \dfrac{\pi d \sin \psi}{\lambda}} \right|, \quad \text{and}$$

$$I = I_0 \frac{\sin^2 \dfrac{\pi b \sin \psi}{\lambda}}{\left(\dfrac{\pi b \sin \psi}{\lambda} \right)^2} \cdot \frac{\sin^2 \dfrac{\pi N \sin \psi}{\lambda}}{\sin^2 \dfrac{\pi d \sin \psi}{\lambda}},$$

where A_0 and I_0 are the amplitude and intensity of the vibration at point F_0 (i.e. at $\psi = 0$) due to the effect of a *single* slit.

33.3.5

The *principal minima* in the diffraction of light by a diffraction grating occur at diffraction angles ψ, corresponding to interference minima in diffraction by a single slit (33.3.1). Thus

$$b \sin \psi = \pm m \lambda,$$

where $m = 1, 2, 3 \ldots$.

In these directions none of the slits provide light (each slit extinguishes itself).

The *principal maxima* (32.4.3) correspond to diffraction angles ψ that comply with the condition

$$d \sin \psi = \pm n \lambda,$$

where $n = 1, 2, 3 \ldots$ is the *order of the principal maximum*.

Note. If certain values of ψ simultaneously comply with the conditions for both principal maxima and principal minima, then the principal maxima corresponding to these values of ψ are not observed. For example, if $d = 2b$, then all the even principal maxima ($n = 2$, 4, 6, etc.) are absent. The intensity of a principal maximum of the n-th order is

$$I_n = I_0 \left(\frac{Nd}{\pi n b} \right)^2 \sin^2 \frac{\pi n b}{d}.$$

33.3.6

Between each two principal maxima, there are $N - 1$ *additional minima* that comply with the condition

$$d \sin \psi = \pm \frac{p\lambda}{N},$$

where p may be any positive whole number with the exception of N, $2N$, $3N$, etc. Accordingly, there are $N - 2$ additional maxima whose intensity is negligibly low compared to that of the principal maxima.

The *angular width of a principal maximum* of the n-th order, i.e. the difference between the values of the angles ψ corresponding to the additional minima bounding this maximum, is

$$\Delta\psi_n = \frac{2\lambda}{Nd \cos \psi_n} = \frac{2\lambda}{L \cos \psi_n},$$

where $\psi_n = \arcsin(n\lambda/d)$, and $L = Nd$ is the length of the diffraction grating. For principal maxima of not particularly high orders, angles ψ_n are small and $\cos \psi_n \approx 1$, so that $\Delta\psi_n \approx 2\lambda/L$.

33.3.7

With monochromatic light the diffraction pattern on screen E in the focal plane of lens L (Figure 33.7) has, at large N values, the form of narrow and bright principal maxima separated by practically dark and wide intervals. If the ratio d/b is an irrational number, the intensities of the principal maxima (33.3.5) decrease monotonically with an increase in the order n of the maximum.

When the grating is illuminated by white light, an uncoloured central zero-order maximum is observed on the screen. On both sides of this maximum, *diffraction spectra* of the 1st, 2nd, etc. orders are observed. These spectra appear as iridescent bands in which there is a continuous transition in colour from blue-violet at the inner edge of the spectrum to red at the outer edge.

33.3.8

Upon inclined incidence of light on a diffraction grating (Figure 33.8), the condition for the principal maxima is of the form

$$d(\sin\psi - \sin i) = \pm n\lambda,$$

where $n = 1, 2, 3\ldots$, i is the angle of incidence of light on the surface of the grating. Frequently, the directions of the rays of light falling on the grating and diffracted from it are specified by the angles α_0 and α which these rays make with the axis OX of coordinates, arranged in the plane of the grating, perpendicular to the slits. In this case, the condition for the principal maxima can be

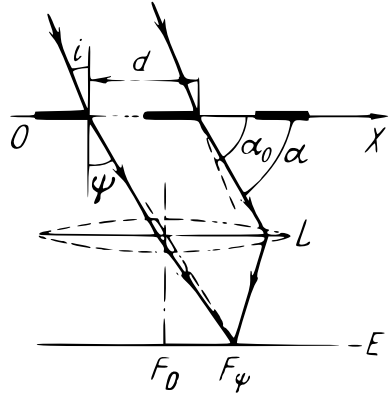


Figure 33.8.: Diffraction of light with inclined incidence on a grating.

rewritten in the form

$$d(\cos\alpha - \cos\alpha_0) = \pm n\lambda.$$

33.3.9

Two screens are said to be *complementary* if the apertures in one of them exactly coincide in shape, size and relative position with the opaque areas in the other screen, and vice versa. Complementary, for example, are an opaque screen in the form of a circle (disk) of radius R and an opaque screen having a circular aperture of the same radius R. On the basis of the Huygens-Fresnel principle, it is possible to prove *Babinets theorem* (also called *Babinet's principle*). This theorem states that in Fraunhofer diffraction by any screen, the intensity of diffracted light in any direction, except that of the propagation of a plane wave falling on the screen, should be the same as in diffraction by the complementary screen.

33.3.10

Example 4. *Diffraction by a large number of identical and identically oriented obstacles*. The light intensity I at an arbitrary point M of the diffraction pattern, like in diffraction by a one-dimensional grating (33.3.4), can be presented in the form:

$$I = fI_1.$$

Here I_1 is the intensity at point M upon diffraction of the same incident plane wave by a *single* obstacle. The

function f depends only upon the number and relative arrangement of the obstacles.

If the obstacles are arranged quite randomly with respect to one another and their number N is large, then $f \approx N$. In this case, the distribution of light intensity is the same as in diffraction by a single obstacle. But the intensity at each point of the diffraction pattern is N times as much. For example, in diffraction of light by a glass plate coated with spherical dust particles of diameter d, a system of bright concentric interference rings is observed. The sizes of these rings correspond to the diffraction of light by an opaque disk of diameter d or, in accordance with Babinets principle (33.3.9), by a round aperture of the same diameter.

33.4 Diffraction by a Space Lattice

33.4.1

A space, or three-dimensional, difraction grating is an optically nonhomogeneous medium in which the inhomogeneities are periodically repeated in varying all three spatial coordinates. An example of a space diffraction grating is the crystal lattice of a crystalline solid. Particles at the lattice points (atoms, molecules or ions) serve as orderly arranged centres that coherently scatter light falling on them. Assume that d_1, d_2 and d_3 are the lattice constants along the three coordinate axes $\xi\,\eta$ and ζ that are oriented along three edges of the lattice intersecting in one of its points. Then in Fraunhofer diffraction (33.2.1),

the principal maxima comply with the *Laue conditions*

$$\begin{aligned} d_1(\cos\alpha - \cos\alpha_0) &= n_1\lambda, \\ d_2(\cos\beta - \cos\beta_0) &= n_2\lambda, \quad \text{and} \\ d_3(\cos\gamma - \cos\gamma_0) &= n_3\lambda. \end{aligned}$$

Here α_0, β_0 and γ_0 and α, β and γ are the angles between the coordinate axes $\xi\,\eta$ and ζ, and the directions of propagation of the incident and diffracted rays, respectively, n_1, n_2 and n_3 are whole numbers determining the order of the maximum, and λ is the wavelength of the light. The Laue conditions follow from the relations (33.3.8) for diffraction maxima in inclined incidence of light on a one-dimensional diffraction grating.

33.4.2

Of the three angles α, β and γ (and likewise for angles α_0, β_0 and γ_0) only two angles are independent because they must comply with one geometric relationship whose specific form depends upon the angles between the coordinate axes $\xi\,\eta$ and ζ. For example, if the coordinate axes are mutually per pendicular, i.e. if the lattice is orthogonal, the geometric relationship between α, β and γ is of the form:

$$cos^2\alpha + cos^2\beta + \cos^2\gamma = 1.$$

Therefore, with an arbitrarily given direction of incidence on a space lattice of monochromatic light with a given wavelength λ, it is impossible, in general, to find values

of α, β and γ that simultaneously comply with the geometric relationship and Laues three conditions. The only exception is the zero-order maximum ($n_1 = n_2 = n_3 = 0$), for which $\alpha = \alpha_0$, $\beta = \beta_0$ and $\gamma = \gamma_0$.

In order to observe a diffraction maximum of the order (n_1, n_2 and n_3) at given values of the angles α_0, β_0 and γ_0, it is necessary for the incident light to have a certain definite wavelength. For instance, in the case of an orthogonal lattice, the wavelength should be

$$\lambda = -2\frac{\dfrac{n_1}{d_1}\cos\alpha_0 + \dfrac{n_2}{d_2}\cos\beta_0 + \dfrac{n_3}{d_3}\cos\gamma_0}{\left(\dfrac{n_1}{d_1}\right)^2 + \left(\dfrac{n_2}{d_2}\right)^2 + \left(\dfrac{n_3}{d_3}\right)^2}$$

If the wavelength λ of the incident light is a fixed value, the Laue conditions and the geometric relationship between angles α, β and γ can simultaneously be complied with by a suitable choice of the direction of light incidence on the diffraction grating, i.e. of angles α_0, β_0 and γ_0.

33.4.3

It follows from Laues conditions that at $\lambda \geqslant 2d_{max}$, where d_{max} is the maximum of the values of d_1, d_2 and d_3, there should be no maxima, except the zero-order one ($n_1 = n_2 = n_3 = 0$). Light of such wavelengths propagates in a medium without noticing its inhomogeneities, i.e. without undergoing diffraction. Hence, the condition $\lambda \geqslant 2d_{max}$ is called the *condition for optical homogeneity of the medium*.

The crystal lattice constants of solids are considerably shorter than the wavelengths of visible light ($d_i \approx 5 \times 10^{-7}$ m, whereas $\lambda_{vis} \approx 5 \times 10^{-7}$ m). Hence, crystals are optically homogeneous media for visible light.[28] At the same time, crystals are natural diffraction lattices for X rays (31.4.4).

[28] Molecular scattering of visible light (34.3.1) is possible in crystals. It is associated with the impairment of their optical homogeneity due to fluctuations in density.

33.4.4

The diffraction of X rays by crystals can be interpreted as the result of interference of X rays that are mirror reflected from a system of parallel planes passing through the crystal lattice points. They are called *planes of atoms*, or *lattice planes, of the crystal*. The distance d between two adjacent lattice planes is railed the *interplanar spacing*, or *distance*, and the angle θ between the incident ray and the lattice plane (Figure 33.9) is called the *grazing angle*. The path difference of rays reflected from two adjacent lattice planes[29] is $\Delta = \overline{BC} + \overline{BD} = 2d \sin\theta$. Therefore, according to (32.2.1), reflection is observed only in the directions, corresponding to diffraction maxima that comply with the Wulff-Bragg condition:

$$2d \sin\theta = m\lambda,$$

where $m = 1, 2, \ldots$ is the order of the diffraction maximum.

[29] X rays are not refracted in crystals because the values of the refractive index (31.5.1) of all crystals for electromagnetic radiation of such high frequency are practically equal to unity.




Figure 33.9.: X ray diffraction.

33.4.5

The experimental method of investigating the atomic structure of matter by analysing the diffraction of X radiation as it passes through the substance being investigated

is called *X-ray structure analysis*. This method proves most efficient in studying the structure of crystalline bodies. The diffraction pattern, registered on photographic film, is called the X-ray photograph, or pattern, of the specimen.

An X-ray photograph, obtained in the diffraction of a beam of white" X-radiation (with a continuous frequency spectrum) by a *monocrystal* is called a *Laue diffraction pattern*. It consists of discrete diffraction (Laue pattern) spots whose position is determined by the Laue conditions (33.4.1). A *Debye-Scherrer-Hull powder photograph*, or *X-ray powder photograph*, is an X-ray photograph obtained in the diffraction of a beam of monochromatic X-radiation by a *polycrystalline* specimen (for instance, a crystalline powder). Such a photographic pattern consists of a system of concentric diffraction rings. The radii of the rings $r = l \tan 2\theta$, where l is the distance from the specimen to the plane of the X-ray powder photograph, perpendicular to the incident ray, and angles θ comply with the Wulff-Bragg condition (33.4.4).

33.5 Resolving Power of Optical Instruments

33.5.1

The image of the object in any optical system (telescope, microscope, photographic camera, etc.) is obtained by means of a restricted beam of light admitted into the instrument by the so-called *aperture diaphragm*. Such a diaphragm may be that of a photographic camera, lens

mount of a telescope, etc. Reducing the diameter of the aperture diaphragm helps to decrease various distortions of the image resulting from the use of wide beams of light and called *geometrical aberrations of the optical system*.

But, owing to diffraction of light in an optical instrument, the image of a bright point is not a point, but a bright spot surrounded by a system of concentric interference rings (alternating dark and bright ones in the case of monochromatic light and iridescent in the case of white light). This phenomenon limits the *resolving power (resolution) of the optical instrument*, i.e. its capacity to provide separate images of two points of the object close to each other.

33.5.2

According to *Rayleigh's criterion*, the images of two identical point sources of light can still be seen separately if the central maximum of the diffraction pattern of one falls exactly on the first minimum of the diffraction pattern of the other. It follows from (33.3.3) that in accordance with the Rayleigh criterion, two close stars, observed in a telescope with monochromatic light of the wavelength λ, can be resolved (viewed separately) if the angular separation (distance) between them is

$$\Delta\varphi \geqslant 1.22\frac{\lambda}{D},$$

where D is the diameter of the objective. The quantity $(\Delta\varphi)_0 == 1.22\lambda/D$ is called the *angular resolution limit of the telescope*. The reciprocal quantity $1/(\Delta\varphi)_0$ is called

the resolving power of the telescope. The resolving power of a telescope increases in proportion to the diameter of its objective. The condition for the resolution of a terrestrial telescope and a photographic camera in viewing and photographing distant items coincides with that for an astronomical telescope.

The *angular resolution limit of the eye* is determined by the diffraction of light by the pupil ($D \approx 2\,\text{mm}$) and the granular structure of the retina. This limit is about one minute of arc.

33.5.3

The *resolving power of a microscope* is characterized bythe quantity (AZ)0, the shortest distance between two points of the object that are separately visible on the image. In the case of a self-luminous object, all of whose points can be assumed to be incoherent sources,

$$(\Delta l)_0 = \frac{0.61\lambda_0}{A},$$

where λ_0 is the wavelength of the light in vacuum, $A = n \sin u$ is the *numerical aperture of the objective*, n is the refractive index of the medium between the object and the objective, and u is one half of the aperture angle of the beam of light issuing from a point of the object and entering the microscope objective (i.e. the angle between the outermost ray entering the objective and the optical axis). For non-self-luminous objects, the value of $(\Delta l)_0$ depends upon the illumination conditions. But in this case as well, $(\Delta l)_0 \geqslant \lambda_0/A$.

The resolving power of a microscope can be improved either by reducing the wavelength λ_0, or by increasing the numerical aperture A (numerical aperture is abbreviated N.A.). The former method is employed in ultraviolet and electron microscopy, and the latter, in the immersion microscope, in which the space between the objective and the object is filled with a transparent liquid having a refractive index $n > 1$.

33.6 Holography

33.6.1

Holography is a technique for obtaining a three-dimensional optical image of objects and is based on the phenomenon of wave interference. In contrast to the conventional photographic method, light-sensitive fine-grained photographic emulsion is used to record the relations, not only between the amplitudes (or their squares, i.e. the intensities) of light waves scattered by various small portions of the objects surface, but also between the phases of these waves.

The essence of the holographic method is made clear in Figure 33.10. Photographic plate P (Figure 33.10 (a)) records the interference pattern obtained in superposing wave *1*, scattered by the object Q and called the *signal wave*, or *object beam* and wave *2*, coherent with wave *1* and having fixed values of amplitude and phase. Wave *2*, called the *reference wave*, or *reference beam*, is emitted by the same source of light that illuminates the object and, after reflection from mirror B, falls directly on the

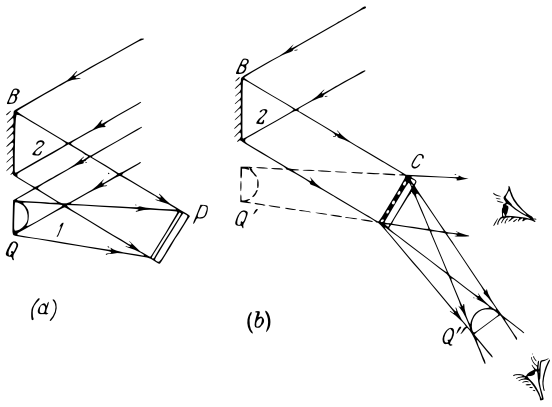


Figure 33.10.: The principle of holographic imaging.

photographic plate P. The interference pattern recorded on the photographic plate after it is developed is called the hologram of object Q. It consists of a very fine and intricate pattern of alternating interference maxima and minima in the blackening of the photographic emulsion and, in contrast to a photographic image, has no outward resemblance to the object.

Holograms are obtained by the interference of light at large path differences, i.e. they require an extremely high degree of coher-ence of the light (32.2.4). For this reason lasers (**??**) are used in holography as the light source.

33.6.2

Reconstructing the image of the object from its hologram C (Figure 33.10 (b)) is accomplished by passing reference

wave *2*, from the same laser used to make the hologram, through it as in the projection of a slide (diapositive). In this operation, the orientation of the plate with the hologram with respect to the reference wave should also be maintained. Wave *2* is diffracted by the hologram. As a result of this diffraction, two three-dimensional images of the object, a virtual and a real image, are seen. The virtual image Q' is at the same place, with respect to the hologram, where the object Q was in taking the photograph. This image is visible in looking through the hologram as if it was a window. The real image Q" is on the other side of the hologram. It seems to he in the air in front of the hologram and is a mirror image of the object.

Ordinarily, the virtual image of the object is used; in visual perception it is identical to the object itself. It not only has the property of being three-dimensional, but its perspective varies with the position of the eye of the observer with respect to the hologram. For example, by moving the head along the hologram, it is possible to see behind some item located in the foreground of the holographic image.

33.6.3

The *interference pattern* at each point of the hologram is determined by light scattered by all the points of the object. Hence, any portion of the hologram contains information about the whole object and can enable the image of the whole object to be restored if, in damaging the hologram, only this single portion remains intact.

The smaller the size of the saved portion of the damaged hologram, the less the light diffracted by it in restoring the image. The luminance is correspondingly reduced and the sharpness of the holographic image of the object is impaired. Thus, a hologram has essential advantages with respect to reliability of storage of information over a conventional photograph or photographic negative, each element of which contains information only about the portion of the object depicted on it.

Holographic recording of information is distinguished for its high capacity and compact form. A great many holograms can be recorded on a single photographic plate. For instance, it is sufficient, for this purpose, to record each hologram with a different value of the angle of incidence of the reference wave on the photographic plate.

33.6.4

Holography can be used to obtain coloured three-dimensional images of objects. To make such a coloured hologram, use is made of the monochromatic light of three lasers with three primary colours (for instance, red, green and blue). The recording of the interference patterns, corresponding to light of three wavelengths, is accomplished simultaneously or consecutively on the same photographic plate. To reconstruct the coloured three-dimensional image of the object it is necessary to simultaneously direct onto the hologram the three reference beams of monochromatic light that were used in recording.

33.6.5

Three-dimensional holograms have special properties not possessed by the ordinary kind. They are obtained by using thick-layer photographic emulsions. Recorded on a three-dimensional hologram is a spatial interference pattern, instead of a plane one. This pattern is obtained in superposing the signal and reference waves. Such a hologram is similar to a spatial diffraction grating (lattice). It is capable of separating out of the incident white light, monochromatic light of the wavelength that was used in recording the hologram. Therefore, an image recorded as a three-dimensional hologram can be reconstructed by illuminating the hologram either by the corresponding monochromatic light or by white light. If a three-dimensional hologram is coloured, the coloured three-dimensional image can be reconstructed by simply illuminating the hologram with white light.

34 Absorption, Scattering And Dispersion Of Light. Vavilov-Cherenkov Radiation

34.1 Interaction of Light With Matter

34.1.1

According to the concepts of classical electron theory, the variable electromagnetic field of a light wave, propagating in a dielectric medium, sets up forced vibrations of the bound charges (electrons and ions) included in the composition of the molecules of the -medium. Consequently, each molecule of the medium can be considered as a system of oscillators with different angular frequencies of natural vibration (28.1.1). Ions are considerably more massive than electrons and execute appreciable vibration only as the effect of low-frequency (infrared) radiation. In the frequency region of visible and ultraviolet light, the deciding role is played by the forced vibration of the external, more weakly bound electrons of atoms and molecules.

They are called *optical electrons*.

34.1.2

Electrons and ions that execute forced vibrations by the action of light radiate secondary light waves of the same frequency. The average distance between the molecules of a medium is only a small fraction of the coherence length (32.1.4) of the light. Therefore, the secondary waves radiated by a great number of neighbouring molecules are coherent and display interference when superposed.

If the medium is homogeneous and isotropic (30.1.6), interference results in the formation of a transmitted wave, whose phase velocity depends upon the frequency and whose direction of propagation coincides with that of the primary wave.

34.1.3

When the medium is optically nonhomogeneous, the superposition of the primary and secondary waves results in scattering of the light (34.3.1). Finally, when light falls on the interface between two different media, interference results in the formation of a reflected wave in addition to the transmitted wave. Thus, a more or less considerable layer of particles of the medium, adjoining the reflecting surface, participates in the formation of the reflected wave. Therefore, upon total internal reflection (31.5.8), the electromagnetic field of the light wave is not completely cut off at an interface with an optically less dense medium, but partly penetrates it. The field strength E, however,

decreases very rapidly as the distance to the interface increases according to the equation

$$E \propto \exp\left[-\frac{2\pi z}{\lambda_2}\sqrt{\left(\sin^2\frac{i}{n_{21}^2}\right)-1}\right],$$

where z is the distance from the interface, i is the angle of incidence ($i > i_{cr}$), λ_2 is the wavelength of light in the medium, i_{cr} is the critical angle (31.5.8), and n_{21} is the relative refractive index of the medium.

34.2 Absorption of Light

34.2.1

The *absorption of light* refers to the reduction in the energy of a light wave as it is propagated in a substance. It results from the conversion of energy of the wave into internal energy (9.1.2) of the substance or into energy of secondary radiation having a different spectral composition and other directions of propagation (photoluminescence, Section (**??**). Light absorption may lead to heating of the substance, excitation and ionization of its atoms or molecules, photochemical reactions and other processes in the substance.

The absorption of light is described by the *Bouguer-Lambert law* (also called the *Lambert law*), which states that the intensity I of a plane wave of monochromatic light decreases as it passes through an absorbing medium according to the exponential relation

$$I = I_0 \exp(-\alpha x),$$

where I_0 and I are the intensities of the light at the entrance to and exit from a layer of the medium of thickness x, and α is the *absorption factor* (*linear coefficient of absorption*), which depends on the chemical nature and state of the substance and on the wavelength λ of the light.

Beer's law is valid for dilute solutions of an absorbing substance in a nonabsorbing solvent: $\alpha = bc$, where c is the concentration of the solution and b is a proportionality factor that is independent of c. Beers law does not hold for high concentrations because of the effect of the interaction between the closely spaced molecules of the absorbing substance.

34.2.2

According to the Bouguer-Lambert law, the equation of a plane, linearly polarized, monochromatic light wave, propagating in an absorbing medium along the positive direction of the OX axis, is of the form:

$$E = E_0 \exp\left(-\frac{\alpha x}{2}\right) \cos(\omega t - kx).$$

Here E is the strength of the waves electric field at points with the coordinate x, E_0 is the amplitude of E at points in the plane $x = 0$, ω is the angular frequency of the light, $k = 2\pi/\lambda = \omega n/c$ is the wavenumber, λ is the wavelength of the light in the medium, c is the velocity of light in free space, and n is the refractive index of the medium.

In the exponential form the equation of this wave is of

the form (30.2.7):

$$E = E_0 \exp\left(-\frac{\alpha x}{2}\right) \exp i\,(\omega t - kx) = E_0 \exp i\left(\omega t - \frac{\tilde{n}\omega x}{c}\right)$$

where

$$\tilde{n} = n\left(1 - i\frac{\alpha\lambda}{4\pi}\right) = (1 - i\varkappa),$$

is the *complex refractive index of the medium* ($i = \sqrt{-1}$), and $\varkappa = \alpha/2k = \alpha\lambda/4\pi$ is the *absorptivity*, or *absorptive power*, which characterizes the decrease in the intensity and amplitude of a plane wave as it propagates in a medium.

34.2.3

The dependence of the absorption factor α of a dielectric on the lights wavelength λ, characterizing the *light absorption spectrum* in this medium, is related to the resonance phenomenon upon forced vibration of the electrons in the atoms and the atoms in the molecules of the dielectric. Dielectrics absorb light more or less selectively: absorption is great only in frequency regions close to the natural frequencies of vibrations of the electrons in the atoms and the atoms in the molecules. This phenomenon of *resonance absorption of light* is displayed most clearly in dilute monatomic gases (for example, the vapours of most metals), which have a *line spectrum of light absorption*. Discrete frequencies of intensive light absorption coincide with the frequencies of the self-radiation of excited atoms in these gases.

Systems of closely spaced lines, forming *absorption bands*, are observed in gases having polyatomic molecules. The structure of the absorption bands is determined by the composition and structure of the molecules. Liquid and solid dielectrics have *continuous absorption spectra*, consisting of comparatively wide absorption bands, within which the absorption factor α reaches a quite high value and varies smoothly in accordance with the wavelength λ. This kind of dependence of α on λ in condensed media is due to the strong interaction between the particles of the medium, leading to the appearanceof a great number of additional resonance frequencies.

34.2.4

At sufficiently high intensities of light, deviations from the Bouguer-Lambert law (34.2.1) are observed: the absorption factor of a dielectric medium begins to depend upon I, decreasing with an increase in I. This phenomenon, inexplicable within the framework of classical light absorption theory, is readily interpreted in the quantum theory of the interaction of light with matter. In the absorption of light, a part of the molecules of the medium goes over into an excited state. The excited molecules cannot participate in further light absorption until they return, after expending their surplus energy, to the unexcited ("normal") state. The higher the intensity of the light and the longer the average lifetime $\langle \tau \rangle$ of a molecule in the excited state, the greater the fraction of excited molecules in the medium.

If this fraction of excited molecules is negligible, light

is absorbed in accordance with the Bouguer-Lambert law. Otherwise, α decreases with an increase in the intensity of the light. It is feasible to obtain a nonequilibrium state of the medium, in which the fraction of excited molecules is so large that the absorption factor of the medium becomes negative. This phenomenon is made use of in a quantum oscillator of radio waves and light (**??**).

34.2.5

Metals in a condensed state contain a huge amount of conduction electrons and, therefore, have high electrical conductance. When subjected to light, the conduction electrons execute variable motion and radiate secondary waves. As a result of the superposition of the primary wave, falling on the surface of the metal, and the secondary wave, an intensive reflected wave is formed and a relatively weak wave that enters the metal. The reflection coefficient (31.5.6) can reach 95 per cent and even more. It depends upon the surface finish of the metal, its electrical conductance and the light frequency.

The refracted wave is rapidly absorbed in the metal. Its energy is consumed on the production of Joule heat, evolved by the conduction currents initiated by the action of light in the thin layer of metal adjacent to the surface. In the frequency region of infrared radiation, the optical properties of metals are determined mainly by the conduction electrons. But in the region of visible light and especially ultraviolet radiation, bound electrons, in the ions of the metal, begin to play an appreciable role. This leads to a reduction in the reflection coefficient and to its

pronounced dependence on the frequency.

34.3 Scattering of Light

34.3.1

The *scattering of light* is the phenomenon in which light is transformed by a substance. It is accompanied by a change in the direction of light propagation, and is manifested as an extrinsic glow of the substance. This glow is due to the forced vibration of the electrons in the atoms of the scattering medium by the action of the incident light. Light scattering occurs in an optically nonhomogeneous medium, whose refractive index varies irregularly from point to point due either to fluctuations in the density of the medium or to the presence in it of small foreign particles. In the former case, *the light scattering* is said to be *molecular* or *Rayleigh scattering*; in the second, *light scattering in a turbid medium*. Examples of turbid media are aerosols (smoke and fog), emulsions and colloidal solutions.

34.3.2

The scattering of light in turbid media by particles whose size is small compared to the wavelength λ, is called the *Tyndal effect*. A system of electrons, executing forced vibration in the atoms of electrically isotropic particles of small size $r_0 \approx (0.1 \text{ to } 0.2)\ \lambda$, is equivalent to one oscillating electrical dipole (linear harmonic oscillator). This dipole oscillates at the frequency ν of the light incident

on it, and the intensity of the light it radiates is proportional to ν^4 (31.3.3). Hence, *the Rayleigh law* is valid for scattered light. It states that the intensity I of scattered light is inversely proportional to the fourth power of the wavelength: $I \propto \lambda^{-4}$. When white light passes through a finely divided turbid medium, short-wave (dark-to-light blue) light predominates in the scattered light, and long-wave (yellow-to- red) light in the transmitted light. This explains, for instance, the light-blue colour of the sky and the yellowish-red colour of the rising and setting sun.

In scattering of natural light (34.1.1), the dependence of the intensity of the scattered light on the scattering angle θ is of the form:

$$I_\theta = I_{\pi/2}\,(1 + \cos^2\theta).$$

Here I_θ and $I_{\pi/2}$ are the intensities of light scattered at angles of θ and $\pi/2$ to the direction of the primary light beam falling on a turbid medium. Light scattered at the arbitrary angle θ is partly polarized (35.1.1); that scattered at the angle $\pi/2$ is completely linearly polarized (31.1.7): vector $\mathbf{E}$ of the field set up by this light is perpendicular to the plane passing through the incident and scattered rays.

34.3.3

As the size r_0 of the inhomogeneities in a turbid medium is increased, the laws of light scattering are changed. At $r_0 > \lambda$, the dependence of I_θ on θ is of complex form, the intensity of the forward scattering of light (in the directions $\theta < \pi/2$) being greater than for backward

scattering. This phenomenon is called the *Mie effect*. In this case, light scattered at the angle $\theta = \pi/2$ is only partly polarized. The dependence of the scattered light intensity I on the wavelength λ is of the form: $I \propto \lambda^{-p}$, where $p < 4$ and decreases with an increase in r_0. At $r_0 > \lambda$, the spectral compositions of the scattered and incident light practically coincide. This explains, for instance, the white colour of the clouds.

34.3.4

Molecular scattering in pure media, not containing any foreign impurities, is due to inhomogeneitics that occur in the process of random thermal motion of the particles of the medium. These inhomogeneities are associated with fluctuations in density (11.6.1), whereas in media having anisotropic (polar) molecules, the inhomogeneities are also due to fluctuations in the orientation of these molecules (fluctuations of anisotropy). In true solutions, light may be scattered by fluctuations in concentration.

Under ordinary conditions the size of the regions of the medium, corresponding to any appreciable fluctuations, is much less than the wavelength of visible light. Therefore, the dependence of the scattered light intensity on the wavelength λ and angle θ, as well as on the kind of polarization in molecular scattering, is analogous to the corresponding laws for the Tyndal effect. But, in contrast to the Tyndal effect, the intensity of molecular scattering of light depends upon the temperature of the medium, increasing with the temperature.

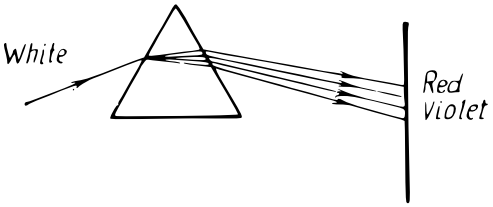


Figure 34.1.: Prismatic dispersion of light.

34.4 Normal and Anomalous Light Dispersion

34.4.1

The *dispersion of light* is the dependence of its phase velocity v in a medium on its frequency ν. According to Section (31.5.1), $v = c/n$, where c is the velocity of light in free space, and n is the refractive index of the medium. Since c is a universal constant, the same for electromagnetic waves of any frequency, the existence of the dispersion of light in a medium is due to the fact that' its refractive index n depends upon the frequency ν. This dependence is readily detected, for example, in passing a beam of white light through a prism made of some transparent medium. Observed on the screen, mounted behind the prism, is an iridescent band (Figure 34.1) called a *prismatic*, or *dispersion spectrum*.

34.4.2

The dependence of the refractive index n of a medium on the light frequency ν is neither linear nor monotonic. The region of ν values in which $\mathrm{d}n/\mathrm{d}\nu > 0$, i.e. n increases with ν, corresponds to *normal dispersion of light*. Normal dispersion is found for substances transparent to light. For example, ordinary glass is transparent to visible light and, in this frequency region, normal dispersion of light is observed in glass. A case of normal dispersion of light is illustrated in Figure 34.1.

The dispersion of light is said to be *anomalous* if $\mathrm{d}n/\mathrm{d}\nu < 0$, i.e. the refractive index of the medium decreases with an increase in ν. Anomalous dispersion is found in frequency regions that correspond to intensive absorption of light in the given medium (34.2.1). In ordinary glass, for instance, these bands are in the infrared and ultraviolet parts of the spectrum.

34.4.3

Depending upon the kind of dispersion light undergoes, its group velocity u can be either more or less than its phase velocity v. According to Sect. (30.4.3), the group velocity is related to the angular velocity ω of the wave and to its wave-number k by the equation: $u = \mathrm{d}\omega/\mathrm{d}k$. Since $\omega = 2\pi\nu$ and $k = 2\pi/\lambda = 2\pi n\nu/c$,

$$u = \frac{c}{n + \nu\dfrac{\mathrm{d}n}{\mathrm{d}\nu}} = \frac{v}{1 + \dfrac{\nu}{n}\dfrac{\mathrm{d}n}{\mathrm{d}\nu}}.$$

In normal dispersion the group velocity is less than the phase velocity ($u < v$). In the case of anomalous dispersion $u > v$ and, in particular, if $n + \nu \, \mathrm{d}n/\mathrm{d}\nu < 1$, then $u > c$. This does not contradict the statement of the special theory of relativity that the velocity of any signal (including a light signal) cannot exceed c (5.1.3).

The concept of group velocity correctly describes only a signal whose "shape", i.e. the distribution of amplitudes and energies along its "length", does not change when the signal travels through the medium. But for light, this condition is complied with only approximately; the narrower the frequency spectrum of the signal and the less the light dispersion in the medium, the more exactly the condition is complied with. In the frequency regions corresponding to anomalous dispersion, the group velocity does not coincide with the velocity of the signal because, owing to considerable dispersion of light, the "shape" of the signal changes rapidly as it propagates in the medium.

34.5 Classical Electron Theory of Light Dispersion

34.5.1

Optically transparent media are non-magnetic ($\mu_r \approx 1$), so that their refractive index (31.5.1)$n = \sqrt{\varepsilon_r} = \sqrt{1 + \chi_e}$ where ε_r and χ_e are the relative permittivity (dielectric constant) and the dielectric (or electric) susceptibility of the medium (18.2.4). Therefore, the dispersion of light can he regarded as the dependence of ε_r and χ_e on the frequency of the variable electromagnetic field of the light,

causing electronic polarization of the medium (18.2.2).

If each atom (or molecule) of the medium contains one optical electron (34.1.1), the polarization vector of the medium (18.2.3) $\mathbf{P}_e = -en_0\mathbf{r}$, where $-e$ is the charge of the electron, $\mathbf{r}$ is its displacement from the equilibrium position, and n_0 is the concentration of atoms (or molecules) of the medium. On the other hand (18.2.4), $\mathbf{P}_e = \varepsilon_0\chi_e\mathbf{E}$, where ε_0 is the electric constant (14.2.7), and $\mathbf{E}$ is the strength of the electric field of the light.

34.5.2

An optical electron executes forced vibrations under the effect of the following forces:

(a) restoring quasi-elastic force (**??**) $\mathbf{F}_{\text{rest}} = -m\omega_0^2\mathbf{r}$, where m and ω_0 are the mass of the electron and the angular frequency of its free undamped vibrations;

(b) force of resistance $\mathbf{F}_{\text{resi}} = -2\beta m\,\mathrm{d}\mathbf{r}/\mathrm{d}t$, where β is the damping factor of free vibrations of the electron;

(c) driving forc $\mathbf{F} = -e\mathbf{E}$, exerted on the electron by a variable field of strength $\mathbf{E}$. The equation of forced vibrations is

$$\frac{\mathrm{d}^2\mathbf{r}}{\mathrm{d}t^2} + 2\beta\frac{\mathrm{d}\mathbf{r}}{\mathrm{d}t} + \omega_0^2\mathbf{r} = -\frac{e\mathbf{E}}{m}.$$

In the case of linearly polarized monochromatic light with the angular frequency ω, the field strength $\mathbf{E} = \mathbf{E}_0\cos\omega t$, where $\mathbf{E}_0 = \text{const.}$ is the amplitude vector. If, in addition, the medium does not absorb light, then

$\beta = 0$ and the steady-state forced vibration of the optical electron is executed according to the relation

$$\mathbf{r} = -\frac{e\mathbf{E}}{m(\omega_0^2 - \omega^2)}.$$

Here the polarization vector of the medium is

$$\mathbf{P}_e = \frac{n_0 e^2 \mathbf{E}}{m(\omega_0^2 - \omega^2)} \quad \text{and} \quad \chi_e = \frac{n_0 e^2}{\varepsilon_0 m(\omega_0^2 - \omega^2)}.$$

The dependence of the refractive index n of the medium on ω is of the form

$$n^2 = 1 + \frac{n_0 e^2}{\varepsilon_0 m(\omega_0^2 - \omega^2)}.$$

34.5.3

At values of ω close to ω_0, the absorption of light in the medium can no longer be neglected, assuming that $\beta = 0$. In an absorbing medium (i.e. at $\beta \neq 0$), vibrations of the optical electron and of vector $\mathbf{P}_e$ are out of phase with respect to the oscillations of the field strength $\mathbf{E}$ (29.2.2):

$$\mathbf{r} = \mathbf{A}\cos(\omega t + \varphi_0),$$

where

$$\mathbf{A} = -\frac{e\mathbf{E}_0}{m\sqrt{(\omega_0^2 - \omega^2)^2 + 4\beta^2\omega^2}}, \quad \text{and} \quad \tan\varphi_0 = -\frac{2\beta\omega}{(\omega_0^2 - \omega^2)}.$$

Accordingly

$$\mathbf{P}_e = -\frac{n_0 e^2 \mathbf{E}_0 \cos(\omega t + \varphi_0)}{m\sqrt{(\omega_0^2 - \omega^2)^2 + 4\beta^2\omega^2}}.$$

Introduced to describe the properties of a light-absorbing medium, along with the complex refractive index (34.2.2) $\tilde{n} = n(1 - i\varkappa)$, are the *complex dielectric susceptibility* $\tilde{\chi}_e$ and the *complex dielectric constant* $\tilde{\varepsilon}_r$:

$$\tilde{\chi}_e = \frac{\tilde{P}_e}{\varepsilon_0 \tilde{E}} \quad \text{and} \quad \tilde{\varepsilon}_r = 1 + \tilde{\chi}_e, \text{ whereas } \tilde{n}^2 = 1 + \tilde{\chi}_e.$$

Here $\tilde{P}_e$ and $\tilde{E}$ are complex values of the polarization and strength of the field:

$$\tilde{P}_e = \frac{n_0 e^2 E_0 \exp i(\omega t + \varphi_0)}{m\sqrt{(\omega_0^2 - \omega^2)^2 + 4\beta^2\omega^2}} \quad \text{and} \quad \tilde{E} = E_0 \exp i(omegat),$$

so that

$$\begin{aligned}
\tilde{n}^2 &= n^2(1 - i\varkappa)^2 \\
&= 1 + \frac{n_0 e^2}{\varepsilon_0 m\sqrt{(\omega_0^2 - \omega^2)^2 + 4\beta^2\omega^2}} \exp i\varphi_0, \\
n^2(1 - \varkappa^2) &= 1 + \frac{n_0 e^2 \cos\varphi_0}{\varepsilon_0 m\sqrt{(\omega_0^2 - \omega^2)^2 + 4\beta^2\omega^2}} \\
&= 1 + \frac{n_0 e^2(\omega_0^2 - \omega^2)}{\varepsilon_0 m[(\omega_0^2 - \omega^2)^2 + 4\beta^2\omega^2]}, \\
2n^2\varkappa &= -\frac{n_0 e^2 \sin\varphi_0}{\varepsilon_0 m\sqrt{(\omega_0^2 - \omega^2)^2 + 4\beta^2\omega^2}} \\
&= \frac{2n_0 e^2 \beta\omega}{\varepsilon_0 m[(\omega_0^2 - \omega^2)^2 + 4\beta^2\omega^2]}.
\end{aligned}$$

34.5.4

In the classical electron theory of light dispersion in gases, each molecule of the gas is dealt with as a system of q linear oscillators. If ω_{0j} and β_{0j} are the natural angular frequency and damping factor of the j-th oscillator, then

$$n^2(1-\varkappa^2) = 1 + \frac{n_0 e^2}{\varepsilon_0 m} \sum_{j=1}^{q} \frac{(\omega_0^2 - \omega^2) f_j}{(\omega_0^2 - \omega^2)^2 + 4\beta^2\omega^2} \quad \text{and}$$

$$n^2 \varkappa = \frac{n_0 e^2 \omega}{\varepsilon_0 m} \frac{\beta_j f_j}{(\omega_0^2 - \omega^2)^2 + 4\beta^2\omega^2}$$

The dimensionless coefficient f_j characterizes the contribution of the j-th oscillator to the dispersion and absorption of light. It is called the *oscillator strength*. In the classical theory of dispersion, the values of ω_{0j} and f_j are assumed to he known from experimental investigations.

For gases, $\varkappa \ll 1$ and n differs only slightly from unity, so that $n^2 - 1 = (n+1)(n-1) \approx 2(n-1)$. Therefore, the dependence of n on ω is of the form

$$n = 1 + \frac{n_0 e^2}{2\varepsilon_0 m} \sum_{j=1}^{q} \frac{(\omega_0^2 - \omega^2) f_j}{(\omega_0^2 - \omega^2)^2 + 4\beta^2\omega^2}.$$

The curve of this equation is shown in Figure 34.2. Anomalous dispersion is observed close to each of the frequencies ω_{0j}.

34.6 Vavilov-Cherenkov Radiation

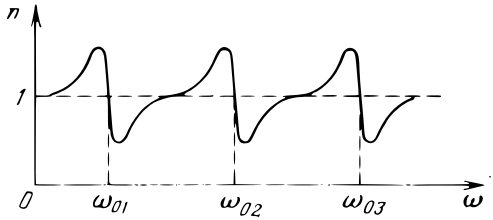


Figure 34.2.: Dependece of n on ω.

34.6.1

Vavilov-Cherenkov radiation (or *effect*) is the radiation of light, differing from luminescence (**??**), emitted in the motion of charged particles in a substance at velocities V greater than the phase velocity v of light in this substance. The condition for the existence of this radiation is: $c/n < V < c$, where c is the velocity of light in free space (or in vacuum), and $n > 1$ is the refractive index of the substance.

In the process of Vavilov-Cherenkov radiation, the energy and velocity of the free emitting particle is reduced, i.e. the particle is retarded. But, in contrast to braking radiation (bremsstrahlung) of slowly moving charged particles (31.3.4), *resulting from their change in velocity*, the reduction in the velocity of particles in Vavilov-Cherenkov radiation is itself a *consequence* of this *radiation*.

In other words, if the loss of energy of the particle, consumed in emitting Vavilov-Cherenkov radiation, could be replenished in some way and the particle would continue travelling in the substance at a "faster-than-light" velocity ($V > v$), Vavilov-Cherenkov radiation would still

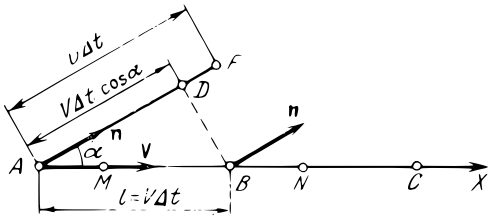


Figure 34.3.: A charged particle emitting Vavilov-Cherenkov radiation.

be observed, whereas there would be no braking radiation in this case.

34.6.2

A charged particle gives rise to short-duration polarization (18.2.2) of the substance in the vicinity of the points through which it travels. Hence, the molecules of the medium, lying on the path of the particle, become temporarily acting coherent sources (30.5.1) of elementary electromagnetic waves that interfere upon superposition.

If $V < v = c/n$, the elementary waves cancel one another. Assuming that the charged particle travels at the velocity V (where $V < v$) along the OX axis (Figure 34.3) and is at points A and B at the instants of time t and $t + \Delta t$, respectively. The distance between A and B is $l = V\Delta t$. The path difference of elementary waves, radiated from points A and B in the arbitrary direction $\mathbf{n}$, making the angle a with vector $\mathbf{V}$, is

$$\Delta = \overline{DF} = (v - V\cos\alpha)\Delta t = l\left(\frac{v}{V} - \cos\alpha\right).$$

It is possible, for each value of the wavelength λ, to find a value $l = l_{\alpha\lambda}$ at which $\Delta = \lambda/2$, so that the elementary waves cancel one another. Thus

$$l_{\alpha\lambda} = \frac{\lambda}{2\left(\frac{v}{V} - \cos\alpha\right)}.$$

When $l = l_{\alpha\lambda}$, radiation, in the direction n from any point M of portion AB of the path of the charged particle, is cancelled upon interference with radiation in the same direction from a like point N on the adjacent portion $\overline{BC} = \overline{AB} = l_{\alpha\lambda}$, the distance between points M and N being $\overline{MN} = l_{\alpha\lambda}$. Therefore, upon motion of a charged particle at uniform velocity in a straight line in a substance at a "slower-than-light" velocity, the particle does not emit radiation.

34.6.3

If a particle travels in a substance at a "faster-than-light" velocity $V > v = c/n$, the value of $l_{\alpha\lambda}$, complying with the condition for the cancelling of elementary waves,

$$l_{\alpha\lambda} = \frac{\lambda}{2\left|\frac{v}{V} - \cos\alpha\right|},$$

can be found for all values of angle α, with the exception of

$$\theta = \arccos\frac{v}{V} = \arccos\frac{c}{nV}.$$

For the direction $\theta = \alpha$, the path difference of the elementary waves emitted by any two points A and B of

the path of the charged particle (Figure 34.3) equals zero. Thus

$$\Delta = \overline{DF} = (v - V\cos\theta)\Delta t = 0.$$

Consequently, elementary waves, propagating in the direction $\theta = \alpha$, reinforce one another upon interference, forming a resultant radiation in this direction. This is Vavilov-Cherenkov radiation. Light, emitted at each small portion of the path of a charged particle, is propagated along the elements of a cone, whose vertex O (Figure 34.4) is located on this portion and whose axis coincides with the path of the particle. The elements make the angle $\theta = \arccos(c/nV)$ with the axis. The light is polarized so that vector $\mathbf{E}$ is normal to the surface of the cone, and vector $\mathbf{H}$ is tangent to it.




Figure 34.4.: Propagation cone of Vavilov-Cherenkov radiation.

35 Polarization of Light

35.1 Polarization of Light in Reflection and Refraction at the Interface Between Two Dielectric Media

35.1.1

Light emitted by ordinary (nonlaser) sources is made up of a set of a great many plane polarized wave trains, or packets (32.1.3), whose electric vectors **E** vary along all possible directions perpendicular to the ray (30.2.1). Light is said to be *natural*, or *unpolarized*, if not one of the above-indicated directions of vibration is predominant. In natural light, the resultant strength **E** oscillates at each point of the field in a direction that rapidly and randomly varies in a plane perpendicular to the ray.

Light is said to be *partially polarized* if in it there is a predominant direction of oscillation of vector **E**. Partially polarized light can be regarded as a collection ("mixture") of natural and linearly polarized light, simultaneously propagating in a single direction.

35.1.2

The *polarization of light* is the separation of linearly polarized light out of natural or partially polarized light. Special devices, called *polarizers*, are used for this purpose. Their principle of operation is based on the polarization of light upon being reflected or refracted by the interface between two dielectric media, as well as on the phenomenon of birefringence (35.2.1) and dichroism (35.2.10). The same devices can be utilized as *analyzers*, i.e. devices to determine the kind and degree of polarization of light.

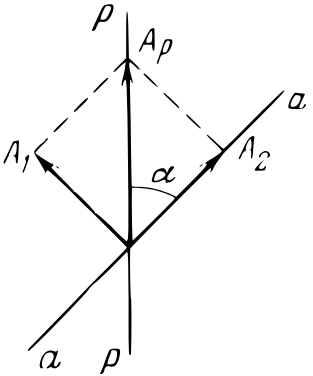


Figure 35.1.: Analysing linearly polarized light.

Assume that linearly polarized light, whose electric vector $\mathbf{E}_p$ is along the line p-p and oscillates with the amplitude A_p, falls on the analyzer perpendicularly to the plane of Figure 35.1. Assume further that the electric vector $\mathbf{E}_a$ of the light passed by the analyzer is along line a-a, which makes the angle α with line p-p. The incident light can be represented in the form of two waves, linearly polarized in mutually perpendicular planes (31.1.8). The wave whose electric vector $\mathbf{E}_1$ oscillates along the direction perpendicular to a-a, with the amplitude $A_1 = A_p \sin\alpha$, cannot pass through the analyzer. But the other wave, whose electric vector $\mathbf{E}_2$ oscillates along the direction of a-a, with the amplitude $A_2 = A_p \cos\alpha$ passes completely through the analyzer. Consequently, the amplitude of the light emerging from the analyzer is

$$A_a = A_2 = A_p \cos\alpha.$$

The intensities I_a and I_p of the linearly polarized light incident on and emerging from the analyzer, respectively,

are related by the *Malus law*:

$$I_a = I_p \cos^2 \alpha.$$

The *principal plane of a polarizer* (or *analyzer*) is the plane of polarization [plane of oscillation, according to previous terminology (31.1.7)] of light passed through the polarizer (or analyzer).

35.1.3

In investigating the laws of light polarization as a result of reflection and refraction of natural light, the light can be conveniently dealt with as a combination of linearly polarized waves, of equal intensities, of two types: s- and p-waves (31.5.4).

The reflection coefficient (31.5.6) of the s-waves (R_s) is always greater than that (R_p) of the p-waves. Therefore, in contrast to incident natural light, reflected and transmitted (refracted) light is partially polarized. Oscillations of the electric field vector $\mathbf{E}$ of the s-type (perpendicular to the plane of incidence) predominate in reflected light, whereas oscillations of the p-type (in the plane of incidence) predominate in transmitted light.

Brewster's law states that reflected light is completely linearly polarized at the angle of incidence $i = i_{Br}$, complying with the condition $\tan i_{Br} = n_{21}$, where n_{21} is the relative refractive index of a medium reflecting light.

The angle i_{Br} is called *Brewster's* angle. When $i = i_{Br}$, the reflected and refracted rays are perpendicular to each other and the the reflection coefficient of the p-wave is $R_p = 0$ (31.5.6). Hence, only s-type waves are reflected.

But their reflection coefficient is considerably less than unity (about 0.15 for glass). Thus, the transmitted light is only partially polarized.

35.1.4

Polarization of transmitted light can be enhanced by subjecting the light to a number of consecutive reflections and refractions. This is done in a stack consisting of several identical and parallel plates of some transparent dielectric (for instance, glass), set at the Brewster angle to the incident light beam.

If the number of plates in the stack is sufficiently large, then the light passing through the stack is found to be practically linearly polarized (p-type). In the absence of light absorption in the stack, the intensities I_s and I_p of the reflected and transmitted linearly polarized light are the same and equal to one-half of the intensity I_0 of the incident natural light. Thus

$$I_s = I_p = \frac{1}{2} I_0.$$

35.1.5

According to the conceptions of classical electron theory, the formation of the reflected wave is due to the secondary waves emitted by the molecules, the oscillators of the light reflecting medium (34.1.3). Oscillators (vibrating electric dipoles), whose axis is perpendicular to the plane of incidence, correspond to a wave of the s-type. These oscillators are shown in Figure 35.2 by black dots on the

refracted and reflected rays. As is evident from the polar directional diagram (Figure 35.4), such oscillators should radiate intensively in all directions lying in the plane of incidence, i.e. they should participate in the formation of both the reflected and the refracted s-waves.

Oscillators, whose axis lies in the plane of incidence and is perpendicular to the refracted ray (shown in Figure 35.2 by transverse dashes), correspond to a wave of the p-type. Oscillators do not radiate along their axis (Figure 35.4), and at $i = i_{Br}$ the reflected ray is perpendicular to the refracted one, thereby being parallel to the axes of these oscillators. Hence, at $i = i_{Br}$ these oscillators do not radiate in the direction of the reflected ray, making no contribution to the reflected wave. Consequently, the reflected light is completely linearly polarized (s-type waves).




Figure 35.2.: Polarization of light on refraction and reflection.

35.2 Birefringence (Double Refraction)

35.2.1

Most crystals are optically anisotropic (30.1.6). Their relative dielectric permittivity (dielectric constant) and refractive index depend on the direction of the electric vector $\mathbf{E}$ of the light wave. Observed in optically anisotropic crystals is the phenomenon of *double refraction*, or *birefringence*, which consists in the splitting of a light ray, falling on a surface of the crystal, into two refracted rays. The birefringence of light in a crystal of Iceland spar ($CaCO_3$) is illustrated in Figure 35.3.

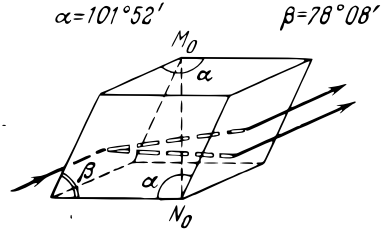


Figure 35.3.: The birefringence of light in a crystal of Iceland spar ($CaCO_3$).

35.2.2

The *optic axis of a crystal* is the direction in an optically anisotropic crystal along which light propagates without undergoing birefringence. It is necessary to underline that the optic axis of a crystal is no single special straight line similar, for instance, to the axis of symmetry of a body. It only characterizes a certain *direction* in the crystal and can be passed through any point of the crystal.

Depending upon their type of symmetry, optically anisotropic crystals can be either *uniaxial* or *biaxial*, i.e. they can have either one or two optic axes. An example of a uniaxial crystal is Iceland spar, whose optic axis coincides in direction with the diagonal M_0N_0 of the crystal (Figure 35.3).

The *principal plane* (or *principal section*) *of a uniaxial crystal* for a certain ray is the plane passing through this ray and intersecting the optic axis.

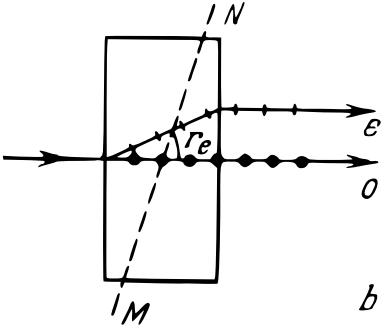


Figure 35.4.: The ordinary and extraordinary rays.

35.2.3

In a uniaxial crystal, one of the rays formed in birefringence (double refraction) obeys the ordinary laws of light refraction (31.5.3). It lies in the plane of incidence and complies with Snells law. It is therefore called the *ordinary*, or *O ray*. The second ray is called the *extraordinary* or *E ray* because it generally does not lie in the plane of incidence and does not obey Snells law.

For example, even in the case of normal incidence of light on a plate cut from a uniaxial crystal, the extraordi-

nary ray is refracted (Figure 35.4). Its refractive angle r_e depends on how the surface of the plate is oriented with respect to the optic axis of the crystal. It may be equal to zero only in two cases:

(a) if the surface of the plate is perpendicular to the optic axis (light propagates in the plate along the optic axis and is thereby not subject to birefringence);

(b) if the surface of the plate is parallel to the optic axis (light propagates in the plate perpendicular to the optic axis).

In a biaxial crystal both refracted rays behave like extraordinary ones.

35.2.4

Birefringence indicates that a light wave incident on an optically anisotropic crystal produces two waves, propagating through the crystal, generally in different directions. In a uniaxial crystal, they are called the *ordinary* and *extraordinary* waves. The ordinary and extraordinary rays indicate the directions of the Umov-Poynting vectors (31.2.3) of the corresponding waves in the crystal, i.e. the direction of energy transfer by these waves.

The ordinary and extraordinary waves are linearly polarized (31.1.7).[30] In the ordinary wave, vector $\mathbf{E}$ is perpendicular to the principal plane of the crystal for the ordinary ray. The electric vector $\mathbf{E}$ of the extraordinary wave lies in the principal plane of the crystal for the extraordinary ray. The directions of vectors $\mathbf{E}$ in the ordinary and extraordinary waves are conditionally

[30] Frequently, mention is made of linear polarization of the ordinary and extraordinary rays, actually meaning the polarization of the waves corresponding to them.

shown in Figure 35.4 by black dots on the ordinary ray and transverse dashes on the extraordinary ray (it is assumed that both rays, and optic axis MN intersecting them, lie in the plane of the figure).

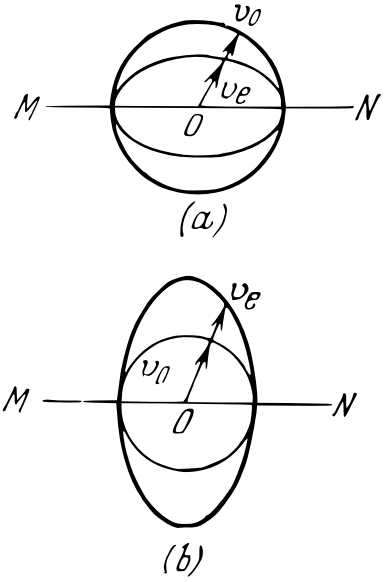


Figure 35.5.: The velocity of ordinary and extraordinary rays in an anisotropic crystal.

35.2.5

The *ray velocity of the wave*, or simply *ray velocity*, in an optically anisotropic crystal is the velocity $\mathbf{v}$ of energy transfer by the wave. In a uniaxial crystal, the *velocity $\mathbf{v}_o$ of the ordinary ray* is numerically equal in all directions: $v_o = c/n_o$, where c is the velocity of light in free space (or in vacuum), and $n_o = \text{const.}$ is the *refractive index of the crystal for the ordinary ray*. Accordingly, the *velocity $\mathbf{v}_e$ of the extraordinary ray* is numerically equal to $v_e = c/n_e$, where n_e is the refractive index of the crystal for the extraordinary ray. The values of n_e and v_e depend on the direction of the extraordinary ray with respect to the optic axis of the crystal. For a ray propagating along the optic axis, $n_e = n_o$ and $v_e = v_o$. The value of n_e differs to the greatest extent from that of n_o for a direction perpendicular to the optic axis: $n_e = n_{eo}$.

35.2.6

The *ray surface of a wave in a crystal* is the locus of the heads of vectors $\mathbf{v}$ of the ray velocity of the wave that extend from a certain point O in the crystal in all possible directions.

In a uniaxial crystal, the ray surface of the ordinary

wave has the shape of a sphere, whereas that of the extraordinary wave is an ellipsoid of revolution about the optic axis MN passing through point O. The ellipsoid and sphere contact each other at the points of intersection with optic axis MN. When $n_e \geqslant n_o$, the ellipsoid is inscribed in the sphere (Figure **??** (a)), whereas if $n_e \leqslant n_o$ the ellipsoid is circumscribed about the sphere (Figure **??** (b)). In the former case, the uniaxial crystal is said to be *optically positive*, in the latter, *optically negative*.

35.2.7

Birefringence in a uniaxial crystal can be explained and the directions of the ordinary and extraordinary rays can be found by using the Huygens graphical method. Assume that a plane unpolarized light wave is incident on the plane surface ab of a uniaxial optically negative crystal (or a plate cut out of this crystal) at the angle i (Figure 35.6). The optic axis MN of the crystal, passing through point A of surface ab, lies in the plane of the figure and makes the angle γ with plane ab.

At the instant t of time being considered, the front AD of the incident wave has reached pointed on the surface of the crystal, and this point becomes the source of two linearly polarized elementary secondary waves, ordinary and extraordinary, in the crystal. At the instant of time $t + \Delta t$, where Δt is the time required for the incident light to travel the distance $\overline{DK}$, the disturbance, propagating from point A in the form of the ordinary elementary wave, reaches the points of a sphere of radius $v_0 \Delta t$ having its

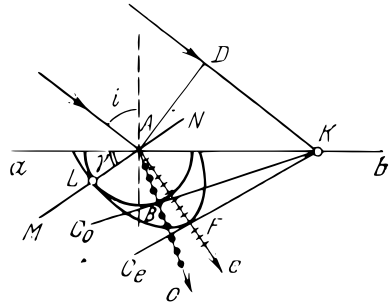


Figure 35.6.: Analysing birefringence in a uniaxial crystal using the Huygens graphical method.

centre at point A.

The disturbance, propagating from point A in the form of the extraordinary elementary wave, reaches points at the same time on the surface of the ellipsoid of revolution that contacts the sphere of radius v0At at point L of its intersection with optic axis MN. This ellipsoid is geometrically similar to the ray surface of the extraordinary wave in the crystal (35.2.5).

Planes KC_o and KC_e, perpendicular to the plane of the figure and tangent, respectively, to the sphere and the ellipsoid, indicate, according to the Huygens principle (33.1.1), the positions, at the instant of time $t + \Delta t$, of the fronts of the ordinary and extraordinary waves that actually propagate in a uniaxial crystal. Straight lines from point A to the points of tangency B and F indicate the directions of the ordinary and extraordinary rays. Both rays lie in the plane of incidence, but the extraordinary ray is not orthogonal to the wave surface KC_e.

The ordinary and extraordinary waves are linearly polarized in mutually perpendicular planes. The directions of the electric vectors $\mathbf{E}_o$ and $\mathbf{E}_e$ in the ordinary and extraordinary waves are shown in Figure 35.6 by black dots and transverse dashes located on the corresponding rays.

Note. If the optic axis MN of the crystal does not lie in the plane of incidence of the light, then, in general, the extraordinary ray also does not lie in the plane of incidence. Consequently, the angle between the planes of polarization of the ordinary and extraordinary waves differs slightly from a right angle.

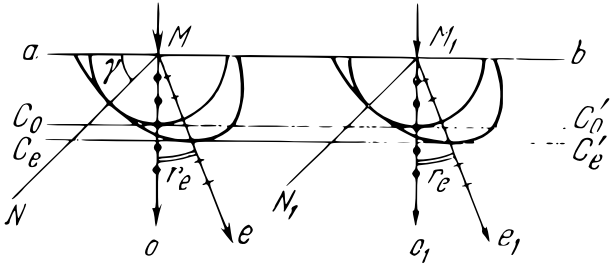


Figure 35.7.: The ordinary and extraordinary rays in the case of normal incidence of light on the surface of an optically negative uniaxial crystal.

35.2.8

. The construction for the ordinary and extraordinary rays in the case of normal incidence of light on the surface of an optically negative uniaxial crystal is shown in Figure 35.7. Here ab is the position of the incident wavefront at the instant t of time, and C_oC_o' and C_eC_e' are the positions of the fronts of the ordinary and extraordinary waves in the crystal at the instant of time $t + \Delta t$.

It is assumed that the optic axis MN lies in the plane of incidence and makes the angle γ, differing from 0 and $\pi/2$, with the refracting surface ab. It is evident from Figure 35.7 that the ordinary ray is an extension of the incident one and that the extraordinary ray is refracted by the angle $r_e \neq 0$.

Considered in Figure 35.8 is a case in which light is normally incident on the plane surface ab of an optically negative uniaxial crystal, whose optic axis MN is parallel to ab. Here, as is evident from the construction, the

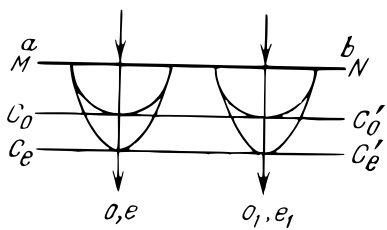


Figure 35.8.: Analysing the case when light is normally incident on the plane surface of an optically negative uniaxial crystal.

extraordinary ray is not refracted at the surface ab and coincides in direction with the ordinary and incident rays. But the velocities of the ordinary and extraordinary rays in the crystal in this direction differ and are respectively equal to (35.2.5): $v_o = c/n_o$ and $v_e = c/n_{eo}$. Therefore, the two rays (waves) travel the same distance d in the crystal with an optical-path difference (32.3.2):

$$\Delta s = d(n_o - n_{eo}).$$

35.2.9

The path of the rays in a *polarizing prism* are shown in Figure 35.9. This prism is cut out of a crystal of Iceland spar so that its sides AB and CD are parallel to its optic axis MN. Then the prism is cut apart along its diagonal plane AC and glued together along these diagonal surfaces by a thin layer of an optically isotropic transparent substance called Canada balsam.

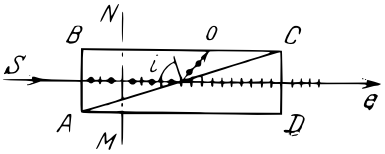


Figure 35.9.: The path of rays in a polarising prism.

The crystal of Iceland spar is uniaxial and optically negative; its refractive indices (35.2.5) are: $n_o = 1.658$ and $n_{eo} = 1.486$. The refractive index of Canada balsam is $n_{Cb} = 1.550$, i.e. Canada balsam is a medium less optically dense than the material of the prism for the ordinary ray and more optically dense than this material for the extraordinary ray. Light falls on the prism normal to its side AB (ray S in Figure 35.9).

The ordinary and extraordinary rays propagate in the prism without being refracted until they reach the layer AC of Canada balsam. The dimensions of the prism are selected so that the angle of incidence i of the ordinary ray on surface AC is greater than the critical angle for total

internal reflection (31.5.8). Therefore, the ordinary wave is completely reflected by the layer of Canada balsam (ray *o* in Figure 35.9). The extraordinary wave passes freely through the layer of Canada balsam and the second half of the polarizing prism. Thus, the polarizing prism can be used as a polarizer (35.1.2).

35.2.10

All birefringent crystals absorb light to one or another degree. This absorption is anisotropic: the absorption factor (34.2.1) depends upon the orientation of the electric vector of the light wave and on the direction of light propagation in the crystal, as well as on the wavelength. This phenomenon is called *dichroism*, or *pleochroism*, because it is manifested in the different colouring of the crystals in different directions. An example of a strongly dichroic crystal is tourmaline, a uniaxial crystal in which the ordinary ray is absorbed much more intensely than the extraordinary ray. Even more pronounced dichroism is displayed by crystals of herapathite, which is used to make thin films, converting natural light into linearly polarized light and called *polaraids*.

35.3 Interference of Polarized Light

35.3.1

Trains of waves with all possible orientations with respect to the ray of their planes of polarization, included in the composition of natural light, are incoherent because they

correspond to the radiation of various *independent* atoms of the light source. All these trains participate in the formation of the ordinary and extraordinary waves that propagate in a uniaxial crystal when natural light falls on it.

But the contribution of each separate train to these two waves is, in general, not the same. It is greater to the wave whose plane of polarization makes the smaller angle a with the plane of polarization of the wave train. In other words, the ordinary and extraordinary waves are generated mainly by *different* wave trains included in the composition of natural light. Consequently, the ordinary and extraordinary waves, propagated in a uniaxial crystal on which natural light falls, are not coherent.

35.3.2

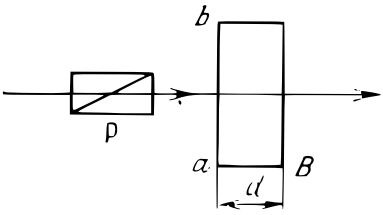


Figure 35.10.: Analysing beams passing through a polariser.

The ordinary and extraordinary waves, propagated in a uniaxial crystal upon the incidence of linearly polarized light [obtained from natural light by means, for example, of a polarizing prism (35.2.9) or some other polarizer] are coherent with each other. This is due to the fact that the planes of polarization of all the wave trains included in the composition of the incident light have the same orientation.

Assume that a parallel beam of light, after passing through polarizer P (Figure 35.10), is normally incident on the plane surface ab of plane-parallel plate B, cut out of a uniaxial crystal parallel to its optic axis MN (axis MN is parallel to plane ab). Shown in Figure 35.11 is vector $\mathbf{A}_i$ of the amplitude of the i-th wave train.

This vector is oriented along line $p - p$, corresponding to the direction of oscillation of the electric vector in the light emerging from the polarizer. The contributions of the ith wave train to the ordinary and extraordinary waves are characterized by the amplitudes $A_{io} = A_i \sin\alpha$ and $A_{ie} - A_i = \cos\alpha$, whose ratio $A_{io}/A_{ie} = \tan\alpha$ is the same for all trains. In particular, if $\alpha = \pi/4$, then $A_{io} = A_{ie}$ because pairwise coherent trains, polarized in mutually perpendicular planes, have the same intensity.




Figure 35.11.: Analysing beams passing through a polariser.

35.3.3

At the entrance to crystal plate B (35.3.2), the electric vectors $\mathbf{E}_0$ and $\mathbf{E}_e$ of the ordinary and extraordinary waves oscillate in phase and their vector sum is equal to electric vector of linearly polarized monochromatic incident light: $\mathbf{E}_p = \mathbf{E}_0 + \mathbf{E}e$. In the plate the ordinary and extraordinary waves propagate at different velocities (35.2.8). Therefore, at the exit from the plate (of thickness d), the mutually perpendicular electric vectors $\mathbf{E}'_o$ and $\mathbf{E}'_e$ of the ordinary and extraordinary waves oscillate with a phase difference of

$$\Delta\varphi = \frac{2\pi\Delta s}{\lambda_0} = \frac{2\pi d}{\lambda_0}(n_0 - n_{eo})$$

where Δs is the optical-path difference of these waves (35.2.8), and λ_0 is the wavelength of light in vacuum. Consequently, as a result of its passing through the plate, the light, in the general case, becomes elliptically polarized (31.1.7): the head of vector $\mathbf{E}' = \mathbf{E}'_o + \mathbf{E}'_e$ describes an ellipse lying in a plane perpendicular to the beam. If α is

the angle between the direction of oscillation of vector $\mathbf{E}_p$ and the optic axis MN of the plate, then amplitudes A_o and A_e of vectors $\mathbf{E}_o$ and $\mathbf{E}_e$ equal: $A_o = Ap\sin\alpha$ and $A_e = Ap\cos\alpha$, where A_p is the amplitude of vector $\mathbf{E}_p$.

In the absence of light absorption in the plate, the amplitudes of vectors $\mathbf{E}'_o$ and $\mathbf{E}'_e$ are also equal to A_o and A_e.

35.3.4

In accordance with the thickness d of the plate, several special cases are possible.

(a) A *quarter-wave plate* is one whose thickness satisfies the relation: $d(n_o - n_{eo}) = \pm(m + 1/4)\lambda_0$, where $m = 0, 1, 2, \ldots$; the plus sign corresponding to an optically negative crystal, and the minus sign to an optically positive one (35.2.6). At the exit from such a plate the oscillations of vectors $\mathbf{E}'_o$ and $\mathbf{E}'_e$ have a phase difference of $\pi/2$. If, in addition, $\alpha = \pi/4$, the light emerging from the plate is circularly polarized (31.1.7).

(b) For a *half-wave plate*: $d(n_o - n_{eo}) = \pm(m + 1/2)\lambda_0$. At the exit from such a plate, the oscillations of vectors $\mathbf{E}'_o$ and $\mathbf{e}'$ have a phase difference of π. Light emerging from the plate remains linearly polarized. But the directions of oscillation of vectors $\mathbf{E}_p$ and $\mathbf{E}'$ of the incident and transmitted light are symmetrical with respect to the principal plane of the plate (Figure 35.12).




Figure 35.12.: Half-wave plate.

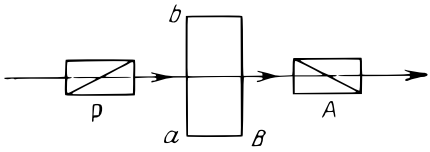


Figure 35.13.: Making interference possible in coherent waves emerging from crystal plate.

(c) For a *full-wave plate*: $d(n_o - n_{eo}) = \pm m\lambda_0$ a result of passing through the plate, the light remains linearly polarized in the same plane as the incident light.

35.3.5

Coherent waves emerging from crystal plate B (Figure 35.10) cannot display interference because they are polarized in mutually perpendicular planes. Therefore, one more polarizing prism, the analyzer A (Figure 35.13) is mounted beyond plate B. The analyzer separates out of the incident coherent waves, the components polarized in one plane. It thus provides the conditions necessary for obtaining the interference of these waves. The results of this interference depend upon the phase difference $\Delta\varphi$ acquired by the ordinary and extraordinary waves in the plate, on the ratio of the amplitudes of these waves and on the angle β between the principal planes of the analyzer and polarizer (35.1.2).

For example, if the angle between the principal plane of the polarizer and optic axis MN of the plate $\alpha = \pi/4$, the amplitudes and intensities of the ordinary and extraordinary waves are the same. Assume in this case that monochromatic light of the wavelength λ_0 in vacuum

is incident on the plate. The two following limiting cases may occur:

$$\Delta\varphi = \frac{2\pi d}{\lambda_0}\,(n_o - n_{eo})) = \begin{cases} \pm 2m\pi \\ \pm(2m+1)\pi, \end{cases}$$

(where $m = 0,\ 1,\ 2,\ \ldots$). In the first case, corresponding to a full-wave plate, the light falling on the analyzer is linearly polarized in the principal plane of the polarizer. Therefore, at $\beta = 0$ (the analyzer is mounted parallel to the polarizer), the intensity I_a of the light passing through the analyzer is maximal, whereas at $\beta = \pi/2$ (the analyzer and polarizer are crossed), $I_a = 0$, i.e. at $\beta = 0$ an interference maximum is observed, whereas at $\beta = \pi/2$ a minimum is observed.

In the second case, corresponding to a half-wave plate, the light falling on the analyzer is linearly polarized in a plane making the angle $2\alpha = \pi/2$ with the principal plane of the polarizer. Therefore, at $\beta = 0$ an interference minimum is observed, whereas at $\beta = \pi/2$ a maximum is observed.

If linearly polarized *white light* is incident on plate B (Figure 35.13), then in observing the light through the analyzer, the plate is seen to be coloured. Upon rotating the analyzer about the beam, i.e. in varying angle β, the colouring changes. This is due to the fact that the value of the phase difference $\Delta\varphi$, determining the result of interference, depends upon the wavelength of the light.

A plate, whose thickness d is not the same at various places, is seen in white light to be oddly coloured, with each coloured interference line (*isochromate*) passing

through points of equal thickness d. A similar pattern is observed in a plate, which is of equal thickness at all points, but the value of the difference $(n_o - n_{eo})$ varies. In this case, each isochromatc passes through points of the plate corresponding to the same value of $(n_o - n_{eo})$.

35.4 Artificial Optical Anisotropy

35.4.1

An optically isotropic transparent body becomes anisotropic if it is subjected to mechanical deformation. This phenomenon is sometimes called *photoelasticity*. Upon linear (uniaxial) tension or compression of an isotropic body alongthe OX axis, it acquires the optical properties of a uniaxial crystal (35.2.2), whose optic axis is parallel to OX. The difference between the refractive indices for the ordinary (n_o) and extraordinary (n_{eo}) rays, in the direction perpendicular to axis OX, is proportional to the normal stress σ (**??**). Thus

$$n_o - n_{eo} = k\sigma,$$

where k is the proportionality factor depending upon the properties of the body.

35.4.2

The *electrooptical Kerr effect* is the appearance of optical anisotropy in a transparent isotropic solid, liquid or gaseous dielectric upon being placed in an external electric field. By the action of the uniform electric field,

the dielectric is polarized and acquires the optical properties of a uniaxial crystal whose optic axis coincides in direction with the field strength vector **E**. The difference between the refractive indices of a polarized dielectric for extraordinary and ordinary rays of monochromatic light, propagating perpendicular to the direction of vector **E**, satisfies the *Kerr law*:

$$n_{eo} - n_o = B\lambda_0 E^2,$$

where λ_0 is the wavelength of the light in vacuum, and B is the *Kerr constant*. The value of B depends upon the nature of the substance, wavelength λ_0 and the temperature, decreasing, as a rule, as the temperature is raised. The sign of the difference $(n_{eo} - n_o)$ is independent of the direction of the field. For the majority of substances $B > 0$, so that they are similar with respect to their optical properties in a uniform electric field to optically positive uniaxial crystals (35.2.6).

35.4.3

The *Cotton-Mouton effect* is the appearance of optical anisotropy in certain isotropic substances (liquids, glasses and colloids) when they are placed in a strong external magnetic field. In a uniform magnetic field, the substance acquires the optical properties of a uniaxial crystal, whose optic axis coincides in direction with the magnetic field strength vector **H**. The difference between the refractive indices of the substance for extraordinary and ordinary rays of monochromatic light, propagating in the direction

perpendicular to vector $\mathbf{H}$, is proportional to H^2. Thus

$$n_{eo} - n_o = C\lambda_0 E^2,$$

where C is the *Cotton-Mouton constant*, and λ_0 is the wavelength of light in vacuum. The value of constant C depends upon the nature of the substance, wavelength λ_0 and the temperature.

35.5 Rotation of the Plane of Polarization

35.5.1

As linearly polarized light passes through certain substances that are said to be *optically active*, the plane of polarization of the light (31.1.7) rotates about the directionof the ray. Optical activity is displayed by certain crystals (quartz, cinnabar, etc.), pure liquids and solutions (turpentine, a solution of sugar in water, etc.). All substances that are optically active in the liquid state, possess the same property in the crystalline state as well. But some substances that are optically active in the crystalline state, lose this activity in the liquid state. Consequently, optical activity can be due either to the structure of the molecules of the substance themselves or to the arrangement of the particles in the crystal lattice.

35.5.2

In optically active crystals and pure liquids, the angle φ of rotation of the plane of polarization of light is pro-

portional to the thickness l of the layer of the substance through which light passes. Thus $\varphi = \alpha l$. The proportionality factor α is called the *rotatory power*, or *specific rotation*. The rotatory power depends upon the nature of the substance, the temperature and the wavelength λ_0 of the light in vacuum. The dependence of α on λ_0 is called the *rotary*, or *rotatory, dispersion*. Far from the band of light absorption by the substance, rotary dispersion obeys *Biot's law*:

$$\alpha \propto \frac{1}{\lambda_0^2}.$$

35.5.3

The majority of optically active crystals exist in two versions. As light passes through a crystal of one version, said to be *dextrorotatory* or *right-handed*, the plane of polarization is rotated to the right, i.e. clockwise (for an observer looking toward the oncoming beam). In the passing of light through a crystal of the other version, said to be *levorotatory* or *left-handed*, the plane of polarization is rotated to the left (counterclockwise). The values of the rotatory power for the two versions of the same optically active crystal differ only in sign.

35.5.4

The angle of rotation of the plane of polarization of light in travelling a path of length l in an optically active solution is

$$\varphi = [\alpha] c l = [\alpha] D K l.$$

Here c is the volume-mass concentration of the optically active substance in the solution (in $\mathrm{kg/m^3}$), D is the density of the solution, and $K = c/D$ is the weight-part concentration, i.e. the ratio of the mass of the optically active substance to the mass of the whole solution. The proportionality factor $[\alpha]$ is called the *rotatory power*, or *specific rotation of the solution*. The value of $[\alpha]$ depends on the nature of the optically active substance and of the solvent, the wavelength of the light and the temperatufe.

35.5.5

When subjected to the action of an external magnetic field, an optically inactive medium acquires the capacity to rotate the plane of polarization of light propagating along the direction of the field. This phenomenon is known as the *Faraday effect*, or *magnetic rotation of the plane of polarization of light*. The angle φ of rotation of the plane of polarization is proportional to the path length of the light in the substance and to the strength H of the magnetic field. Thus $\varphi = VHl$. The proportionality factor V is called the *Verdet constant*. It depends upon the nature of the substance and the wavelength of the light . The direction of magnetic rotation of the plane of polarization (for an observer looking along the magnetic field) is the same whether the light propagates along the direction of vector $\mathbf{H}$ or in the opposite direction. In this feature the Faraday effect differs from the rotation of the plane of polarization of light in natural optically active media.

36 Thermal Radiation

36.1 Thermal Radiation. Kirchhoff's Law

36.1.1

All bodies emit electromagnetic waves to one or another degree. Highly heated bodies, for instance, glow, whereas at ordinary temperatures they are the source of only invisible infrared radiation.

Electromagnetic radiation, emitted by a substance and produced at the expense of its internal energy (9.1.2) is called *thermal*, or *heat radiation*. It depends only on the temperature and the optical properties of the radiating bodies. If the energy consumption of a body on thermal radiation is not replenished by supplying more heat to the body, its temperature gradually drops and the thermal radiation is reduced.

Radiative heat exchange (heat exchange through radiation) is the spontaneous process of transferring energy in the form of heat from a more heated body to a less heated one. It is accomplished by thermal radiation and

the absorption of electromagnetic waves by these bodies.

36.1.2

Thermal radiation is the only kind that can be in a state of thermodynamic equilibrium (8.3.3) with matter. In equilibrium, the energy consumption on thermal radiation is compensated for by the absorption of the same amount of energy by the body owing to the radiation falling on it. *Radiative (radiation) equilibrium* is set up in an adiabatically closed system (i.e. one that does not exchange heat with the external medium), all bodies of which are at the same temperature.




Figure 36.1.: Heat exchange between two adiabatically closed systems.

It follows from the second law of thermodynamics (11.3.2) that radiative equilibrium is independent of the material of the bodies that make up the closed thermodynamically equilibrium system. The volume density of the energy of radiation equilibrium and its frequency distribution are universal functions of the temperature. As a matter of fact, if this were not so, it would be possible to take two adiabatically closed systems A and B (Figure 36.1), at the same temperature $T_A = T_B = T$, and accomplish radiative heat exchange between them by making a small hole in the heatproof wall separating them. If the volume density of energy E^d_A of system A is greater than that E^d_B of system B, i.e. $E^d_A > E^d_B$, then, owing to heat exchange between the systems, the radiant energy in system A and its temperature should decrease and the radiant energy in system B and its temperature should increase until the values of the volume energy densities in systems A and B become equal: $E^{d'}_A = E^{d'}_B$. But, in

this case, $T'_B > T'_A$ so that the process being considered contradicts the second statement of the second law of thermodynamics (11.3.2). Consequently, E^d_A cannot be greater than E^d_B. In exactly the same way, E^d_B cannot be greater than E^d_A, i.e. $E^d_A = E^d_B = E^d(T)$ is a universal function of the temperature.

36.1.3

Serving as the spectral characteristic of radiative equilibrium is the *spectral density of the volume energy denstiy of this radiation*. Thus

$$\rho(\nu, T) = \frac{\mathrm{d}E^d}{\mathrm{d}\nu},$$

where $\mathrm{d}E^d$ is the energy of radiative equilibrium with frequencies from ν to $\nu + \mathrm{d}\nu$ enclosed within unit volume of the radiation field. The volume energy density of this field is

$$E^d = \int_0^\infty \rho(\nu, T)\mathrm{d}\nu.$$

Radiation equilibrium is *isotropic*, i.e. it is not polarized and all directions of its propagation are equally probable. The energy $\mathrm{d}E$ of radiation equilibrium in vacuum at frequencies from ν to $\nu + \mathrm{d}\nu$ incident in unit time on unit area of the surface of each of the bodies of a thermodynamically equilibrium system is equal to

$$\mathrm{d}E = \frac{c}{4}\rho(\nu, T)\mathrm{d}\nu.$$

where c is the velocity of light in free space (or in a vacuum).

36.1.4

The *radiant exitance*[31] *(total emissive power)* of a body is the physical quantity M_c, numerically equal to the energy of electromagnetic waves of all possible frequencies (or wavelengths) from 0 to ∞[32] radiated in unit time from unit area of a bodys surface.

The *emissive power (spectral density of radiant exitance)* of a body is the physical quantity numerically equal to the ratio of the energy $\mathrm{d}E$ radiated in unit time from unit area of the surface of the body by electromagnetic waves in a narrow range of frequencies from ν to $\nu + \mathrm{d}\nu$ (or wavelengths in vacuum from λ to $\lambda + \mathrm{d}\lambda$), to the width of this range:

$$r_\nu = \frac{\mathrm{d}E}{\mathrm{d}\nu} \quad \text{or}$$
$$r_\lambda = \frac{\mathrm{d}E}{\mathrm{d}\lambda} = \frac{c}{\lambda^2} r_\nu,$$

where c is the velocity of light in vacuum. The values of r_ν (or r_λ) depend upon the frequency (or wavelength), temperature, chemical composition of the body and the condition of its surface.

The radiant exitance of a body is related to r_ν and r_λ by the equations

$$M_e = \int_0^\infty r_\nu \mathrm{d}\nu = \int_0^\infty r_\lambda \mathrm{d}\lambda.$$

36.1.5

The *absorptance (monochromatic absorption coefficient) of a body* is the dimensionless quantity av which indicates

[31] Formerly called the radiant emittance.

[32] It is practically sufficient to be restricted to the range of frequencies and wavelengths of optical radiation (31.4.3).

what fraction of the energy of electromagnetic waves of frequencies from ν to $\nu + d\nu$, incident on the surface of the body, is absorbed by it. Thus

$$\alpha_\nu = \frac{dE_{abs}}{dE_{inc}} \leqslant 1.$$

The value of α_ν depends upon the frequency, temperature, chemical composition of the body and the condition of its surface.

A *blackbody* (denoted by a superscript asterisk) is one that completely absorbs all incident radiation, regardless of its direction, spectral composition and polarization, without reflecting or transmitting any: $\alpha_\nu^* \equiv 1$. Though a blackbody is a theoretical ideal, it can be nearly realized in practice by an almost complete enclosure with a small opening (Figure 36.2). Light entering the enclosure through hole O undergoes repeated reflection from the walls. At this the energy of the incident light is practically completely absorbed by the walls of the enclosure regardless of the material of which they are made. The emissive power of a blackbody is denoted in the following by r_ν^* (or r_λ^*) and its radiant exitance by M_e^*.




Figure 36.2.: A blackbody realization in practice.

A *greybody* is one whose absorptance is less than unity and is independent of the frequency (or wavelength) of the light, the directions of its propagation and polarization:

$$\frac{\partial \alpha_\nu^{gr}}{\partial \nu} \equiv 0 \quad \text{and} \quad \alpha_\nu^{gr} = \alpha^{gr}.$$

36.1.6

According to the *principle of detailed balance* any microscopic process in an equilibrium system should proceed

at the same rate as the reverse process. This principle of statistical physics enables a relation to be found between the emissive power r_ν and the absorptance α_ν of any opaque body. Assume that the body is part of a thermodynamically equilibrium system at the temperature T. The energy radiated per unit time from unit area of the surface of the body being considered in the frequency range from ν to $\nu + \mathrm{d}\nu$ is $\mathrm{d}E_{rad} = r_{nu}\mathrm{d}\nu$. During the same time, the same portion of the surface of the body absorbs a part of the energy of the radiation equilibrium (36.1.3) incident on thissurface. It is equal to $\mathrm{d}E_{abs} = \alpha_\nu(c/4)\rho(\nu, T)\mathrm{d}\nu$. Since, according to the principle of detailed balance, $\mathrm{d}E_{rad} = \mathrm{d}E_{abs}$,

$$\frac{r_\nu}{\alpha_\nu} = r_\nu^* = \frac{c}{4} = \rho(\nu, T).$$

This equation expresses *Kirchhoff's law* (for radiation), which states that the ratio of the emissive power of a body to its absorptance does not depend upon the nature of the body and is equal to the emissive power r_ν^* of a blackbody at the same temperature and frequency values.

The dependence of r_ν^* on ν and T is called *Kirchhoff's function*:

$$r_\nu^* = f(\nu, T) = \frac{c}{4} = \rho(\nu, T).$$

36.1.7

It follows from Kirchhoff's law that the radiant exitance (36.1.4) of a body is equal to

$$M_e = \int_0^\infty \alpha_\nu r_\nu^* \mathrm{d}\nu.$$

In particular, the radiant exitance of a greybody is

$$M_e^{gr} = \alpha^{gr} M_e^*, \text{ where } M_e^* = \int_0^\infty r_\nu^* \mathrm{d}\nu,$$

is the radiant exitance of a blackbody at the same temperature. For a nongrey body

$$M_e = \beta M_e^*,$$

where β is the *total degree of blackness of the body*. It depends on the material of the body, the condition of its surface and the temperature. For all bodies except a blackbody, $\beta < 1$.

36.1.8

Radiation equilibrium at the temperature T is identical to thermal radiation of a blackbody at the same temperature. Therefore, it is often called *blackbody radiation*. The relation between the radiant exitance of a blackbody and the volume density of the energy of blackbody radiation is of the form

$$M_e^* = \frac{c}{4} E^d = \frac{c}{4} \int_0^\infty \rho(\nu, T) \mathrm{d}\nu.$$

36.2 Stefan-Boltzmann and Wien Laws

36.2.1

The *Stefan-Boltzmann law* states that the radiant exitance of a blackbody is proportional to the fourth power of its

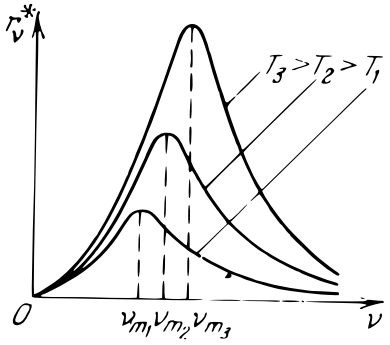


Figure 36.3.: The dependence of the emissive power r_ν^* of a blackbody on the frequency ν.

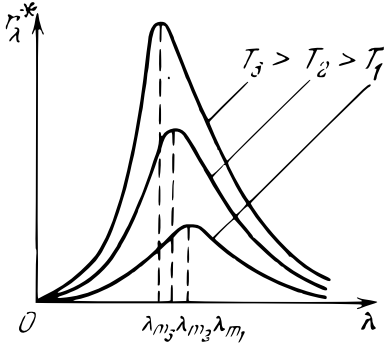


Figure 36.4.: The dependence of the emissive power r_ν^* of a blackbody on the wavelength λ.

absolute temperature. Thus

$$M_e^* = \sigma T^4,$$

where $\sigma = 5.67 \times 10^{-8}\,\mathrm{W\,K^4/m^2}$ is the *Stefan-Boltzmann constant*. This law can be derived theoretically by considering the radiative equilibrium in an enclosed cavity by thermodynamic methods.

36.2.2

The dependence of the emissive power r_ν^* of a blackbody on the frequency ν for several constant values of the temperature is shown in Figure 36.3. In the region of low frequencies, $r_\nu^* \propto \nu^2 T$, whereas for the region of high frequencies (the right-hand branch of the curves far away from the maxima) $r_\nu^* \propto \nu^3 \exp\left[-a_{1\nu/T}\right]$, where a_1 is a constant factor.

The radiant energy of a blackbody is nonuniformly distributed in its spectrum. A blackbody displays almost no radiation in the regions of very high and very low frequencies. As the temperature is raised, the maximum of r_ν^* is shifted toward thehigher frequencies in accordance with the law: $\nu_m = b_1 T$, where ν_m is the frequency corresponding to maximum r_ν^* at the temperature T, and b_1 is a constant factor.

The dependence of the emissive power of a blackbody $r_\lambda^* = c r_\nu^*/\lambda^2$ (36.1.4) on the wavelength λ is shown in Figure 36.4.

As the temperature of the blackbody is raised, the maximum of rj is shifted toward the shorter wavelengths

in accordance with the *Wien displacement law*:

$$\lambda_m = \frac{b}{T},$$

where $b = 2.9 \times 10^{-3}\,\mathrm{m\,K}$ is the *Wien constant*.

36.2.3

All attempts that were made failed to theoretically sub stantiate the experimentally found form of Kirchhoffs function, $r_\nu^* = f(\nu, T)$, shown in Figure 36.3, within the framework of classical physics. Using thermodynamic methods, the *Wien formula* was found:

$$r_\nu^* = \nu^3 \varphi\left(\frac{\nu}{T}\right),$$

where $\varphi(\nu/T)$ is an unknown function of ν/T.

Rayleigh and Jeans applied the laws of electrodynamics and equipartition of energy in an equilibrium system (10.6.4) to obtain the *Rayleigh-Jeans law*:

$$r_\nu^* = \frac{2\pi\nu^2}{c^2} kT,$$

where k is Boltzmanns constant (8.4.5).

The Rayleigh-Jeans law agreed with experimental data only in the region of low frequencies. Moreover, it leads to the absurd conclusion that at any temperature the radiant exitance M_e^* of a blackbody and the volume density of energy E^d of radiation equilibrium are inhnitely large. This conclusion, arrived at by classical physics in the problem of explaining the spectral distribution of radiation equilibrium, has been aptly named the ultraviolet catastrophe.

36.3 Planck's Formula

36.3.1

The volume density of energy of radiation equilibrium (blackbody radiation) in a closed cavity, as well as the energy distribution of this radiation in frequency are independent of the material of the cavity walls and are fully determined by the temperature. Therefore, an infinite system of harmonic oscillators with all possible natural frequencies can be taken as a theoretical model of a blackbody. Each of such oscillat ors corresponds to a monochromatic component of blackbody radiation. Let $\langle E_\nu \rangle$ be the average energy of an oscillator with the natural frequency ν. Then, according to calculations, the radiant exitance of a blackbody is

$$r_\nu^* = \frac{2\pi\nu^2}{c^2}\langle E_\nu \rangle,$$

If kT is taken for $\langle E_\nu \rangle$, as follows from the classical law of the equipartition of energy (10.6.4)[33], then the preceding expression for r_ν^* coincides with the Rayleigh-Jeans law (36.2.3).

[33] One oscillatory degree of freedom of an oscillator accounts for twice as much energy, on an average, as one degree of translational or rotary motion, because the oscillator has not only kinetic, but potential energy as well. On an average, this potential energy is equal to the kinetic energy.

36.3.2

Planck was able to find the correct expression for the average energy $\langle E_\nu \rangle$ of an oscillator and for the Kirchhoff function by introducing the *quantum hypothesis*, which was entirely alien to classical physics. It is assumed in classical physics that the energy of any system can vary in

a *continuous manner*, i.e. that it can take any arbitrarily close consecutive values.

According to Plancks quantum hypothesis, the energy $\langle E_\nu \rangle$ of an oscillator can have only definite *discrete (quantized)* values, equal to a whole number of elementary portions, called *energy quanta* $E_{\nu\,0}$. Thus

$$E_\nu = nE_{\nu\,0}, \text{ where } n = 0,\, 1,\, 2, \ldots$$

If it is assumed that the oscillator distribution in possible discrete energy states is described by the Boltzmann distribution law (10.4.2), the probability pn of finding the oscillator in a state with the energy $nE_{nu\,0}$ at the temperature T is equal to

$$p_n = C \exp\left[\frac{-nE_{\nu\,0}}{kT}\right].$$

Here k is the Boltzmann constant (8.4.5) and C is a constant factor determined from the normalization condition:

$$\sum_{n=0}^{\infty} p_n = 1, \text{ i.e. } C = \frac{1}{\sum_{n=0}^{\infty} \exp\left[\frac{-nE_{\nu\,0}}{kT}\right]}.$$

The average value of the oscillator energy is

$$\langle E_\nu \rangle = \sum_{n=0}^{\infty} p_n nE_{\nu\,0} = E_{\nu\,0} \frac{\sum_{n=0}^{\infty} n \exp\left[\frac{-nE_{\nu\,0}}{kT}\right]}{\sum_{n=0}^{\infty} \exp\left[\frac{-nE_{\nu\,0}}{kT}\right]},$$

from which

$$\begin{aligned}\langle E_\nu \rangle &= -E_{\nu\,0}\frac{\frac{\mathrm{d}}{\mathrm{d}\xi}\sum_{n=0}^{\infty} n\exp(-n\xi)}{\sum_{n=0}^{\infty}\exp(-n\xi)} \\ &= -E_{\nu\,0}\frac{\mathrm{d}}{\mathrm{d}\xi}\ln\sum_{n=0}^{\infty}\exp(-n\xi),\end{aligned}$$

where $\xi = E_{\nu\,0}/kT$. Since

$$\begin{aligned}\sum_{n=0}^{\infty}\exp(-n\xi) &= \frac{1}{1-\exp(-\xi)} \quad \text{and} \\ -\ln\sum_{n=0}^{\infty}\exp(-n\xi) &= \ln(1-\exp(-\xi)), \ \text{then} \\ \langle E_\nu \rangle &= \frac{E_{\nu\,0}}{\exp\left[\dfrac{E_{\nu\,0}}{kT}\right]-1} \quad \text{and} \\ r_\nu^* &= \frac{2\pi\nu^2}{c^2}\frac{E_{\nu\,0}}{\exp\left[\dfrac{E_{\nu\,0}}{kT}\right]-1}.\end{aligned}$$

Comparing this expression for r_ν^* with the Wien formula (36.2.3), it follows that a *quantum of energy* is equal to

$$E_{\nu\,0} = h\nu,$$

where h is a universal constant, called *Planck's constant* (Appendix II).

Planck's radiation formula for the emissive power r_ν^* of a blackbody is

$$r_\nu^* = \frac{2\pi\nu^2}{c^2} \frac{h\nu}{\exp\left[\dfrac{h\nu}{kT}\right] - 1}.$$

Accordingly, the *spectral density of radiation equilibrium* (36.1.3) is equal to

$$\rho(\nu, T) = \frac{8\pi\nu^2}{c^3} \frac{h\nu}{\exp\left[\dfrac{h\nu}{kT}\right] - 1}.$$

36.3.3

At low frequencies ($h\nu \ll kT$), $\exp[h\nu/kT - 1] \approx h\nu/kT$ and the Planck radiation formula coincides with the Rayleigh-Jeans law (36.2.3).

Following from Plancks radiation formula is the Stefan-Boltzmann law (36.2.1):

$$\begin{aligned} M_e^* &= \frac{2\pi h}{c^2} \int_0^\infty \frac{\nu^3 \mathrm{d}\nu}{\exp\left[\dfrac{h\nu}{kT}\right] - 1} \\ &= \frac{2\pi k^4 T^4}{c^2 h^3} \int_0^\infty \frac{\eta^3 \mathrm{d}\eta}{\exp\eta - 1} = \frac{2\pi^5 k^4}{15 c^2 h^3} T^4. \end{aligned}$$

The Planck constant is related to the Stefan-Boltzmann constant σ (36.2.1) as follows:

$$h = \sqrt[3]{\frac{2\pi^5 k^4}{15 c^2 \sigma}} = 6.62 \times 10^{-34}\,\mathrm{J\,s}.$$

36.3.4

The Planck formula for the emissive power r_λ^* of a blackbody is

$$r_\lambda^* = \frac{2\pi c^2 h}{\lambda^5} \frac{1}{\exp\left[\dfrac{hc}{\lambda kT}\right] - 1}.$$

The wavelength λ_m corresponding to maximum r_λ^* is determined from the transcendental equation

$$xe^x - 5e^x + 5 = 0, \text{ where } x = hc/\lambda_m kT.$$

The root of this equation $x = 4.965$, and λ_m satisfies the Wien displacement law (36.2.2):

$$\lambda_m T = b, \text{ where } b = \frac{hc}{4.965\,\mathrm{K}} = 2.9 \times 10^{-3}\,\mathrm{m\,K}.$$

36.4 Optical Pyrometry

36.4.1

Optical pyrometry is the name given to miscellaneous techniques for measuring high temperatures based on the laws of thermal radiation. The instruments used for this purpose are called *pyrometers*.

Radiation pyrometers record the integrated radiation of the heated body being investigated; optical pyrometers record the radiation of a heated body in one or two narrow portions of the spectrum.

36.4.2

The *radiant flux* Φ_e is the average power of optical radiation (31.4.3) during a time considerably greater than a period of oscillation of the electromagnetic field of the light.

The *irradiance* E_e (*radiant flux density*) of a surface is the ratio of the flux of incident radiation on this surface to its area. Thus $E_e = \mathrm{d}\Phi_e/\mathrm{d}S$, where $\mathrm{d}\Phi_e$ is the radiant flux incident on a portion of the surface of area $\mathrm{d}S$.

The *radiant intensity* I_e of a radiative body is the radiant flux emitted by the body within a unit solid angle. Thus $I_e = \mathrm{d}\Phi_e/\mathrm{d}\Omega$, where $\mathrm{d}\Phi_e$ is the radiant flux within the solid angle $\mathrm{d}\Omega$.

36.4.3

The *radiance* L_e of the portion $\mathrm{d}S$ of a radiative surface in a given direction is the ratio of the radiant intensity $\mathrm{d}I_e$ of area $\mathrm{d}S$ in the direction being considered to the area of the projection of dS on a plane perpendicular to the direction. Thus

$$L_e = \frac{\mathrm{d}I_e}{\mathrm{d}S\cos\varphi}$$

where φ is the angle between the specified direction and the normal to the surface of area $\mathrm{d}S$.

The *spectral density of the radiance* is the ratio of the radiance $\mathrm{d}L_e$, corresponding to a narrow band of the optical spectrum, to the width of this band. Thus

$$b_\nu = \frac{\mathrm{d}L_e}{\mathrm{d}\nu} \quad \text{and} \quad b_\lambda = \frac{\mathrm{d}L_e}{\mathrm{d}\lambda}.$$

36.4.4

A source of optical radiation is said *to obey Lambert's law*, or *to be a cosine radiator*, if its radiance L_e, as well as its spectral densities b_ν and b_λ are the same in all directions, i.e. are independent of angle φ. A blackbody could be called a cosine radiator.

The radiance of a cosine radiator and its spectral densities are related to its radiant exitance and its spectral densities (36.1.4) as follows:

$$L_e = \frac{M_e}{\pi}, \quad b_\nu = \frac{\mathrm{d}r_\nu}{\mathrm{d}\pi} \quad \text{and} \quad b_\lambda = \frac{\mathrm{d}r_\lambda}{\mathrm{d}\pi}.$$

36.4.5

In optical pyrometry, distinction is made between radiation, brightness and colour temperatures of a body.

The *radiation temperature* T_r of a body is the temperature of a blackbody at which its radiance L_e^* is equal to the radiance L_e of the given body. If the body being investigated is a cosine radiator, whose total degree of blackness is β (36.1.7), then, from the condition that $L_e(T) = L_e^*(T_r)$, where T is the true temperature of the body, it follows that

$$\beta M_e^*(T) = M_e^*(T_r) \quad \text{and}$$
$$T = \frac{T_r}{\sqrt[4]{\beta}} \geqslant T_r.$$

36.4.6

The *brightness (luminance) temperature* T_b of a body is the temperature of a blackbody at which its spectral density b_λ^* of radiance for a definite wavelength λ_0 is equal to the spectral density b_λ of radiance for the given body for the same wavelength: $b_\lambda(\lambda_0, T) = b_\lambda^*(\lambda_0, T_b)$. Usually $\lambda_0 = 660\,\text{nm}$ (red light).

For a cosine radiator, whose absorptance (36.1.5) for light of the wavelength λ_0 at the temperature T of the body is equal to $\alpha_\lambda(\lambda_0, T)$, it follows from Kirchholfs law (36.1.6) and from Plancks formula (36.3.4) that

$$\alpha_\lambda(\lambda_0, T)\, r_\lambda^*(\lambda_0, T) = r_\lambda^*(\lambda_0, T_b),$$

and

$$\alpha_\lambda(\lambda_0, T)\left[\exp\left(\frac{a_2}{\lambda_0 T_b}\right) - 1\right] = \exp\left(\frac{a_2}{\lambda_0 T}\right) - 1,$$

where $a_2 = hc/k$. Since $a_\lambda(\lambda_0, T) \leqslant 1$, then $T \geqslant T_b$.

36.4.7

The *colour temperature* T_c of a body is the temperature of a blackbody at which the relative distributions of the spectral density of the radiance b_λ^* of the blackbody and that b_λ of the body being considered are close to one another to the maximum degree in the visible region of the spectrum. Thus

$$\frac{b_\lambda(\lambda_1, T)}{b_\lambda(\lambda_2, T)} = \frac{b_\lambda^*(\lambda_1, T_c)}{b_\lambda^*(\lambda_2, T_c)}.$$

For a cosine radiator

$$\frac{r_\lambda(\lambda_1, T)}{r_\lambda(\lambda_2, T)} = \frac{r^*_\lambda(\lambda_1, T_c)}{r^*_\lambda(\lambda_2, T_c)}.$$

As a rule, $\lambda_1 = 655\,\mathrm{nm}$ (red light) and $\lambda_1 = 470\,\mathrm{nm}$ (green light). The colour temperature of a greybody (36.1.5) coincides with its true temperature and can be found by Wiens displacement law (36.2.2).

37 Fundamentals Of Quantum Optics

37.1 External Photoelectric Effect (Photoemissive Effect)

37.1.1

Quantum optics is the branch of optics that studies phenomena in which the quantum properties of light are manifested. Such phenomena include thermal radiation (36.1.1), the photoelectric effect, the Compton effect (37.3.1) and photochemical processes.

The *photoelectric effect* in gases consists in the ionization of the atoms and molecules of the gas due to the action of light, and is usually called *photoionization*.

In condensed bodies (liquids and solids) distinction is made between the external and internal photoelectric effects.

The *external photoelectric effect (photoemission)* is the emission of electrons by a substance subject to the action

of light. Electrons ejected from the substance in the external photoelectric effect are called photoelectrons, and the electric current formed by them in their ordered motion in the external electric field is called the photoelectric current.

The *internal photoelectric effect* is the redistribution of electrons among the energy states in solid and liquid semiconductors and dielectrics due to the action of light. It is manifested in the change in the concentration of current carriers in a medium (20.1.4) and leads to photoconduction or the barrier-layer photoelectric effect.

Photoconduction is an increase in the electrical conductivity of a substance due to light falling on it. The *barrier-layer photoelectric effect* is the generating of an emf (photo-emf) by the action of light in a system consisting of a semiconductor and metal in contact or two different kinds of semiconductors [for example at a p-n junction (**??**)].

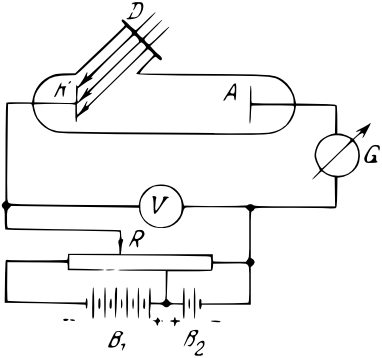


Figure 37.1.: Investigating the external photoelectric effect in metals.

37.1.2

Shown in Figure 37.1 is an installation for investigating the external photoelectric effect in metals. Light enters through window D and falls on the surface of cathode K, which is inside a vacuum tube and is called the *photoelectric cathode*. The shape of the curve, representing the dependence of the photoelectric current I in the tube on the potential difference U between the anode A and cathode K upon constant irradiance E_e of the cathode (36.4.2) by monochromatic light, is shown in Figure 37.2.

The existence of a photoelectric current at negative values of U from 0 to $-U_0$ indicates that the photoelectrons have a certain initial velocity when emitted from the cathode, and the corresponding kinetic energy. The maximum initial velocity v_{max} of the photoelectrons is related to the *retarding voltage (retarding potential)* U_0 by the equation

$$\frac{mv_{max}^2}{2} = eU_0,$$

where e and m are the absolute values of the charge and the mass of the electron.

The photoelectric current increases with U only to a definite limiting value I_S called the *saturation photoelectric current*. At this value, all the electrons escaping from the cathode, due to the effect of light, reach the anode. If n_{sec} is the number of photoelectrons emitted from the cathode per second, then

$$I_S = en_{sec}.$$

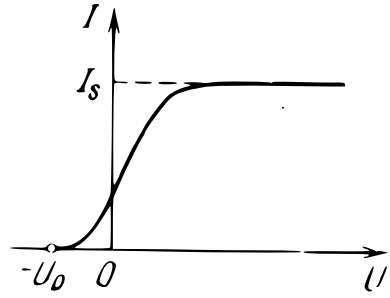


Figure 37.2.: The dependene of photoelectric current on potential difference in the tube.

37.1.3

The external photoelectric effect obeys the following laws.

1. The *Stoletov law* slates that at a constant spectral composition of the light incident upon the photoelectric cathode, the saturation photoelectric current is proportional to the irradiance (36.4.2) of the cathode:

$$I_S \propto E_e \quad \text{and} \quad n_{sec} \propto E_e.$$

2. For a given photoelectric cathode, the initial velocity of the photoelectrons depends upon the frequency of the light, but not on its intensity.

3. A *photoelectric threshold* exists for each photoelectric cathode, i.e. the minimum frequency ν_0 of light at which the external photoelectric effect is still feasible. This frequency ν_0 depends upon the material of the photoelectric cathode and the condition of its surface.

The second and third laws cannot be interpreted on the basis of the classical electromagnetic theory of light. According to this theory the removal of conduction electrons from the metal is a result of their "swaying" in the electromagnetic field of the light wave so that they are "loosened". This effect should increase with the light intensity and with the irradiance of the photoelectric cathode, proportional to the intensity.

37.1.4

Only the quantum theory of light enabled the laws of the external photoelectric effect to be properly explained. In a further development of Planck's ideas on the quantization of the energy of atoms (oscillators) (36.3.2), Einstein proposed the hypothesis that light is not only radiated, but also propagates in space and is absorbed by matter in the form of separate discrete quanta of electromagnetic radiation, which were named *photons*. All photons of monochromatic light of the frequency v have the same energy $E_{ph} = h\nu$, where h is Planck's constant, and travel

in space at the velocity c of light in vacuum (or in free space). In the absorption of light each absorbed photon transmits all of its energy to a particle of the absorbing substance.

In the external photoelectric effect, for example, a conduction electron of the metal, in absorbing a photon, receives all of its energy $h\nu$. The work function Φ (**??**) is the minimum energy that it is necessary to impart to the electron for it to escape from a metal. Hence, *Einstein's photoelectric emission equation*, expressing the law of the conservation of energy in the photoelectric effect, is of the form

$$h\nu = \Phi + \frac{mv_{max}^2}{2}.$$

37.1.5

The second law of the photoelectric effect follows directly from Einstein's equation:

$$\frac{mv_{max}^2}{2} = eU_0 = h\nu - \Phi.$$

Thus, v_{max} and U_0 depend only upon the frequency of the light and the work function in emitting an electron from the photoelectric cathode.

The maximum initial kinetic energy of the photoelectrons depends upon the light frequency according to a linear relation. It becomes zero at the frequency ν_0, corresponding to the photoelectric threshold. Thus

$$\nu_0 = \frac{\Phi}{h}.$$

Consequently, the photoelectric threshold depends only on the electron work function of the metal.

37.1.6

The photoelectric effect is inertialess, i.e. the emission of photoelectrons begins immediately, as soon as light with the frequency $\nu \geqslant \nu_0$ falls on the photoelectric cathode. This feature of the external photoelectric effect is still another confirmation of the quantum nature of interaction between light and matter. According to classical wave conceptions, quite considerable time is required for an electromagnetic wave of given intensity to impart sufficient energy to the electron for its emission from the metal.

37.1.7

At very high intensities of light, achieved by means of lasers (**??**), a *multiple-photon*, or *nonlinear photoelectric effect* is observed. In this case, the electron can simultaneously receive the energy of N photons rather than that of one photon. Then the equation of the law of conservation of energy in the external photoelectric effect under the action of light of frequency ν is of the form

$$Nh\nu = \Phi + \frac{mv_{max}^2}{2}.$$

The photoelectric threshold of the N-photon photoelectric effect is

$$(\nu_0)_N = \frac{\Phi}{Nh}.$$

37.2 Mass and Momentum of the Photon. Light Pressure

37.2.1

The *mass of the photon* (37.1.4) having the energy $E_{ph} = h\nu$, where ν is the frequency of the light and h is Planck's constant, can be found from the mass-energy relation (5.7.2). Thus

$$m_{ph} = \frac{h\nu}{c^2}.$$

where c is the velocity of light in free space (or in a vacuum). The photon always travels with the velocity c, and its rest mass (5.6.1) equals zero.

37.2.2

The *momentum* $\mathbf{p}_{ph}$ *of the photon* is numerically equal to

$$p_{ph} = m_{ph}c = \frac{h\nu}{c} = \frac{h}{\lambda}.$$

where λ is the wavelength of the light in vacuum. Since the wavenumber is $k = 2\pi/\lambda$,

$$p_{ph} = \frac{h}{2\pi}k = \hbar k \quad \text{and} \quad \mathbf{p}_{ph} = \hbar\mathbf{k},$$

where $\hbar = h/2\pi$, and $\mathbf{k}$ is the wave vector (30.2.7).

37.2.3

Light exerts a pressure on the bodies that reflect or absorb it. In quantum optics, light pressure is interpreted as the




Figure 37.3.: Analysing pressure of light falling on a surface of a body.

result of the transfer of momentum to bodies by photons as the light is reflected or absorbed. The *light pressure* p on the plane surface ab of a body (Figure 37.3) is equal to the numerical value of the normal component of the total momentum transferred by photons to the body on unit area of the surface being considered during unit time.

Assume that monochromatic light of frequency ν is incident upon surface ab at the angle i (Figure 37.3) and that n_{sec} is the number of photons incident per second upon unit area of surface ab. If R is the coefficient of reflection (31.5.6) of light from the surface being considered, then, of the n_{sec} photons, $R\,n_{sec}$ are reflected and $(1-R)n_{sec}$ are absorbed. The photons being reflected transfer a total momentum to the body, directed normal to the surface ab and numerically equal to

$$R\,n_{sec}\frac{2h\nu}{c}\cos i.$$

The photons being absorbed transfer a total momentum to the body, whose component normal to surface ab is numerically equal to

$$(1-R)\,n_{sec}\frac{h\nu}{c}\cos i.$$

Thus the light pressure equals

$$\begin{aligned} p &= R\,n_{sec}\frac{2h\nu}{c}\cos i + (1-R)\,n_{sec}\frac{h\nu}{c}\cos i \\ &= (1+R)n_{sec}\frac{h\nu}{c}\cos i. \end{aligned}$$

If n_0 is the photon concentration of the incident light, then $n_{sec} = n_0 c\cos i$ and $n_0 h\nu = \left\langle E^d \right\rangle$ is the average

value of the volume energy density of the light. Hence

$$p = n_0 h\nu(1 + R)\cos^2 i = \left\langle E^d \right\rangle (1 + R)\cos^2 i.$$

Thus, the pressure of light can be equally well explained by either wave theory (31.2.6) or quantum theory.

37.3 Compton Effect

37.3.1

The *Compton effect* is the change in the wavelength of X-rays when they are scattered by a substance containing lightweight atoms. The wavelength λ' of the radiation, scattered at the angle θ to the direction of propagation of the primary monochromatic radiation of wavelength λ, is longer than λ', by the amount $\Delta\lambda$, which depends only on angle θ. Thus

$$\Delta\lambda = \lambda' - \lambda = 2\lambda_C \sin^2 \frac{\theta}{2}.$$

The constant $\lambda_C = 2.43 \times 10^{-12}$ m is called the *Compton wavelength of the electron*. The Compton effect cannot be explained on the basis of the classical wave theory of light.

37.3.2

According to quantum theory, the Compton effect is the result of elastic collision of the X-ray photon with a free or effectively free electron (in light atoms, the binding

energy of an electron with the atom is substantially less than the energy of an X-ray photon). In this collision the photon transfers part of its energy and a part of its momentum to the electron in accordance with the laws of the conservation of energy and momentum. If the electron was initially at rest, it follows from the law mv of conservation of energy that

$$h\nu + m_0c^2 = h\nu' + mc^2, \tag{a}$$

where $\nu = c/\lambda$ and $\nu' = c/\lambda'$ are the frequencies of the incident and scattered radiation, m_0c^2 is the rest energy of the electron (5.7.3), and mc^2 is the total energy of the electron (5.7.2) after the collision (energy of the *Compton recoil electron*).




Figure 37.4.: Investigating Compton scattering.

It follows from the law of conservation of momentum that

$$\mathbf{p}_{ph} = m\mathbf{v} + \mathbf{p}'_{ph},$$

or, in accordance with Figure 37.4,

$$(mv)^2 \left(\frac{h\nu}{c}\right)^2 + \left(\frac{h\nu'}{c}\right)^2 - 2\frac{h^2\nu\nu'}{c^2}\cos\theta, \tag{b}$$

where v is the velocity of the Compton recoil electron.

The mass of the recoil electron is related to its velocity v by the equation (5.6.1)

$$m = \frac{m_0}{\sqrt{1-(v/c)^2}}. \tag{c}$$

Combining equations (a), (b) and (c), we obtain

$$m_0c^2(\nu-\nu') = 2h\nu\nu'\sin^2\frac{\theta}{2} \quad \text{or}$$
$$\Delta\lambda = \lambda' - \lambda = \frac{2h}{m_0c}\sin^2\frac{\theta}{2}.$$

Thus, the *Compton wavelength of the electron* is

$$\lambda_C = \frac{h}{m_0c}.$$

37.3.3

The kinetic energy of the recoil electron (5.7.1) is

$$E_k = (m-m_0)c^2 = h(\nu-\nu')$$
$$= h\nu\nu'\left(\frac{1}{\nu'}-\frac{1}{\nu}\right) = \frac{hc}{\lambda\lambda'}(\lambda'-\lambda) \quad \text{or}$$
$$E_k = h\nu\frac{\Delta\lambda}{\lambda+\Delta\lambda} = h\nu\frac{2a\sin^2\dfrac{\theta}{2}}{1+2a\sin^2\dfrac{\theta}{2}},$$

where $a = \lambda_C/\lambda$, and $h\nu$ is the energy of the incident photon.

The energy E_k is maximal at $\theta = \pi$. Thus

$$E_{k\,\max} = \frac{2ah\nu}{1+2a}.$$

37.3.4

When an electron is tightly bound to its atom, a photon scattered by the electron transfers energy and momentum, not to the electron, but to the atom as a whole. The mass of the atom is many times greater than that of the electron. Hence, only a small part of the photon's energy is transferred to it, so that the wavelength λ' of the scattered radiation does not differ practically from the wavelength λ' of the incident radiation.

The percentage of electrons that are tightly bound in their atoms increases with the atomic number of the element and, consequently, with the atomic mass. Therefore, the heavier the atoms of the scattering substance, the greater the relative intensity of the unshifted component ($\lambda' = \lambda$) in the scattered radiation.

37.3.5

In contrast to the scattering of photons, accomplished by both free and bound electrons, only *bound* electrons can absorb photons. For example, in the external photoelectric effect, a photon is absorbed by a bound electron, which expends a part of the energy it receives on the work function (i.e. in doing work to escape from the substance), the work function being a measureof how strongly the electron was bound in the substance.

The absorption of a photon by a free electron is impossible, because this process would contradict the laws of conservation of energy and momentum. This can be readily shown by considering the absorption of a photon

by a stationary free electron. It follows from the laws of conservation of energy and momentum that the following two relations must be simultaneously complied with:

$$(m - m_0)c^2 = h\nu \quad \text{and} \quad mv = \frac{h\nu}{c},$$

where $m = m_0/\sqrt{1 - (v/c)^2}$. But these equations are simultaneous only at $\nu = 0$.

37.4 Wave-Particle Duality of the Properties of Light

37.4.1

Such phenomena as interference (30.5.2) and diffraction of light (33.2.1) are convincing proof of the wave nature of light. At the same time, the laws of thermal radiation equilibrium (36.1.2), the photoelectric effect (37.1.1) and the Compton effect (37.3.1) can be successfully interpreted only on the basis of quantum concepts of light as being a flux of discrete photons (37.1.4). But the wave and quantum (particle) methods of describing light mutually complement, rather than contradict, each other, because light simultaneously possesses both wave- and particlelike properties. Light is a dialectic unity of these opposite properties.

37.4.2

The principal equations relating the wavelike properties of light (frequency ν and wavelength λ in vacuum) to its

particlelike properties (the energy E_{ph} and momentum p_{ph} of a photon) are:

$$E_{ph} = h\nu \quad \text{and} \quad p_{ph} = \frac{h}{\lambda},$$

The wavelike properties of light play the decisive role in the laws of its propagation, interference, diffraction, and polarization; whereas the particlelike properties play no less important a role in the interaction of light with matter. The longer the wavelength of light, the less the momentum and energy of the photon, and the more difficult it is to detect the quantum properties of light. For example, the external photoelectric effect occurs only at energies of a photon greater than or equal to the work function in releasing an electron from a substance (37.1.5). The shorter the wavelength of electromagnetic radiation, the higher the energy and momentum of the photons, and the more difficult it is to detect the wavelike properties of this radiation. For example, X-rays are diffracted only by an extremely thin refraction grating, the crystal lattice of a solid (33.3.4).

37.4.3

Quantum optics employs the statistical approach in dealing with the laws of light propagation. According to this approach, the diffraction of monochromatic light by some obstacle (for instance, by a diffraction grating) consists in the redistribution of the photons in space caused by this obstacle.

The probability that the photons will hit various points on a screen mounted behind the obstacle is not the same.

This explains why a diffraction pattern appears on the screen; The irradiance E_e (36.4.2) of some small portion $\mathrm{d}S$ of the screen's surface is proportional to the number $\mathrm{d}n_{sec}$ of photons incident upon this portion ($\mathrm{d}S$) per second.

Consequently, E_e is proportional to the probability of photons hitting unit area of the screen's surface at the point being considered. On the other hand, according to wave conceptions, E_e is proportional to the square of the amplitude A of the light at the same point on the screen. Hence, the square of the amplitude of the light wave at some point in space is a measure of the probability of a photon being at this point.

37.4.4

Experiments in light diffraction indicate that in changing the intensity of a light flux incident on an obstacle, the appearance of the diffraction pattern, i.e. the relation between the irradiances at various points of the screen, remains unchanged.

This indicates that wavelike properties are inherent in each separate photon, and not only in an assembly of a great number of simultaneously travelling photons. As a photon passes through an optical system it is impossible to indicate the particular point of the screen it will hit. It is feasible only to speak of the probability $\mathrm{d}E^d$ that the photon will hit some small portion $\mathrm{d}S$ of the surface of the screen.

Part VI.

Atomic and Molecular Physics

38 Elements Of Quantum Mechanics

38.1 Wave-Particle Dualism of the Properties of Particles of Matter

38.1.1

Quantum mechanics[34] deals with the physics of atoms, molecules and their associations, crystals in particular, as well ;is atomic nuclei and elementary particles. Objects of the microcosm studied by quantum mechanics have linear dimensions of the order of 10^{-6} to 10^{-13} cm. If the particles travel at velocities $v \ll c$, where c is the velocity of light in free space, non-relativistic quantum mechanics is applied; at $v \lesssim c$, relativistic quantum mechanics is resorted to.[35]

[34] Also called *wave mechanics* in its early stages of development.

[35] Information on relativistic quantum mechanics is beyond the scope of the present handbook. Wherever applied, the term quantum mechanics refers to non-relativistic quantum mechanics.

38.1.2

Quantum mechanics is based on Plancks concepts concerning the discrete nature of changes in the energy of atoms (36.3.2), Einstein's ideas on photons (37.1.4), and data on the quantum nature of certain physical quantities (momentum and energy, for instance) that characterize, under definite conditions, the states of particles of the microcosm.

38.1.3

The basic concept of quantum mechanics is that the wave-particle dualism of properties, established for light (37.4.1), is of a universal nature. It should manifest itself for any particles having a momentum p. All particles with the finite momentum p possess wave properties and their motion is accompanied by a certain wave process.

38.1.4

The de Broglie formula establishes the dependence of the wavelength associated with a moving particle of matter on the momentum p of the particle. Thus

$$\lambda = \frac{h}{p} = \frac{h}{mv},$$

where m is the mass of the particle, v is its velocity, and h is Planck's constant (Appendix II). The waves mentioned here are called *de Broglie*, or *matter waves*.

Another form of the de Broglie formula is

$$\mathbf{p} = \frac{h}{2\pi}\mathbf{k} = \hbar\mathbf{k},$$

where $\mathbf{k} = 2\pi\hat{\mathbf{n}}/\lambda$ is the wave vector, whose magnitude $k == 2\pi/\lambda$ is the wavenumber, i.e. the number of wavelengths per 2π units of length, $\hat{\mathbf{n}}$ is a unit vector in the direction of wave propagation, and $\hbar = h/2\pi = 1.05 \times 10^{-34}\,\mathrm{J\,s}$.

38.1.5

The de Broglie wavelength for a particle of mass m, having the kinetic energy E_k (3.2.1), is

$$\lambda = \frac{h}{\sqrt{2mE_k}}.$$

In particular, for an electron accelerated in an electric field with a potential difference of ΔV volts (16.2.7),

$$\lambda = \frac{12.25}{\sqrt{\Delta V}}\text{Å}.$$

38.1.6

The de Broglie formula is confirmed by experiments in the scattering of electrons and other particles by crystals and in the passage of particles through matter. An indication of the wave process in all such experiments is the diffraction pattern observed, showing the distribution of the electrons (or other particles) in the particle detecting devices.

No wave properties are manifested by macroscopic bodies. The de Broglie wavelengths for such bodies are so short that it proves impossible to detect any wave properties.

38.1.7

The phase velocity (30.2.10) of de Broglie waves is

$$v_{ph} = \frac{\omega}{k} = \frac{c^2}{v} = \frac{c^2}{h} m\lambda,$$

where m is the mass of the particle, v is its velocity, and λ is the de Broglie wavelength. Since $c > v$, the phase velocity of de Broglie waves is greater than the velocity of light in free space.

The dependence of the phase velocity of de Broglie waves on the wavelength indicates that these waves undergo dispersion (30.3.8). The group velocity (30.4.3) of de Broglie waves is equal to the particle velocity v. Thus

$$u = \frac{\mathrm{d}\omega}{\mathrm{d}k} = v.$$

Table 38.1 compares the particle and wave properties of particles of mass m, travelling at the velocity v.

38.1.8

Besides the de Broglie formula, it is assumed in quantum mechanics that the following relation exists between the total energy E of a particle and the frequency ν of its de Broglie wave:

$$E = h\nu = \hbar\omega,$$

Particle like properties	**Wavelike properties**
Velocity v	De Broglie wavelength $\lambda = \frac{h}{p} = \frac{h}{mv}$
Momentum $p = mv$	De Broglie wave frequency $\nu = \frac{E}{h} = \frac{mc^2}{h}$
Energy $E = mc^2$	Group velocity of de Broglie waves $u = v$
	Phase velocity of de Broglie waves $v_{ph} = \frac{c^2}{v}$

Table 38.1.: Table comparing the particle and wave properties.

where $\omega = 2\pi\nu$ is the angular frequency (28.1.2) and $\hbar = h/2\pi$ (38.1.4).

38.1.9

De Broglie waves are of a specific nature having no analogies among the waves dealt with in classical physics. The square of the magnitude of the de Broglie wave's amplitude at a given point is a measure of the probability that the particle is to be found at this point (this is the *probability, or statistical, meaning of de Broglie waves*).

The diffraction patterns, observed in the experiments mentioned in Section (38.1.6), are an indication of statistical laws. According to these laws the particles, reach definite places in the receivers, these being the places where the intensity (30.3.6) of the de Broglie wave is found to be highest. No particles are observed at the places where, according to the statistical interpretation, the square of the magnitude of the probability wave amplitude becomes zero.

38.2 Schrödinger Wave Equation

38.2.1

The position of a particle in space at a given instant of time is determined in quantum mechanics by specifying its *Schrödinger wave function* (also called the *psi function* or the *probability amplitude*) $\psi(x, y, z, t)$. The probability $\mathrm{d}w$ that the particle is within the element $\mathrm{d}V$ of volume is proportional to $|\psi|^2$ and to the element $\mathrm{d}V$ of volume. Thus

$$\mathrm{d}w = |\psi|^2 \, \mathrm{d}V,$$

where $|\psi|^2$ is the square of the magnitude of the psi function: $|\psi|^2 = \psi\psi^*$. Here ψ^* is a function that is the complex conjugate of ψ. The quantity $|\psi|^2$ is the *probability density* $|\psi|^2 = \mathrm{d}w/\mathrm{d}V = \rho$ and specifies the probability of the particle occupying the given point in space. The intensity of the de Broglie wave is determined by the quantity $|\psi|^2$.

38.2.2

Following from the definition of the psi function is the *normalization condition for probabilities*:

$$\iiint |\psi|^2 \, \mathrm{d}V = 1,$$

in which the triple integral with respect to volume is calculated along the coordinates x, y and z, from $-\infty$ to $+\infty$, i.e. throughout the whole infinite space. The normalization condition indicates that it is a certain event

that the particle is some where in space and the probability of this event should be unity.

38.2.3

The wave function $\psi(x, y, z, t)$ is the main characteristic of the state of micro-objects (atoms, molecules and elementary particles). This function is made use of to calculate the average value of some physical quantity L that characterizes the object which is in the state described by the wave function ψ. Thus

$$\langle L \rangle = \iiint L|\psi|^2 \, dx dy dz,$$

where $\langle L \rangle$ is the average value of L and integration is carried out as indicated in Section (38.2.2).

38.2.4

The fundamental differential equation of quantum mechanics[36], concerning the wave function $\psi(x, y, z, t)$ is called the *Schrödinger time-dependent wave equation*. It determines the psi function for microparticles in a field of force with the potential energy $U(x, y, z, t)$ (3.3.1) at the velocity $v \ll c$, where c is the velocity of light in free space. The Schrödinger equation is of the form

$$i\hbar \frac{\partial \psi}{\partial t} = -\frac{\hbar^2}{2m} \nabla^2 \psi + U(x, y, z, t)\psi,$$

where ∇^2 is the Laplace operator, m is the mass of the particle, $\hbar = h/2\pi$, h is Planck's constant, and $i = \sqrt{-1}$.

[36] See the second footnote to (38.1.1).

The Schrödinger equation is supplemented by the following conditions that are imposed on the psi function:

(a) the psi function should be finite, single-valued and continuous;
(b) the partial derivatives $\partial\psi/\partial x$, $\partial\psi/\partial y$ and $\partial\psi/\partial z$ should be continuous;
(c) the function $|\psi|^2$ should be integrable, i.e. the integral $\iiint_{-\infty}^{+\infty} L|\psi|^2\,\mathrm{d}V$ should be finite. In the simplest cases, this condition is reduced to the normalization of probabilities (38.2.2).

38.2.5

In the case when the psi function is time-independent, i.e. $\psi = \psi(x, y, z)$, it satisfies the Schrödinger steady-state equation:

$$\nabla^2\psi + \frac{2m}{\hbar^2}(E - U)\psi = 0,$$

where E is the total energy of the particle. The remaining notation is given in Section (38.2.4). The psi functions satisfying the Schrödinger equation for the given form of $U = U(x, y, z)$ are called *eigenfunctions*. They exist only at definite values of E, called the *eigenvalues of the energy*. The whole set of eigenvalues of E forms the *energy spectrum of the particle*. If U is a monotonic function and $U \to 0$ at infinity, then in the region $E < 0$, the eigenvalues of the energy form a *discrete spectrum*. The most important problem of quantum mechanics is to find the eigenvalues and eigenfunctions of particles (or systems of particles).

38.2.6

Schrödinger's time-dependent equation has the solution:

$$\psi(x,\, y,\, z,\, t) = \psi(x,\, y,\, z) \exp\left(-\frac{iEt}{\hbar}\right).$$

The state of the particle at the given instant of time is described by a periodic function of time with the angular frequency $\omega = E/\hbar$, determined by the total energy E of the particle. This corresponds to the relation between the total energy E of the particle and the de Broglie wave frequency (38.1.8).

If a particle is in a definite energy state with the energy $E = \text{const.}$, the probability $\mathrm{d}w$ of finding it in the element $\mathrm{d}V$ of volume is independent of time. Thus

$$\mathrm{d}w = |\psi|^2 \mathrm{d}V = \psi\psi^* \mathrm{d}V.$$

This is said to be the *steady state* of the particle. An atom in the steady state has constant energy and does not radiate electromagnetic waves (**??**).

38.3 Motion of a Free Particle

38.3.1

In free motion of a particle ($U = 0$), its total energy E coincides with its kinetic energy. If the OX axis is taken along vector $\mathbf{v}$ of the particle's velocity ($\mathbf{v} = \text{const.}$),

Schrödinger's steady-state equation (38.2.4) has the following solution:

$$\psi = A\exp\left(-\frac{i\sqrt{2mE}x}{\hbar}\right) + B\exp\left(\frac{i\sqrt{2mE}x}{\hbar}\right),$$

where m is the mass of the particle, $\hbar = h/2\pi$, h is Planck's constant, and A and B are certain constants. The Schrödinger time-dependent equation (38.2.4) has, in this case, the solution

$$\psi(x,\, y,\, z,\, t) = A\exp\left(-i\frac{E}{h}t - \frac{\sqrt{2mE}x}{\hbar}\right) + B\exp\left(i\frac{E}{h}t + \frac{\sqrt{2mE}x}{\hbar}\right),$$

which is the superposition of two plane monochromatic waves (31.1.6) of equal frequency $\omega = E/\hbar$, propagating, one in the positive direction of the OX axis with the amplitude A and the other in the opposite direction with the amplitude B.

38.3.2

In quantum mechanics a free particle is described by a plane monochromatic de Broglie wave with the wavenumber k (38.1.4):

$$k = \frac{1}{\hbar}\sqrt{2mE}.$$

The probability of finding the particle at any point in space is constant. For waves propagating along the positive

direction of the OX axis,

$$|\psi|^2 = \psi\psi^* = |A|^2.$$

38.4 A Particle in a One-Dimensional Infinitely Deep Potential Well

38.4.1

A *potential well* is a region of space in which the potential energy U of a particle is less than a certain value U_{max}. In particular, at $U = U(x)$ and $U_{max} = \infty$, there is a one dimensional potential well of infinite depth. If the potential energy of the particle outside and inside the potential well has the following values (Figure 38.1:

$$U = 0 \text{ at } 0 \leqslant x \leqslant L,$$
$$U = \infty \text{ at } x \leqslant 0 \quad \text{and} \quad x \geqslant L,$$

the well has a "flat bottom".

The motion of collectivized electrons in a metal is dealt with in classical electronic theory as motion in a potential well, the potential energy of the electron outside the metal equalling zero, and that inside the metal being negative and numerically equal to the work function of the metal (energy required to remove an electron from the metal) (**??**). The potential well illustrated in Figure 38.1 is simpler than the real potential well of electrons in a metal.




Figure 38.1.: A one dimensional potential well.

38.4.2

The Schrödinger steady-state equation (38.2.5) for particles in a potential well, considered in the preceding subsection, is of the form

$$\frac{\mathrm{d}^2\psi}{\mathrm{d}x^2} + \frac{2m}{\hbar^2}E\psi = 0,$$

at boundary conditions $\psi(0) = \psi(L) = 0$, which indicate that $\psi = 0$ and $|\psi|^2 = 0$ outside the region $0 \leqslant x \leqslant L$, i.e. that the probability of finding the particle outside the potential well is zero.

The solution of the Schrödinger equation is

$$\psi(x) = A\cos kx + B\sin kx,$$

where A and B are constants, and $k = \sqrt{2mE/\hbar}$ is the wavenumber (38.1.4). It follows from the boundary conditions that $A = 0$, $B \neq 0$ and $\sin kL = 0$, i.e. the wavenumber can assume a set of discrete values that comply with the requirement: $knL = n\pi$, where $n = 1, 2, 3, \ldots$

The last equation means that

$$\frac{2\pi}{\lambda_n} = \frac{\pi n}{L} \quad \text{or} \quad \lambda_n = \frac{2L}{n}.$$

A whole number of de Broglie half-waves should fit into the length of the potential well.

38.4.3

Physical quantities that can have only definite discrete values are said to be *quantized (quantized physical quantities)*. The eigenvalues of the energy E_n of a particle in a

one-dimensional infinitely deep potential well,

$$E_n = \frac{n^2\pi^2\hbar^2}{2mL^2} \quad (n = 1, 2, \dots).$$

comprise a discrete set of energy values that are quantized (see also Section (38.2.5)).

The quantized values of E_n are called *energy levels*, and the numbers n, determining the energy levels of a particle in a potential well, are called *quantum numbers*.

38.4.4

At large quantum numbers ($n \gg 1$), the energy levels of a particle in a potential well become relatively closer to one another. The relation $\Delta E/E_n \approx 2/n \ll 1$, where $\Delta E = E_{n+1} - -E_n = (2n+1)n^2\hbar^2/2mL^2$. The inequality $\Delta E \ll E_n$ at $n \gg 1$ indicates that the quantization of energy at large quantum numbers yields results close to those obtained in classical physics: the energy levels become *quasi-continuous* (quasi-continuous energy levels at $n \gg 1$).

Bohr's correspondence principle states that at high quantum numbers the conclusions and results obtained in quantum mechanics should correspond to those of classical mechanics.

A more general statement of the correspondence principle is that between any theory developed from a classical one and the initial classical theory there must be a regular relationship: in definite limiting cases, the new theory must go over into the old one. For example, the formulas of kinematics and dynamics of the special theory of

relativity become the formulas of Newton's mechanics at velocities where $(v/c)^2 \ll 1$ (5.3.4). Geometrical optics is a limiting case of wave optics if the wavelength can be neglected ($\lambda \to 0$).

38.5 Linear Harmonic Oscillator

38.5.1

A *linear (one-dimensional) harmonic oscillator* is a particle of mass m, vibrating with the natural angular frequency ω_0 (28.1.2) along a certain axis OX due to the action of quasi-elastic force F, which is proportional to the displacement x of the particle from its equilibrium position. Thus $F = -kx$. Here k is a factor of the quasi-elastic force, related to m and ω_0 by the equation: $k = m\omega^2$ (28.2.3). The potential energy U of the harmonic oscillator (28.2.3) is

$$U(x) = \frac{kx^2}{2}.$$




Figure 38.2.: A linear harmonic oscillator.

38.5.2

In classical physics the amplitude (28.1.3) of small vibration of a harmonic oscillator is determined by the margin of its total energy E (Figure 38.2). At points B and A, with the coordinates $\pm a$, the total energy E is equal to

the potential energy:

$$E = \begin{cases} U(a) \\ U(-a) \end{cases}$$

where a is the amplitude of vibration of the classical harmonic oscillator. Such an oscillator cannot get outside the limits of the region $(-a, +a)$.

38.5.3

The probability $w_{cl}(x)\mathrm{d}x$ of finding the oscillator on the line segment from x to $x + \mathrm{d}x$ in accordance with classical mechanics,

$$w_{cl}(x)\,\mathrm{d}x = \frac{1}{\pi a} \frac{\mathrm{d}x}{\sqrt{1 - \dfrac{x^2}{a^2}}}$$

is represented by the curve in Figure 38.3.




Figure 38.3.: Classical probability w_{cl} of finding the oscillator in the line segment x.

38.5.4

The vibration of a linear harmonic oscillator is investigated in quantum mechanics by means of the Schrödinger steady-state equation (38.2.5):

$$\frac{\mathrm{d}^2\psi}{\mathrm{d}x^2} + \frac{2m}{\hbar^2}\left(E - \frac{m\omega_0^2 x^2}{2}\right)\psi = 0$$

The solutions of this equation, complying with the conditions in Section (38.1.4), are the eigenfunctions (wave

functions) of a linear harmonic oscillator:

$$\psi_n(x) = \frac{1}{\sqrt{x_0}} \exp\left(-\frac{\xi^2}{2}\right) H_n(\xi), \quad \xi = \frac{x}{x_0}$$

where $x_0 = \sqrt{\hbar/2\pi m\omega_0}$, $H_n(\xi)$ is a Chebyshev-Hermite polynomial of the nth order :

$$H_n(\xi) = \frac{(-1)^n}{\sqrt{2^n n!\sqrt{\pi}}} \exp\left(\xi^2\right) \frac{\mathrm{d}^n \exp^{-\xi^2}}{\mathrm{d}\xi^n}$$

The eigenfunctions for $n = 0,\ 1,\ 2$ are:

$$\psi_0(x) = \frac{1}{\sqrt{x_0\sqrt{\pi}}} \exp\left(-\frac{x^2}{2x_0^2}\right),$$

$$\psi_1(x) = \frac{1}{\sqrt{2x_0\sqrt{\pi}}} \frac{2x}{x_0} \exp\left(-\frac{x^2}{2x_0^2}\right),$$

$$\psi_2(x) = \frac{1}{\sqrt{8x_0\sqrt{\pi}}} \left(4\frac{x^2}{x_0^2} - 2\right) \exp\left(-\frac{x^2}{2x_0^2}\right).$$

The *node of a wave function* is its value equal to zero. The number of nodes of the function ψ_n is equal to the quantum number n (38.4.3).




Figure 38.4.: Energy levels of the oscillator.

38.5.5

The eigenvalues of the energy En of a linear harmonic oscillator,

$$E_n = \left(n + \frac{1}{2}\right) h\nu_0 = \left(n + \frac{1}{2}\right) \hbar\omega_0, \quad (n = 0,\ 1,\ \ldots),$$

where $\nu_0 = \omega_0/2\pi$, and ω_0 is the natural angular frequency (38.5.1), are the set of equally spaced energy levels shown in Figure 38.4. At $n \gg 1$ (where $n + 1/2 \approx n$), the energy levels of the oscillator coincide with the values of quantized energy of the oscillator $E'_n = n\hbar\omega_0$, postulated by Planck in the theory of blackbody radiation (36.1.5).

38.5.6

The minimum energy that can be had by a harmonic oscillator is called the *zero-point energy* E_0:

$$E_0 = \frac{h\nu_0}{2} = \frac{\hbar\omega_0}{2} \quad \text{at } n = 0.$$

In classical physics and in Planck's theory it was assumed that $E_0 = 0$ (at $n = 0$). This means that the oscillator does not vibrate and is in a state of equilibrium. Atoms, as oscillators, should not, according to classical physics, execute any vibrations at the temperature of absolute zero ($T = 0$). It has been proved in modern quantum mechanics, that the zero-point energy of a harmonic oscillator cannot be reduced however much it is cooled, even down to absolute zero (11.8.4). Zero-point energy of the oscillator corresponds to its *zero vibration*.

In quantum mechanics, zero-point energy is a typical feature of any system of particles. At temperatures close to absolute zero, a substance is in a condensed state and its atoms (or molecules or ions) are dealt with as vibrating oscillators. Zero-point energy is the least amount of energy that a quantum oscillator should have in its lowest energy state (at $n = 0$) in order to comply with the indeterminacy relation (38.6.2).




Figure 38.5.: Comparison of probability density for classical and quantum cases for the linear harmonic oscillator for $n = 1$.

38.5.7

The probability of finding a quantum linear harmonic oscillator on the OX axis in the region from x to $x + \mathrm{d}x$ is

$$w_{qu}(x)\mathrm{d}x = |\psi n(x)|^2 \mathrm{d}x.$$

Compared in Figure 38.5 are the quantum probability density at $n - 1$ and the classical probability density $w_{cl}(x)$. The existence of nonzero values of $w_{qu}(x)$ beyond the limits of the classically allowed region $|x| \geqslant a$ is explained by the feasibility of the passing of particles possessing wavelike properties through a potential barrier (38.7.2).

38.5.8

As the number n is increased, the probability distribution curve $|\psi|^2$, illustrated in Figure 38.6 for $n = 10$, becomes more and more like the classical probability distribution curve Figure 38.3. This agrees with Bohr's correspondence principle (38.4.4).

38.5.9

Making use of the eigenfunctions of the energy of a linear harmonic oscillator, the average energy $\langle E \rangle$ of such an oscillator can be calculated:

$$\langle E \rangle = \frac{\hbar\omega_0}{2} + \frac{\hbar\omega_0}{\exp(\hbar\omega_0/kT) - 1} = \frac{\hbar\omega_0}{2} + \langle E_1 \rangle.$$

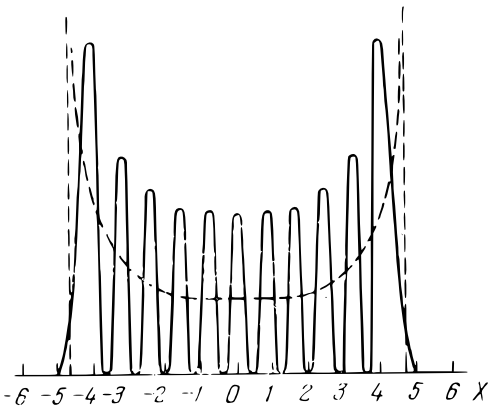


Figure 38.6.: Comparison of probability density for classical and quantum cases for the linear harmonic oscillator for $n = 10$.

Accurate to within zero-point energy, $\langle E \rangle$ is expressed by the term $\langle E_1 \rangle$, which was obtained by Planck in developing his theory of the thermal radiation of a blackbody. Graphically, this term is represented in Figure 38.7, at $T = \text{const.}$, as a function of the frequency. It is evident that the greatest contribution to $\langle E_1 \rangle$ is made by vibrations with low frequencies, corresponding to long wavelengths.

At a high temperature ($kT \gg \hbar\omega_0$)

$$\langle E_1 \rangle = \frac{\hbar\omega_0}{1 + \dfrac{\hbar\omega_0}{kT} - 1} = kT.$$

This result coincides with that obtained from the principle of equipartition of energy (10.6.4).




Figure 38.7.: Expectation value (average energy) of linear harmonic oscillator.

38.6 Heisenberg Indeterminacy Principle

38.6.1

The wavelike properties of microparticles (38.1.4) introduce limitations into the possibility of applying the concepts of coordinates and momentum in their classical form to such particles. Limitations also exist in classical physics in the application of certain concepts to definite items. It is of no meaning, for instance, to apply the idea of temperature to a single molecule; the concept of point localization (location at a certain point) is inapplicable in determining the position of a wave in space, etc. But in classical mechanics, a definite value of the particle's coordinate corresponds to exact values of its velocity and momentum.

In quantum mechanics there exist fundamental restrictions in the possibility of simultaneously determining the exact coordinate of a particle and its exact momentum. These restrictions are associated with the wave-particle dualism of the properties of microparticles (38.1.3).

38.6.2

The *Heisenberg indeterminacy relations* are the inequalities

$$\Delta x \times \Delta p_x \geqslant \frac{\hbar}{2},$$
$$\Delta y \times \Delta p_y \geqslant \frac{\hbar}{2},$$
$$\Delta z \times \Delta p_z \geqslant \frac{\hbar}{2}.$$

Here Δx, Δy and Δz are the ranges of the coordinates within which a particle, described by a de Broglie wave (38.1.4), may be localized if the projections of its momentum along the coordinate axes are within the ranges Δp_x, Δp_y and Δp_z. The Heisenberg relations indicate that the coordinates x, y, and z of the particle and the projections p_x, p_y and p_z of its momentum on the corresponding axes cannot simultaneously have values exactly equal to x and p_x, y and p_y, and z and p_z. These physical quantities can have values given to an accuracy determined by the Heisenberg relations. The more accurately the position of the particle is determined, i.e. the smaller the values of Δx, Δy and Δz, the less accurately the values are determined for the projections of its momentum (i.e. the greater are Δp_x, Δp_y and Δp_z). If the position of the particle along the OX axis is exactly determined and $\Delta x = 0$, then $\Delta p_x = \infty$ and the value of the projection p_x of the momentum on this axis becomes entirely indeterminate.

38.6.3

The indeterminacy relations put definite restrictions in quantum mechanics on the feasibility of describing the motion of a particle along a certain path.

In classical theory each point of the path of a particle has definite coordinates x, y, and z and the particle has a definite momentum $\mathbf{p}$ with projections p_x, p_y and p_z along the coordinate axes. This is realized in quantum mechanics only in cases when the particle travels in a macroscopic region of space (for instance, the particle may leave a trace on a photographic plate or on the screen of an oscillograph). If, for example, the position of an electron is fixed with an accuracy determined by the linear dimensions of a grain of photographic emulsion, subject to the (effect of the electron, then $\Delta x \approx 10^{-6}\,\text{m}$. This corresponds to an indeterminacy in the momentum equal to Apx $\Delta p_x \geqslant \hbar/2\Delta x \approx 10^{-28}\,\text{kg m/s}$ and in the velocity equal to $\Delta v_x = \Delta p_x/m \approx 10^2\,\text{m/s}$. This indeterminacy at electron velocities of the order of 10^6 to $10^7\,\text{m/s}$, enables us to assume that the electron is travelling along a definite path with an exact velocity specified at each point of this path.

38.6.4

If the particle is travelling in a microscopic region of space, the indeterminacy relations substantially affect the nature of its motion. For example, the position of an electron travelling in an atom can be determined with an accuracy to the dimensions of the atom, i.e. $\Delta x \approx 10^{-10}\,\text{m}$. But

the indeterminacy of the electron's velocity Δv_x, in this case, is found to be of the same order of magnitude as the velocity itself: $\Delta v_x \approx 10^6$ m/s $\approx v$. The path of an electron in an atom with the exact velocity specified at each point does not have the meaning it has in classical mechanics (1.2.3). This by no means indicates that the indeterminacy principle places fundamental limitations on our knowledge of the microcosm. It only indicates the limited applicability of the concepts of classical physics to the region of the microcosm.

38.6.5

No restrictions are made by the indeterminacy principle with respect to the feasibility of applying the conception of the coordinate and momentum of a macroscopic body in the classical sense. The wave properties of such bodies are not manifested in any way (38.1.6) and, consequently, the indeterminacy relations are not applied to them.

38.6.6

The indeterminacy relations for energy E and time t are

$$\Delta E \times \Delta t \geqslant \hbar.$$

where ΔE is the indeterminacy of the energy of a particle, which is in a state with the energy E during the length of time Δt. The longer a particle is in the given state, the more accurately its energy in this state can be determined.

38.6.7

Measurement is the process of interaction of an instrument with the item being investigated as a result of which certain information is obtained on the properties of the item. This process proceeds in space and time and is an objective process.

The interaction between the measuring instrument and the item being measured essentially differs for microscopic and macroscopic items. In the latter case, the measuring process is described with more or less accuracy by the laws of classical physics, and the instrument has no effect on the item being measured that cannot be accurately taken into account in the terms and con cepts of classical physics or reduced to as small a value as desired.

In quantum mechanics, owing to the objectively existing duality of the properties of microscopic items (38.1.3), the measuring process is inevitably associated with substantial effects of the instrument on the course of the phenomenon being investigated.

For example, to determine the position of the electron it must be "illuminated" by light of the highest possible frequency. As a result of the collision between the photon and the electron, the momentum p_x of the latter is changed by an amount determined by the indeterminacy relation: $\Delta p_x \geqslant \hbar/2\Delta x$ (38.6.2). This effect on the item being measured cannot be considered small or inessential because the state of the item is changed. This change is such that as a result of measurement, definite classical characteristics of a particle, for instance, its momentum, are found to be specified only within the limits restricted

by the indeterminacy relations.

38.7 Tunnel Effect

38.7.1

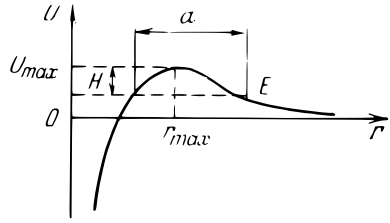


Figure 38.8.: Potential well of the form $U = U(r)$.

Potential wells in which particles are located may be of much more complicated shape than those dealt with in Section 38.4. If the potential energy of the particle is of the form $U = U(r)$, as shown in Figure 38.8, the particle moves in a field of forces that can be represented in the form of a *potential barrier*. This means that the forces act on the particle in a certain limited region of space. Outside of this region the particles move as free ones.

The height H of the barrier and its width a for a given particle depend upon the energy E of the particle. In order for a particle to get out of a potential well or to enter it from outside, it is necessary, according to classical mechanics, to impart energy to the particle equal to or greater than $|U_{max} - E| = H$.

38.7.2

The *tunnel effect* is the passing ("leaking") of particles through potential barriers. The tunnel effect is a quantum-mechanical one and is due to the wavelike properties of the particles (38.1.3).

The *penetrability (penetrability factor)* D of a potential barrier is the quantity

$$D = \frac{I_{tran}}{I_{inc}},$$

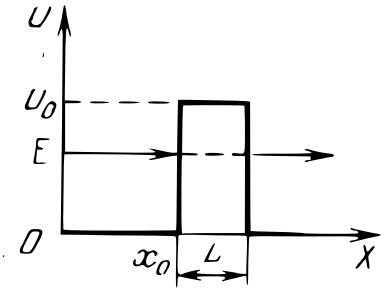


Figure 38.9.: A rectangular potential well with height U_0 and width L.

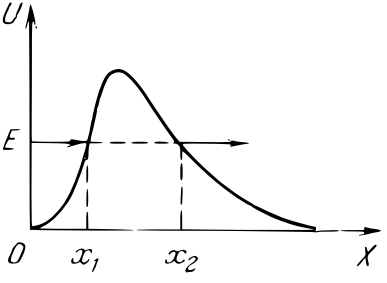


Figure 38.10.: A potential well of a complex shape.

where I_{tran} is the intensity (30.3.6) of de Broglie waves passing through the potential barrier, and I_{inc} is the intensity of the waves incident on the barrier.

The penetrability of a rectangular potential barrier of the height U_0 and width L (Figure 38.9) is

$$D = D_0 \exp\left[-\frac{2}{\hbar}\sqrt{2m(U_0 - E)}\, L\right],$$

where m is the mass of the particle, and E is its energy. For a potential barrier of complex shape

$$D = D_0 \exp\left[-\frac{2}{\hbar}\int_{x_1}^{x_2}\sqrt{2m(U_0 - E)}\mathrm{d}x\right],$$

where x_1 and x_2 are the coordinates of the points at the beginning and end of the potential barrier $U(x)$ for a given value E of the total energy (Figure 38.10. In these formulas D_0 is a constant factor close to unity.

38.7.3

The tunnel effect plays an important role when the penetrability is not too low. This occurs in the cases when the linear dimensions of the potential barrier are commensurable with atomic dimensions. For example, at $U_0 - E = 10\,\mathrm{eV}$ for an electron ($m \approx 10^{-30}\,\mathrm{kg}$) and $L = 10^{-10}\,\mathrm{m}$, we obtain $D \approx 1/e$.

Under the same conditions, excepting that $L = 10^{-2}\,\mathrm{m}$, $D \approx \exp\left(10^{-8}\right)$. The penetrability of the barrier decreases with an increase in the mass of the particle and in the difference $U_0 - E$.

38.7.4

The *paradox of the tunnel effect* is that the passing of a particle through the potential barrier enables it to be found in a region that is forbidden from the classical point of view. In this region the potential energy of the particle exceeds its total energy; its kinetic energy is negative and, consequently, the velocity (momentum) of the particle becomes an imaginary quantity.

Actually no such paradox exists. The tunnel effect is a purely quantum-mechanical phenomenon and here an unexpected difficulty arises, from the classical point of view, in representing the total energy E in the form of the sum of the kinetic and potential energies: $E = p^2/2m + U(x)$. Owing to the fact that the indeterminacy relation (38.6.2) excludes the possibility of simultaneously specifying definite values, to any degree of accuracy, for the coordinate x and momentum p of a particle, it is found to be inadmissible in quantum mechanics to represent the total energy as the sum of two exactly definite parts: the kinetic $p^2/2m$ and potential $U(x)$ energies. If the coordinate x of the particle is fixed in the region Δx and its potential energy $U(x)$ is determined with sufficient accuracy, then the indeterminacy Δp introduced into the value of the particle's momentum ($\Delta p \approx \hbar/A$) excludes the possibility of specifying the exact value of the kinetic energy $p^2/2m$ of the particle.

Consequently, the previous value of the particle's total energy E cannot be specified either. It is found, in this case, that the change in the kinetic energy AE, caused by fixing the particle's coordinate, exceeds the difference

between the barrier height U_0 (Figure 38.9) and the total energy E of the particle:

$$\Delta E_k > U_0 - E.$$

Thus, ΔE_k exceeds the energy that the particle, inside the potential well, lacks to surmount the barrier "in the classical way" to get out of the well.

The role played by the tunnel effect in solid-state physics and in the phenomenon of radioactive decay is dealt with in Sections (**??**) and (**??**).

39 Structure Of Atoms And Molecules And Their Optical Properties

39.1 The Hydrogen Atom and Hydrogen-Like Ions

39.1.1

An atom is the smallest particle of matter possessing all the chemical properties of the given chemical element. An atom consists of a positively charged nucleus and electrons moving about in the electric field of the nucleus. The nuclear charge Ze (42.1.2) is equal in magnitude to the total charge of all the electrons of the atom. An ion is the electrically charged particle formed when an atom or molecule loses or gains electrons. 39.1.2 The simplest atomic system is the hydrogen atom, consisting of a single proton in the nucleus and a single electron moving in the Coulomb field of the nucleus. Hydrogen-like ions

(isoelectronic with hydrogen) are such as He+, Li+++ and Be++, which also have a nucleus with the charge Ze and a single electron. 39.1.3 Among the optical properties of atoms, the most important is their emission spectrum. The frequency v of the lines in the discrete line spectrum of hydrogen is described by the Balmer-Rydberg formula: where 2 :rc2me4 . R = j-g (m Gaussian units). Here c is the velocity of light in free space, m is the mass of the electron, e is the electron charge, h is Plancks constant, and e0 is the electric constant in SI units (14.2.7). Quantities R and R' = R/c are called the Rydberg constant in s-1 and in cm-1 or m-1, respectively: R 3.2931193 X 1015 s-1 and R' = 1.0973*31 X 107 m*1.:t!i 1] HYDROGEN ATOM 555 The whole numbers n and m are called the principal quantum numbers, and m = n + 1, n + 2, etc. A group of lines having I he same n value is called a series. The hydrogen spectrum has I lie following series: Lyman series at n = 1, Baimer series at n 2, Paschen series at n = 3, Brackett series for n = 4, Pfund series for n = 5 and the Humphreys series for n = 6. Kor hydrogen-like ions (39.1.1) the Balmer-Rydberg formula is where Z is the atomic number of the element in the Mendeleev periodic table (39.3.5). 39.1.4 Each value of the quantum number n in the Balmer- Uydberg formula corresponds to the series limit with the maximum frequency (at m = oo), called the term Tn. Thus B Z2R Tn = (for hydrogen), Tn = (for hydrogen-like ions). 39.1.5 The energy of a hydrogen-like ion in a state with the principal quantum number n is: Z2Rh 1 En | En n2 h The magnitude En is called the binding energy of the electron in the atom. The minimum value E1 (at n = 1) corresponds to the ground,

or normal, state of the atom (39.1.9). All energy values at n > 1 characterize excited states of the atom. The most vital distinguishing feature of excited states is the finite lifetime t of the electron in these states: state of the atom, isolated from all external effects, t is unlimited. The maximum energy value max = 0 as n -> oo corresponds'to ionization of the atom or ion, i.e. to the removal of an electron from it. In magnitude, the ionization energy is equal to the binding energy of an electron in the atom (or ion). The ionization potential (16.2.6) of an atom of hydrogen or of a hydrogen-like ion in the state with the principal quantum number n is equal to V = Z2Rhfen2, where e is the magnitude of the charge of the electron. A diagram of the energy levels in the hydrogen atom and the arrangement of its series of spectral lines are given in Fig. 39.1.13.53- 13 - 12 - 11 - Cb s Co Cu -c; 10 9 8 7 6 2 I<o I č 5 k 0 0 C'O'vT Cco (0 3 UoCNi r- cjcv 5 COO 5 3- l- I- 0- Fig. 39,1 r ><r <r o o c o c c t- o 25 11 t u n b <o ib ř0 | CJ jğ ğ <o 20000 - bOOOO - C/j CL) <C> ooooo - I Wavenumber, cm::!).!] H Y D R O G E N A T O M 557 39.1.6 The spectrum and the energy levels of the hydrogen atom were first interpreted by means of Bohrs postulates. Bohr's first postulate (steady states postulate) states that there are a set of stationary, or steady, states of the atom in which it does not radiate electromagnetic waves. The steady states correspond to steady orbits (39.1.8) along which electrons travel with acceleration, but no light is radiated (cf. Sect. 31.3.4). Bohrs first postulate was explained by quantum mechanics (38.2.6). Bohr's second postulate (orbit quantization rule) states that in the steady state of the atom, the

electron, travelling along a circular orbit, has quantized values of its angular momentum that comply with the condition Ly = mvr = kh (k = 1, 2, 3, . . .). Mere rn is the mass of the electron, v is its velocity, r is the radius of the Mh orbit, and h = hi2k. The whole number k is equal to the number of de Broglie wavelengths for the electron (38.1.4) per length of the circular orbit: 2nr/X = 2nrmvlh = k. The quantization of the angular momentum in quantum mechanics is discussed in Sect. 39.1.8. Bohrs third postuldte (the Bohr frequency condition) states that in going from one steady state orbit to another, the atom either emits or absorbs one photon. A photon is emitted when the atom passes from a state with more energy to one with less energy. Upon transition* in the opposite direction, a photon is absorbed. The energy hv of the photon is equal to the difference in energy in the two states. Thus En Em = hv. When En > Em a photon is emitted; when En < Em a photon is absorbed. In quantum mechanics, Bohrs frequency condition follows from the theory of quantum transitions from one energy state to another. Information on this theory is beyond the scope of the present handbook. 39.1.7 SchU:dingers steady-state equation (38.2.5) for the motion of an electron in the Coulomb field of a nucleus with the charge Ze (42.1.2) is of the form558 STRUCTURE OF ATOMS AND MOLECULES [39 where U (r) = Z<?2/4jte0r is the potential energy of an electron located at the distance r from the nucleus, e0 is the electric constant in SI units (14.2.7), and E is the total energy of the electron in the atom, which it is necessary to determine under the assumption that the wave functions o|) comply with the

conditions indicated in Sect. 38.2.4. 39.1.8 A solution of the Schrodinger steady-state equation for an electron in a centrally symmetrical Coulomb field of the nucleus yields the following: (a) the angular momentum of the electron in the atom is quantized according to the formula: L,= Vl(l + 1)*, where the orbital quantum number Z, determining the angular momentum, varies within the limits: Z = 0, 1, . . ., (n 1), where n is the principal quantum number (39.1.3); (b) at E < 0, when the electron is bound in the atom, its motion is periodic, and the value of the total energy E is quantized. The eigenvalues En (38.2.5) are determined by the formula: En En Z2mei 1 8/*2eğ n2 2ji 2Z2mei P Z2i?/? 7l2 (in SI units), Z2Rh (in Gaussian units). Here R is the Rydberg constant (39.1.3). The solution of the Schrodinger equation for an electron in a hydrogen-like ion leads to energy levels of the Balmer-Rydberg type (39.1.4). 39.1.9 In accordance with the orbital quantum number, the following letters have been assigned to designate the state of the electron in atoms: 5-state at Z = 0, p-state at Z = 1, d-state at Z = 2, /-state at Z = 3, etc. The 5-state of the electron in the hydrogen atom at n = 1 is called the ground state (see also Sect. 39.1.5). This state is spherically symmetrical. The wave function of this state depends only upon the distance r of the electron from the nucleus [|) = -i|) (r)] and is of the form t|) = l |) (r) = C e r/aż,:19.2] SPACE QUANTIZATION 559 where C is a constant determined from the normalization condition for probabilities (38.2.2), and a0 is the first Bohr radius: 4ne0h2 . OT . , a0 = —- (in SI units), me2 h2 aa = —s- (in Gaussian units). m e 2 In quantum mechanics, the electron orbits in the

atom are considered to be the locus of points at which the probability of finding the electron is a maximum. In particular, for the 5-state of the hydrogen atom, such an orbit is the first circular Bohr orbit of a radius equal to a0. 39.2 Space Quantization 39.2.1 Space quantization is the existence of definite discrete orientations in space of the angular momentum vector Li of the electron. This phenomenon has been proven in quantum mechanics. The only allowed orientations of Li are those in which the projection Ljz of vector Lj along the direction Z of the external magnetic, field assumes values that are multiples of Thus Llz= mh, where m is a whole number called the magnetic quantum number and assumes the values m = 0, ś1, ś2, . . ., and I is the orbital quantum number (39.1.8). Given in Fig. 39.2 is the space quantization of vectors Lj for electrons in the p- and d-states (39.1.9). 39.2.2 Since the angular momentum vector of the electron is proportional to the orbital magnetic moment of the electron (26.1.2), it follows from space quantization that the vector pm of the orbital magnetic moment of the electron (26.1.2) in the external magnetic field cannot assume arbitrary orientations.560 STRUCTURE OF ATOMS AND MOLECULES [39 39.2.3 It was experimentally established that space quantization is observed in atoms having a single outer-shell (valence) electron in the 5-state (where I = 0) (39.1.9). In this state the atoms lack angular momentum (L0 = 0; see Sect. 39.1.8). Space quantization, detected in such experiments, pertained to electron spin, and confirmed the existence of two possible spin orientations in the external magnetic field (26.1.3). The magnitude of the spin angular momentum L/s of

the electron is determined by the formula (39.1.8): Fig. 39.2 Llt= Y + i) h , where s is the spin quantum, number, equal to s = 1/2. Therefore, the numerical value of electron spin equals (26.1.3): Space quantization of spin means that the projection Lisz of the spin vector L/s on the direction of the external magnetic field is determined by the formula Lisz TUs'i where ms is the spin magnetic quantum number, differing from the spin quantum number s in that it can assume two values: not only +1/2, but 1/2 as well*. * Frequently, no distinction is made between the two spin quantum numbers s and ms, referring, in this case, to ms to which two values, ś1/2, are assigned.30.3] PAULI EXCLUSION PRINCIPLE. PERIODIC TABLE 561 39.3 Pauli Exclusion Principle. Mendeleev's Periodic Table 39.3.1 The simplest statement of the P a u li ex clu sion p rin cip le is: in any atom there cannot be two electrons occupying two identical steady states, which are specified by a set of four quantum numbers: the principal t z , orbital Z, magnetic m and spin magnetic ms quantum numbers. Also obeying the Pauli principle, in addition to electrons, are other particles having half-integral spin (in h units). In any system of fermions (41.2.4) no two particles can exist in identical quantum states (41.1.4). For the electrons in an atom, the Pauli principle is written as follows: Z 1 (t z , Z, / / I , m s) = 0 or 1, where Zx (t z , Z, t z z , ms) is the number of electrons in the state specified by the given set of quantum numbers. 39.3.2 The maximum number Z2 (ti, Z, m) of electrons occupying states specified by a set of three quantum numbers, ti, Z and 77i, and differing only in the orientations of the spins of the electrons, is Z2 (t z , Z, m) = 2, because the

spin magnetic quantum number ms can assume only two values: 1/2 and 1/2. 39.3.3 The maximum number Z3 (tz, Z) of electrons occupying states specified by two quantum numbers, n and Z, is Z3 (tz, Z) = 2 (21 + 1). This is based on the fact that for a given I value vector L/ can assume (2Z + 1) different orientations in space. 39.3.4 The maximum number of Z (t z) electrons occupying states specified by the value n of the principal quantum number is l=n -1 Z(ż)= 2 Z*(ż. J) = 2ż*. 1=0 Table 39.1 lists the maximum number of electrons occupying states characterized by the given values of the principal n and orbital I quantum numbers. 36-0186562 STRUCTURE OF ATOMS AND MOLECULES [30 TABLE 39.1 39.3.5 The systematics for filling the electron states in atoms and the periodicity with which changes occur in the properties of chemical elements enabled them all to be arranged into Mendeleev s periodic system of elements. Modern theory of the periodic system is based on the following principles: (a) The atomic number Z of a chemical element is equal to the total number of electrons in an atom of the given element. (b) The state of the electrons in an atom is determined by a set of four quantum numbers: n, I, m and ms. The distribution of the electrons according to the energy states should comply with the principle of minimum potential energy: as the number of electrons is increased, each consecutive electron should occupy the energy state with the least possible energy. (c) The filling of the energy states in the atom by electrons should proceed in accordance with the Pauli principle (39.3.1). 39.3.6 An electron shell is a collection of all the electron states in an atom, which have the same value of the principal

quantum number n (39.1.3). Distinction is made between the following electron shells (Table 39.1): K at n = 1, L at n = 2, M at n = 3, N at n = 4, etc. Inside the electron shell, the electrons are distributed among the subshells, each of which corresponds to a certain value of the orbital quantum number I (39.1.8). 39.3.7 The order for the filling of the electron energy states in an atom in the shells and, within one shell, in the subshells, should correspond to the sequence of the energy levels with the given n:t!M] CHEMICAL BONDS AND MOLECULAR STRUCTURE 563 iind I values, and comply with the Pauli principle (39.3.5b). For light-weight atoms, this order consists of first filling the shell with the lower value of n, and only then filling the next shell with electrons. Inside a given shell, first the state with I = 0 is filled, then the states with larger and larger I values up to I = n 1. Such an ideal periodic system of elements would have a structure end number of elements in each period (lengths of the periods) corresponding to Table 39.1. 39.3.8 Deviations from the order indicated in Sect. 39.3.7 begin with potassium (Z = 19) and are explained as follows. The interaction between electrons in the atom leads, at sufficiently large principal quantum numbers nf to a situation in which states with larger n and lesser I values can have less energy, i.e. be more favourable from the energy viewpoint than states with less n, but with higher I values. As a result we have elements with incompletely filled preceding shells, but in which subsequent shells are being filled. Chemical elements, in which the filling of preceding shells is completed after the partial filling of subsequent shells, are called transition elements. 39.3.9

The outer (valence) electrons of an atom are those in the shell with the highest n value that belong to the s- and p-sub- shells, i.e. they have 1 = 0 or I 1 (39.1.9). These electrons determine the chemical and optical properties of the atoms (see also Sect. 20.3.1). The total number of electrons in the s- and p- subshells is equal to 8 (Table 39.1). Most chemical reactions are based on giving up or attaching outer (valence) electrons. It proves expedient, theoretically, for an atom, with the (5 + p)- subshell less than half-filled to give up valence electrons, and for one with a more than half-filled (s + p)-subshell to attach more electrons from other atoms in the process of chemical reactions. 39.4 Chemical Bonds and Molecular Structure 39.4.1 A molecule is the smallest particle of a given substance, possessing its principal chemical properties. Molecules consist of either the same or different atoms (39.1.1), joined together by interatomic chemical bonds. Chemical bonds are based on various interactions of the outer (valence) electrons of the atoms (39.3.9). This is indicated by the changes in the optical spectrum, which explains the behaviour of these electrons when molecules are formed of atoms. 36*564 STRUCTURE OF ATOMS AND MOLECULES [39 A definite amount of work must be done to dissociate molecules into their constituent atoms. On the contrary, the formation of molecules is accompanied by the evolution of energy. This shows that there are forces which bind atoms into molecules. The energy evolved in forming molecules is a measure of the forces of interaction that join atoms into molecules. 39.4.2 At large distances r between atoms, distances that considerably exceed the linear dimensions d of

the atoms, forces of mutual attraction exist between them. At distances r comparable to d, the forces become ones of mutual repulsion, which do not permit the electrons of a given atom to penetrate too deeply into the electron shells of an adjacent atom. As in the case of interaction between molecules (12.1.4), the repulsive forces between atoms are more short-ranged, than those of attraction (Fig. 12.1). The signs of the forces of attraction and repulsion are discussed in Sect. 12.1.4. 39.4.3 r0 between the atoms of a diatomic molecule, the oppositely [directed forces of attraction and repulsion counterbalance each other and their vector sum equals zero. The distance r0 corresponds to the minimum mutual (potential) energy Eg (r) of the atoms of a diatomic molecule (cf. Sect. 12.1.6) (Fig. 39.3). The equilibrium interatomic distance r0 in a molecule is called the bond length, or distance. The quantity D is called the dissociation, or bond, energy. It is numerically equal to the work that must be done to dissociate a molecule into its constituent atoms and to separate them to infinite distances from one another. The dissociation energy is equal to the energy evolved in forming a molecule, but is of opposite sign. Dissociation energy is negative, whereas the energy evolved in forming molecules is positive. 39.4.4 Heteropolar (ionic) molecules are ones formed as the result of the conversion of interacting atoms into oppositely electrically charged and mutually attracting ions (39.1.1). This kind of bond between the atoms of a molecule is called a heteropolar (or ionic or electrovalent) bond. The formation of heteropolar molecules isCHEMICAL BONDS AND MOLECULAR STRUCTURE 565 based on the behaviour of atoms with

differently filled outer (s + p)-subshells, discussed in Sect. 39.3.9. Typical heteropolar (ionic) molecules are those of the alkali-halide salts, formed by ions from the elements of the I and VII groups of the periodic system (39.3.5). These include: NaCl (Na+Cl), Csl (Cs+I-) and others. Metals of the first group have low ionization potentials V (39.1.5), whereas atoms of group VII are characterized by a high electron affinity, which is the amount of energy released when an electron is attached to a metalloid atom. The transition of an electron from a metal atom to a metalloid atom leads to the formation of ions, each of which has a stable eight-electron (s + p)- subshell (39.3.9). As a result, a stable heteropolar (ionic) molecule is formed. 39.4.5 Homopolar atomic) molecules are ones formed by the mutual attraction of neutral atoms. The chemical bond of the atoms of a homopolar molecule is said to be covalent. A covalent bond lias the property of being saturated (saturation of a covalent bond), which is manifested as the definite valency of the atoms. An atom of hydrogen can be bound to only one other atom, and an atom of carbon to no more that four other atoms. The simplest molecule with a covalent bond is the hydrogen molecule H2; it consists of two electrons and two nucleiprotons. The basis of the quantum-mechanical explanation of the covalent bond in the H2 molecule is the indistinguishability of identical particles, e.g. the electrons in a hydrogen molecule (see also Sect. 41.1.2). The electrons in the H2 molecule, each of which belongs to a definite nucleus, can be interchanged and this still leads to the same system: an H2 molecule consisting of two electrons and two nuclei. The indistinguishability of

electrons leads to the occurrence of a special quantum-mechanical exchange interaction between two identical electrons. This interaction consists in the electron of each of the atoms in the hydrogen molecule spending a certain part of its time at the nucleus of the other atom. This constitutes the bond between the two atoms forming the molecule. It follows from quantum-mechanical calculations that when two hydrogen atoms approach each other to a distance commensurable with the Bohr radius (39.1.9), and under the condition that the spins of the electrons in the atoms are antiparallel (26.1.3), the two atoms attract each other and a stable 'FT2 molecule is formed. With parallel spins of the electrons, the two atoms of hydrogen repel each other, and no molecule of hydrogen is formed.566 STRUCTURE OF ATOMS AND MOLECULES [39 39.5 Optical Properties of Molecules. Molecular Spectra 39.5.1 Owing to their specific appearance, the spectra of molecules, or molecular spectra, are called band spectra. They consist of a set of more or less wide bands formed of closely spaced spectral lines. Bands are observed in molecular spectra in the infrared, visible and ultraviolet ranges of the scale of electromagnetic waves, (31.4.3). Closely spaced bands form a group of bands. Several groups of bands are observed for the simplest diatomic molecules. Continuous broad emission (or absorption) bands are observed in the visible and ultraviolet regions of the spectra of polyatomic complex molecules. 39.5.2 As in the spectra of atoms (39.1.3), a separate spectral line in a molecular spectrum appears as a result of a change in the energy of a molecule. The total energy Em of a molecule can be presented as the

sum of the following parts, assumed independent in a first approximation: Em = E + E + E f + E f + E, where E[n is the energy of translational motion of the centre of mass (2.3.3) of the molecule, E is the energy of motion of the electrons in the molecules atoms, E is the energy of vibrational motion about their equilibrium positions of the nuclei in the molecules atoms, E is the energy of rotary motion of the molecule as a whole, and E is the energy of the nuclei in the molecules atoms. The energy E is not quantized (38.4.3) and its-change cannot lead to the production of a molecular spectrum; the effect of E on the molecular spectrum can be neglected in a first approximation. The energy E'in of the molecule, whose change governs the molecular spectrum, constitutes the sum of three components: E'm = E1 – Eyl -1- i?J,n. 39.5.3 According to the Bohr frequency condition (39.1.6), the frequency v of the photon emitted by the molecule when its energyOPTICAL PROPERTIES OF MOLECULES 567 state changes is equal to Ač'm A E f AE A E f v = ——— I —— | —- h h ' h 1 h 1 where A/?, AE f and AEf are the changes in the corresponding parts of the energy E'm, which assume discrete quantized values. The production of closely spaced lines, forming bands at various parts of the spectrum, is explained by the fact that Ač< Ač< A Ef. In the far-infrared region of the spectrum (wavelengths of the order of 0.1 to 1 mm), the transition of the molecule from one rotational energy level to another produces spectral lines of a rotation spectrum. .10.5.4 In the infrared region of the spectrum (wavelengths from one to several dozen micrometres), transitions of molecules be-Vv-r Vv Vibrational Rotational energy energy levels levels

Fig. 39.4 tween vibrational energy levels produce the lines of the vibrational spectrum of the molecule. Upon changes in the vibrational energy levels of the molecule, its rotational energy levels are also changed at the same time. Hence, transitions of molecules between vibrational levels are vibrational-rotational transitions, producing a vibrational-rotational spectrum with the frequencies vvr (Fig. 39.4). This spectrum consists of groups of closely spaced lines568 STRUCTURE OF ATOMS AND MOLECULES [39 determined by the fact that the given vibrational transition is accompanied by rotational transitions. 39.5.5 The visible and ultraviolet regions of the spectrum are produced as a result of transitions of the molecule between the various electron energy levels. Each electron energy level corresponds to various possible vibrations of the nucleus in the molecule, ve-v ve Electron energy Vibrational energy levels levels Fig. 39.5 i.e. to a set of vibrational energy levels. Transitions between electron-vibrational levels lead to the production of an electron- vibrational spectrum of the molecule, characterized by the frequencies veV of the various lines (Fig. 39.5). Since each vibrational energy state corresponds to a system of rotational levels (39.5.4), each electron-vibrational transition corresponds to a certain band. The whole electron-vibrational spectrum of the molecule in the visible and nearby regions consists of a system of several groups of bands. 39.6 Raman Scattering of Light * 39.6.1 Raman scattering of light, or the Raman effect, refers to the shifted frequencies vs and va observed, along with the frequency v0 of the source of radiation, in the spectrum of light scattered by a solid or liquid body. A

spectral line with the frequency vs = v0 v is called a Stokes (red) line; one with the frequency va = v0 + v is called an anti-Stokes (violet) line. The set of lines * Commonly called combination scattering in the Soviet literature.39.6] RAMAN SCATTERING OF LIGHT 569 with the frequencies vs and va form the Raman spectrum of the molecule, containing red and violet satellites with the frequency v0. The intensity of the violet satellites is less than that of the red ones, but increases with the temperature. The intensity of the red satellites is practically independent of the temperature. 39.6.2 The quantum-mechanical explanation of the Raman scattering phenomenon consists in an analysis of the interaction between a photon of incident light having the frequency v0 and a molecule at the ground vibrational energy level with the energy Ev. If, as a result of the interaction with the photon, the molecule is moved to higher vibrational energy level with the energy E1 > A1, the energy AEm = 2?v required for this purpose is borrowed from the incident light. A photon with the energy hv0 is absorbed and, in its place, a photon is produced with lower frequency v and an energy equal to hv = hv0 AEm. At this the frequency v appears in the scattered light. It equals and corresponds to the frequency of a red satellite. The whole set of red satellites are produced in transitions of the molecule to various excited vibrational energy states. 39.6.3 If a molecule at the vibrational energy level with the energy Ey (39.6.2) .moves, due to interaction with a photon having the energy hv0, to an energy state with less energy (2?), a violet satellite of the frequency va is produced in the scattered light spectrum. This frequency

, AEm where AE = Efv E?Y. The probability of Raman scattering with an increase in frequency is less than the same scattering with a reduction in frequency. This is due to the fact that the number of molecules at the higher energy levels is less than the number at the lower levels. Consequently, the intensity of violet satellites is less than that of the red ones. When the temperature is raised, the molecule popula-570 STRUCTURE OF ATOMS AND MOLECULES [39 tion of the upper energy levels increases, as does the intensity of the violet satellites. The number of molecules in the ground state changes only slightly upon heating. Therefore, the intensity of the red satellites, remains practically unchanged as the temperature is raised. 39.7 Luminescence. X rays 39.7.1 Luminescence is the radiation of light by bodies at a temperature 71, which is over and above the thermal radiation (36.1.1) at this temperature. The duration of luminescence substantially exceeds the periods of radiation of atomic systems. Depending upon the method applied to excite the luminescent glow, distinction is made between cathodoluminescence, electroluminescence, photoluminescence and chemiluminescence. Luminescent substances are called luminophors. 39.7.2 Luminescent radiation is a nonequilibrium one (cf. Sect. 36.1.2) and is caused by a comparatively small number of luminescence centresatoms, molecules or ionsput into an excited state by the source of luminescence. The return of the excited centre to its ground or less excited state is accompanied by luminescent radiation. The duration of this radiation is determined by the duration of the excited state, which depends on the properties of not only the radiating cen-

tres, but of the medium surrounding them as well. The duration of a metastable excited state can reach 10-4 s, thereby correspondingly increasing the duration of the luminescence. 39.7.3 Luminescence that immediately ceases together with the action of the glow exciting source is called fluorescence. Luminescence that persists long after the action of the glow exciting source has ceased to act is called phosphorescence. The phenomenon of fluorescence is associated with the transitions of atoms, molecules or ions from ordinary excited states with a duration of the order of 10-8 s to the ground state. Phosphorescence, which provides for prolonged glow, is due to the transition of luminescence centres from metastable states to the ground state (39.7.2). The subdivision of luminescence into fluorescence and phosphorescence is arbitrary; it is sometimes difficult to establish a time-based boundary between them. 39.7.4 The excitation of luminescence by moans of an electron beam is feasible provided that the kinetic energy of a bombarding'!!).7] LUMINESCENCE. X RAYS 571 electron satisfies the inequality mu2 Y Ee Eg, where Ee and Eg are the total energies of the luminescent particle in the excited and ground states. 39.7.5 Photoluminescence is excited by electromagnetic radiation in the visible or ultraviolet ranges and complies with the Stokes law: the wavelength of photoluminescence is usually longer than that of the exciting light. The quantum-mechanical basis for the Stokes law is that in the absorption of a photon of exciting light with the energy hv, a photon with the energy hvum, less than hv, is produced. The surplus energy hv hvum = Em, where Em is energy expended on various processes except photoluminescence. As a rule,

Em > 0 and V]um < v, i.e. > X in accordance with the Stokes law. Sometimes, anti-Stokes luminescent radiation is observed. It complies with a condition that is the opposite of the Stokes law, i.e. jura < This occurs when a definite part of the energy of thermal motion of the particles of the luminescent substance is added to the energy hv of the photon that excites the luminescence. Thus vium = hv+ akT, where a is a factor depending upon the nature of the luminescent substance, k is Boltzmanns constant (8.4.5), and T is the absolute temperature. 39.7.6 Photoluminescent energy efficiency is the ratio of the energy of luminescent radiation to the energy from the source absorbed under steady-state conditions by the luminophor. The quantum yield of photoluminescence is the ratio of the number of photons of photoluminescent radiation to the number of photons of the exciting light, the latter having constant energy. Vavilov s law states that the photoluminescent energy efficiency increases proportionally to the wavelength X of the absorbed radiation. Then, after reaching a maximum value in the wavelength range from X to A-max, drops rapidly to zero upon a further increase in wavelength. With an increase in the wavelength of the exciting light of given energy, there is an increase in the number of photons contained in the given energy of primary radiation. Each of these photons can produce a photon of the energy hvum. There-572 STRUCTURE OF ATOMS AND MOLECULES [39 fore, the photoluminescent energy efficiency increases with the wavelength X. The sharp drop in energy efficiency at X = A,max indicates that photons with the frequency less than vmin = c / ax cannot excite the particles of the

luminophor. 39.7.7 X rays are electromagnetic waves with a wavelength from 0.01 to 800 A that are produced by braking high-speed electrons by a substance. There are two types of short-wave X rays. At electron energies, not exceeding a certain critical value that depends upon the substance in which the electrons are braked, white, or continuous, X rays are produced. It is radiated by braked electrons and has a continuous spectrum, bounded on the short- wavelength side by a certain boundary min, called the continuous-spectrum boundary. The boundary wavelength Xmin depends upon the kinetic energy Ak of the electrons that produce the bremsstrahlung and is reduced with an increase in the kinetic energy Ak. The existence of mirl is explained by the fact that the maximum energy frvmax of a photon of X rays, produced at the expense of the energy of the electron, cannot exceed Ek. Thus max = k* Consequently, Xmn = c/vmax = ch/E. Making use of data on the values of Ek and 7,min, this formula enables Plancks constant (Appendix II) to be determined. In its time this method was one of the most accurate and reliable ones. 39.7.8 The second type of X rays, characteristic X radiation of atoms of matter, has a line spectrum. It is an individual characteristic of a substance and does not change when the substance enters a chemical compound. It follows that, contrary to optical spectra, characteristic X rays are associated with processes in the deep- lying filled inner electron shells of atoms (39.3.6), which undergo no changes in chemical reactions of the atoms. Line X-ray spectra consist of lines composing several series. The same types of line series are observed in various elements, differing only in that the like

series of lines in the heavier elements are shifted toward the side of shorter wavelengths. 39.7.9 In the order of increasing wavelengths, the series of characteristic X rays are called the K-, L- M-, and A-series. As an electron is removed from one of the inner shells of an atom with the nuclear charge Ze, the vacant space is occupied by an electron from a shell farther from the nucleus and an X-ray photon is emitted. Thus, after removing an electron from the A-shell, the filling of the vacancy by electrons from L-, M- and other shells, produces the Ka-, Ap- and AY-lines that form the A-series,:i0.8] STIMULATED EMISSION OF RADIATION. LASERS 573 The frequency v of the lines of characteristic X rays can be found by Mosley's law: / v = a(Z-6), where a is a constant for the given series of lines (in s-1/2), and b is the screening constant. This constant means that an electron, accomplishing a transition corresponding to a certain line, is subject, not to the whole charge Ze of the nucleus, but to the charge (Z b) e, which has been weakened by the screening action of other electrons. 39.8 Stimulated Emission of Radiation. Lasers 39.8.1 An atom located in an electromagnetic field at an excited energy level can, with a certain probability, be transferred by the effect of the field to a lower energy state. It is as if the electromagnetic field tumbles the atom down from its excited level to the ground state or only to a less excited state. Such a transition is accompanied by stimulated (induced) radiation of the substance, produced by the action of an electromagnetic wave on it. 39.8.2 From the viewpoint of wave optics (32.1.1) the phenomenon of stimulated emission of radiation means that as the electromagnetic wave passes through a substance

its intensity (31.2.4) is increased, i.e. negative absorption of light occurs. But the frequency (30.2.5) of the wave, direction of its propagation, its phase (30.2.5) and polarization (31.1.7) remain unchanged. Stimulated emission of radiation is strictly coherent (30.5.1) to the electromagnetic wave passing through the substance and producing the emission. 39.8.3 From the quantum-mechanical point of view, the coherence mentioned in Sect. 39.8.2 means that the new photon, produced as a result of the stimulated emission, in no way differs from the photon it was produced by. The new photon, produced in stimulated emission, strengthens the light passing through the medium. As is shown in Fig. 39.66, the process of stimulated emission leads to the production of two photons with the energy hv in place of one such photon. But, in addition to stimulated emission, absorption of light also occurs. As a result of the absorption of a photon by an atom at the energy level Eu the photon disappears and574 STRUCTURE OF ATOMS AND MOLECULES [39 the atom moves to the energy level E2 (Fig. 39.6a). This process reduces the intensity of the light that passes through the substance. 39.8.4 A medium is said to be active if in it the intensity of transmitted light increases. This indicates that in an active medium the process of stimulated emission predominates over the process of light absorption. Otherwise, when the chief role is played Before interaction he After interaction ——0———— 0)—- (a) Absorption hi? E2 2he ' E / " j) (b) Stimulated emission Fig. 39.6 by the absorption of light, the medium weakens the radiation passing through it. An active medium is also called one with negative absorption (39.8.1). 39.8.5

The absorption of light in matter proceeds in accordance with the Bouguer-Lambert law: I = I0e ax, where a > 0 is the absorption factor, x is the thickness of the absorbing layer, /0 is the intensity (31.2.4) of light at the entrance to the layer (at x = = 0), and I is the intensity of the light that has passed through the layer of thickness x. The Bouguer-Lambert-Fabrikant law is valid for a medium with negative absorption. Thus I = where | a |>0 is a positive quantity corresponding to the strengthening, rather than the weakening, of light passing through an active medium. At this the intensity of the light increases drastically with the thickness of the layer of the medium (Fig. 39.7). In other words, the absorption factor a is a negative quantity for an active medium.30.8] STIMULATED EMISSION OP RADIATION. LASERS 575 39.8.6 Three types of optical processes, illustrated in Fig. 39.8 can occur between two energy levels with the energies E1 and E2. Under conditions in which spontaneous emission can be neglected, i.e. radiation in which the excited atoms (or molecules or ions) spontaneously drop to the ground state, the optical properties of a medium are determined by competition between two processes: absorption and stimulated emission. The number of events of absorption is proportional to the concentration N- of particles Fig. 39.8 with the energy at the lower energy level. The number of events of stimulated emission is proportional to the concentration N2 of particles at the upper energy level. The absorption factor a in the Bouguer-Lambert-Fabrikant law (39.8.5) is proportional to the difference between the numbers of events of absorption and stimulated emission. Thus a = k (N1 N2), where /c > 0

is the proportionality factor. 39.8.7 When the system is in a state of thermodynamic equilibrium (8.3.3), N2 < Nt and a > 0. This means that the number of events of absorption usually exceeds the number of transitions accompanied by stimulated emission of radiation. To obtain a medium with a negative absorption factor it is necessary to provide for a nonequilibrium state in the system, at which N2 > > Nx. Such states are said to be inverted. In such a state the576 STRUCTURE OP ATOMS AND MOLECULES [39 number of events of stimulated emission of radiation exceeds the number of events of absorption. 39.8.8 Lasers (from the acronym for Light Amplification by the Stimulated Emission of Radiation), or generators of coherent light, are sources of light operating on the principle of stimulated emission of radiation in an active medium with an inverted population of energy levels (39.8.7). If these devices operate in the optical range, they are known as lasers proper. Those that operate in the range of ultrashort radiowaves are called masers (Aficrowave Amplification by Stimulated Emission of Radiation). 39.8.9 The process of obtaining an inverted state (population inversion) in a medium (39.8.7), required for laser operation, is Radiationless Fig. 39.9 called pumping the active medium. In practice, pumping is accomplished by the three-level procedure. One of the first lasers operating according to a three-level pumping procedure had a ruby for the active medium (alumina Al203 with the addition of chromium oxide Cr203). In the crystal lattice of alumina, a part of the Al atoms are replaced by Cr3+ ions, which serve as the active substance accomplishing the transitions with stimulated emission. A

schematic diagram of the energy levels of Cr3+ is given in Fig. 39.9. The nearest to the ground-state level C are two broad energy bands A (41.8.2) and the double metastable level B. Intensive radiation, applied to the ruby by green light of a powerful pumping flashtube, filled with neon and krypton, transfers the chromium ions to the level of the A band. From here radiationless30.8] STIMULATED EMISSION OF RADIATION. LASERS 577 transitions occur to the B level. The surplus energy is imparted to the ruby crystal lattice. As a result, a population inversion of the chromium ions at the B and C levels is obtained (39.8.7) and the laser emits red light of the wavelengths 6927 A and 6943 A, corresponding to chromium ion transitions from level B to level C. 39.8.10 The avalanche-type increase in intensity in an active medium (39.8.5) indicates that such a medium operates as an Semitransparent Mirror mirror 2 1 3 Fig. 39.10 amplifier of electromagnetic waves. The light amplification effect in a laser is increased by passing the light many times through the same layer of the active medium. This takes place by means of the arrangement shown in Fig. 39.10a. Photon A, travelling 37-0186578 STRUCTURE OF ATOMS AND MOLECULES [39 parallel to the axis of the active medium (a ruby rod) 7, gives rise to an avalanche of photons moving in the same direction (Fig. 39.106). A part of this avalanche passes through semitransparent mirror 3 and leaves the laser, and a paTt is reflected and incfeases again iii the active medium (Fig. 39.10c). A part of the Avalanche of photons that Teaches the nontransparent mirror 2 is absorbed by it* but after reflection from this mirror the rest move in the same diTection as

the initial starting photon A (Fig. 39.10d). The multiply amplified stream of photons, leaving the laser through the semitransparent mirror 3, produces an extremely intense pencil of light rays, highly directional and with very little angular spread. Photons B and C (Fig. 39.106), travelling at an angle to the axis of the active medium, build up an avalanche of photons which, after multiple reflection, disappears from the medium and does not participate in light amplification. The high coherency, sharp directional properties and great intensity of laser radiation are the basis for its ever-increasing application in science and engineering.