

---

DATE: 2012-8-31

Software Version: 2.3.1.2.0.194

**Note:** This version updates one function: “47.Storage Devices”.

## TABLE OF CONTENTS

1.	RTSP.....	1
1.1.	RTSP OPTIONS.....	1
1.2.	RTSP DESCRIBE.....	1
1.3.	RTSP SETUP.....	2
1.4.	RTSP PLAY.....	2
1.5.	RTSP TEARDOWN.....	3
2.	JPEG images(snapshot) request.....	3
3.	Network Parameter.....	4
3.1.	Get system network parameter.....	5
3.2.	Set system network parameter.....	6
4.	System date and time.....	7
4.1.	Get system date and time.....	8
4.2.	Set system date and time.....	8
4.3.	Change the time zone and the NTP host.....	10
5.	Add, modify and delete users.....	10
5.1.	Create a new user account.....	12
5.2.	Change the password of a existing account.....	12
5.3.	Remove an account.....	13
5.4.	List users accounts.....	14
6.	Restart server.....	14

---

7. Factory default.....	15
8. Hard factory default.....	15
9. Video coding.....	15
9.1. Get the encoding parameters.....	17
9.2. Set the encoding parameters.....	18
10. Video Mask.....	19
10.1. Get the video mask options.....	20
10.2. Set the video mask options.....	21
11. Video parameters.....	21
11.1. Get the video parameters.....	23
11.2. Set the video parameters.....	23
12. Video format.....	24
12.1. Get the video format.....	24
12.2. Set the video format.....	25
13. Audio parameter.....	25
13.1. Get the audio parameter options.....	26
13.2. Set the audio parameter options.....	27
14. Text overlay.....	27
14.1. Get the text overlay options.....	29
14.2. Set the text overlay options.....	29
15. Motion alarm.....	30
15.1. Get the motion alarm options.....	33
15.2. Set the motion alarm options.....	34
16. Shelter alarm.....	34

---

17. Sensor alarm.....	35
17.1. Get the sensor alarm options.....	37
17.2. Set the sensor alarm options.....	38
18. Video lose alarm.....	38
18.1. Get the video lose alarm options.....	40
18.2. Set the video lose alarm options.....	41
19. Network interruption alarm.....	41
19.1. Get the network interruption alarm options.....	42
19.2. Set the network interruption alarm options.....	43
20. Alarm status.....	43
20.1. Get the alarm statues.....	44
20.2. Clear the alarm statues.....	45
21. PPPOE.....	46
21.1. Get the PPPOE options.....	47
21.2. Set the PPPOE options.....	47
22. UPNP.....	48
22.1. Get the UPNP options.....	49
22.2. Set the UPNP options.....	49
23. Email.....	50
23.1. Get the email options.....	51
23.2. Set the email options.....	51
24. FTP.....	52
24.1. Get the FTP options.....	53
24.2. Set the FTP options.....	54

---

25. DDNS.....	55
25.1. Get the DDNS options.....	56
25.2. Set the DDNS options.....	57
26. VPN.....	57
26.1. Get the VPN options.....	58
26.2. Set the VPN options.....	59
27. RTSP Parameter.....	59
27.1. Get the RTSP options.....	60
27.2. Set the RTSP options.....	61
28. IP Email.....	61
28.1. Get the IP Email options.....	62
28.2. Set the IP Email options.....	63
29. Center connection.....	63
29.1. Get the center connection options.....	64
29.2. Set the center connection options.....	65
30. Mobile monitor.....	65
30.1. Get the mobile monitor options.....	66
30.2. Set the mobile monitor options.....	67
31. Record.....	67
31.1. Get the record options.....	69
31.2. Set the record options of the different channels.....	69
31.3. Set the record options (shared by all channels).....	70
32. Snap.....	71
32.1. Get the snap options.....	72

---

32.2. Set the snap options.....	73
33. COM Setting.....	73
33.1. Get the COM options.....	75
33.2. Set the COM options.....	76
34. System Info.....	76
35. Upgrade.....	77
36. Obtaining device firmware version.....	77
37. DHCP.....	78
38. SYSLOGO.....	79
39. PTZ.....	81
40. PTZ Setting.....	82
40.1. Get the PTZ options.....	84
40.2. Set the PTZ options.....	86
41. Dome Control.....	86
42. Get The System Parameters.....	88
43. OSD Position.....	89
44. Default parameter setting.....	90
45. SNMP.....	91
45.1. Get the SNMP options.....	93
45.2. Set the SNMP options.....	93
46. CDP Auto-discovery Protocols.....	94
47. Storage Devices.....	95
47.1. Get Storage Devices information.....	95
47.2. Formatted The Storage Devices.....	96

---

## 1.1. RTSP

The RTSP URL is **rtsp://<the IP address of the server>/av0\_0**.

first num-channel#(0~3),second num-main(0)/sub(1) stream.

The OPTIONS, DESCRIBE, SETUP, PLAY, TEARDOWN methods are supported. The RTSP protocol is described in RFC2326.

## 1.2. RTSP OPTIONS

The OPTIONS command returns a list of supported RTSP commands.

**Example:**

```
OPTIONS rtsp://<192.168.55.88>/av0_0 RTSP/1.0
```

```
CSeq:2
```

**Response example:**

```
RTSP/1.0 200 OK
```

```
CSeq:2
```

```
Date:Sun, 13 May 2012 16:39:25 GMT
```

```
Public: OPTIONS, DESCRIBE, SET_PARAMETER, GET_PARAMETER,
```

```
SETUP, TEARDOWN, PLAY, PAUSE\r\n
```

Notice: The SET\_PARAMETER function and PAUSE function, our RTSP library temporarily not support.

## 1.3. RTSP DESCRIBE

**Example:**

```
DESCRIBE rtsp://<192.168.55.88>/av0_0 RTSP/1.0
```

```
CSeq:3
```

```
Accept: application/sdp
```

**Response example:**

```
RTSP/1.0 200 OK
```

---

CSeq:3

Server: myipc/1.0.0

Date: Sun, 13 May 2012 16:39:25 GMT

Context-type: application/sdp

Context-Base: **rtsp://<192.168.55.88>/av0\_0**

Context-length: 291

#### **1.4. RTSP SETUP**

**Example:**

SETUP **rtsp://<192.168.55.88>/av0\_0** RTSP/1.0

CSeq:4

Transport: RTP/AVP;unicast;client\_port=2568-2569

**Response example:**

RTSP/1.0 200 OK

CSeq:4

Server: myipc/1.0.0

Date: Sun, 13 May 2012 16:39:25 GMT

Session: 8962035351000806693

Transport: RTP/AVP;unicast;client\_port=2568-2569;source=192.168.55.88;  
server\_port=8018-8019;ssrc=4f08d90f

#### **1.5. RTSP PLAY**

**Example:**

PLAY **rtsp://<192.168.55.88>/av0\_0** RTSP/1.0

CSeq:5

Session: 8962035351000806693

Range: npt=0.000-\r\n

---

**Response example:**

RTSP/1.0 200 OK

CSeq:5

Server: myipc/1.0.0

Date: Sun, 13 May 2012 16:39:25 GMT

Session: 8962035351000806693

RTP-Info: url=rtsp://192.168.55.88/av0\_1/trackID=1

## **1.6. RTSP TEARDOWN**

**Example:**

TEARDOWN rtsp://<192.168.55.88>/av0\_0 RTSP/1.0

CSeq:8

Session: 8962035351000806693

**Response example:**

RTSP/1.0 200 OK

CSeq:8

Date: Sun, 13 May 2012 16:39:25 GMT

## **1. JPEG images(snapshot) request**

**Syntax:**

**http://<server ipaddr>/cgi-bin/images\_cgi?channel=<vaule>&user=<value>**

**&pwd=<value>**

When a JPEG image is requested, the server returns either the specified JPEG image file or "Request failed:Param error".

**Note: This requires users access(administrator or normal user). Channel valid values are 0 to 3.**

**Example:**



---

**http://192.168.55.88/cgi-bin/images\_cgi?channel=0&user=admin&pwd=admin**

**Response example:**

HTTP/1.0 200 OK\r\n  
Context-length:23311\r\n  
Context-type: image/jpeg\r\n  
\r\n  
<JPEG image data>\r\n

## 2. Network Parameter

Get or set system network parameter.

**Syntax:**

**http://<server ipaddr>/cgi-bin/network\_cgi? [&<parameter>=<value>]**

**Note: This requires administrator access(administrator authorization).**

with the following parameters and values

<b>&lt;parameter&gt;=&lt;value &gt;</b>	<b>Values</b>	<b>Description</b>
user=<string>	A user name	Valid characters are a thru z, A thru Z and 0 thru 9.
pwd=<string>	A user password	Valid characters are a thru z, A thru Z and 0 thru 9.
action=<string>	get/set	Specifies what to do.
BootProto=<string>	dhcp,none	Enable/disable dynamic IP address assignment to the device.
IPAddress=<string>	An ip address	IP Address. The physical address of the device on the network.

SubnetMask=<string>	An ip address	Subnet mask. Divides the network.
DefaultRouter=<string>	An ip address	Default router/gateway used for connecting devices attached to different networks.
HostName=<string>	An host name	The name of the device on the network.
DNSServer1=<string>	An ip address	Primary Domain Name System server.
DNSServer2=<string>	An ip address	Secondary Domain Name System server.
Port=<int>	80,1~65535	The port of the server.
MACAddress=<string>	An MAC address like: 00-fc-14-0e-ff-05	MAC address. The unique identify of the device.

### 1.7. Get system network parameter

#### Syntax:

**http://<server ipaddr>/cgi-bin/date\_cgi?action=get&user=<value>  
&pwd=<value>**

#### Example:

http://192.168.55.88/cgi-bin/network\_cgi?action=get&user=admin&pwd=admin

#### Response example:

HTTP/1.0 200 OK\r\n  
Content-Type:text/plain\r\n  
\r\n  
BootProto=none

---

IPAddress=192.168.55.88  
SubnetMask=255.255.255.0  
DefaultRouter=192.168.88.2  
MACAddress=00-5d-20-a0-35-12  
HostName=DVS131  
DNSServer1=192.168.88.2  
DNSServer2=221.5.88.88  
Port=80

## 1.8. Set system network parameter

### Syntax:

**http://<server ipaddr>/cgi-bin/date\_cgi?action=set[&<parameter>=<value >...]**

**You can set the value of a parameter or all the parameters value.**

### Example: set all the parameters value

http://192.168.55.88/cgi-bin/network\_cgi?action=set&user=admin&pwd=admin  
&BootProto=none&IPAddress=192.168.55.88&SubnetMask=255.255.255.0&Def  
aultRouter=192.168.88.2&HostName=DVS134&MACAddress=00-fc-14-0e-ff-05&  
DNSServer1=192.168.88.2&DNSServer2=221.5.88.88&Port=80

### Response example:

#### Case 1: system network parameter are changed.

HTTP/1.0 200 OK\r\n  
Content-Type:text/plain\r\n  
\r\n  
OK, Device is rebooting\r\n

#### Case 2: only HostName is changed.

HTTP/1.0 200 OK\r\n  
Content-Type:text/plain\r\n  
\r\n

---

OK\r\n

**Case 3: no system network parameter are changed.**

HTTP/1.0 200 OK\r\n

Content-Type:text/plain\r\n

\r\n

Param not change\r\n

**Case 4: system network parameter are error.**

HTTP/1.0 200 OK\r\n

Content-Type:text/plain\r\n

\r\n

Request failed:Param error\r\n

### 3. **System date and time**

Get or set the system date and time.

**Syntax:**

**http://<server ipaddr>/cgi-bin/date\_cgi?<parameter>=<value >**

**Note: This requires administrator access(administrator authorization).**

<b>&lt;parameter&gt;=&lt;value&gt;</b>	<b>Values</b>	<b>Description</b>
action=<string>	get or set	Specifies what to do.  get = get the current date and time.  set = set the current date and time.
user=<string>	A user name	Valid characters are a thru z, A  thru Z and 0 thru 9.
pwd=<string>	A user password	Valid characters are a thru z, A

		thru Z and 0 thru 9.
--	--	----------------------

## 1.9. Get system date and time

### Syntax:

**http://<server ipaddr>/cgi-bin/date\_cgi?action=get&user=<value>  
&pwd=<value>**

### Return:

HTTP/1.0 200 OK\r\n  
Content-Type:text/plain\r\n  
\r\n  
<month> <day>, <year> <hour>:<minute>:<second> <time zone> <NTP  
Host>\r\n

### Example:

http://192.168.55.88/cgi-bin/date\_cgi?action=get&user=admin&pwd=admin

### Response example:

HTTP/1.0 200 OK\r\n  
Content-Type:text/plain\r\n  
\r\n  
5 22, 2012 15:4:57 29 clock.isc.org \r\n

## 1.10. Set system date and time

### Syntax:

**http://<server ipaddr>/cgi-bin/date\_cgi?action=set[&<parameter>=<value >...]**

with the following parameters and values

<parameter>=<value>	Values	Description
year = <int>	2012-2099	Current year.

month = <int>	1-12	Current month.
day = <int>	1-31	Current day.
hour = <int>	0-23	Current hour.
minute = <int>	0-59	Current minute.
second = <int>	0-59	Current second.
timezone = <int>	0-34 0:(GMT-12:00) , 1:(GMT-11:00) 2:(GMT-10:00), 3:(GMT-9:00) 4:(GMT-8:00) , 5:(GMT-7:00) 6:(GMT-6:00) , 7:(GMT-5:00) 8:(GMT-5:00) , 9:(GMT-4:30) 10:(GMT-4:00), 11:(GMT-3:00) 12:(GMT-2:00), 13:(GMT-1:00) 14:(GMT), 15:(GMT+1:00) 16:(GMT+1:00),17:(GMT+1:00)	Time zone. 18:(GMT+1:00) , 19:(GMT+2:00) 20: (GMT+2:00) , 21: (GMT+3:00) 22: (GMT+3:30), 23: (GMT+4:00) 24: (GMT+4:30), 25: (GMT+5:00) 26: (GMT+5:30), 27: (GMT+6:00) 28: (GMT+7:00), 29: (GMT+8:00) 30: (GMT+9:00), 31: (GMT+9:30) 32:(GMT+10:00), 33:(GMT+11:00) 34: (GMT+12:00)
ntpHost=<string>	A IP address or NTP server name	Such as: clock%2Eisc%2Eorg(clock.isc.org) 192%2E168%2E88%2E185(Make sure that the NPT server is open).

**Example:**

http://192.168.55.88/cgi-bin/date.cgi?action=set&user=admin&pwd=admin  
 &year=2012&month=5&day=18&hour=11&minute=54&second=12

**Response:**

**Case 1: a successful set.**

---

HTTP/1.0 200 OK\r\n

Content-Type:text/plain\r\n

\r\n

OK\r\n

**Case 2: a failed set,Setting or syntax are probably incorrect.**

HTTP/1.0 200 OK\r\n

Content-Type:text/plain\r\n

\r\n

Request failed: Param error\r\n\r\n

### 1.11. Change the time zone and the NTP host

**Note:** When DHCP function opens, NTP server address the default for DHCP server address.

**Syntax:**

**http://<server ipaddr>/cgi-bin/date\_cgi?action=set&user=<avalue>  
&pwd=<value>&timezone=<value>&ntpHost=<value>**

**Example:**

http://192.168.55.88/cgi-bin/date\_cgi?action=set&user=admin&pwd=admin&time  
mezone=29&ntpHost=time%2Ewindows%2Ecom

**Response:**

HTTP/1.0 200 OK\r\n

Content-Type:text/plain\r\n

\r\n

OK\r\n

## 4. Add, modify and delete users

**Note:** This requires administrator access(administrator authorization), and System has an administrator user, four normal users.

---

**Syntax:**

**http://<server ipaddr>/cgi-bin/pwdgrp.cgi?<parameter>=<value>**

**[&<parameter>=<value>...]**

with the following parameters and values

<b>&lt;parameter&gt;=&lt;value&gt;</b>	<b>Values</b>	<b>Description</b>
action=<string>	add, update, remove, get	add = create a new user account.  update = change account information of specified parameters if the account exists.  remove = remove an existing account.  get = get a list of the user accounts.
user=<string>	A user name	Valid characters are a thru z, A thru Z and 0 thru 9.
pwd=<string>	A user password	Valid characters are a thru z, A thru Z and 0 thru 9.
username=<string>	<string>	The user account name, a non-existing user name. Valid characters are a thru z, A thru Z and 0 thru 9.
password=<string>	<string>	The user account password.  Valid characters are a thru z, A thru Z and 0 thru 9.
level=<int>	1,2	One representatives of an administrator,



		Two representatives of an normal user.
--	--	--

### 1.12. Create a new user account.

#### Example:

`http://192.168.55.88/cgi-bin/pwdgrp.cgi?action=add&user=admin&pwd=admin  
&username=hanghe1234&password=123456&level=2`

#### Response:

##### Case 1: a successful add.

`HTTP/1.0 200 OK\r\n`

`Content-Type:text/plain\r\n`

`\r\n`

`OK\r\n`

##### Case 2: Administrator user can't increase.

`HTTP/1.0 200 OK\r\n`

`Content-Type:text/plain\r\n`

`\r\n`

`Administrator user can't increase\r\n`

##### Case 3: No user surplus or users already exist.

`HTTP/1.0 200 OK\r\n`

`Content-Type:text/plain\r\n`

`\r\n`

`No user surplus or users already exist\r\n`

### 1.13. Change the password of a existing account.

#### Example:

`http://192.168.55.88/cgi-bin/pwdgrp.cgi?action=update&user=admin&pwd=admin  
&username=myipc&password=134`

#### Response:

---

**Case 1: a successful upadte.**

HTTP/1.0 200 OK\r\n

Content-Type:text/plain\r\n

\r\n

OK\r\n

**Case 2: The user doesn't find.**

HTTP/1.0 200 OK\r\n

Content-Type:text/plain\r\n

\r\n

The user doesn't find\r\n

**1.14. Remove an account.**

**Example:**

http://192.168.55.88/cgi-bin/pwdgrp.cgi?action=remove&user=admin&pwd=admin&username=myipc

**Response:**

**Case 1: a successful remove.**

HTTP/1.0 200 OK\r\n

Content-Type:text/plain\r\n

\r\n

OK\r\n

**Case 2: The user doesn't find.**

HTTP/1.0 200 OK\r\n

Content-Type:text/plain\r\n

\r\n

The user doesn't find \r\n

**Case 3: Administrators can't be deleted.**

---

```
HTTP/1.0 200 OK\r\n
Content-Type:text/plain\r\n
\r\n
Administrators can't be deleted\r\n
```

### 1.15. List users accounts.

#### Example:

```
http://192.168.55.88/cgi-bin/pwdgrp.cgi?action=get&user=admin&pwd=admin
```

#### Response: A successful Get.

```
HTTP/1.0 200 OK\r\n
Content-Type:text/plain\r\n
\r\n
Username:password:level\r\n
<the users information>
```

## 5. Restart server

**Note:** This requires administrator access(administrator authorization).

#### Syntax:

```
http://<server ipaddr>/cgi-bin/restart.cgi?user=admin&pwd=admin
```

#### Example:

```
http://192.168.55.88/cgi-bin/restart.cgi?user=admin&pwd=admin
```

#### Response:

```
HTTP/1.0 200 OK\r\n
Content-Type:text/plain\r\n
\r\n
OK,Device is rebooting\r\n
```

---

## 6. **Factory default**

Reload factory default. All parameters except Network parameters are set to their factory default value.

**Note:** This requires administrator access(administrator authorization).

**Syntax:**

**`http://<server ipaddr>/cgi-bin/factorydefault_cgi? user=admin&pwd=admin`**

**Return:**

HTTP/1.0 200 OK\r\n

Content-Type:text/plain\r\n

\r\n

OK, Device is rebooting \r\n

## 7. **Hard factory default**

Reload factory default. All parameters are set to their factory default value.

**Note:** This requires administrator access(administrator authorization).

**Syntax:**

**`http://<server ipaddr>/cgi-bin/hardfactorydefault_cgi? user=admin&pwd=admin`**

**Return:**

HTTP/1.0 200 OK\r\n

Content-Type:text/plain\r\n

\r\n

OK, Device is rebooting \r\n

## 8. **Video coding**

Set and get the encoding parameters.

---

**Note: This requires administrator access(administrator authorization).**

**Syntax:**

**http://<server ipaddr>/cgi-bin/videocoding\_cgi?<parameter>=<value>**

**[&<parameter>=<value>...]**

with the following parameters and values

<b>&lt;parameter&gt;=&lt;value&gt;</b>	<b>Values</b>	<b>Description</b>
action=<string>	get, set	get = get the encoding parameters. set = set the encoding parameters.
user=<string>	A user name	Valid characters are a thru z, A thru Z and 0 thru 9.
pwd=<string>	A user password	Valid characters are a thru z, A thru Z and 0 thru 9.
channel=<int>	0~3	The channel number of the video.
EncType1=<string>	H.264, MJPEG	Encoding format of the main stream.
Resolution1=<string>	704*576, 704*288 352*288, 176*144	The resolution of the main stream.
BitflowType1=<string>	CBR, VBR	The type of bit rate of the main stream.
KeyInterval1=<int>	1~200	The main stream I-frame interval.
FrameRate1=<int>	1~25(PAL), 1~30(NTSC)	The frame rate of the main stream.
NormalBitrate1=<int>	30~16384	The bit rate of the main stream.
AlarmBitrate1=<int>	30~16384	If streaming type of CBR, when moving

		alarm occurs, use this code flow size.
EncType2=<string>	H.264, MJPEG	Encoding format of the Sub-stream.
Resolution2=<string>	704*576, 704*288 352*288, 176*144	The resolution of the Sub-stream.
BitflowType2=<string>	CBR, VBR	The type of bit rate of the Sub-stream.
KeyInterval2=<int>	1~200	The Sub-stream I-frame interval.
FrameRate2=<int>	1~25(PAL), 1~30(NTSC)	The frame rate of the Sub-stream.
NormalBitrate2=<int>	30~16384	The bit rate of the Sub-stream.
AlarmBitrate2=<int>	30~16384	If streaming type of CBR, when moving alarm occurs, use this code flow size.
Profile1=<string>	Main Profile Baseline"	
Profile2=<string>	Main Profile Baseline"	
PicLevel1	1~6	Main piclevel
PicLevel2	1~6	Min piclevel

### 1.16. Get the encoding parameters

#### Syntax:

**http://<server ipaddr>/cgi-bin/videocoding\_cgi?action=get&user=<value>**

**pwd=<value>&channel=<value>**

#### Example:

---

http://192.168.55.88/cgi-bin/videocoding.cgi?action=get&channel=0&user=admin&pwd=admin

**Response:**

HTTP/1.0 200 OK\r\n

Content-Type:text/plain\r\n

\r\n

Main stream options:

EncType1=H.264

Resolution1=704\*576

KeyInterval1=200

FrameRate1=25

BitflowType1=CBR

NormalBitrate1=512

AlarmBitrate1=2800

Sub-stream options:

EncType2=H.264

Resolution2=352\*288

KeyInterval2=50

FrameRate2=25

BitflowType2=VBR

NormalBitrate2=512

### 1.17. Set the encoding parameters

**Syntax:**

http://<server ipaddr>/cgi-bin/videocoding.cgi?action=set&channel=<value>

[&<parameter>=<value>...]

---

**Example:** Set the encoding parameters of the main stream.

`http://192.168.55.88/cgi-bin/videocoding.cgi?action=set&channel=0&user=admin&pwd=admin&EncType1=H.264&Resolution1=704*576&BitflowType1=CBR&KeyInterval1=20&Bitrate1=2035&FrameRate1=25`

**Response:**

`HTTP/1.0 200 OK\r\n`

`Content-Type:text/plain\r\n`

`\r\n`

`OK\r\n`

If you change the resolution of the main stream, the device will restart and it will return "OK,Device is rebooting".

## 9. Video Mask

Get and set the video mask options.

**Note:** This requires administrator access(administrator authorization).

**Syntax:**

`http://<server ipaddr>/cgi-bin/videomask.cgi?<parameter>=<value>`

`[&<parameter>=<value>]`

with the following parameters and values.

<code>&lt;parameter&gt;=&lt;value&gt;</code>	Values	Description
<code>action=&lt;string&gt;</code>	get, set	get = get the video mask options. set = set the video mask options.
<code>channel=&lt;int&gt;</code>	0~3	The channel number of the video.
<code>user=&lt;string&gt;</code>	A user name	Valid characters are a thru z, A thru Z and 0 thru 9.



pwd=<string>	A user password	Valid characters are a thru z, A thru Z and 0 thru 9.
MaskSwitch=<string>	open, close	Whether to enable the video mask.
MaskArea0_x=<int>	0~704	The x coordinate values of the mask area 0.
MaskArea0_y=<int>	0~576	The y coordinate values of the mask area 0.
MaskArea0_w=<int>	0~704	The width of the mask area 0.
MaskArea0_h=<int>	0~576	The height of the mask area 0.
MaskArea1_x=<int>	0~704	The x coordinate values of the mask area 1.
MaskArea1_y=<int>	0~576	The y coordinate values of the mask area 1.
MaskArea1_w=<int>	0~704	The width of the mask area 1.
MaskArea1_h=<int>	0~576	The height of the mask area 1.

MaskArea2_x=<int>	0~704	The x coordinate values of the mask area 2.
MaskArea2_y=<int>	0~576	The y coordinate values of the mask area 2.
MaskArea2_w=<int>	0~704	The width of the mask area 2.
MaskArea2_h=<int>	0~576	The height of the mask area 2.
MaskArea3_x=<int>	0~704	The x coordinate values of the mask area 3.
MaskArea3_y=<int>	0~576	The y coordinate values of the mask area 3.
MaskArea3_w=<int>	0~704	The width of the mask area 3.
MaskArea3_h=<int>	0~576	The height of the mask area 3.

### 1.18. Get the video mask options

#### Syntax:

http://<server ipaddr>/cgi-bin/videomask\_cgi?action=get&channel=<value>  
&user=<value>&pwd=<value>

#### Example:

---

```
http://192.168.55.88/cgi-bin/videomask.cgi?action=get&channel=0&user=admin&pwd=admin
```

**Response:**

```
HTTP/1.0 200 OK\r\n
```

```
Content-Type:text/plain\r\n
```

```
\r\n
```

```
MaskSwitch=close
```

```
MaskArea0_x=0 MaskArea0_y=0 MaskArea0_w=704 MaskArea0_h=576
```

```
MaskArea1_x=0 MaskArea1_y=0 MaskArea1_w=0 MaskArea1_h=0
```

```
MaskArea2_x=0 MaskArea2_y=0 MaskArea2_w=0 MaskArea2_h=0
```

```
MaskArea3_x=0 MaskArea3_y=0 MaskArea3_w=0 MaskArea3_h=100
```

### 1.19. Set the video mask options

**Syntax:**

**http://<server ipaddr>/cgi-bin/videomask.cgi?action=set[&parameter =<value>...]**

**Example: Set the video mask parameters of the first channel.**

```
http://192.168.55.88/cgi-bin/videomask.cgi?action=set&channel=0&user=admin&pwd=admin&MaskSwitch=open&MaskArea0_x=10&MaskArea0_y=20&MaskArea0_w=100&MaskArea0_h=200&MaskArea1_x=210&MaskArea1_y=300&MaskArea1_w=30&MaskArea1_h=40
```

**Response:**

```
HTTP/1.0 200 OK\r\n
```

```
Content-Type:text/plain\r\n
```

```
\r\n
```

```
OK\r\n
```

## 10. Video parameters

Get and set the Video parameters.

---

**Note:** This requires administrator access(administrator authorization), and only the equipment to support this parameter, you can get or set its value.

**Syntax:**

**http://<server ipaddr>/cgi-bin/videoparameter\_cgi?<parameter>=<value>**

**[&<parameter>=<value>...]**

with the following parameters and values.

<b>&lt;parameter&gt;=&lt;value&gt;</b>	<b>Values</b>	<b>Description</b>
action=<string>	get, set	get = get the video parameters. set = set the video parameters.
channel=<int>	0~3	The channel number of the video.
user=<string>	A user name	Valid characters are a thru z, A thru Z and 0 thru 9.
pwd=<string>	A user password	Valid characters are a thru z, A thru Z and 0 thru 9.
Brightness=<int>	1~255	The brightness of the video.
Contrast=<int>	1~255	The contrast of the video.
Chroma=<int>	1~255	The chroma of the video.
Saturation=<int>	1~255	The saturation of the video.
Acutance=<int>	1~255	The acutance of the video.
Red=<int>	1~255	Red of the video.
Green=<int>	1~255	Green of the video.
Blue=<int>	1~255	Blue of the video.

Gamma=<int>	1~255	The Gamma of the video.
Mirror=<String>	open close	Image Mirror
Flip=<String>	open close	Image Flip
TRCutLevel=<String>	low、 high	0 Low level 1 high level
InfraredLamp=<String>	low、 high	0 Low level 1 high level
AutoAwb=<String>	auto、 manual	AWD
AwbRed=<int>	1~255	Red of the AWD
AwbGreen=<int>	1~255	Green of the AWD.
AwbBlue=<int>	1~255	Blue of the AWD

## 1.20. Get the video parameters

### Syntax:

**http://<serveripaddr>/cgi-bin/videoparameter\_cgi?action=get&channel=<value>  
&user=<value>&pwd=<value>**

### Example:

http://192.168.55.88/cgi-bin/videoparameter\_cgi?action=get&channel=0&user=admin&pwd=admin

### Response:

HTTP/1.0 200 OK\r\n

Content-Type:text/plain\r\n

\r\n

Brightness=112

Contrast=132

Chroma=114

---

Saturation=128

### 1.21. Set the video parameters

#### Syntax:

**http://<server ipaddr>/cgi-bin/videoparameter\_cgi?action=set&channel=  
<value>[&<parameter>=<value>...]**

**Example:** Set the video parameters of the channel 0.

http://192.168.55.88/cgi-bin/videoparameter\_cgi?action=set&channel=0&user=admin&pwd=admin&Brightness=20&Contrast=100&Chroma=200&Saturation=123

#### Response:

HTTP/1.0 200 OK\r\n  
Content-Type:text/plain\r\n  
\r\n  
OK\r\n

## 11. Video format

Get and set the video format.

**Note:** This requires administrator access(administrator authorization).

#### Syntax:

**http://<server ipaddr>/cgi-bin/videoformat\_cgi?<parameter>=<value>  
[&<parameter>=<value>]**

with the following parameters and values.

<parameter>=<value>	Values	Description
action=<string>	get, set	get = get the video format. set = set the video format.

user=<string>	A user name	Valid characters are a thru z, A thru Z and 0 thru 9.
pwd=<string>	A user password	Valid characters are a thru z, A thru Z and 0 thru 9.
Videoformat=<string>	PAL, NTSC	The channel number of the video.

### 1.22. Get the video format

#### Syntax:

**http://<server ipaddr>/cgi-bin/videoformat\_cgi?action=get&user=<value>  
&pwd=<value>**

#### return:

HTTP/1.0 200 OK\r\n  
Content-Type:text/plain\r\n  
\r\n  
Videoformat=<value>\r\n

### 1.23. Set the video format

#### Syntax:

**http://<server ipaddr>/cgi-bin/videoformat\_cgi?action=set&user=<value>  
&pwd=<value>&Videoformat=<value>**

#### Example:

http://192.168.55.88/cgi-bin/videoformat\_cgi?action=set&user=admin&pwd=admin&Videoformat=PAL

#### Response:

HTTP/1.0 200 OK\r\n  
Content-Type:text/plain\r\n

---

\r\n

OK,Device is rebooting\r\n

If the video format has not changed, return "Param not change".

## 12. Audio parameter

Get and set the audio parameter options.

### Note:

This requires administrator access.

### Syntax:

**http://<server ipaddr>/cgi-bin/audio\_cgi?<parameter>=<value>**

**[&<parameter>=<value>]**

with the following parameters and values.

<b>&lt;parameter&gt;=&lt;value&gt;</b>	<b>Values</b>	<b>Description</b>
action=<string>	get, set	get = get the audio parameter options. set = set the audio parameter options.
user=<string>	A user name	Valid characters are a thru z, A thru Z and 0 thru 9.
pwd=<string>	A user password	Valid characters are a thru z, A thru Z and 0 thru 9.
AudioSwitch=<string>	open,close	Enable audio. When video need to voice, need to open this switch.
AudioType=<string>	G.726,G.711A, G.711U, AAC	The type of the audio encoding. DVS does not have AAC encoding.
AudioInput=<string>	Mic, Line	The type of the audio Input . DVS only have 'Line' input.
AudioBitrate=<int>	16000	The value of the bitrate.



AudioSamplingRate =<string>	8K,16K,32K	The value of the audio sampling rate. DVS only have 8K sampling rate.
AudioInVol=<int>	1~15	The size of the input volume.
AudioOutVol=<int>	1~15	The size of the output volume.

#### 1.24. Get the audio parameter options

##### Syntax:

**http://<server ipaddr>/cgi-bin/audio.cgi?action=get&user=<value>  
&pwd=<value>**

##### Example:

http://192.168.55.88/cgi-bin/audio.cgi?action=get&user=admin&pwd=admin

##### Response:

```
HTTP/1.0 200 OK\r\n
Content-Type:text/plain\r\n
\r\n
AudioSwitch=close
AudioType=G.711A
AudioBitrate=16000
AudioSamplingRate=8k
AudioInput=Line
AudioInVol=2
AudioOutVol=5
```

#### 1.25. Set the audio parameter options

##### Syntax:

**http://<server ipaddr>/cgi-bin/audio.cgi?action=set[&<parameter>=<value>]**

##### Example:

---

http://192.168.55.88/cgi-bin/audio\_cgi?action=set&channel=0&user=admin&pwd=admin&AudioSwitch=close&AudioType=G.711U&AudioInVol=1&AudioOutVol=15

**Response:**

HTTP/1.0 200 OK\r\n

Content-Type:text/plain\r\n

\r\n

OK\r\n

### 13. Text overlay

Get and set the text overlay options.

**Note:** This requires administrator access(administrator authorization).

**Syntax:**

http://<server ipaddr>/cgi-bin/textoverlay\_cgi?<parameter>=<value>

[&<parameter>=<value>]

with the following parameters and values.

<parameter>=<value>	Values	Description
action=<string>	get, set	get = get the text overlay options. set = set the text overlay options.
channel=<int>	0~3	The channel number of the video.
user=<string>	A user name	Valid characters are a thru z, A thru Z and 0 thru 9.
pwd=<string>	A user password	Valid characters are a thru z, A thru Z and 0 thru 9.

Title=<string>	<string>	Valid characters are a thru z, A thru Z and 0 thru 9.
WeekValue=<int>	0,1	Whether to display the week, 0 - Do not show, 1 – Show.
TimeValue=<int>	0,1	Whether to display the time, 0 - Do not show, 1 – Show.
DateValue=<int>	0,1	Whether to display the date, 0 - Do not show, 1 – Show.
BitrateValue=<int>	0,1	Whether to display the bitrate, 0 - Do not show, 1 – Show.
TitleValue=<int>	0,1	Whether to display the title, 0 - Do not show, 1 – Show.
Color=<int>	0~4	The color of the font, 0-white, 1-black, 2-yellow, 3-red, 4-blue.

### 1.26. Get the text overlay options

#### Syntax:

**http://<server ipaddr>/cgi-bin/textoverlay\_cgi?action=get&channel=<value>  
&user=<value>&pwd=<value>**

#### Example:

http://192.168.55.88/cgi-bin/textoverlay\_cgi?action=get&channel=0&user=admin&pwd=admin

#### Response :

HTTP/1.0 200 OK\r\n

Content-Type:text/plain\r\n

\r\n

Title=345

TitleValue=1

---

DateValue=1  
TimeValue=1  
WeekValue=0  
BitrateValue=1  
Color=2

### 1.27. Set the text overlay options

#### Syntax:

**http://<server ipaddr>/cgi-bin/textoverlay\_cgi?action=set&channel=<value>  
[&<parameter>=<value>]**

#### Example:

http://192.168.55.88/cgi-bin/textoverlay\_cgi?action=set&channel=0&user=admin&pwd=admin&Title=ipc-cgi&WeekValue=0&TimeVTime=1&DateValue=0&TitleValue=0&BitrateValue=0

#### Response:

HTTP/1.0 200 OK\r\n  
Content-Type:text/plain\r\n  
\r\n  
OK\r\n

## 14. Motion alarm

Get and set the motion alarm options.

**Note:** This requires administrator access(administrator authorization).When device has storage (hard disk, SD card, USB disk), linkage Snap, linkage Record document will be saved to storage first and do related process based on file storage. Or it will be saved to memory for the moment and do related process based on file storage.

#### Syntax:

---

**http://<server ipaddr>/cgi-bin/motion\_cgi?<parameter>=<value>**

**[&<parameter>=<value>]**

with the following parameters and values.

<b>&lt;parameter&gt;=&lt;value&gt;</b>	<b>Values</b>	<b>Description</b>
action=<string>	get, set	get = get the motion alarm options. set = set the motion alarm options.
channel=<int>	0~3	The channel number of the video.
user=<string>	A user name	Valid characters are a thru z, A thru Z and 0 thru 9.
pwd=<string>	A user password	Valid characters are a thru z, A thru Z and 0 thru 9.
Sensitivity=<int>	1~5	The sensitivity of motion alarm.
MotionSwitch=<string>	close, open	Whether to open the motion alarm.
EMailSwitch=<string>	close, open	Whether the alarm is sent to the email.
Time1Switch=<string>	close, open	Time 1 selector switch.
Time1_BgnHour=<int>	0~23	The beginning of the hour value.
Time1_BgnMinute=<int>	0~59	The beginning of the minute value.
Time1_EndHour=<int>	0~23	The end of the hour value.
Time1_EndMinute=<int>	0~59	The end the minute value.
Time2Switch=<string>	close, open	Time 2 selector switch.
Time2_BgnHour=<int>	0~23	The beginning of the hour value.
Time2_BgnMinute=<int>	0~59	The beginning of the minute value.

Time2_EndHour=<int>	0~23	The end of the hour value.
Time2_EndMinute=<int>	0~59	The end the minute value.
DetectArea0_x=<int>	0~704	The x coordinate values of the detection area 0.
DetectArea0_y=<int>	0~576	The y coordinate values of the detection area 0.
DetectArea0_w=<int>	0~704	The width of the detection area 0.
DetectArea0_h=<int>	0~576	The height of the detection area 0.
DetectArea1_x=<int>	0~704	The x coordinate values of the detection area 1.
DetectArea1_y=<int>	0~576	The y coordinate values of the detection area 1.
DetectArea1_w=<int>	0~704	The width of the detection area 1.
DetectArea1_h=<int>	0~576	The height of the detection area 1.
DetectArea2_x=<int>	0~704	The x coordinate values of the

		detection area 2.
DetectArea2_y=<int>	0~576	The y coordinate values of the detection area 2.
DetectArea2_w=<int>	0~704	The width of the detection area 2.
DetectArea2_h=<int>	0~576	The height of the detection area 2.
DetectArea3_x=<int>	0~704	The x coordinate values of the detection area 3.
DetectArea3_y=<int>	0~576	The y coordinate values of the detection area 3.
DetectArea3_w=<int>	0~704	The width of the detection area 3.
DetectArea3_h=<int>	0~576	The height of the detection area 3.
OutputSwitch=<string>	close, open	Whether the alarm is sent to the warning lights.
OutputDuration=<int>	0~2*60*60	Alarm output duration.
SnapSwitch=<string>	close, open	When the motion alarm occurs, whether to snap.
SnapNum=<int>	0~3600	The number of captured images.
SnapInterval=<float>	0~3600,0.5,1.5	The interval of captured images.
SnapSaveMode=<string>	Local,Ftp,Email FtpEmail	The way to save the pictures. FtpEmail means Ftp and Email .

RecordSwitch=<string>	close, open	When the motion alarm occurs, whether to record.
RecordTime=<int>	0~2*60*60	Recording continuous time.
RecordSaveMode=<string>	Local,Ftp	The way to save the Video resource.

### 1.28. Get the motion alarm options

#### Syntax:

**http://<server ipaddr>/cgi-bin/motion.cgi?action=get&channel=<value>  
&user=<value>&pwd=<value>**

#### Example:

```
http://192.168.55.88/cgi-bin/motion.cgi?action=get&channel=0&user=admin&
pwd=admin
```

#### Response:

```
DetectArea0_x=0 DetectArea0_y=0 DetectArea0_w=704 DetectArea0_h=576
DetectArea1_x=0 DetectArea1_y=0 DetectArea1_w=0 DetectArea1_h=0
DetectArea2_x=0 DetectArea2_y=0 DetectArea2_w=0 DetectArea2_h=0
DetectArea3_x=0 DetectArea3_y=0 DetectArea3_w=0 DetectArea3_h=0
MotionSwitch=open
Sensitivity=1
Time1Switch=close
Time1_BgnHour=0 Time1_BgnMinute=0 Time1_EndHour=23
Time1_EndMinute=30
Time2Switch=close
Time2_BgnHour=6 Time2_BgnMinute=10 Time2_EndHour=10
Time2_EndMinute=20
EMailSwitch=open
OutputSwitch=open
OutputDuration=20
SnapSwitch=close
```



---

SnapNum=100  
SnapInterval=1.5  
SnapSaveMode=Ftp  
RecordSwitch=open  
RecordTime=10  
RecordSaveMode=Ftp

### 1.29. Set the motion alarm options

**Syntax:**

**`http://<server ipaddr>/cgi-bin/motion_cgi?action=set[&parameter =<value>...]`**

**You can set the value of a parameter or all the parameters value.**

**Example: Set the motion alarm parameters of the first channel.**

```
http://192.168.55.88/cgi-bin/motion_cgi?action=set&channel=0&user=admin&
pwd=admin&MotionSwitch=open&EMailSwitch=open&Time1Switch=open&Tim
e1_BgnHour=0&Time1_BgnMinute=0&Time1_EndHour=20&Time1_EndMinute=
30&Sensitivity=1&DetectArea0_x=0&DetectArea0_y=0&DetectArea0_w=704&R
ecordSwitch=open&RecordTime=61&RecordSaveMode=Ftp
```

**Response:**

```
HTTP/1.0 200 OK\r\n
Content-Type:text/plain\r\n
\r\n
OK\r\n
```

## 15. Shelter alarm

Open or close the shelter alarm .

**Note: This requires administrator access(administrator authorization).**

**Syntax:**

**`http://<server ipaddr>/cgi-bin/shelter_cgi?channel=<value>&`**

---

**ShelterSwitch=<value>&user=<value>&pwd=<value>**

with the following parameters and values.

<b>&lt;parameter&gt;=&lt;value&gt;</b>	<b>Values</b>	<b>Description</b>
channel=<int>	0~3	The channel number of the video.
ShelterSwitch =<string>	close, open	Whether to open the shelter alarm.
user=<string>	A user name	Valid characters are a thru z, A thru Z and 0 thru 9.
pwd=<string>	A user password	Valid characters are a thru z, A thru Z and 0 thru 9.

**Example:** Open the channel 0 shelter alarm .

```
http://192.168.55.88/cgi-bin/shelter.cgi?action=set&channel=0&user=admin&pwd=admin&ShelterSwitch=open
```

**Response:**

```
HTTP/1.0 200 OK\r\n
```

```
Content-Type:text/plain\r\n
```

```
\r\n
```

```
OK\r\n
```

## **16. Sensor alarm**

Get and set the sensor alarm options.

**Note:** This requires administrator access(administrator authorization).

**Syntax:**

```
http://<server ipaddr>/cgi-bin/sensor.cgi?<parameter>=<value>
```

```
[&<parameter>=<value>]
```

---

with the following parameters and values.

<b>&lt;parameter&gt;=&lt;value&gt;</b>	<b>Values</b>	<b>Description</b>
action=<string>	get, set	get = get the sensor alarm options. set = set the sensor alarm options.
channel=<int>	0~3	The channel number of the video.
user=<string>	A user name	Valid characters are a thru z, A thru Z and 0 thru 9.
pwd=<string>	A user password	Valid characters are a thru z, A thru Z and 0 thru 9.
DetectSwitch=<string>	close, open	Whether to open the sensor alarm.
SensorType=<string>	NormalOpen, NormalClose	The type of the sensor.
EMailSwitch=<string>	close, open	Whether the alarm is sent to the email.
Time1Switch=<string>	close, open	Time 1 selector switch.
Time1_BgnHour=<int>	0~23	The beginning of the hour value.
Time1_BgnMinute=<int>	0~59	The beginning of the minute value.
Time1_EndHour=<int>	0~23	The end of the hour value.
Time1_EndMinute=<int>	0~59	The end the minute value.
Time2Switch=<string>	close, open	Time 2 selector switch.
Time2_BgnHour=<int>	0~23	The beginning of the hour value.
Time2_BgnMinute=<int>	0~59	The beginning of the minute value.
Time2_EndHour=<int>	0~23	The end of the hour value.

Time2_EndMinute=<int>	0~59	The end the minute value.
OutputSwitch=<string>	close, open	Whether the alarm is sent to the warning lights.
OutputDuration=<int>	0~2*60*60	Alarm output duration.
SnapSwitch=<string>	close, open	When the motion alarm occurs, whether to snap.
SnapNum=<int>	0~3600	The number of captured images.
SnapInterval=<float>	0~3600,0.5,1.5	The interval of captured images.
SnapSaveMode=<string>	Local,Ftp,Email FtpEmail	The way to save the pictures. FtpEmail means Ftp and Email .
RecordSwitch=<string>	close, open	When the motion alarm occurs, whether to record.
RecordTime=<int>	0~2*60*60	Recording continuous time.
RecordSaveMode=<string>	Local,Ftp	The way to save the Video resource.

### 1.30. Get the sensor alarm options

#### Syntax:

**http://<server ipaddr>/cgi-bin/sensor\_cgi?action=get&channel=<value>  
&user=<value>&pwd=<value>**

#### Example:

http://192.168.55.88/cgi-bin/sensor\_cgi?action=get&channel=0&user=admin&pwd=admin

#### Response:

DetectSwitch=close  
SensorType=NormalOpen  
Time1Switch=open

---

Time1\_BgnHour=8 Time1\_BgnMinute=0 Time1\_EndHour=23  
Time1\_EndMinute=59  
Time2Switch=close  
Time2\_BgnHour=0 Time2\_BgnMinute=0 Time2\_EndHour=23  
Time2\_EndMinute=22  
EMailSwitch=close  
OutputSwitch=close  
OutputDuration=10  
SnapSwitch=close  
SnapNum=10  
SnapInterval=1.5  
SnapSaveMode=Email  
RecordSwitch=close  
RecordTime=64  
RecordSaveMode=Ftp

### 1.31. Set the sensor alarm options

#### Syntax:

**http://<server ipaddr>/cgi-bin/sensor\_cgi?action=set[&parameter =<value>...]**

**You can set the value of a parameter or all the parameters value.**

**Example: Set the sensor alarm parameters of the first channel.**

http://192.168.55.88/cgi-bin/sensor\_cgi?action=set&channel=0&user=admin&pwd=admin&DetectSwitch=open&SensorType=NormalClose&EMailSwitch=open&Time1Switch=open&Time1\_BgnHour=0&Time1\_BgnMinute=0&Time1\_EndHour=20&Time1\_EndMinute=30&SnapSwitch=open&SnapNum=6&SnapInterval=2.5&SnapSaveMode=FtpEmail&RecordSwitch=open&RecordTime=88&RecordSaveMode=Ftp

#### Response:

HTTP/1.0 200 OK\r\n

Content-Type:text/plain\r\n

\r\n

---

OK\r\n

## 17. Video lose alarm

Get and set the video lose alarm options.

**Note:** This requires administrator access(administrator authorization). When device has storage (hard disk, SD card, USB disk), linkage Snap, linkage Record document will be saved to storage first and do related process based on file storage. Or it will be saved to memory for the moment and do related process based on file storage.

**Syntax:**

**http://<server ipaddr>/cgi-bin/videolose\_cgi?<parameter>=<value>**

**[&<parameter>=<value>]**

with the following parameters and values.

<b>&lt;parameter&gt;=&lt;value&gt;</b>	<b>Values</b>	<b>Description</b>
action=<string>	get, set	get = get the video lose alarm options. set = set the video lose alarm options.
channel=<int>	0~3	The channel number of the video.
user=<string>	A user name	Valid characters are a thru z, A thru Z and 0 thru 9.
pwd=<string>	A user password	Valid characters are a thru z, A thru Z and 0 thru 9.
LoseSwitch=<string>	close, open	Whether to open the video lose alarm.
EMailSwitch=<string>	close, open	Whether the alarm is sent to the email.
OutputSwitch=<string>	close, open	Whether the alarm is sent to the warning lights.

OutputDuration=<int>	0~2*60*60	Alarm output duration.
SnapSwitch=<string>	close, open	When the motion alarm occurs, whether to snap.
SnapNum=<int>	0~3600	The number of captured images.
SnapInterval=<float>	0~3600,0.5,1.5	The interval of captured images.
SnapSaveMode=<string>	Local,Ftp,Email FtpEmail	The way to save the pictures. FtpEmail means Ftp and Email .
RecordSwitch=<string>	close, open	When the motion alarm occurs, whether to record.
RecordTime=<int>	0~2*60*60	Recording continuous time.
RecordSaveMode=<string>	Local,Ftp	The way to save the Video resource.

### 1.32. Get the video lose alarm options

#### Syntax:

**http://<server ipaddr>/cgi-bin/videolose\_cgi?action=get&channel=<value>  
&user=<value>&pwd=<value>**

#### Example:

```
http://192.168.55.88/cgi-bin/videolose_cgi?action=get&channel=0&user=admin
&pwd=admin
```

#### Response:

```
HTTP/1.0 200 OK\r\n
Content-Type:text/plain\r\n
\r\n
LoseSwitch=open
EMailSwitch=open
OutputSwitch=open
OutputDuration=20
SnapSwitch=close
```

---

SnapNum=100  
SnapInterval=1.5  
SnapSaveMode=Ftp  
RecordSwitch=open  
RecordTime=10  
RecordSaveMode=Ftp

### 1.33. Set the video lose alarm options

**Syntax:**

**http://<server ipaddr>/cgi-bin/videolose\_cgi?action=set[&<parameter>=<value>]**

**Example:**

http://192.168.55.88/cgi-bin/videolose\_cgi?action=set&channel=0&user=admin&pwd=admin&LoseSwitch=open&EMailSwitch=open&outputSwitch=open&OutputDuration=21&SnapSwitch=open&SnapNum=20&SnapInterval=2&SnapSaveMode=FtpEmail  
&RecordSwitch=open&RecordTime=61&RecordSaveMode=Ftp

**Response:**

```
HTTP/1.0 200 OK\r\n
Content-Type:text/plain\r\n
\r\n
OK\r\n
```

## 18. Network interruption alarm

Get and set the network interruption alarm options.

**Note:** This requires administrator access(administrator authorization).

**Syntax:**

**http://<server ipaddr>/cgi-bin/networkinterruption\_cgi?<parameter>=<value>  
[&<parameter>=<value>]**

with the following parameters and values.



<b>&lt;parameter&gt;=&lt;value&gt;</b>	<b>Values</b>	<b>Description</b>
action=<string>	get, set	get = get the network interruption alarm options.  set = set the network interruption alarm options.
user=<string>	A user name	Valid characters are a thru z, A thru Z and 0 thru 9.
pwd=<string>	A user password	Valid characters are a thru z, A thru Z and 0 thru 9.
DetectSwitch=<string>	close, open	Whether to open the video lose alarm.
OutputSwitch=<string>	close, open	Whether the alarm is sent to the warning lights.
OutputDuration=<int>	0~2*60*60	Alarm output duration.
SnapSwitch=<string>	close, open	When the motion alarm occurs, whether to snap.
SnapNum=<int>	0~3600	The number of captured images.
SnapInterval=<float>	0~3600,0.5,1.5	The interval of captured images.
RecordSwitch=<string>	close, open	When the motion alarm occurs, whether to record.
RecordTime=<int>	0~2*60*60	Recording continuous time.

### 1.34. Get the network interruption alarm options

#### Syntax:

**http://<server ipaddr>/cgi-bin/networkinterruption\_cgi?action=get**  
**&user=<value>&pwd=<value>**

#### Example:

---

```
http://192.168.55.88/cgi-bin/networkinterruption_cgi?action=get&user=admin
&pwd=admin
```

**Response:**

```
HTTP/1.0 200 OK\r\n
Content-Type:text/plain\r\n
\r\n
DetectSwitch=close
OutputSwitch=close
OutputDuration=9
SnapSwitch=close
SnapNum=10
SnapInterval=1.5
RecordSwitch=close
RecordTime=62
```

### 1.35. Set the network interruption alarm options

**Syntax:**

```
http://<server ipaddr>/cgi-bin/networkinterruption_cgi?action=set
[&<parameter>=<value>]
```

**Example:**

```
http://192.168.55.88/cgi-bin/networkinterruption_cgi?action=set&user=admin
&pwd=admin&DetectSwitch=open&outputSwitch=open&OutputDuration=21&S
napSwitch=open&SnapNum=20&SnapInterval=2&RecordSwitch=open&RecordTi
me=61
```

**Response:**

```
HTTP/1.0 200 OK\r\n
Content-Type:text/plain\r\n
\r\n
OK\r\n
```

## 19. Alarm status

Obtain alarm status.

### Note:

This requires administrator access(administrator authorization). The alarm duration is two seconds, and within two seconds, the arrival of the next alarm, alarm start time will not change.

### Syntax:

**http://<server ipaddr>/cgi-bin/alarmstate\_cgi?action=<value>**

**&user=<value>&pwd=<value>**

with the following parameters and values.

<b>&lt;parameter&gt;=&lt;value&gt;</b>	<b>Values</b>	<b>Description</b>
action=<string>	get, clear	get = get the alarm statues.  clear = Remove all the current state of alarm.
user=<string>	A user name	Valid characters are a thru z, A thru Z and 0 thru 9.
pwd=<string>	A user password	Valid characters are a thru z, A thru Z and 0 thru 9.
Alarm Type=<string>	MotionDetection, VideoLoss, SensorAlarm, NetworkInterruption, Shelter Alarm.	The type of the alarm.

### 1.36. Get the alarm statues

### Syntax:

---

**http://<server ipaddr>/cgi-bin/alarmstate\_cgi?action=get&user=<value>  
&pwd=<value>**

**Return:**

HTTP/1.0 200 OK\r\n  
Content-Type:text/plain\r\n  
\r\n  
Alarm Type=<value> channel=<value> date=year-month-day  
time=hour:minute:second

**Example:**

http://192.168.55.88/cgi-bin/alarmstate\_cgi?action=get&user=admin&pwd=admin

**Response:**

**Case1:** No alarm message.

HTTP/1.0 200 OK\r\n  
Content-Type:text/plain\r\n  
\r\n

NO Alarm\r\n

**Case2:** Have alarm message.

HTTP/1.0 200 OK\r\n  
Content-Type:text/plain\r\n  
\r\n  
Alarm Type=Motion channel=0 date=2012-06-04 time=20:00:36  
  
Alarm Type=VideoLoss channel=0 date=2012-06-04 time=20:00:34

### **1.37. Clear the alarm statues**

**Syntax:**

**http://<server ipaddr>/cgi-bin/alarmstate\_cgi?action=clear&user=<value>**

---

**&pwd=<value>**

**Return:**

HTTP/1.0 200 OK\r\n

Content-Type:text/plain\r\n

\r\n

## 20. **PPPOE**

Get and set the PPPOE options.

**Note: This requires administrator access(administrator authorization).**

**Syntax:**

**http://<server ipaddr>/cgi-bin/pppoe\_cgi?<parameter>=<value>**

**[&<parameter>=<value>]**

with the following parameters and values.

<b>&lt;parameter&gt;=&lt;value&gt;</b>	<b>Values</b>	<b>Description</b>
action=<string>	get, set	get = get the PPPOE options. set = set the PPPOE options.
user=<string>	A user name	Valid characters are a thru z, A thru Z and 0 thru 9.
pwd=<string>	A user password	Valid characters are a thru z, A thru Z and 0 thru 9.
PppoeSwitch=<string>	open, close	Whether use PPPOE to dial out.
Pppoelppaddr=<string>	An IP address	The IP address returned in the dial-up after the success of. Can not be set.

PppoeUser=<string>	<string>	Valid characters are a thru z, A thru Z and 0 thru 9.  The length is more than 32.
PppoePwd=<string>	<string>	Valid characters are a thru z, A thru Z and 0 thru 9.  The length is more than 32.
OnlieTime=<int>	<string>	The amount of time online. Can not be set.

### 1.38. Get the PPPOE options

#### Syntax:

**http://<server ipaddr>/cgi-bin/pppoe CGI?action=get&user=<value>  
&pwd=<value>**

#### Example:

http://192.168.55.88/cgi-bin/pppoe CGI?action=get&user=admin&pwd=admin

#### Response:

HTTP/1.0 200 OK\r\n  
Content-Type:text/plain\r\n  
\r\n  
PppoeSwitch=close  
Pppoelpaddr=0.0.0.0  
PppoeUser=hanghe  
PppoePwd=456123  
OnlieTime=0minutes

### 1.39. Set the PPPOE options

#### Syntax:

**http://<server ipaddr>/cgi-bin/pppoe CGI?action=set[&<parameter>=  
<value>]**

#### Example:

---

http://192.168.55.88/cgi-bin/pppoe\_cgi?action=set&user=admin&pwd=admin&PppoeSwitch=open&PppoeUser=test&PppoePwd=456123

**Response:**

HTTP/1.0 200 OK\r\n

Content-Type:text/plain\r\n

\r\n

OK\r\n

## 21. UPNP

Get and set the UPNP options.

**Note:** This requires administrator access(administrator authorization).

**Syntax:**

http://<server ipaddr>/cgi-bin/upnp\_cgi?<parameter>=<value>

[&<parameter>=<value>]

with the following parameters and values.

<parameter>=<value>	Values	Description
action=<string>	get, set	get = get the UPNP options. set = set the UPNP options.
user=<string>	A user name	Valid characters are a thru z, A thru Z and 0 thru 9.
pwd=<string>	A user password	Valid characters are a thru z, A thru Z and 0 thru 9.
UpnpSwitch =<string>	open,close	Whether to enable the UPNP .
UpnpEthNo=<string>	Lineate, WiFi	NIC type.

UpnpMode=<string>	Designate, Auto	The mode of the UPNP server.
UpnpHost=<string>	<A server URL>	The host address of the UPNP.
UpnpWebPort=<int>	Valid port number.	The web port of the UPNP.
UpnpDataPort=<int>	Valid port number.	The data port of the UPNP.

#### 1.40. Get the UPNP options

##### Syntax:

**http://<server ipaddr>/cgi-bin/upnp\_cgi?action=get&user=<value>  
&pwd=<value>**

##### Example:

**http://192.168.55.88/cgi-bin/upnp\_cgi?action=get&user=admin&pwd=admin**

##### Response:

HTTP/1.0 200 OK\r\n  
Content-Type:text/plain\r\n  
\r\n  
UpnpSwitch=close  
UpnpEthNo=WiFi  
UpnpMode=Designate  
UpnpHost=192.168.88.18  
UpnpWebPort=80  
UpnpDataPort=5000

#### 1.41. Set the UPNP options

##### Syntax:

**http://<server ipaddr>/cgi-bin/upnp\_cgi?action=set[&<parameter>=<value>]**

##### Example:



---

http://192.168.55.88/cgi-bin/upnp.cgi?action=set&user=admin&pwd=admin&UpnpSwitch=open&UpnpEthNo=Wifi&UpnpMode=Designate&UpnpWebPort=55&UpnpDataPort=88&UpnpHost=192%2E168%2E88%2E188

**Response:**

HTTP/1.0 200 OK\r\n

Content-Type:text/plain\r\n

\r\n

OK\r\n

## 22. Email

Get and set the Email options.

**Note:** This requires administrator access(administrator authorization).

**Syntax:**

http://<server ipaddr>/cgi-bin/email.cgi?<parameter>=<value>

[&<parameter>=<value>]

with the following parameters and values.

<parameter>=<value>	Values	Description
action=<string>	get, set	get = get the Email options. set = set the Email options.
user=<string>	A user name	Valid characters are a thru z, A thru Z and 0 thru 9.
pwd=<string>	A user password	Valid characters are a thru z, A thru Z and 0 thru 9.
SmtServer=<string>	<string>	Such as: smtp%2E126%2Ecom(smtp.126.com).
MailFrom=<string>	<string>	Such as: ipc-cgi%40126%2Ecom(ipc-cgi@126.com).

MailTo=<string>	<string>	Such as:  xxx%40163%2Ecom%2Ecn  (xxx@163.com).
SmtpUser=<string>	<string>	Valid characters are a thru z, A thru Z and 0 thru 9.
SmtpPwd=<string>	<string>	Valid characters are a thru z, A thru Z and 0 thru 9.
MailTile=<string>	<string>	Such as:  Alarm%20Message(Alarm Message)
SmtpPort=<int>	25,1~65535	Smtp port.

#### 1.42. Get the email options

##### Syntax:

**http://<server ipaddr>/cgi-bin/email\_cgi?action=get&user=<value>  
&pwd=<value>**

##### Example:

http://192.168.55.88/cgi-bin/email\_cgi?action=get&user=admin&pwd=admin

##### Response:

```
HTTP/1.0 200 OK\r\n
Content-Type:text/plain\r\n
\r\n
SmtpServer=smtp.126.com
MailFrom=ipc-cgi@126.com
MailTo=ipc-email@163l.com.cn
SmtpUser=ipc-cgi1
SmtpPwd=123456
MailTile=Alarm Message
```

---

Smtpport=25

### 1.43. Set the email options

#### Syntax:

**http://<server ipaddr>/cgi-bin/email\_cgi?action=set[&<parameter>=<value>]**

#### Example:

```
http://192.168.55.88/cgi-bin/email_cgi?action=set&user=admin&pwd=admin&SmtppServer=smtpp%2E126%2Ecom&MailFrom=ipc-cgi%40126%2Ecom&MailTo=xxx%40163%2Ecom%2Ecn&SmtppUser=ipc-cgi&SmtppPwd=123456&MailTitle=Alarm%20Message&SmtppPort=25
```

#### Response:

HTTP/1.0 200 OK\r\n

Content-Type:text/plain\r\n

\r\n

OK\r\n

## 23. FTP

Get and set the FTP options.

#### Note:

This requires administrator access, when the preferred server connection fails, the device enabled the alternate server connection. **FtpURL2**, **FtpPath2**, **FtpUser2**, **FtpPwd2**, **FtpPort2** are the parameter of the alternate server.

#### Syntax:

**http://<server ipaddr>/cgi-bin/ftp\_cgi?<parameter>=<value>**

**[&<parameter>=<value>]**

with the following parameters and values.

<parameter>=<value>	Values	Description
---------------------	--------	-------------

action=<string>	get, set	get = get the FTP options. set = set the FTP options.
user=<string>	A user name	Valid characters are a thru z, A thru Z and 0 thru 9.
pwd=<string>	A user password	Valid characters are a thru z, A thru Z and 0 thru 9.
FtpURL=<string>	A IP address	Such as: 192%2E168%2E88%2E187
FtpPath=<string>	<string>	Such as:%2Fcapture%2F(/capture/)
FtpUser=<string>	<string>	Valid characters are a thru z, A thru Z and 0 thru 9.
FtpPwd=<string>	<string>	Valid characters are a thru z, A thru Z and 0 thru 9.
FtpPort=<int>	21,1~65535	FTP server port.
FtpURL2=<string>	A IP address	Such as: 192%2E168%2E88%2E186
FtpPath2=<string>	<string>	Such as:%2Fcapture%2F(/capture/)
FtpUser2=<string>	<string>	Valid characters are a thru z, A thru Z and 0 thru 9.
FtpPwd2=<string>	<string>	Valid characters are a thru z, A thru Z and 0 thru 9.
FtpPort2=<int>	21,1~65535	FTP server port.

#### 1.44. Get the FTP options

**Syntax:**

**http://<server ipaddr>/cgi-bin/ftp.cgi?action=get&user=<value>  
&pwd=<value>**

**Example:**

---

`http://192.168.55.88/cgi-bin/ftp.cgi?action=get&user=admin&pwd=admin`

**Response:**

HTTP/1.0 200 OK\r\n

Content-Type:text/plain\r\n

\r\n

Preferred Server:

FtpURL=192.168.88.185

FtpPath=/catalog/

FtpPort=21

FtpUser=ftp1

FtpPwd=123456

Alternate Server:

FtpURL2=192.168.88.186

FtpPath2=/capture/

FtpPort2=21

FtpUser2=ftp2

FtpPwd2=123456

### 1.45. Set the FTP options

**Syntax:**

`http://<server ipaddr>/cgi-bin/ftp.cgi?action=set[&<parameter>=<value>]`

**Example: set the alternate server parameter**

`http://192.168.55.88/cgi-bin/ftp.cgi?action=set&user=admin&pwd=admin&FtpURL2=192%2E168%2E88%2E187&FtpPath2=%2Fphotos%2F&FtpPort2=22&FtpUser2=ftptest&FtpPwd2=admin`

**Response:**

HTTP/1.0 200 OK\r\n

Content-Type:text/plain\r\n

\r\n

---

OK\r\n

## 24. DDNS

Get and set the DDNS options.

**Note:** This requires administrator access(administrator authorization).

**Syntax:**

**http://<server ipaddr>/cgi-bin/ddns\_cgi?<parameter>=<value>**

**[&<parameter>=<value>]**

with the following parameters and values.

<b>&lt;parameter&gt;=&lt;value&gt;</b>	<b>Values</b>	<b>Description</b>
action=<string>	get, set	get = get the DDNS options. set = set the DDNS options.
user=<string>	A user name	Valid characters are a thru z, A thru Z and 0 thru 9.
pwd=<string>	A user password	Valid characters are a thru z, A thru Z and 0 thru 9.
Provider=<string>	NULL,mvddns.net ,3322.org, dyndns.org	Service providers. NULL: Do not enable DDNS service.
DdnsName=<string>	<string>	DDNS registered name.
DdnsPass=<string>	<string>	DDNS registered password.
Domain=<string>	<string>	If DDNS is set successfully, you can access the device through the domain name.
ServerUrl=<string>	<A server URL>	The address of the DDNS server.  Such as:

		members%2Edyndns%2Eorg (members.dyndns.org)
ServerPort=<int>	Valid port number.	The port of the DDNS server.
DdnsMapDataPort=<int>	Valid port number.	Data mapping port.
DdnsMapWebPort=<int>	Valid port number.	Web service mapping port.
UpdateInterval=<int>	0:2 minutes, 1:5 minutes, 2:30 minutes, 3:1 hours, 4: 2 hours, 5: 1 days, 6:IP update.	DDNS update time interval.

#### 1.46. Get the DDNS options

##### Syntax:

**http://<server ipaddr>/cgi-bin/ddns\_cgi?action=get&user=<value>&pwd=<value>**

##### Example:

**http://192.168.55.88/cgi-bin/ddns\_cgi?action=get&user=admin&pwd=admin**

##### Response:

```
HTTP/1.0 200 OK\r\n
Content-Type:text/plain\r\n
\r\n
Provider=dyndns.org
DdnsName= ddns001
DdnsPass= 123456
Domain= mk56.dyndns.org
ServerUrl=members.dyndns.org
ServerPort=30000
DdnsMapDataPort=5000
DdnsMapWebPort=80
```

---

UpdateInterval=5 minutes

### 1.47. Set the DDNS options

#### Syntax:

**http://<server ipaddr>/cgi-bin/ddns\_cgi?action=set[&<parameter>=<value>]**

#### Example:

http://192.168.55.88/cgi-bin/ddns\_cgi?action=set&user=admin&pwd=admin&Provider=dyndns%2Eorg&DdnsName=ddns001&DdnsPass=123456&Domain=mk56%2Edyndns%2Eorg&ServerUrl=members%2Edyndns%2Eorg&ServerPort=20000&DdnsMapDataPort=500&DdnsMapWebPort=8080&UpdateInterval=1

#### Response:

HTTP/1.0 200 OK\r\n

Content-Type:text/plain\r\n

\r\n

OK\r\n

## 25. VPN

Get and set the VPN options.

**Note:** This requires administrator access(administrator authorization).

#### Syntax:

**http://<server ipaddr>/cgi-bin/vpn\_cgi?<parameter>=<value>**

**[&<parameter>=<value>]**

with the following parameters and values.

<parameter>=<value>	Values	Description
action=<string>	get, set	get = get the VPN options. set = set the VPN options.



user=<string>	A user name	Valid characters are a thru z, A thru Z and 0 thru 9.
pwd=<string>	A user password	Valid characters are a thru z, A thru Z and 0 thru 9.
VpnSwitch=<string>	open,close	Whether to enable the VPN.
VpnServer=<string>	<string>	The address of the VPN server.
VpnName=<string>	<string>	The user name.
VpnPwd=<string>	<string>	The user password.
VpnIP=<string>	Valid port number.	The IP address of the equipment when VPN enable successful. Can't be set.
VpnStatus=<string>	Valid port number.	The status of the VPN.  Can't be set.

#### 1.48. Get the VPN options

##### Syntax:

**http://<server ipaddr>/cgi-bin/vpn\_cgi?action=get&user=<value>&pwd=<value>**

##### Example:

**http://192.168.55.88/cgi-bin/vpn\_cgi?action=get&user=admin&pwd=admin**

##### Response:

```
HTTP/1.0 200 OK\r\n
Content-Type:text/plain\r\n
\r\n
VpnSwitch=open
VpnServer=192.168.88.188
VpnName=test1
VpnPwd=123456
```

---

VpnIP=0.0.0.0

VpnStatus=dial-up failed 2 times, device will try again!

### 1.49. Set the VPN options

#### Syntax:

**http://<server ipaddr>/cgi-bin/vpn.cgi?action=set[&<parameter>=<value>]**

#### Example:

http://192.168.55.88/cgi-bin/vpn.cgi?action=set&user=admin&pwd=admin&VpnSwitch=open&VpnServer=192.168.88.188&VpnName=test&VpnPwd=123456

#### Response:

HTTP/1.0 200 OK\r\n

Content-Type:text/plain\r\n

\r\n

OK\r\n

## 26. RTSP Parameter

Get and set the RTSP options.

**Note:** This requires administrator access(administrator authorization).

#### Syntax:

**http://<server ipaddr>/cgi-bin/rtsp.cgi?<parameter>=<value>**

**[&<parameter>=<value>]**

with the following parameters and values.

<parameter>=<value>	Values	Description
action=<string>	get, set	get = get the RTSP options. set = set the RTSP options.
user=<string>	A user name	Valid characters are a thru z, A

		thru Z and 0 thru 9.
pwd=<string>	A user password	Valid characters are a thru z, A thru Z and 0 thru 9.
RtspSwitch=<string>	open, close	Whether to enable the RTSP.
RtspMode=<string>	Initiative, Passivity	RTSP service mode.
RtspAuth=<string>	open, close	Whether to enable the RTSP auth.
RtspPacketSize=<int>	1~1460	RTSP data package time.
RtspServer=<string>	<RTSP server address >	When the mode selection to take the initiative to connect, you need to set this parameter. The address of the RTSP server.
RtspPort=<int>	1~65535	The port of the RTSP server.
MultServer=<int>	<RTSP MultServer address >	The address of the RTSP multicast server.
MultPreVPort=<int>	Valid port number.	The main-stream multicast video port.
MultPreAPort=<int>	Valid port number.	The main-stream multicast audio port.
MultAltVPort=<int>	Valid port number.	Sub-stream multicast video port.
MultAltAPort=<int>	Valid port number.	Sub-stream multicast audio port.

### 1.50. Get the RTSP options

#### Syntax:

**http://<server ipaddr>/cgi-bin/rtsp.cgi?action=get&user=<value>&pwd=<value>**

#### Example:

**http://192.168.55.88/cgi-bin/rtsp.cgi?action=get&user=admin&pwd=admin**

---

**Response:**

```
HTTP/1.0 200 OK\r\n
Content-Type:text/plain\r\n
\r\n
RtspSwitch=open
RtspMode=Passivity
RtspAuth=close
RtspPacketSize=1460
RtspPort=554
Multicast Options:
MultServer=231.0.0.222
MultPreVPort=5010
MultPreAPort=5012
MultAltVPort=5020
MultAltAPort=5022
```

### 1.51. Set the RTSP options

**Syntax:**

**`http://<server ipaddr>/cgi-bin/rtsp_cgi?action=set[&<parameter>=<value>]`**

**Example:**

`http://192.168.55.88/cgi-bin/rtsp_cgi?action=set&user=admin&pwd=admin&RtspSwitch=close&RtspMode=Initiative&RtspAuth=open&RtspPacketSize=1400&RtspPort=553&MultServer=231.0.0.221&MultPreVPort=5001&MultPreAPort=5002&MultAltVPort=5003&MultAltAPort=5004`

**Response:**

```
HTTP/1.0 200 OK\r\n
Content-Type:text/plain\r\n
\r\n
OK\r\n
```

## 27. IP Email

Get and set the IP Email options.

**Note:** This requires administrator access(administrator authorization).

**Syntax:**

**http://<server ipaddr>/cgi-bin/ipemail\_cgi?<parameter>=<value>**

**[&<parameter>=<value>]**

with the following parameters and values.

<b>&lt;parameter&gt;=&lt;value&gt;</b>	<b>Values</b>	<b>Description</b>
action=<string>	get, set	get = get the IP Email options. set = set the IP Email options.
user=<string>	A user name	Valid characters are a thru z, A thru Z and 0 thru 9.
pwd=<string>	A user password	Valid characters are a thru z, A thru Z and 0 thru 9.
IpEmailSwitch =<string>	open, close	Whether to enable the IP Email.
UpdateInterval =<int>	0: Default 1: 1 hour, 2: 2 hour, 3: 1 day, 4: 2 day, 5: 7 day.	IP Email update time interval.

### 1.52. Get the IP Email options

**Syntax:**

**http://<server ipaddr>/cgi-bin/ipemail\_cgi?action=get&user=<value>**

**&pwd=<value>**

**Example:**

---

```
http://192.168.55.88/cgi-bin/ipemail_cgi?action=get&user=admin&pwd=admin
```

**Response:**

```
HTTP/1.0 200 OK\r\n
Content-Type:text/plain\r\n
\r\n
IpEmailSwitch=close
UpdateInterval=Default
```

### 1.53. Set the IP Email options

**Syntax:**

```
http://<server ipaddr>/cgi-bin/ipemail_cgi?action=set[&<parameter>=<value>]
```

**Example:**

```
http://192.168.55.88/cgi-bin/ipemail_cgi?action=set&user=admin&pwd=admin
&IpEmailSwitch=open&UpdateInterval=3
```

**Response:**

```
HTTP/1.0 200 OK\r\n
Content-Type:text/plain\r\n
\r\n
OK\r\n
```

## 28. Center connection

Get and set the center connection options.

**Note:** This requires administrator access(administrator authorization).

**Syntax:**

```
http://<server ipaddr>/cgi-bin/connecting_cgi?<parameter>=<value>
[&<parameter>=<value>]
```

with the following parameters and values.

<parameter>=<value>	Values	Description
action=<string>	get, set	get=get the center connection options. set = set the center connection options.
user=<string>	A user name	Valid characters are a thru z, A thru Z and 0 thru 9.
pwd=<string>	A user password	Valid characters are a thru z, A thru Z and 0 thru 9.
ConnectCenterSwitch=<string>	open, close	Whether to enable the center connection.
ConnectCenterPort =<int>	Valid port number.	The port of the connection service.
ConnectCenterIP=<string>	An IP address.	Such as: 192%2E167%2E88%2E185(192.168.88.185).

#### 1.54. Get the center connection options

##### Syntax:

**http://<server ipaddr>/cgi-bin/connecting CGI?action=get&user=<value>  
&pwd=<value>**

##### Example:

```
http://192.168.55.88/cgi-bin/connecting CGI?action=get&user=admin&pwd=admin
```

##### Response:

```
HTTP/1.0 200 OK\r\n
Content-Type:text/plain\r\n
\r\n
ConnectCenterSwitch=close
ConnectCenterPort=6500
```

---

ConnectCenterIP=192.168.55.88

### 1.55. Set the center connection options

#### Syntax:

**http://<server ipaddr>/cgi-bin/connecting\_cgi?action=set[&<parameter>=<value>]**

#### Example:

http://192.168.55.88/cgi-bin/connecting\_cgi?action=set&user=admin&pwd=admin&ConnectCenterSwitch=open&ConnectCenterPort=5500&ConnectCenterIP=192.168.55.88

#### Response:

HTTP/1.0 200 OK\r\n

Content-Type:text/plain\r\n

\r\n

OK\r\n

## 29. Mobile monitor

Get and set the mobile monitor options.

**Note:** This requires administrator access(administrator authorization).

#### Syntax:

**http://<server ipaddr>/cgi-bin/mobile\_cgi?<parameter>=<value>**

**[&<parameter>=<value>]**

with the following parameters and values.

<b>&lt;parameter&gt;=&lt;value&gt;</b>	<b>Values</b>	<b>Description</b>
action=<string>	get, set	get = get the mobile monitor options.  set = set the mobile monitor options.



user=<string>	A user name	Valid characters are a thru z, A thru Z and 0 thru 9.
pwd=<string>	A user password	Valid characters are a thru z, A thru Z and 0 thru 9.
MobileMode=<string>	CS, P2P	The mobile monitor service mode.
ServerUrl=<string>	<string>	The address of the mobile monitor server. Only the CS mode with this option.
ServerPort=<int>	0~65535	The port of the mobile monitor service.
DeviceId=<int>	0~2147483647	The ID of the device access. Only the CS mode with this option.
RealTime=<string>	Fine, Normal, Basic	Real-time selection of services.
ChannelSwitch0=<string>	open, close	Whether the access channel 0. Only the CS mode with this option.
ChannelSwitch1=<string>	open, close	Whether the access channel 1. Only the CS mode with this option.
ChannelSwitch2=<string>	open, close	Whether the access channel 2. Only the CS mode with this option.
ChannelSwitch3=<string>	open, close	Whether the access channel 3. Only the CS mode with this option.

## 1.56. Get the mobile monitor options

### Syntax:

**http://<server ipaddr>/cgi-bin/mobile\_cgi?action=get&user=<value>  
&pwd=<value>**

### Example:

**http://192.168.55.88/cgi-bin/mobile\_cgi?action=get&user=admin&pwd=admin**

### Response:

---

```
HTTP/1.0 200 OK\r\n
Content-Type:text/plain\r\n
\r\n
Mode=CS
ServerUrl=116.113.109.179
ServerPort=15960
DeviceId=2020
RealTime=Basic
ChannelSwitch0=open
ChannelSwitch1=open
ChannelSwitch2=close
ChannelSwitch3=open
```

### 1.57. Set the mobile monitor options

#### Syntax:

**http://<server ipaddr>/cgi-bin/mobile\_cgi?action=set[&<parameter>=<value>]**

**Example:** Set up mobile phone monitoring mode for P2P mode

```
http://192.168.55.88/cgi-bin/mobile_cgi?action=set&user=admin&pwd=admin
&Mode=P2P&ServerPort=1606&RealTime=Fine
```

#### Response:

```
HTTP/1.0 200 OK\r\n
Content-Type:text/plain\r\n
\r\n
OK,Device is rebooting\r\n
```

When the parameter is not changed, return "Param not change\r\n".

## 30. Record

Get and set the record options.

#### Note:

This requires administrator access, When device has storage (hard disk, SD card, USB disk), schedule Record will be saved to the storage first and do related process based on file storage. Or it will be saved to memory for the moment and do related process based on file storage.

**Syntax:**

**http://<server ipaddr>/cgi-bin/record\_cgi?<parameter>=<value>**

**[&<parameter>=<value>]**

with the following parameters and values.

<b>&lt;parameter&gt;=&lt;value&gt;</b>	<b>Values</b>	<b>Description</b>
action=<string>	get, set	get = get the Record options. set = set the Record options.
channel=<int>	0~3	The channel number of the video.
user=<string>	A user name	Valid characters are a thru z, A thru Z and 0 thru 9.
pwd=<string>	A user password	Valid characters are a thru z, A thru Z and 0 thru 9.
SaveMode=<string>	Ftp, Local	The way to save the video resources.
Time1Switch=<string>	close, open	Time 1 selector switch.
Time1_BgnHour=<int>	0~23	The beginning of the hour value.
Time1_BgnMinute=<int>	0~59	The beginning of the minute value.
Time1_EndHour=<int>	0~23	The end of the hour value.
Time1_EndMinute=<int>	0~59	The end the minute value.
Time2Switch=<string>	close, open	Time 2 selector switch.
Time2_BgnHour=<int>	0~23	The beginning of the hour value.

Time2_BgnMinute=<int>	0~59	The beginning of the minute value.
Time2_EndHour=<int>	0~23	The end of the hour value.
Time2_EndMinute=<int>	0~59	The beginning of the minute value.

### 1.58. Get the record options

#### Syntax:

**http://<server ipaddr>/cgi-bin/record\_cgi?action=get&channel=<value>  
&user=<value>&pwd=<value>**

#### Example:

http://192.168.55.88/cgi-bin/record\_cgi?action=get&channel=0&user=admin&pwd=admin

#### Response:

```
HTTP/1.0 200 OK\r\n
Content-Type:text/plain\r\n
\r\n
StreamType=AlternateStream
PackageTime=1
SaveDay=0
OverWrite=1
SaveMode=Ftp
Time1Switch=close
Time1_BngHour=0 Time1_BngMinute=0 Time1_EndHour=20
Time1_EndMinute=59
Time2Switch=close
Time2_BngHour=0 Time2_BngMinute=0 Time2_EndHour=23
Time2_EndMinute=59
```

### 1.59. Set the record options of the different channels

#### Syntax:

---

**http://<server ipaddr>/cgi-bin/record\_cgi?action=set&channel=<value>  
[&<parameter>=<value>]**

**Example:**

http://192.168.55.88/cgi-bin/record\_cgi?action=set&channel=0&user=admin&pwd=admin&SaveMode=Local&Time1Switch=open&Time1\_BngHour=10&Time1\_BngMinute=20&Time1\_EndHour=23&Time1\_EndMinute=50

**Response:**

HTTP/1.0 200 OK\r\n

Content-Type:text/plain\r\n

\r\n

OK\r\n

### **1.60.Set the record options (shared by all channels)**

**Syntax:**

**http://<server ipaddr>/cgi-bin/record\_cgi?action=set[&<parameter>=<value>]**

with the following parameters and values.

<b>&lt;parameter&gt;=&lt;value&gt;</b>	<b>Values</b>	<b>Description</b>
StreamType=<string>	PreferredStream, AlternateStream	The stream type of record.
PackageTime=<int>	1,5,10,15,20...60(Minute)	The package time of record.
SaveDay=<int>	0~180(day)	Video resource reservation time. 0: if sufficient storage space, the resources will be permanently saved.
OverWrite=<int>	0,1	When not enough storage space whether to automatically delete old resource. 0:No 1:Yes

---

**Example:**

```
http://192.168.55.88/cgi-bin/record_cgi?action=set&user=admin&pwd=admin&StreamType=AlternateStream&PackageTime=5&SaveDay=0&OverWrite=1
```

**Response:**

```
HTTP/1.0 200 OK\r\n
```

```
Content-Type:text/plain\r\n
```

```
\r\n
```

```
OK\r\n
```

### 31. Snap

Get and set the snap options.

**Note:**

This requires administrator access, if you use Ftp(Email) to save the image, you need to set the Ftp(Email) parameters first.

**Syntax:**

```
http://<server ipaddr>/cgi-bin/snap_cgi?<parameter>=<value>
```

```
[&<parameter>=<value>]
```

with the following parameters and values.

<parameter>=<value>	Values	Description
action=<string>	get, set	get = get the Record options. set = set the Record options.
channel=<int>	0~3	The channel number of the video.
user=<string>	A user name	Valid characters are a thru z, A thru Z and 0 thru 9.

pwd=<string>	A user password	Valid characters are a thru z, A thru Z and 0 thru 9.
SaveMode=<string>	Ftp,Local,Email, FtpEmail	The way to save the video resources. FtpEmail means Ftp and Email .
ShootInterval=<float>	0.5~1000	The time interval of the captured images.
Time1Switch=<string>	close, open	Time 1 selector switch.
Time1_BgnHour=<int>	0~23	The beginning of the hour value.
Time1_BgnMinute=<int>	0~59	The beginning of the minute value.
Time1_EndHour=<int>	0~23	The end of the hour value.
Time1_EndMinute=<int>	0~59	The end the minute value.
Time2Switch=<string>	close, open	Time 2 selector switch.
Time2_BgnHour=<int>	0~23	The beginning of the hour value.
Time2_BgnMinute=<int>	0~59	The beginning of the minute value.
Time2_EndHour=<int>	0~23	The end of the hour value.
Time2_EndMinute=<int>	0~59	The beginning of the minute value.

### 1.61. Get the snap options

#### Syntax:

**http://<server ipaddr>/cgi-bin/snap\_cgi?action=get&channel=<value>  
&user=<value>&pwd=<value>**

#### Example:

http://192.168.55.88/cgi-bin/snap\_cgi?action=get&channel=0&user=admin&pwd=admin

#### Response:

HTTP/1.0 200 OK\r\n

---

```
Content-Type:text/plain\r\n\r\nSaveMode=Local\nShootInterval=10.0\nTime1Switch=close\nTime1_BngHour=10 Time1_BngMinute=25 Time1_EndHour=23\nTime1_EndMinute=59\nTime2Switch=close\nTime2_BngHour=0 Time2_BngMinute=0 Time2_EndHour=23\nTime2_EndMinute=59
```

### 1.62. Set the snap options

#### Syntax:

```
http://<server ipaddr>/cgi-bin/snap_cgi?action=set&channel=<value>\n\n[&<parameter>=<value>]
```

#### Example:

```
http://192.168.55.88/cgi-bin/snap_cgi?action=set&channel=0&user=admin&pwd=admin&SaveMode=Email&ShootInterval=2.5&Time1Switch=close&Time1_BngHour=10&Time1_BngMinute=20&Time1_EndHour=23&Time1_EndMinute=50
```

#### Response:

```
HTTP/1.0 200 OK\r\n\nContent-Type:text/plain\r\n\r\nOK\r\n
```

## 32. COM Setting

Get and set the COM setting options.

**Note:** This requires administrator access(administrator authorization).



---

**Syntax:**

**http://<server ipaddr>/cgi-bin/com\_cgi?<parameter>=<value>**

**[&<parameter>=<value>]**

with the following parameters and values.

<b>&lt;parameter&gt;=&lt;value&gt;</b>	<b>Values</b>	<b>Description</b>
action=<string>	get, set	get = get the DDNS options. set = set the DDNS options.
user=<string>	A user name	Valid characters are a thru z, A thru Z and 0 thru 9.
pwd=<string>	A user password	Valid characters are a thru z, A thru Z and 0 thru 9.
Baudrate1=<int>	300,600,1200,2400,4800,9600,14400,19200,38400,56000,57600,115200,128000,256000.	RS485 serial communication baud rate.
DataBits1=<int>	5, 6, 7, 8	RS485 serial communication data bits.
StopBits1=<int>	1, 2	RS485 serial communication stop bits.
CheckType1=<string>	0: None, 1: Odd 2: Even, 3: Mark 4: Space	Checksum types of RS485 serial communication.
FlowCtrl1=<string>	None, Hardware, Software	Type of flow control for RS485 serial communication.
Baudrate2=<int>	300,600,1200,2400,4800,9600,14400,19200,38400,56000,57600,115200,128000,256000.	RS232 serial communication baud rate.

	8000,256000.	
DataBits2=<int>	5, 6, 7, 8	RS232 serial communication data bits.
StopBits2=<int>	1, 2	RS232 serial communication stop bits.
CheckType2=<string>	0: None, 1: Odd 2: Even, 3: Mark 4: Space	Checksum types of RS232 serial communication.
FlowCtrl2=<string>	None, Hardware, Software	Type of flow control for RS232 serial communication.

### 1.63. Get the COM options

#### Syntax:

**http://<server ipaddr>/cgi-bin/com\_cgi?action=get&user=<value>  
&pwd=<value>**

#### Example:

**http://192.168.55.88/cgi-bin/com\_cgi?action=get&user=admin&pwd=admin**

#### Response:

```
HTTP/1.0 200 OK\r\n
Content-Type:text/plain\r\n
\r\n
COM RS485:
Baudrate1=9600
DataBits1=8
StopBits1=2
CheckType1=Space
FlowCtrl1=Software
COM RS232:
Baudrate2=9600
DataBits2=5
StopBits2=1
CheckType2=Even
```

---

FlowCtrl2=Hardware

### 1.64. Set the COM options

#### Syntax:

**http://<server ipaddr>/cgi-bin/com\_cgi?action=set[&<parameter>=<value>]**

#### Example:

http://192.168.55.88/cgi-bin/com\_cgi?action=set&user=admin&pwd=admin&Baudrate1=115200&DataBits1=7&StopBits1=1&CheckType1=1&FlowCtrl1=None&Baudrate2=115200&DataBits2=7&StopBits2=1&CheckType2=1&FlowCtrl2=None

#### Response:

HTTP/1.0 200 OK\r\n

Content-Type:text/plain\r\n

\r\n

OK\r\n

## 33. System Info

Get the system information.

**Note:** This requires administrator access(administrator authorization).

#### Syntax:

**http://<server ipaddr>/cgi-bin/systeminfo\_cgi?user=<value>&pwd=<value>**

#### Example:

http://192.168.55.88/cgi-bin/systeminfo\_cgi?user=admin&pwd=admin

#### Response:

HTTP/1.0 200 OK\r\n

Content-Type:text/plain\r\n

\r\n

HostName=DVS134

ChannelNum=4

---

Standard=PAL  
DeviceID=10001  
SoftwareVersion=2.3.1.2.0.142  
HardwareVersion=Hi2312DVS

## 34. Upgrade

Device software upgrade.

**Note:** This requires administrator access(administrator authorization).

**Method:** POST

**Syntax:**

**http://<server ipaddr>/cgi-bin/upgrade\_cgi?user=<value>&pwd=<value>**

**Example:**

```
http://192.168.55.88/cgi-bin/upgrade_cgi?user=admin&pwd=<admin>
```

**Response:**

**Case1:** Upgrade was successful.

```
HTTP/1.0 200 OK\r\n
Content-Type:text/plain\r\n
\r\n
OK,Device is rebooting\r\n
Filename = fx_kn_ex_1.8.0.113.uot\r\n
Size = 1702576 bytes\r\n
```

**Case2:** Upgrade failure.

```
HTTP/1.0 200 OK\r\n
Content-Type:text/plain\r\n
\r\n
Request failed: The upgrade file is not correct!\r\n
```

## 35. Obtaining device firmware version

**Note:** Login using the user must be “root”.

---

Obtaining device firmware version with three steps.

First:

Login equipment remotely via Telnet, Enter your user name and password.

Command: telnet <service ipaddr>, then entry "user",  
then entry "password".

Example: telnet 192.168.55.88 , root, admin

Second:

Switch to the user directory.

Command: cd /usr

Third:

Obtaining device firmware version.

Command: cat FirmwareVersion

## 36. DHCP

**Note:** If a DHCP server is unavailable, the DVS IP address will be 192.168.0.99. And Equipment will be every ten minutes request a DHCP service.

**Syntax:**

**http://<server ipaddr>/cgi-bin/date CGI?action=set&user=<value>**

**&pwd=<value>&BootProto=dhcp**

Open DHCP service:"set BootProto=dhcp",

Close DHCP service:"set BootProto=none".

**Example:**

http://192.168.55.88/cgi-bin/network CGI?action=set&user=admin&pwd=admin  
&BootProto=dhcp

**Response:**

**Case 1: system network parameter are changed.**

HTTP/1.0 200 OK\r\n

Content-Type:text/plain\r\n

---

\r\n

OK, Device is rebooting\r\n

**Case 2: system network parameter are not changed.**

HTTP/1.0 200 OK\r\n

Content-Type:text/plain\r\n

\r\n

Param not change\r\n

**Case 3: system network parameter are error.**

HTTP/1.0 200 OK\r\n

Content-Type:text/plain\r\n

\r\n

Request failed:Param error\r\n

## 37. **SYSLOGO**

**Note:** Log retained for up to 512 records, and Log format according to RFC3164.

**Syntax:**

**http://<server ipaddr>/cgi-bin/sysLog\_cgi?user=<value>&pwd=<value>**

**Return:**

HTTP/1.0 200 OK\r\n

Content-Type:text/plain\r\n

\r\n

<PRI><month> <day> <time> <IP>: <action>\n

**Example:**

http://192.168.55.88/cgi-bin/sysLog\_cgi?user=admin&pwd=admin

**Response:**

**Case1:** get log successful.

---

HTTP/1.0 200 OK\r\n

Content-Type:text/plain\r\n

\r\n

<116>Jul 13 15:56:23 192.168.55.88: Power off

<116>Jul 13 16:03:37 192.168.55.88: Power On

<116>Jul 13 16:04:39 192.168.55.88: Power off

<116>Jul 13 16:09:18 192.168.55.88: Power On

<116>Jul 13 16:10:12 192.168.55.88: Power off

.....

**Case2:** get log failed.

HTTP/1.0 200 OK\r\n

Content-Type:text/plain\r\n

\r\n

Request failed:Allocate memory failure\r\n

**Analytical log command:** <116>Jul 13 15:56:23 192.168.55.88: Power off.

<PRI>=116:

PRI = Facility \* 8 + Severity.

Facility = log alert (14), Severity = Warning: warning conditions(4).

14 \* 8 + 4 = 116.

<month> <day> <time><IP>= Jul 13 15:56:23 192.168.55.88.

<action>= Power off.

The kinds of action:

“Power On”, “Power off”,

“No.<channel+1> Sensor Alarm” ,

“No.<channel+1> Sensor Alarm Finish”,

“No.<channel+1>Motion Alarm ” ,

“No.<channel+1>Motion Alarm Finish”,

“No.<channel+1> Shelter Alarm ” ,

“No.<channel+1>Shelter Alarm Finish”,

“No.<channel+1> Video Lose Alarm ” ,  
“No.<channel+1> Video Lose Alarm Finish”,  
.....

### 38. PTZ

Send commands to the PTZ.

**Note: This requires administrator access(administrator authorization).**

**Syntax:**

**http://<server ipaddr>/cgi-bin/ptz.cgi?action=<value>&user=<value>  
&pwd=<value>**

with the following values.

<b>&lt;parameter&gt;=&lt;value&gt;</b>	<b>Values</b>	<b>Description</b>
action=<string>	Up, Down, Left, Right, AutoOn, AutoOff, FocusAdd, FocusSub, ZoomAdd, ZoomSub, LampOn, LampOff, BrushOn, BrushOff.	Up: PTZ move up. AutoOn: Enable PTZ move automatic. AutoOff: Enable PTZ move automatic. ZoomAdd: Zoom Up. ZoomSub: Zoom Down. FocusAdd, FocusSub: The equipment to support the automatic focus on function, the interface doesn't work.
user=<string>	A user name	Valid characters are a thru z, A thru Z and 0 thru 9.



pwd=<string>	A user password	Valid characters are a thru z, A thru Z and 0 thru 9.
--------------	-----------------	---

**Return:**

HTTP/1.0 200 OK\r\n

Content-Type:text/plain\r\n

\r\n

**Example:**

http://192.168.55.88/cgi-bin/ptz.cgi?action=Up&user=admin&pwd=admin

**Response:**

HTTP/1.0 200 OK\r\n

Content-Type:text/plain\r\n

\r\n

## 39. PTZ Setting

Get or Set the PTZ setting options.

**Note:** This requires administrator access(administrator authorization).

**Syntax:**

http://<server ipaddr>/cgi-bin/ptz\_setting?action=<value>

[&<parameter>=<value>]

with the following values.

<parameter>=<value>	Values	Description
action=<string>	get, set	get = get the PTZ options. set = set the PTZ options.

user=<string>	A user name	Valid characters are a thru z, A thru Z and 0 thru 9.
pwd=<string>	A user password	Valid characters are a thru z, A thru Z and 0 thru 9.
AutoFlip=<string>	ON, OFF	Whether or not to open the auto flip function.
ProportionalPan=<string>	ON, OFF	Whether or not to open the proportional pan function.
VirtualZero=<string>	Set,OK,Cancel	Set of Clear the “virtual zero position”.
ManualLimit=<string>	ON, OFF	Whether or not to open the manual limit function.
ScanLimit=<string>	ON, OFF	Whether or not to open the scan limit function.
DomeCameraReset=<string>	ON	Reset dome camera setting.
HSpeed=<int>	1-40(degrees)	Level scanning speed.
VSPEED=<int>	1-20(degrees)	Vertical scanning speed.
ParkMode=<int>	0-14	0:”NO” 1: “Preset 1” 2: “Preset 2” 3:”Preset 3” 4: “Preset 4” 5:”Preset 5” 6: “Preset 6” 7:”Preset 7” 8:”Preset 8” 9:”Auto Scan” 10:”P&T Scan” 11:” Preset Tour 1”

		12:” Preset Tour 2” 13:”Figure Scan 1” 14:”Figure Scan 2”
ParkTime=<int>	2-60(Minutes)	The automatic guard start time.
Preset1Num[1-8] =<int>	0-255	The number of Preset position.
Preset1KeepTime[1-8] =<int>	0-3600(second)	Preset dwell time.
Preset2Num[1-8] =<int>	0-255	The number of Preset position.
Preset2KeepTime[1-8] =<int>	0-3600(second)	Preset dwell time.
Time[1-5]Switch=<string>	open, close	Enable Timing tasks.
Time [1-5]Task=<int>	0-14	Like ParkMode.
Time[1-5]BgnHour=<int>	0-23	The time to start the task.
Time[1-5]BgnMinute=<int> >	0-59	The time to start the task.
Time[1-5]EndHour=<int>	0-23	The time to start the task.
Time[1-5]EndMinute=<int> >	0-59	The time to start the task.

**Note: The time can’t overlap between the five task.**

### 1.65. Get the PTZ options

---

**Example:**

```
http://192.168.55.88/cgi-bin/ptzsetting.cgi?action=get&user=admin&pwd=admin
```

**Response:**

```
HTTP/1.0 200 OK\r\n
Content-Type:text/plain\r\n
\r\n
PTZ Setting:
AutoFlip=ON
ProportionalPan=OFF
VirtualZero=Not Set
ManualLimit=OFF
ScanLimit=OFF
Scan Speed:
HSpeed=2 VSpeed=1
Park Set:
ParkMode=0 ParkTime=2
Preset Tour:
Preset1Num1=0 Preset1KeepTime1=1
Preset1Num2=0 Preset1KeepTime2=2
Preset1Num3=0 Preset1KeepTime3=3
Preset1Num4=0 Preset1KeepTime4=4
Preset1Num5=0 Preset1KeepTime5=5
Preset1Num6=0 Preset1KeepTime6=6
Preset1Num7=0 Preset1KeepTime7=7
Preset1Num8=0 Preset1KeepTime8=8
Preset2Num1=0 Preset2KeepTime1=10
Preset2Num2=0 Preset2KeepTime2=11
Preset2Num3=0 Preset2KeepTime3=12
Preset2Num4=0 Preset2KeepTime4=13
Preset2Num5=0 Preset2KeepTime5=14
```

---

Preset2Num6=0 Preset2KeepTime6=16

Preset2Num7=0 Preset2KeepTime7=15

Preset2Num8=0 Preset2KeepTime8=17

Time Set:

Time1Switch=close Time1Task=0

Time1BgnHour=1 Time1BgnMinute=2 Time1EndHour=3 Time1EndMinute=4

Time2Switch=close Time2Task=0

Time2BgnHour=5 Time2BgnMinute=6 Time2EndHour=7 Time2EndMinute=8

Time3Switch=close Time3Task=0

Time3BgnHour=9 Time3BgnMinute=0 Time3EndHour=0 Time3EndMinute=0

Time4Switch=close Time4Task=0

Time4BgnHour=2 Time4BgnMinute=3 Time4EndHour=2 Time4EndMinute=4

Time5Switch=close Time5Task=0

Time5BgnHour=3 Time5BgnMinute=4 Time5EndHour=3 Time5EndMinute=5

### 1.66. Set the PTZ options

**Example:**

```
http://192.168.55.88/cgi-bin/ptzsetting.cgi?action=set&user=admin&pwd=admin&HSpeed=1&VSpeed=2&ParkMode=3&ParkTime=4&Preset1Num1=5&Preset1KeepTime1=6&Time1Switch=open&Time1Task=7&Time1BgnHour=8&Time1BgnMinute=9&Time1EndHour=10&Time1EndMinute=11
```

**Response:**

```
HTTP/1.0 200 OK\r\n
```

```
Content-Type:text/plain\r\n
```

```
\r\n
```

```
OK\r\n
```

## 40. Dome Control

Using the dome control command.

**Note:** This requires administrator access(administrator authorization).

---

**Syntax:**

**http://<server ipaddr>/cgi-bin/democontrol\_cgi?<parameter>=<value>**

**[&<parameter>=<value>]**

with the following parameters and values.

<b>&lt;parameter&gt;=&lt;value&gt;</b>	<b>Values</b>	<b>Description</b>
action=<string>	PresetSet, PresetCall, PresetClear, PresetGet, FigureScanSet, FigureScanSave, FigureScanRun, FigureScanStop, LevelFlip, ZeroDetection, UpLimit, DownLimit LeftLimit, RightLimit PresetScan1, PresetScan2, PresetScanStop. AppleScan, AppleScanStop	The command to control the dome.
user=<string>	A user name	Valid characters are a thru z, A thru Z and 0 thru 9.
pwd=<string>	A user password	Valid characters are a thru z, A thru Z and 0 thru 9.
Title=<string>	<string>,[PresetNum]	The title of the Preset position. When using the command of "PresetSet", Need to set up this

		parameters.
PresetNum=<int> >	1-255	The number of the Preset position. When using the command of "PresetSet", "PresetCall", "PresetGet", Need to set up this parameters.
FigureScanNum =<int>	1-2	The number of the Figure Scan. When using the command of "FigureScanSet", Need to set up this parameters.

**Example: Set the preset position.**

http://192.168.55.88/cgi-bin/domecontrol\_cgi?action=PresetSet&user=admin&pwd=admin&Title=test1&PresetNum=15.

**Response:**

```
HTTP/1.0 200 OK\r\n
Content-Type:text/plain\r\n
\r\n
OK\r\n
```

## 41. Get The System Parameters

Get the system parameter in XML format.

**Note: This requires administrator access(administrator authorization).**

**Syntax:**

http://<server ipaddr>/cgi-bin/sysparam\_cgi?&user=<value>&pwd=<value>

**Return:**

```
HTTP/1.0 200 OK\r\n
Content-Type:text/xml\r\n
\r\n
```

```
< system parameter data>
```

Parameters as the chart:

```

<?xml version="1.0" encoding="UTF-8" ?>
- <DOCUMENT>
- <SysParam>
+ <SysInfo>
+ <SysVideo>
+ <SysAudio>
+ <SysNetwork>
+ <SysNetService>
+ <SysFunction>
+ <SysCOM>
+ <UserManage>
</SysParam>
</DOCUMENT>

```

## 42. OSD Position

Change the position of text overlay.

**Note:** This requires administrator access(administrator authorization).

**Syntax:**

**http://<server ipaddr>/cgi-bin/osdposition\_cgi?<parameter>=<value>**

**[&<parameter>=<value>]**

with the following parameters and values.

<b>&lt;parameter&gt;=&lt;value&gt;</b>	<b>Values</b>	<b>Description</b>
action=<string>	Up, Down, Right, Left.	The command to control the position of the OSD.  Move 8 pixels once.
channel=<int>	0~3	The channel number of the video.
value=<int>	1,2	1: mean change the date, time, bitrate, week position.  2: mean change the title position.



user=<string>	A user name	Valid characters are a thru z, A thru Z and 0 thru 9.
pwd=<string>	A user password	Valid characters are a thru z, A thru Z and 0 thru 9.

**Example: Move right the title position of the channel 1.**

```
http://192.168.55.88/cgi-bin/osdposition_cgi?channel=1&action=Right&value=2
&user=admin&pwd=admin
```

**Response:**

```
HTTP/1.0 200 OK\r\n
Content-Type:text/plain\r\n
\r\n
OK\r\n
```

### 43. Default parameter setting

The detail of the setting:

1. date\_cgi
  - a. timezone=23    b. ntpHost=10.200.80.9
2. videocoding\_cgi
  - a. EncType1=H.264
  - b. Resolution1=704\*576
  - c. BitflowType1=CBR
  - d. FrameRate1=15
  - e. NormalBitrate1=512
  - f. EncType2=H.264
  - g. Resolution2=704\*576
  - h. BitflowType2=CBR
  - i. FrameRate2=1
  - j. NormalBitrate2=256

---

3. audio\_cgi

- a. AudioSwitch=close

4. textoverlay\_cgi

- a. TimeValue=1
- b. DateValue=1
- c. WeekValue=0
- d. Color=0
- e. BitrateValue=0
- f. TitleValue=1

5. upnp\_cgi

- a. UpnpSwitch=close

6. ddns\_cgi

- a. Provider=NULL

7. network\_cgi

- a.BootProto=dhcp

8. pwdgrp\_cgi

- a. remove all the normal user account which level is two.

When you call the command of “**factorydefault\_cgi**” or “**hardfactorydefault\_cgi**”, the default setting enable (SW reset).

Press the reset button 3 times within 15 seconds (HW reset).

## 44. SNMP

Get or set SNMP setting.

**Note: This requires administrator access(administrator authorization).**

**Syntax:**

**http://<server ipaddr>/cgi-bin/snmp\_cgi?<parameter>=<value>**

**[&<parameter>=<value>]**

with the following parameters and values.

<b>&lt;parameter&gt;=&lt;value&gt;</b>	<b>Values</b>	<b>Description</b>
action =<string>	get, set	get=get the parameter of SNMP setting. set= set the parameter of SNMP setting.
SnmpV1V2Switch =<string>	open, close	open =enabled the SNMP v1/v2 service. close =disabled the SNMP v1/v2 service.
CommunityRO =<string>	<a string>	The value of the community read-only.
CommunityRW =<string>	<a string>	The value of the community read-write.
SnmpTrapsSwitch =<string>	open, close	open =enabled the SNMP trap service. close =disabled the SNMP trap service.
TrapIpAddr=<string> >	<a IP address>	The address of the trap service.
TrapCommunity =<string>	<a string>	The value of trap community.
SnmpV3Switch =<string>	open, close	open =enabled the SNMP v3 service. close =disabled the SNMP v3 service.
Username=<string> >	<a string>	The user name of the MD5.
Password=<string>	<a string>	The user password of the MD5.
user=<string>	A user name	Valid characters are a thru z, A thru Z and 0 thru 9.

pwd=<string>	A user password	Valid characters are a thru z, A thru Z and 0 thru 9.
--------------	-----------------	---

### 1.67. Get the SNMP options

#### Syntax:

**http://<server ipaddr>/cgi-bin/snmp\_cgi?action=get&user=<value>  
&pwd=<value>**

#### Example:

```
http://192.168.55.88/cgi-bin/snmp_cgi?action=get&user=admin&pwd=admin
```

#### Response:

```
HTTP/1.0 200 OK\r\n
Content-Type:text/plain\r\n
\r\n
SnmpV1V2Switch=open
CommunityRO=
CommunityRW= public
SnmpTrapsSwitch=close
TrapIpAddr=192.168.55.88
TrapCommunity=public
SnmpV3Switch=open
Username= testuser
Password= testpassword
```

### 1.68. Set the SNMP options

#### Syntax:

**http://<server ipaddr>/cgi-bin/snmp\_cgi?action=set[&<parameter>=<value>]**

#### Example:

```
http://192.168.55.88/cgi-bin/snmp_cgi?action=set&user=admin&pwd=admin&
SnmpV3Switch=open&Username=testuser&Password=testpassword
```

## Response:

HTTP/1.0 200 OK\r\n

Content-Type:text/plain\r\n


\r\n

OK\r\n

## 45. CDP Auto-discovery Protocols

**NOTE: Our device will send a CDP packet every 60s.**

The following picture is the CDP packet detail content:

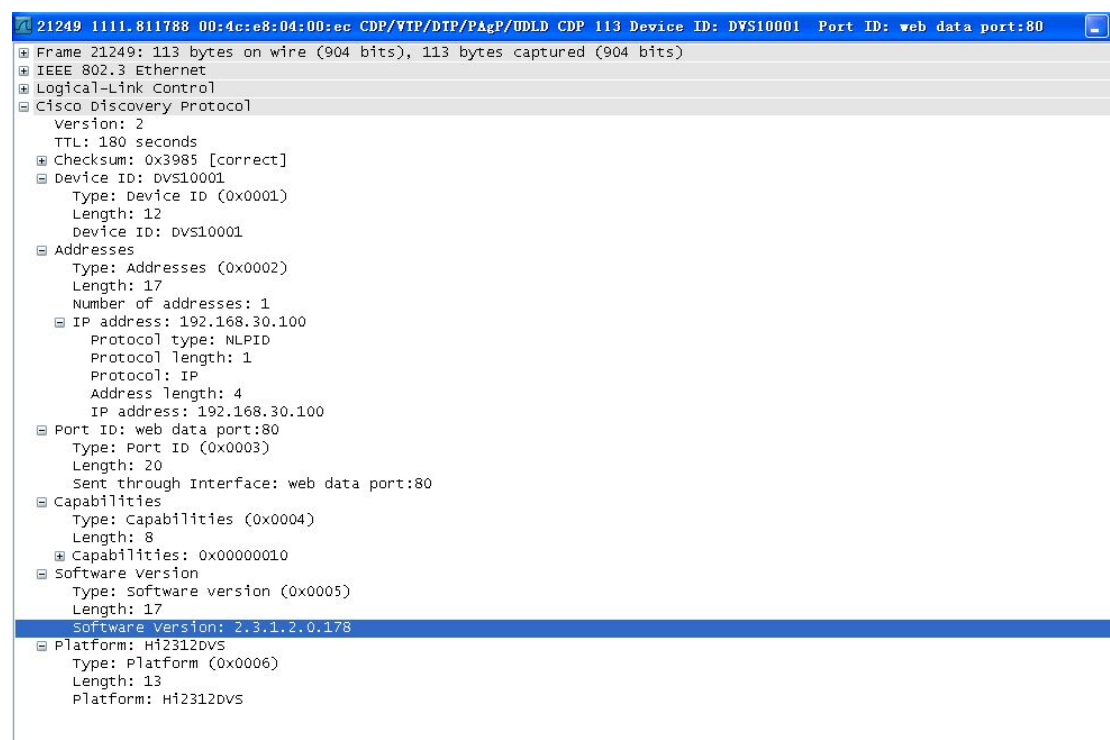

### 1. CDP header:

- CDP protocol version: CDP 2.0
- TTL: 180s
- Checksum: true

### 2. Device ID:

- Type:0x0001
- Length: size of(type) + size of(length) + strlen(device name)
- Device ID: (device name).

### 3. Address: device IP address.

- 
4. Port ID: web data port.
  5. Capabilities: Host.
  6. Soft version: device firmware version.
  7. Platform: Hardware version.

## 46. Storage Devices

Get Storage Devices information, or formatted the Storage Devices.

**Note: This requires administrator access(administrator authorization).**

**Syntax:**

**`http://<server ipaddr>/cgi-bin/storagedevices_cgi?<parameter>=<value>`**  
**`[&<parameter>=<value>]`**

with the following parameters and values.

<b>&lt;parameter&gt;=&lt;value&gt;</b>	<b>Values</b>	<b>Description</b>
action =<string>	get, Format	get=get the detail of Storage Devices. Format = Formatted the Storage Devices.
StorageNum =<int>	1~4	Select which Storage Devices you want to Format.
user=<string>	A user name	Valid characters are a thru z, A thru Z and 0 thru 9.
pwd=<string>	A user password	Valid characters are a thru z, A thru Z and 0 thru 9.

### 1.69. Get Storage Devices information.

**Syntax:**

**`http://<server ipaddr>/cgi-bin/storagedevices_cgi?action=get&user=<value>`**

---

**&pwd=<value>**

**Example:**

```
http://192.168.55.88/cgi-bin/storagedevices_cgi?action=get&user=admin&pwd=admin
```

**Response:**

```
HTTP/1.0 200 OK\r\n
Content-Type: text/plain\r\n
\r\n
```

**Case 1:** Storage Devices are formatted

Storage Device Info:

Title:	TotalSize:	FreeSize:	State:
1 SD	7064	6574	formatted

**Case 2:** Storage Devices are in formatting

Storage Device Info:

Title:	TotalSize:	FreeSize:	State:
1 SD	0	0	formatting(25%)

**Case 2:** Didn't have Storage Devices

Storage Device Info:

Title:	TotalSize:	FreeSize:	State:
--------	------------	-----------	--------

## 1.70. Formatted the Storage Devices

**Syntax:**

**http://<server ipaddr>/cgi-bin/ storagedevices \_cgi?action=Format&**

**StorageNum=<value>&user=<value>&pwd=<value>**

**Example:**

```
http://192.168.55.88/cgi-bin/storagedevices_cgi?action=Format&StorageNum=1&user=admin&pwd=admin
```

**Response:**

```
HTTP/1.0 200 OK\r\n
Content-Type: text/plain\r\n
```

---

\r\n

**Case 1: Formatted success**

OK\r\n

**Case 2: Storage Number Error.**

Request failed:Storage Number Error\r\n